

**TEAC®**

**SERVICE MANUAL**

---

**X-3**

**Stereo Tape Deck**

---

# 1 SPECIFICATIONS AND SERVICE DATA

## SPECIFICATIONS

**Track System** 4-Track Two-Channel Stereo  
**Head System** 3 heads: erase, record, playback  
**Reel Size** 7" and 5"  
**Tape Speed** 19 cm/s (7-1/2 ips) and 9.5 cm/s (4-3/4 ips)  
**Inputs (level and impedance)**  
**MIC:** Specified input level: -60 dB (0.775 mV)/10 kohms  
 Min. input level: -70 dB (245  $\mu$ V)  
**LINE IN:** Specified input level: -12 dB (195 mV)/100 kohms  
 Min. input level: -22 dB (61.5 mV)  
**Outputs (level and impedance)**  
**OUTPUT:** Specified output level: -5 dB (436 mV)/10 kohms  
 Max. OUTPUT level: +1 dB (0.869 V)  
**PHONES:** Specified OUTPUT level: -24 dB (48.9 mV)/8 ohms  
**Playback Equalization**  
**19 cm/s:** 3,180  $\mu$ s + 50  $\mu$ s (NAB)  
**9.5 cm/s:** 3,180  $\mu$ s + 90  $\mu$ s (NAB)  
**Motors**  
 1 DC Servo Capstan Motor  
 2 induction Reel Motor  
**Bias Frequency** 100 kHz  
**Operating Position** Vertical, horizontal  
**Power Requirements**  
 100/117/220/240 V AC, 50/60 Hz, 85 W  
 (General Export Model)  
 117 V AC, 60 Hz, 70 W (USA/Canada Model)  
 220 V AC, 50 Hz, 85 W (Europe Model)  
 240 V AC, 50 Hz, 85 W (UK/AUS Model)  
**Weight** 14 kg (30-14/16 lbs) net

## SERVICE DATA

### MECHANICAL

**Tape Speed Deviation** 3,000 Hz  $\pm$ 30 Hz  
**Tape Speed Drift** 20 Hz  
**Wow and Flutter**  
**Playback:** 0.06% (WRMS), 0.12%(RMS) at 19 cm/s  
 0.10% (WRMS), 0.15% (RMS) at 9.5 cm/s  
**Record/Playback:** 0.08% (WRMS) at 19 cm/s  
 0.15% (WRMS) at 9.5 cm/s  
**Pinch Roller Pressure** 1.8 ~ 2.2 kg (3.97 ~ 4.85 (lbs)  
**Reel Torque (Play mode)**  
**Take-up** 330 ~ 470 g-cm (4.58 ~ 6.53 oz-inch)  
**Back tension** 220 ~ 280 g-cm (3.06 ~ 3.89 oz-inch)  
**Brake Torque**  
**Forward direction:** 1000 ~ 1300 g-cm (13.9 ~ 18.1 oz-inch)  
**Reverse direction:** 500 ~ 700 g-cm (6.94 ~ 9.72 oz-inch)  
**Left/right deviation:** 200 g-cm (2.78 oz-inch)  
**Fast Winding Time** 140 seconds or less for 550 m (1800 feet)

### ELECTRICAL

#### Frequency Response

##### Playback:

|         |                    |          |                    |
|---------|--------------------|----------|--------------------|
| 19 cm/s | 40 Hz +3, -3 dB    | 9.5 cm/s | 40 Hz +3, -3 dB    |
|         | 400 Hz 0 dB (Ref.) |          | 400 Hz 0 dB (Ref.) |
|         | 20 kHz +3, -3 dB   |          | 14 kHz +3, -3 dB   |

##### Overall: (BIAS sw: 1, EQ sw: 1)

|         |                    |          |                    |
|---------|--------------------|----------|--------------------|
| 19 cm/s | 40 Hz +3, -3 dB    | 9.5 cm/s | 40 Hz +3, -3 dB    |
|         | 400 Hz 0 dB (Ref.) |          | 400 Hz 0 dB (Ref.) |
|         | 16 kHz +3, -3 dB   |          | 10 kHz +3, -3 dB   |
|         | 20 kHz +3, -4 dB   |          | 14 kHz +3, -4 dB   |

#### Signal to Noise Ratio


**Playback:** 49 dB min. at 19 cm/s  
 47 dB min. at 9.5 cm/s  
**Overall:** 47 dB min. at 19 cm/s  
 45 dB min. at 9.5 cm/s

**Erase efficiency** 70 dB min. at 1 kHz (measured with input 10 dB higher than the specified input level)

**Channel Separation** 50 dB min. at 1 kHz  
**Adjacent Track Crosstalk** 40 dB min. at 125 Hz  
**Total Harmonic Distortion** 1.5% or less at 1 kHz

#### NOTES:

- Improvements may result in SPECIFICATIONS AND SERVICE DATA changes.
- Value of "dB" in the data refers to 0 dB (0.775 V), except where specified.

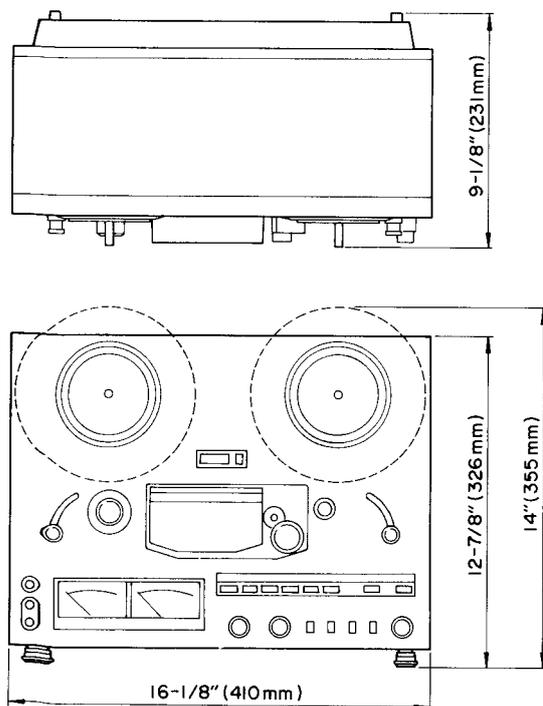

**Fig. 1-1 Dimensions**

#### CAUTION

⚠ Parts marked with this sign are safety critical components. They must always be replaced with identical components – refer to the TEAC parts list and ensure exact replacement.

## 2 MECHANICAL ADJUSTMENTS AND CHECKS

### 2-1 CAPSTAN THRUST CLEARANCE

1. There must be a clearance of 0.1 to 0.3 mm between the capstan shaft and the thrust plate. Check to see that the clearance is within this range. If not, loosen the two screws on the flywheel, adjust the clearance, and retighten the screws.

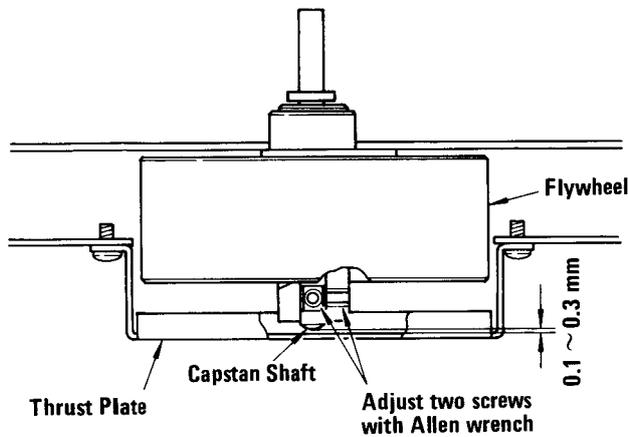


Fig. 2-1

### 2-2 SHUT-OFF SWITCH POSITION

1. There must be a clearance of 1 to 1.5 mm between the cam and actuator(A) when the microswitch is off, and 0.5 mm between the micro switch and actuator(B) when the microswitch is on. Check to see that the clearance is within these values. If not, adjust as necessary.

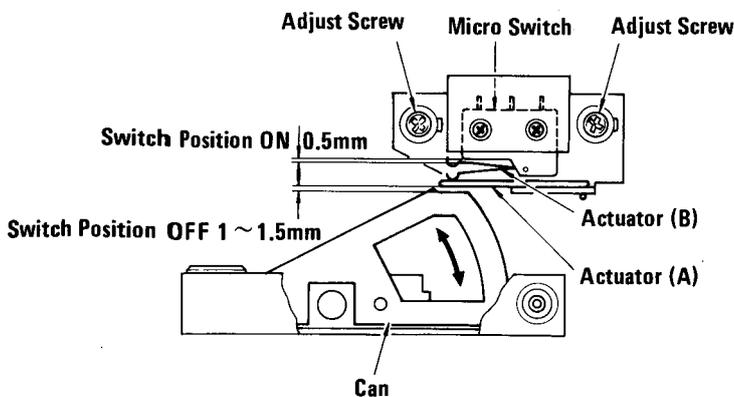


Fig. 2-2

### 2-3 BRAKE MECHANISM

**NOTE:** Be sure that the power is turned off prior to making any adjustments to the brakes.

1. Screw(A) for the left brake (as viewed from the front) must be adjusted so that there is a clearance of 1 mm between lever(C) and lever(E). Screw(A) for the right brake must then be adjusted so that lever(B) is parallel to lever(C).
2. Push the plunger until there is contact at (a); i.e., until the clearance has been eliminated, but make sure that the plunger is not pushed so strongly that the levers (E), (C), and (B) are deflected — they must remain in a horizontal plane.
3. Position the solenoid housing, while the plunger is pushed as described in step #2 above, so that the gap at (f) (the distance between the leftmost edge of the plunger and the leftmost edge of the solenoid housing) is between 11 to 12 mm. When the solenoid housing is so positioned, the plunger should be able to be deflected between 1 to 2 mm when pushed strongly.


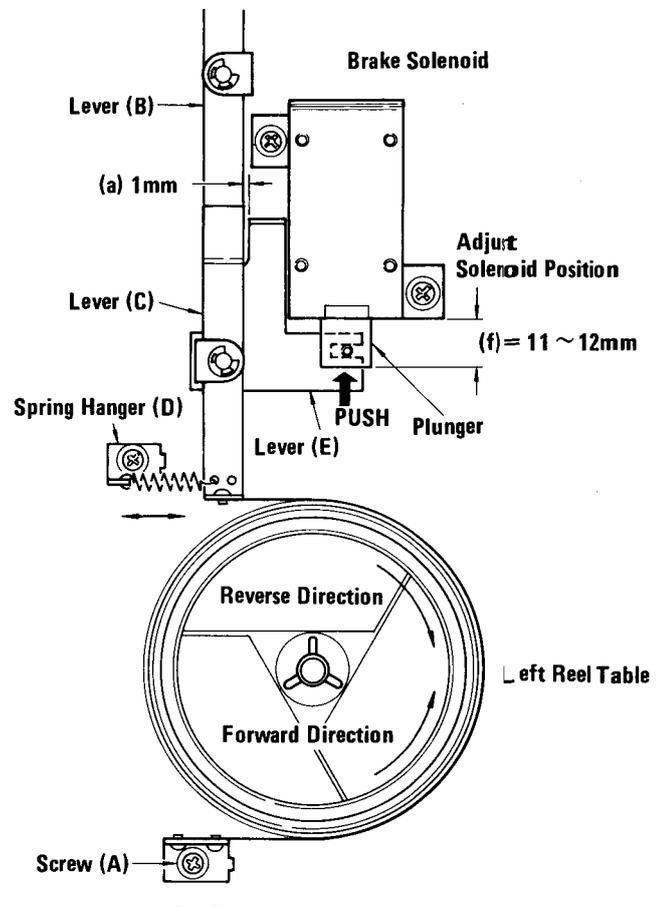


Fig. 2-3

**2-4 BRAKE TORQUE**

**NOTE:** Before making any brake adjustments or measurements, make sure the power is off.

1. Mount an empty 7" reel onto either reel table and attach a spring scale to the reel with a string.
2. Smoothly pull the scale away from the reel under test and note the torque value when the reading on the scale is steady. The proper torque values are given in the chart below.
3. Follow steps 1 and 2 for each measuring condition; i.e., (A) through (D) in Fig. 2-4.
4. If the forward-direction torque is not correct, change the hooking position of the spring hanger (reference (D) in Fig. 2-3) for the corresponding brake requiring adjustment. If, after the forward-direction torque has been properly adjusted and the reverse-direction torque is not correct, or the forward-direction torque is still not correct, check to see if the brake felt pad is worn, and also check that the brake mechanism is properly aligned as explained in Section 2-3, "Brake Mechanism". If necessary, replace the entire reel table.

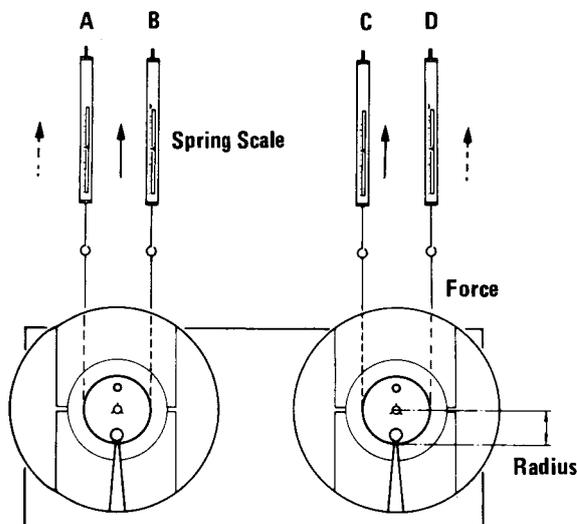

|                             |   |
|-----------------------------|---|
| ↑ Forward direction (B) (C) | 1000 – 1300 g-cm<br>(13.9 – 18.1 oz-inch) |
| ↑ Reverse direction (A) (D) | 500 – 700 g-cm<br>(6.94 – 9.72 oz-inch)   |
| Left/Right deviation        | 200 g-cm<br>(2.78 oz-inch)                |

Torque calculating formulas:

1. Torque (in g-cm or oz-inch)  
= Force or Weight (in g or oz) x Radius (in cm or inch)
2. Conversion of g-cm to oz-inch:  
g-cm x 0.0139 = oz-inch

**Fig. 2-4**


**2-5 REEL MOTOR TORQUE**

(See Fig. 2-5)

**NOTE:** For torque calculation, refer to the formulas above.

**2-5-1 TAKE UP TORQUE**


1. Hold the right tension arm up using a rubber band.
2. Mount an empty 7" reel onto the take-up (right) reel table, and attach a spring scale to the reel with a string.
3. Place the deck in the play mode.
4. Allow the rotation of the reel to slowly pull the scale toward the reel.
5. Hold the spring scale with enough force to allow steady reading.
6. The proper value is between 330 g-cm (4.58 oz-inch) to 470 g-cm (6.53 oz-inch).
7. There is no specially-provided adjustment for take-up torque, so if correction is needed, repair or replace the defective part and/or circuit.

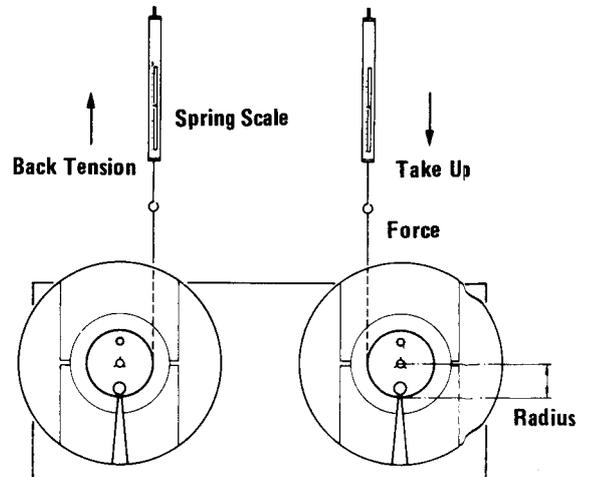

**Fig. 2-5**

**2-5-2 BACK TENSION**


1. Hold the right tension arm up using a rubber band.
2. Mount an empty 7" reel onto the supply (left) reel table, and attach a spring scale to the reel with a string.
3. Place the deck in the play mode.
4. Using a steady, smooth motion, pull against the motor torque to draw the scale away from the reel.
5. After making sure that the reel motion is smooth (the string should not be rubbing against the reel flanges), note the value indicated on the scale.
6. The proper value is between 220 g-cm (3.06 oz-inch) and 280 g-cm (3.69 oz-inch).
7. If necessary, adjust the slider of the resistor (R802) until the proper torque value is obtained. See Fig. 2-6.

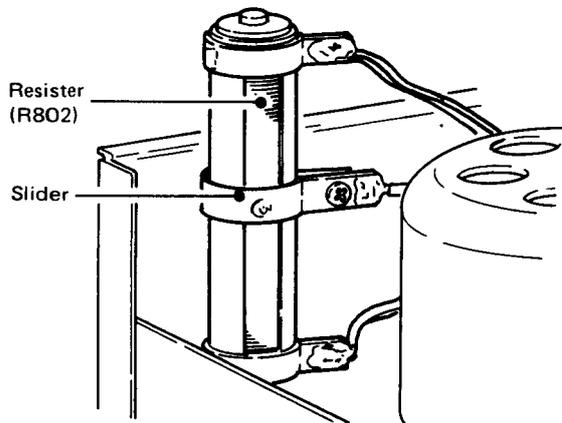

**Fig. 2-6**

**2-6 PINCH ROLLER PRESSURE**

1. Hold the right tension arm using a rubber band, string, etc.
2. Place the deck in the play mode without threading any tape.
3. Attach a spring scale to the pinch roller as shown in Fig. 2-7.
4. Pull the pinch roller away from the capstan shaft (on a plane intersecting the center of the capstan shaft and the pinch roller) until the capstan shaft and the pinch roller are separated.
5. Ease pressure on the scale until the pinch roller just begins to turn. The scale should then be read 1.8 kg to 2.2 kg (3-15/16 lbs to 4-7/8 lbs).

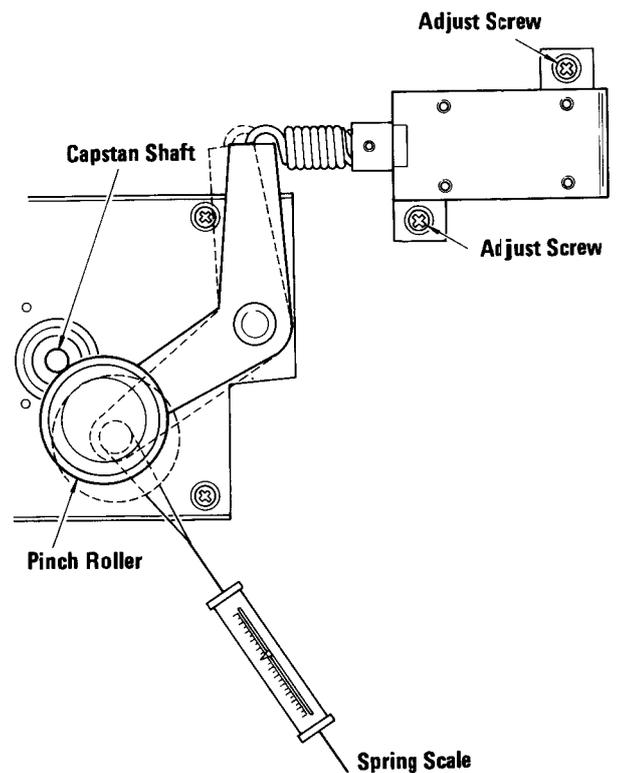

**Fig. 2-7**

**2-7 REEL TABLE HEIGHT**

1. As a general reference, the height of the reel table should roughly correspond to a distance of 38 mm (1-7/16") between the chassis of the deck and the rubber mat on the reel table. If checking reveals any large deviation from this value, loosen the two adjustment screws on the reel table, adjust the height, and retighten the screws.
2. For fine-adjustment, check that, while in fast-forward (forward direction) or rewind (reverse direction) modes starting at the beginning of the tape, the tape does not touch the upper or lower reel flanges. If it does, fine-adjust accordingly.

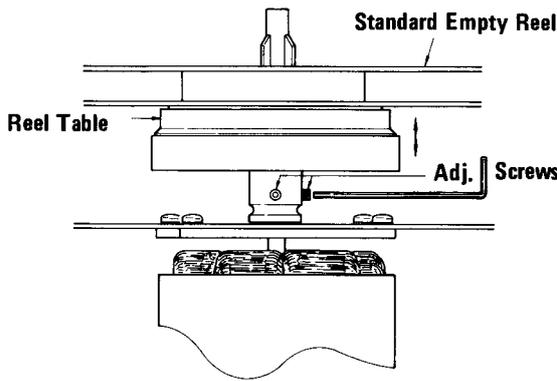


Fig. 2-8

**2-8 TAPE SPEED**

1. Connect a frequency counter to either OUTPUT jack. (See Fig. 2-9).
2. Load a TEAC YTT-2003 test tape containing a 3000-Hz test tone, and set the SPEED switch to HIGH (19 cm/sec or 7-1/2 ips).
3. Play the middle of the test tape and adjust the HIGH speed trimmer resistor until the frequency counter indicates a reading of 3000 Hz. See Fig. 2-10. (CAUTION: Use an insulated screwdriver to prevent shorting.)
4. Playing the tape at both the beginning and the end, check that the tape speed does not vary any more than the limits prescribed in the specifications, so that there is never a total deviation of more than  $\pm 30$  Hz from the 3000-Hz test tone, nor a drift of more than 20 Hz at any given time.
5. Using a TEAC YTT-2002 test tape, repeat steps #3 and #4 above with the SPEED switch set to LOW (9.5 cm/sec or 3-3/4 ips). In step #3, the speed may be adjusted for the proper initial setting by using the LOW speed trimmer resistor.

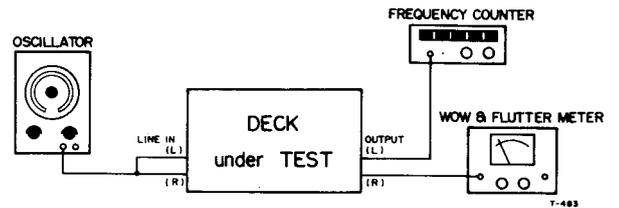


Fig. 2-9

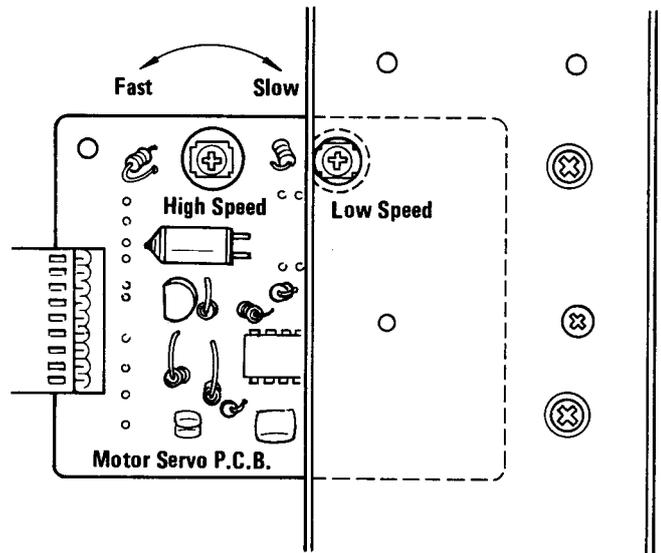


Fig. 2-10

**2-9 WOW AND FLUTTER**

(See Fig. 2-9)

**PLAYBACK**

1. Connect a wow-and-flutter meter to the deck as shown in Fig. 2-9.
2. Load a TEAC YTT-2003 test tape to check the wow and flutter when the deck is set to HIGH speed, or a YTT-2002 test tape to check when set to LOW speed.
3. Play the beginning and end of the respective test tape for each speed setting. The measured wow and flutter should be at least 0.06% (WRMS) and 0.12% (RMS) for the HIGH speed setting and at least 0.10% (WRMS) and 0.15% (RMS) for the LOW speed setting.

**OVERALL**

4. Load a TEAC YTT-8013 test tape and record a 3000-Hz signal on it in both HIGH and LOW speed settings and at the beginning and end of the tape, and while recording the signal, simultaneously monitor the signal from the play head by setting the MONITOR switch to the TAPE position (raised position).
5. The wow-and-flutter meter should indicate a reading of no more than 0.08% (WRMS) in the HIGH speed setting and no more than 0.15% (WRMS) in the LOW speed setting.

## 2-10 HEAD AND TAPE PATH ALIGNMENT

### 2-10-1 HEAD CONFIGURATION

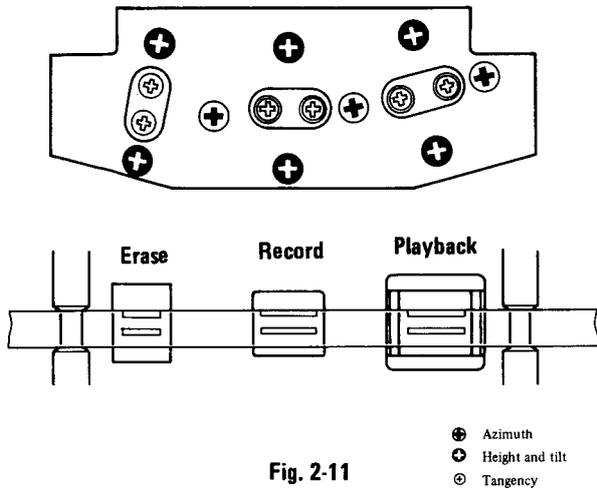


Fig. 2-11

### 2-10-2 ALIGNMENT CONDITIONS

Adjust each head to satisfy each of the following conditions:

| Condition  | Example of Mis-alignment |
|--|--------------------------|
| <b>TILT</b><br>The head surface should be parallel to the tape guide pin surface.                              |                          |
| <b>AZIMUTH</b><br>The gap of the head core should be perpendicular to the tape path.                           |                          |
| <b>HEIGHT</b><br>The upper edge of the upper core of the head should be level with the upper edge of the tape. |                          |
| <b>TANGENCY</b><br>The dotted line should be perpendicular to the surface of the tape.                         |                          |

Fig. 2-12 Head regulation elements

### 2-10-3 ALIGNMENT PROCEDURE

1. By visual observation, align the erase, record, and playback heads so that the proper tilt is obtained for each.
2. Coarse-adjust the azimuth of the erase, record, and playback heads by observing each without a tape threaded.
3. Load a TEAC YTT-8013 test tape and play it.
4. The erase head core should protrude 0.1 mm above the tape while in motion. If not, readjust the azimuth and recheck the tilt and height. Adjust as necessary.
5. Fine-adjust the height of the record and playback heads until the brass-colored spacers appear above the moving tape. (The brass-colored spacers appear about as thin as a pencil line.) When adjusting, make sure all the screws are turned proportionately so that the tilt and azimuth previously adjusted is not altered.
6. If required, make a coarse adjustment of any head requiring tangency correction, while the tape is running.

## 2-11 FREQUENCY AND VOLTAGE CONVERSION

General Export Models Only:

If it is necessary to change the frequency and line voltage settings, follow the instructions below:

**ALWAYS DISCONNECT THE POWER LINE CORD BEFORE MAKING THESE ADJUSTMENTS.**

1. Remove the metal housing\* covering the top and sides of the deck by unscrewing the three screws from each side.
2. Locate the voltage selector on the right (as seen from the front). The frequency selectors are located near each motor as illustrated.

**Voltage Conversion:**

3. Turn the slotted center post of the selector with a screwdriver or coin as illustrated until the proper setting is obtained.

**Frequency Conversion:**

4. For each reel motor, loosen the screws on the respective frequency selector bar and jumper the bar to the terminal corresponding to the AC line frequency of your area, then retighten the screws.
5. Replace the housing and retighten the screws.

\* Decks in some areas have a wooden case which can be removed by unscrewing the screws on the bottom (feet) and sides.

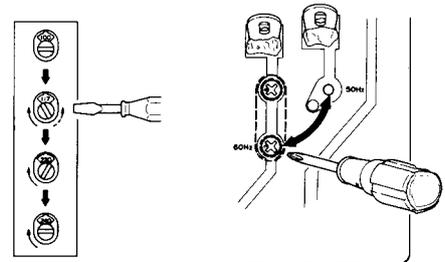


Fig. 2-13

## 2-12 LUBRICATION

Oiling is needed after every 1,000 hours of operation or once a year if the deck is used infrequently. TEAC spindle oil (from TEAC TZ-255 oil kit), Mobil D.T.E. Oil Light, and similar types of oil are recommended. Lubrication is normally not necessary except at the points shown.

1. Place the deck in a horizontal position.
2. Apply a few drops of oil to the respective spindles shown, except the capstan and the reel motors. Spread the oil evenly on the spindle surfaces using a cotton cloth or similar applicator.
3. For the capstan and reel motors, apply a few drops to the indicated positions but do not spread the oil.
4. After oiling all points, operate the deck for 1 to 2 hours until the oil is thoroughly absorbed.

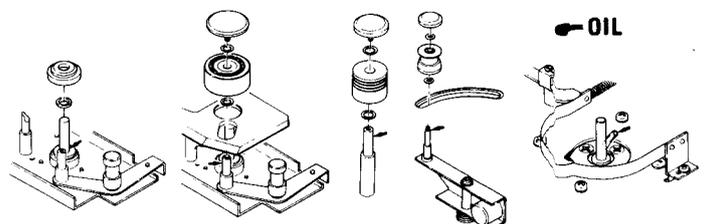


Fig. 2-14

### 3 ELECTRICAL ADJUSTMENTS AND CHECKS

- NOTES:**
1. Clean and demagnetize the entire tape path prior to making any adjustments or checks.
  2. Make sure that the deck is properly set for the voltage in your area.
  3. Adjustments and checks are generally done in order of L-ch, then R-ch. Double reference numbers indicate L-ch/R-ch. (Example: R121/R221)
  4. The value of "dB" refers to 0 dB (0.775 V). If an AC voltmeter calibrated to 0 dB (1 V) is used, compensation should be made accordingly.
  5. An AC voltmeter with an input impedance of 1 M ohms or more must be used.

#### 3-1 POWER SUPPLY CHECK

1. Connect a DC voltmeter to pin 15 of U101 on the Record/Playback PCB.
2. The DC voltage should be +12 V. (See Fig. 3-1)

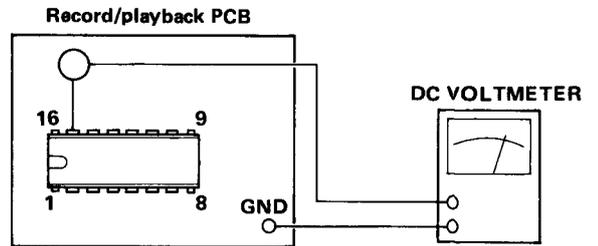


Fig. 3-1

#### 3-2 MONITOR PERFORMANCE (1)

| ITEM                    | CONNECTION   | MODE/ INSTRUCTION  | SIGNAL SOURCE              | ADJUST (or CHECK)   | OUTPUT           | REMARKS  |
|-------------------------|--------------|--|----------------------------|---|------------------|--|
| 1. MONITOR output level | 1-1 Fig. 3-2 | MONITOR sw.:<br>SOURCE<br>OUTPUT cont.:MAX<br>LINE cont: MAX | 400 Hz/-22 dB<br>(61.5 mV) | R121/R221   | +1 dB (869 mV)   | LINE min. input level  |
|                         | 1-2 "        | "  | "                          | OUTPUT cont.<br>If channels do not match re-adjust R121 or R220 to correspond to the higher OUTPUT. | -5 dB (436 mV)   | <b>IMPORTANT:</b> After setting, do not change the OUTPUT control, always leave it in this position. |
| 2. VU meter             | 2-1 Fig. 3-2 | MONITOR sw.:<br>SOURCE<br>LINE cont.: MAX                    | 400 Hz/-22 dB<br>(61.5 mV) | R117/R217   | 0 VU on VU Meter |  |

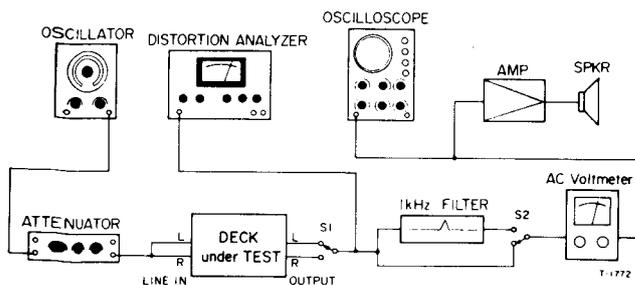


Fig. 3-2 Basic connection

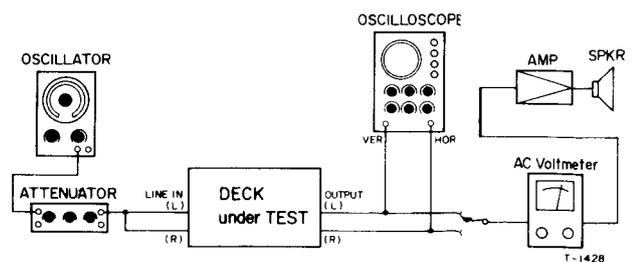


Fig. 3-3 Connection


TEAC test tape: YTT-1002: For playback alignment (9.5 cm/s or 3-3/4 ips)  
 YTT-1003: For playback alignment (19 cm/s or 7-1/2 ips)  
 YTT-8013: For recording alignment (blank)

**3-3 PLAYBACK PERFORMANCE**


| ITEM                     | CONNECTION   | MODE/<br>INSTRUCTION   | SIGNAL<br>SOURCE            | ADJUST<br>(or CHECK)                             | OUTPUT  | REMARKS  |
|--------------------------|--------------|--|-----------------------------|--|---|--|
| 3. Playback head azimuth | 3-1 Fig. 3-3 | MONITOR sw.:<br>TAPE<br>SPEED sw.:<br>HIGH                             | YTT-1003<br>(16 kHz/-10 dB) | Azimuth. adjust<br>screws on head<br>(Fig. 2-11) | Phase: within 45°<br>on oscilloscope<br>(Fig. 3-4)      |  |
| 4. Playback level        | 4-1 Fig. 3-2 | OUTPUT cont.:<br>spec. position<br>SPEED sw.:<br>HIGH<br>Playback mode | YTT-1003<br>(400 Hz/0 dB)   | R105/R205  | -5 dB (436 mv)  |  |
| 5. VU meter              | 5-1 Fig. 3-2 | "  | YTT-1003<br>(400 Hz/0 dB)   | Check  | 0 VU ±0.5 VU  |  |
| 6. Frequency response    | 6-1 Fig. 3-2 | MONITOR sw.:<br>TAPE<br>SPEED sw.:<br>HIGH                             | YTT-1003                    | R111/R211  | 40 Hz~20 kHz<br>±3 dB                                   |  |
|                          | 6-2 "        | "<br>SPEED sw.:<br>LOW   | YTT-1002                    | R113/R213  | 40 Hz~14 kHz<br>±3 dB                                   |  |
| 7. Signal-to-noise ratio | 7-1 Fig. 3-2 | Playback mode<br>Use fully erased<br>tape (use bulk<br>tape eraser)    | YTT-8013                    | Check  | HIGH: 49 dB<br>(min) ratio<br>LOW: 47 dB<br>(min) ratio | Ratio of specified<br>OUTPUT signal<br>(-5 dB) to inherent<br>noise level. |

**3-4 MONITOR PERFORMANCE (2)**

|                        |                                |   |                            |       |  |         |
|------------------------|--------------------------------|---|----------------------------|-------|--|---------|
| 8. MIC Input level     | 8-1 Fig. 3-2 but LINE IN → MIC | LINE cont.:<br>MIN<br>MIC cont.:<br>MAX                           | 400 Hz/-70 dB<br>(245 μV)  | Check | -5 dB ±3 dB<br>(308 mV to<br>615 mV)                 |         |
| 9. PHONES output level | 9-1 Fig. 3-5                   | LINE cont.:<br>MAX<br>MIC cont.:<br>MIN<br>MONITOR sw.:<br>SOURCE | 400 Hz/-22 dB<br>(61.5 mV) | Check | -24 dB ±3 dB<br>(at PHONES jack)<br>(35 mV to 69 mV) | 8Ω load |

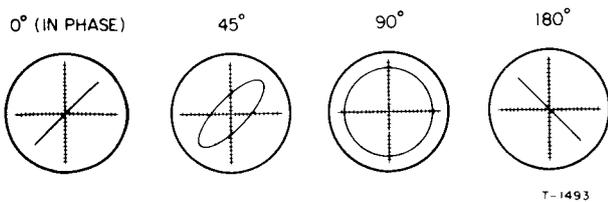

**Fig. 3-4 Confirming phase relationship**

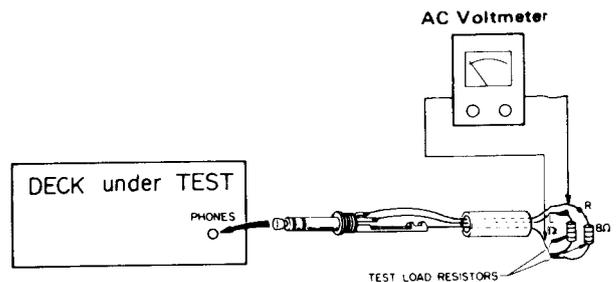

**Fig. 3-5 Connection**


**3-5 RECORDING PERFORMANCE**

TEAC test tape: YTT-8013: For recording alignment (blank)

| ITEM                                    | CONNECTION | MODE/<br>INSTRUCTION                                   | SIGNAL<br>SOURCE   | ADJUST<br>(or CHECK)                                    | OUTPUT                        | REMARKS  |  |
|---|------------|--|--|---|-------------------------------|--|--|
| 10. Bias level                          | 10-1       | AC voltmeter between BIAS TRAP TP (31-B or 33-B) & GND | Rec-pause mode.  | —   | L103/L203                     | Min. reading on VTVM   | Bias Frequency: 100 kHz ±5 kHz   |
|   | 10-2       | Fig. 3-2   | Rec-pause mode.<br>MONITOR sw.: TAPE   | —   | L101/L201                     | Min. reading   |  |
| 11. Record head azimuth                 | 11-1       | Fig. 3-3   | MONITOR sw.: TAPE<br>Record mode   | 10 kHz/−42 dB (6.15 mV)                                 | Azimuth adjust screws of Head | PHASE: within 45° on oscilloscope                            | Fig. 3-4   |
| 12. Record Bias                         | 12-1       | Fig. 3-2   | Test Tape: YTT-8013<br>SPEED sw.: LOW<br>BIAS sw.: 1<br>EQ sw.: 1<br>MONITOR sw.: TAPE | 7 kHz/−22 dB (61.5 mV)                                  | C140/C240                     | Overbias value 3 dB~4 dB (from peak)                         |  |
| 13. Record level                        | 13-1       |  | Test tape: YTT-8013<br>SPEED sw.: LOW<br>BIAS sw.: 1<br>EQ sw.: 1<br>MONITOR sw.: TAPE | 400 Hz/−22 dB (61.5 mV)                                 | R154/R254                     | −5 dB (436 mV)   | Spec. Record condition   |
| 14. Frequency response (BIAS, EQ sw. 1) | 14-1       | Fig. 3-2   | SPEED sw.: LOW<br>Spec. REC condition  | 40 Hz~14 kHz/−42 dB (61.5 V)                            | L102/L202                     | 40 Hz~10 kHz ±3 dB<br>10 kHz~14 kHz +3 dB, −5 dB             | Reference 400 Hz   |
|   | 14-2       | "  | SPEED sw.: HIGH<br>"   | 40 Hz~20 kHz/−32 dB (19.5 mV)                           | Check                         | 40 Hz~16 kHz ±3 dB<br>16 kHz~20 kHz +3 dB, −5 dB             | Reference 400 Hz   |
| 15. Frequency response (BIAS, EQ SW.2)  | 15-1       | Fig. 3-2   | Spec. REC condition<br>SPEED sw.: HIGH   | 400 Hz/−32 dB<br>10 kHz/−32 dB (19.5 mV)                | Check                         | −1 dB ±0.5 dB/400 Hz.<br>−3 dB ±0.5 dB/10 kHz                | When BIAS/EQ switches are changed from "1" to "2", the OUTPUT level should be reduced. |
| 16. Signal-to-noise ratio               | 16-1       | Fig. 3-2   | BIAS sw.: 1<br>EQ sw.: 1<br>SPEED sw.: HIGH & LOW<br>Spec. REC condition               | —   | Check                         | HIGH: 47 dB (min.) ratio<br>LOW: 45 dB (min.) ratio          | Ratio of specified OUTPUT signal (−5 dB) to inherent noise level.                      |
| 17. Erase efficiency                    | 17-1       | Fig. 3-2 switch on the 1 kHz filter                    | SPEED sw.: HIGH<br>RECORD mode   | 1 kHz/−12 dB (195 mV, +10 VU) then, no signal recording | Check                         | OUTPUT: −65 dB or more (436 μV or less) (70 dB [min.] ratio) | Reference OUTPUT level +5 dB. The worst value should be within spec.                   |
| 18. REC MUTE function                   | 18-1       | Fig. 3-2 switch on the 1 kHz filter                    | SPEED sw.: HIGH<br>Spec. REC condition   | 1 kHz/−12 dB (195 mV, +10 VU) then, record muting       | Check                         | OUTPUT: −65 dB or more (775 μV or less) (65 dB [min.] ratio) | Reference OUTPUT level: +5 dB. The worst value should be within spec.                  |

| ITEM                         | CONNECTION                               | MODE/<br>INSTRUCTION   | SIGNAL<br>SOURCE                                    | ADJUST<br>(or CHECK) | OUTPUT  | REMARKS  |
|------------------------------|--|--|---|----------------------|---|--|
| 19. Channel separation (L→R) | 19-1 Fig. 3-2 switch on the 1 kHz filter | SPEED sw.: HIGH<br>Spec. REC condition                             | L: 1 kHz/−22 dB (61.5 mV)<br>R: no signal recording | Check                | R: −50 dB or more (2.45 mV or less) (45 dB [min.] ratio)                        | Find the difference between the 1 kHz-recorded portion (L-ch) and the no signal recorded portion (R-ch). |
| 20. Channel separation (R→L) | 20-1 Fig. 3-2 switch on the 1 kHz filter | SPEED sw.: HIGH<br>Spec. REC condition                             | L: No signal recording<br>R: 1 kHz/−22dB (61.5mV)   | Check                | L: −50 dB or more (2.45 mV or less) (45 dB [min.] ratio)                        | Find the difference between the 1 kHz-recorded portion (R-ch) and the no signal recorded portion (L-ch). |
| 21. Adjacent track crosstalk | 21-1 Fig. 3-2                            | SPEED sw.: HIGH<br>BIAS sw.: 1<br>EQ sw.: 1<br>Spec. REC condition | 125 Hz/−22 dB (61.5 mV)                             | —                    | —   |  |
|                              | 21-2 "                                   | Switch R & L reels then playback                                   | —   | Check                | At both channels, 125 Hz: −45 dB or more (4.36 mV or less) (40 dB [min.] ratio) |  |
| 22. Distortion               | 22-1 Fig. 3-2                            | SPEED sw.: HIGH<br>Spec. REC condition                             | 400 Hz/−22 dB (61.5 mV)                             | Check                | 1.0% or less  |  |

**3-6 ADJUSTMENT AND TEST POINT LOCATIONS**

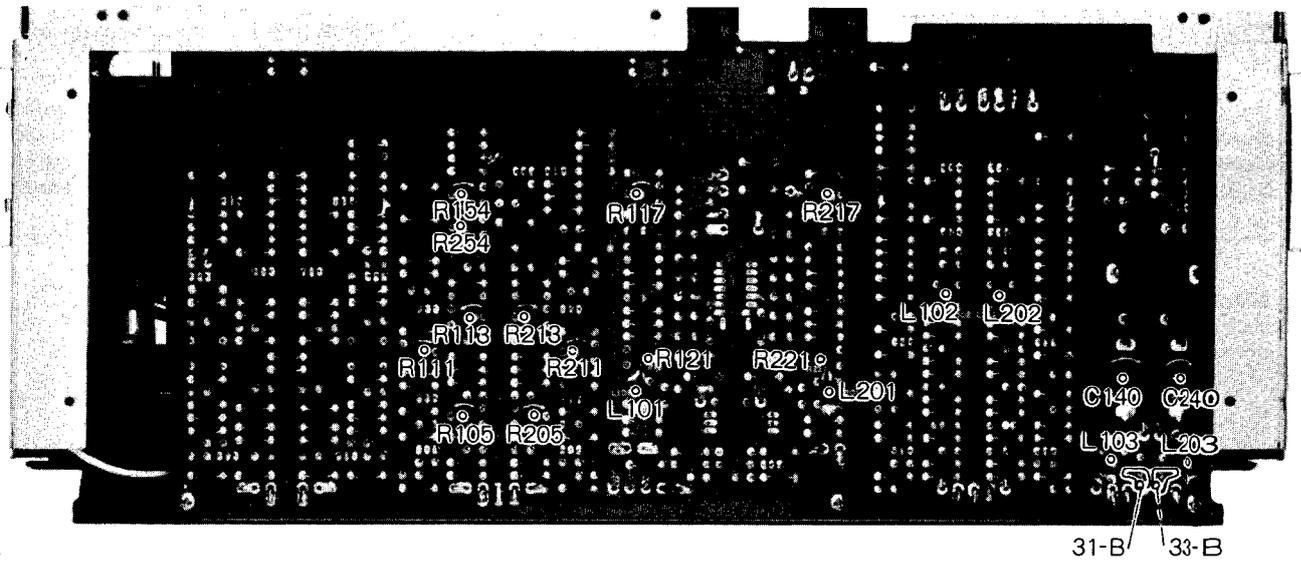

|           |                      |           |                      |
|-----------|----------------------|-----------|----------------------|
| R105/R205 | Playback Level       | L101/L201 | Bias Trap (OUTPUT)   |
| R111/R211 | Playback EQ (HIGH)   | L102/L202 | Record EQ            |
| R113/R213 | Playback EQ (LOW)    | L103/L203 | Bias Trap (record)   |
| R117/R217 | VU Meter Level       | C140/C240 | Record Bias          |
| R121/R221 | Monitor Output Level | 31-B/33-B | Bias Trap Test Point |
| R154/R254 | Record Level         |           |                      |



Fig. 3-6

**ASSEMBLING HARDWARE CODING LIST**

All screws conform to ISO standards, and have crossrecessed heads, unless otherwise noted. ISO screws have the head inscribed with a point as in the figure to the right.



FOR EXAMPLE:

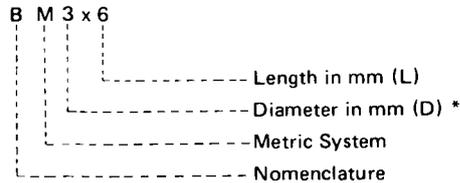


\* Inner dia. for washers and nuts

|               | <i>Code</i> | <i>Name</i>                     | <i>Type</i> |               | <i>Code</i>                         | <i>Name</i>                        | <i>Type</i> |
|---------------|-------------|---------------------------------|-------------|---------------|-------------------------------------|------------------------------------|-------------|
| MACHINE SCREW | <b>R</b>    | Round Head Screw                |             | TAPPING SCREW | <b>BTA</b>                          | Binding Head Tapping Screw(A Type) |             |
|               | <b>P</b>    | Pan Head Screw                  |             |               | <b>BTB</b>                          | Binding Head Tapping Screw(B Type) |             |
|               | <b>T</b>    | Stove Head Screw (Truss)        |             |               | <b>RTA</b>                          | Round Head Tapping Screw(A Type)   |             |
|               | <b>B</b>    | Binding Head Screw              |             |               | <b>RTB</b>                          | Round Head Tapping Screw(B Type)   |             |
|               | <b>F</b>    | Flat Countersunk Head Screw     |             | SETSCREW      | <b>SF</b>                           | Hex Socket Setscrew(Flat Point)    |             |
|               | <b>O</b>    | Oval Countersunk Head Screw     |             |               | <b>SC</b>                           | Hex Socket Setscrew(Cup Point)     |             |
| WOOD SCREW    | <b>RW</b>   | Round Head Wood Screw           |             | <b>SS</b>     | Slotted Socket Setscrew(Flat Point) |                                    |             |
| TAPTITE SCREW | <b>PTT</b>  | Pan Head Taptite Screw          |             | WASHER        | <b>E</b>                            | E-Ring (Retaining Washer)          |             |
|               | <b>WTT</b>  | Washer Head Taptite Screw       |             |               | <b>W</b>                            | Flat Washer (Plain)                |             |
| SEMS SCREW    | <b>BSA</b>  | Binding Head SEMS Screw(A Type) |             |               | <b>SW</b>                           | Lock Washer (Spring)               |             |
|               | <b>BSB</b>  | Binding Head SEMS Screw(B Type) |             |               | <b>LWI</b>                          | Lock Washer (Internal Teeth)       |             |
|               | <b>BSF</b>  | Binding Head SEMS Screw(F Type) |             |               | <b>LWE</b>                          | Lock Washer (External Teeth)       |             |
|               | <b>PSA</b>  | Pan Head SEMS Screw(A Type)     |             | <b>TW</b>     | Trim Washer (Countersunk)           |                                    |             |
|               | <b>PSB</b>  | Pan Head SEMS Screw(B Type)     |             | NUT           | <b>N</b>                            | Hex Nut                            |             |


# 6 EXPLODED VIEWS AND PARTS LIST

## EXPLODED VIEW - 1

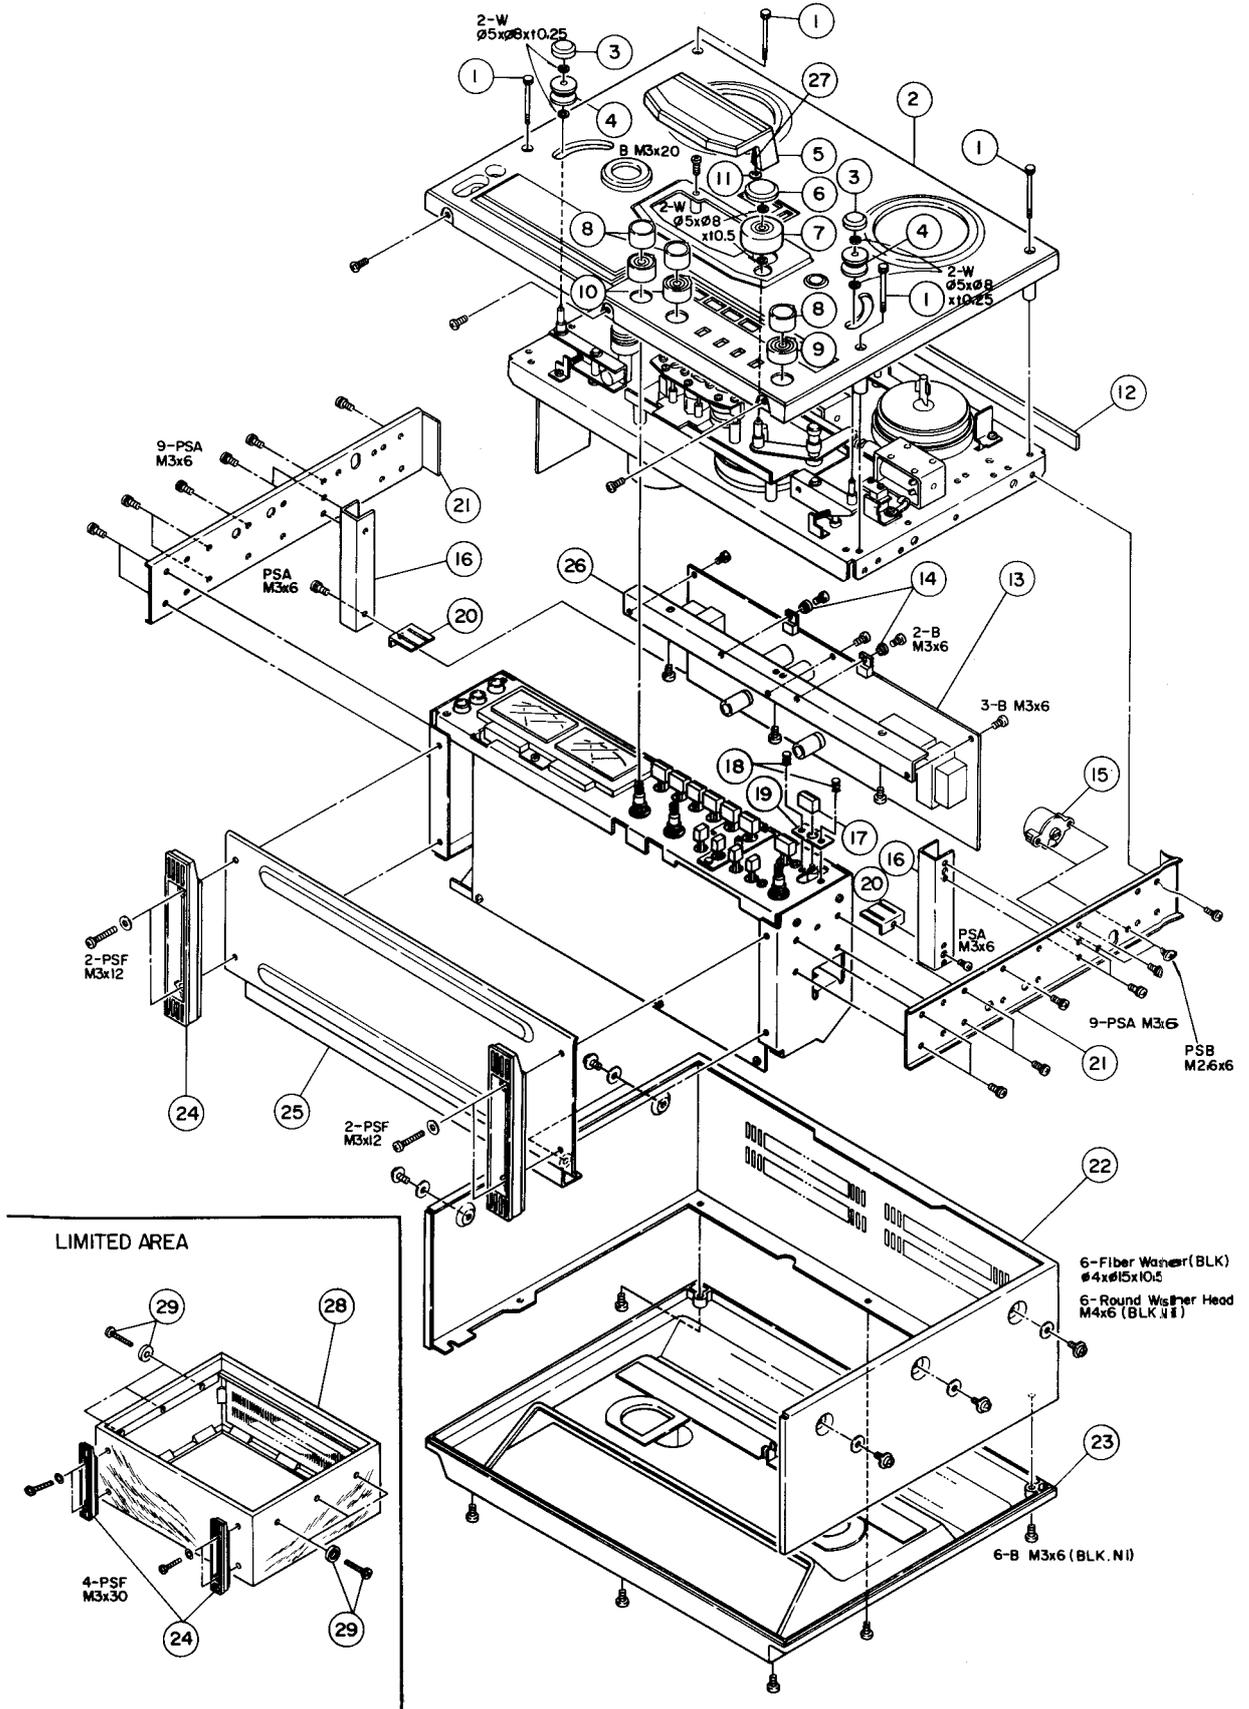



EXPLODED VIEW - 3

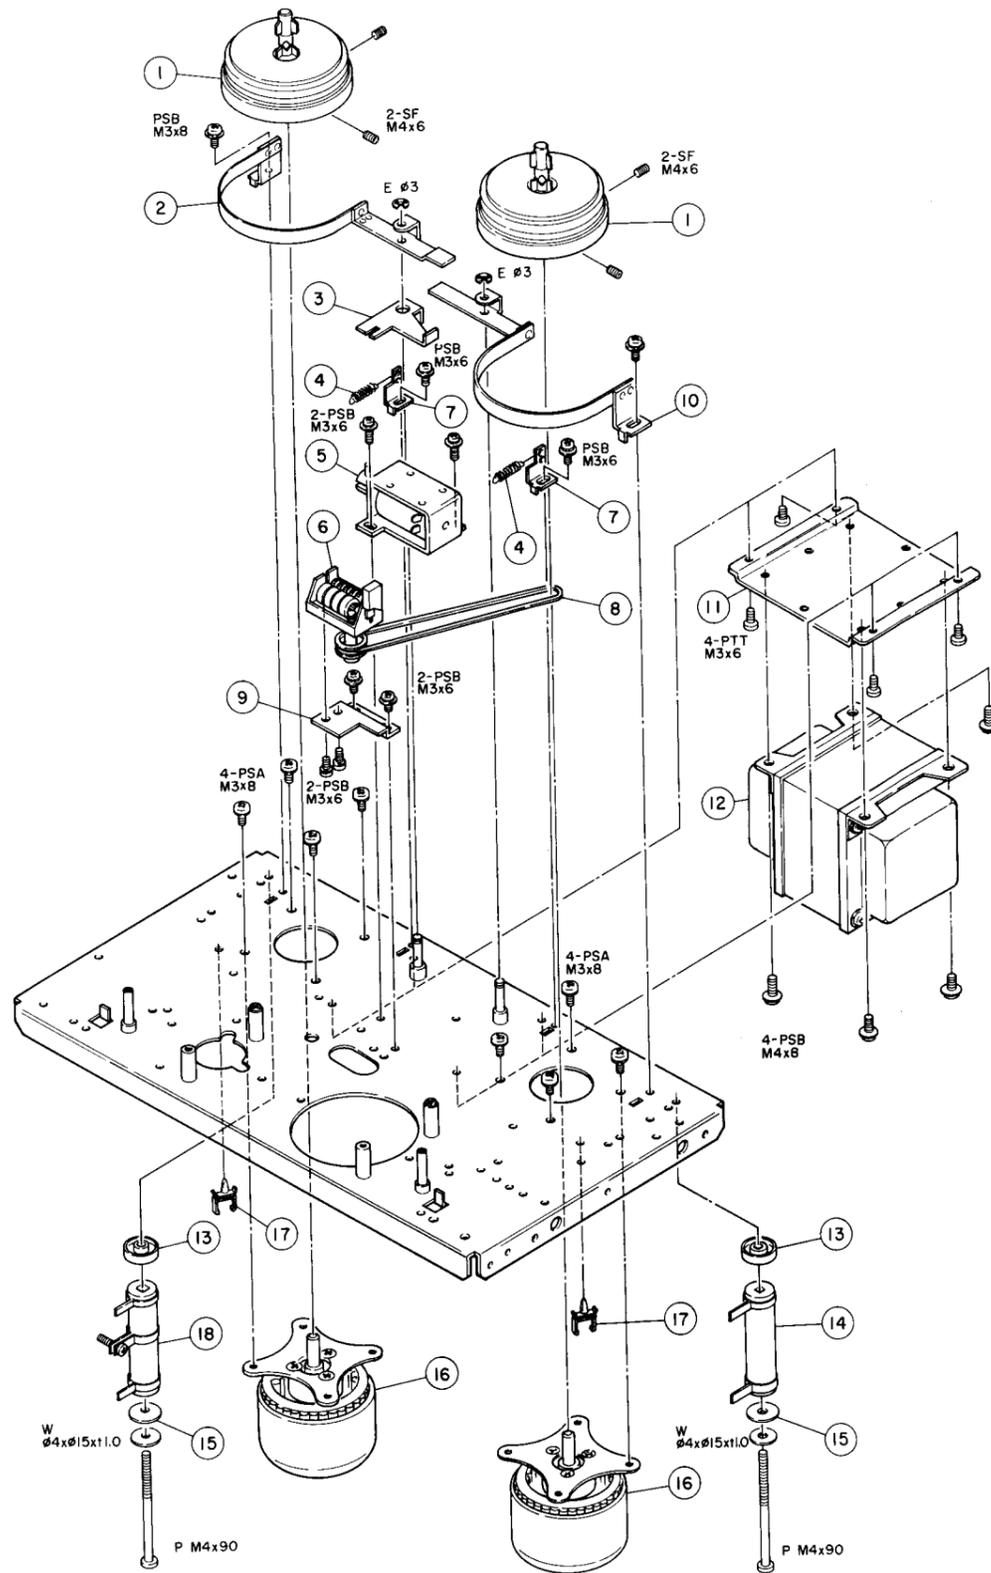

X-3 VIEW-3

\*Parts marked with required longer delivery time than regular parts.

EXPLODED VIEW - 3

| REF. NO. | PARTS NO.     | DESCRIPTION                         |
|----------|---------------|-------------------------------------|
| 3 - 1    | *5600018100   | Table Assy, Reel; A                 |
| 3 - 2    | *5504847000   | Band Assy, Brake; L                 |
| 3 - 3    | *5555939000   | Lever, Brake Actuating              |
| 3 - 4    | *5524291000   | Spring, Brake                       |
| 3 - 5    | 5163048000    | Solenoid                            |
| 3 - 6    | *5058509000   | Counter                             |
| 3 - 7    | *5555929000   | Hook, Spring                        |
| 3 - 8    | 5534853000    | Belt, Counter                       |
| 3 - 9    | *5555940000   | Bracket, Counter                    |
| 3 - 10   | *5504848000   | Band Assy, Brake; R                 |
| 3 - 11   | *5555919000   | Bracket, Transformer                |
| 3 - 12   | △ 5152240000  | Transformer, Power [U, C]           |
|          | △ 5320002400  | Transformer, Power [E, UK, A]       |
|          | △ 5320002500  | Transformer, Power [GE, L]          |
| 3 - 13   | *5534585000   | Holder, Resistor                    |
| 3 - 14   | △ 5181581000  | Resistor, Non Flammable<br>1kΩ 30W  |
| 3 - 15   | *5785254000   | Washer, Bakelite; φ4 x φ17 x t1     |
| 3 - 16   | 7104601000    | Motor, Reel                         |
| 3 - 17   | *5033258000   | Clamper, Cord; E                    |
| 3 - 18   | △ *5181597000 | Resistor, Non Flammable<br>250Ω 30W |

EXPLODED VIEW - 4


| REF. NO. | PARTS NO.     | DESCRIPTION                                     |
|----------|---------------|---|
| 4 - 1    | *5800080500   | Plate, Motor                                    |
| 4 - 2    | 5800080200    | Button, A                                       |
| 4 - 3    | 5800080300    | Button, B                                       |
| 4 - 4    | 5800080400    | Button, C                                       |
| 4 - 5    | 5165068000    | Meter, VU                                       |
| 4 - 6    | *5553364000   | Chassis, Side; L                                |
| 4 - 7    | 5800080000    | Button  |
| 4 - 8    | *5552489001   | Chassis, Amplifier                              |
| 4 - 9    | *5200008500   | PCB Assy, LED                                   |
| 4 - 10   | 5163049000    | Solenoid  |
| 4 - 11   | *5158110000   | PCB Assy, CONTROL B                             |
| 4 - 12   | *5200019500   | PCB Assy, CONTROL A<br>[All except C]           |
|          | *5200019510   | PCB Assy, CONTROL A [C]                         |
| 4 - 13   | *5555945000   | Bracket, PCB; B                                 |
| 4 - 14   | *5124063000   | Jack Assy, 3-gang                               |
| 4 - 15   | *5555946000   | Bracket, Jack                                   |
| 4 - 16   | *5054204000   | Capacitor, Ceramic; 0.01μF 50V                  |
| 4 - 17   | *5200024510   | PCB Assy, REC/PLAY AMPL                         |
| 4 - 18   | *5126038000   | Terminal Assy, IN/OUTPUT                        |
| 4 - 19   | *5158104000   | PCB Assy, IN/OUT PUT                            |
| 4 - 20   | *5552488001   | Chassis, Rear                                   |
| 4 - 21   | *5581056000   | Screw, Shoulder; A                              |
| 4 - 22   | 5534118000    | Rivet, Push                                     |
| 4 - 23   | *5534660000   | Strain Relief, AC Power Cord<br>[All except UK] |
|          | *5534661000   | Strain Relief, AC Power Cord [UK]               |
| 4 - 24   | *5555063000   | Washer, GND                                     |
| 4 - 25   | △ *5128083000 | Cord, AC Power [U, C]                           |
|          | △ *5127246000 | Cord, AC Power [GE, L]                          |
|          | △ *5128077000 | Cord, AC Power [E]                              |
|          | △ *5128095000 | Cord, AC Power [A]                              |
|          | △ *5350008400 | Cord, AC Power [UK]                             |
| 4 - 26   | *5122261000   | Connector, Plug; 4P                             |
| 4 - 27   | *5122262000   | Connector, Plug; 4P                             |
| 4 - 28   | 5282705800    | Var. Res., 100kΩ (A) x 2                        |
| 4 - 29   | △ *5052910000 | Spark Killer,<br>0.033μF + 120Ω/125V [U]        |
|          | △ *5052914000 | Spark Killer,<br>0.033μF + 120Ω/250V [C]        |
|          | △ *5052907000 | Spark Killer,<br>0.01μF + 300Ω/300V [GE, L]     |
|          | △ *5267702500 | Spark Killer, 0.0047μF/250V                     |
| 4 - 30   | △ *5300019400 | Switch, Power [All except U, C]                 |
|          | △ *5134122000 | Switch, Power [U, C]                            |
| 4 - 31   | *5786360500   | R-Pin, φ5                                       |
| 4 - 32   | *5534855000   | Bar, Joint                                      |
| 4 - 33   | *5553365001   | Chassis, Side; R                                |

[U]: U.S.A.  
[A]: AUSTRALIA  
[L]: LIMITED AREA

[C]: CANADA  
[E]: EUROPE

[GE]: GENERAL EXPORT  
[UK]: U.K.

EXPLODED VIEW - 4

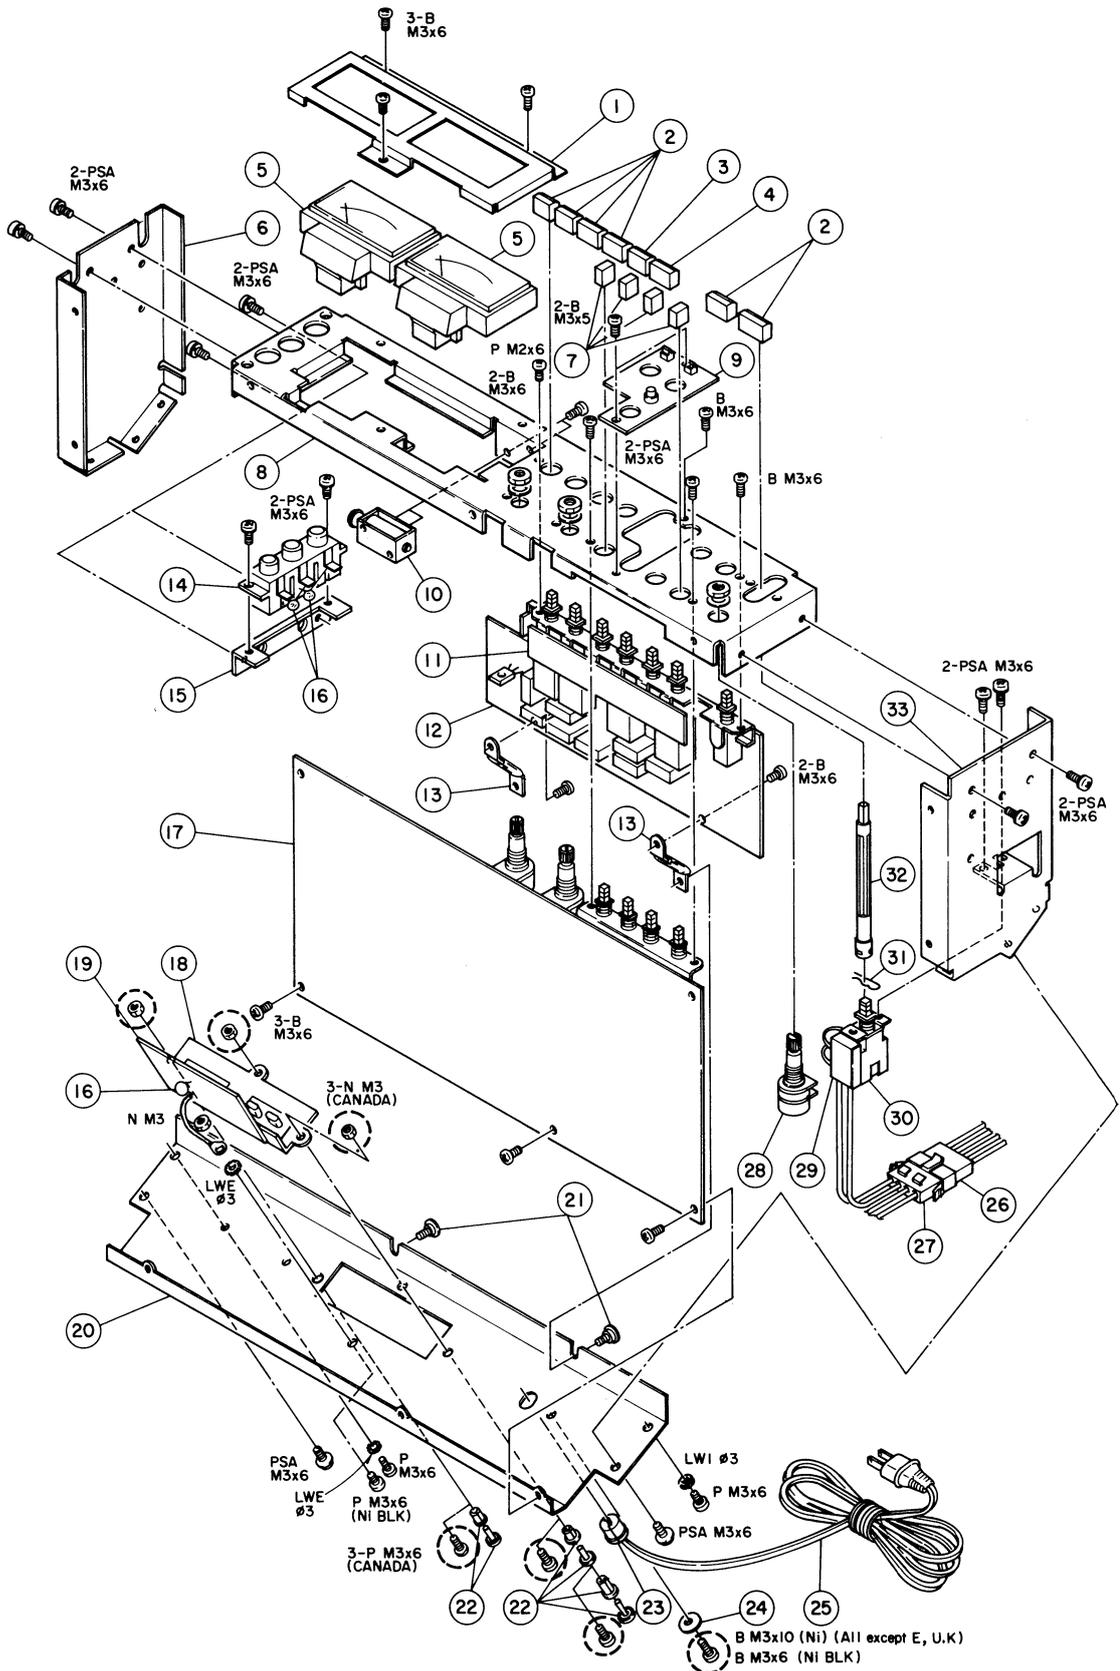


X-3 VIEW-4


# 7 PC BOARDS AND PARTS LIST

PC Boards shown viewed from foil side except CONTROL PCB B ASSY.

## CONTROL PCB A ASSY

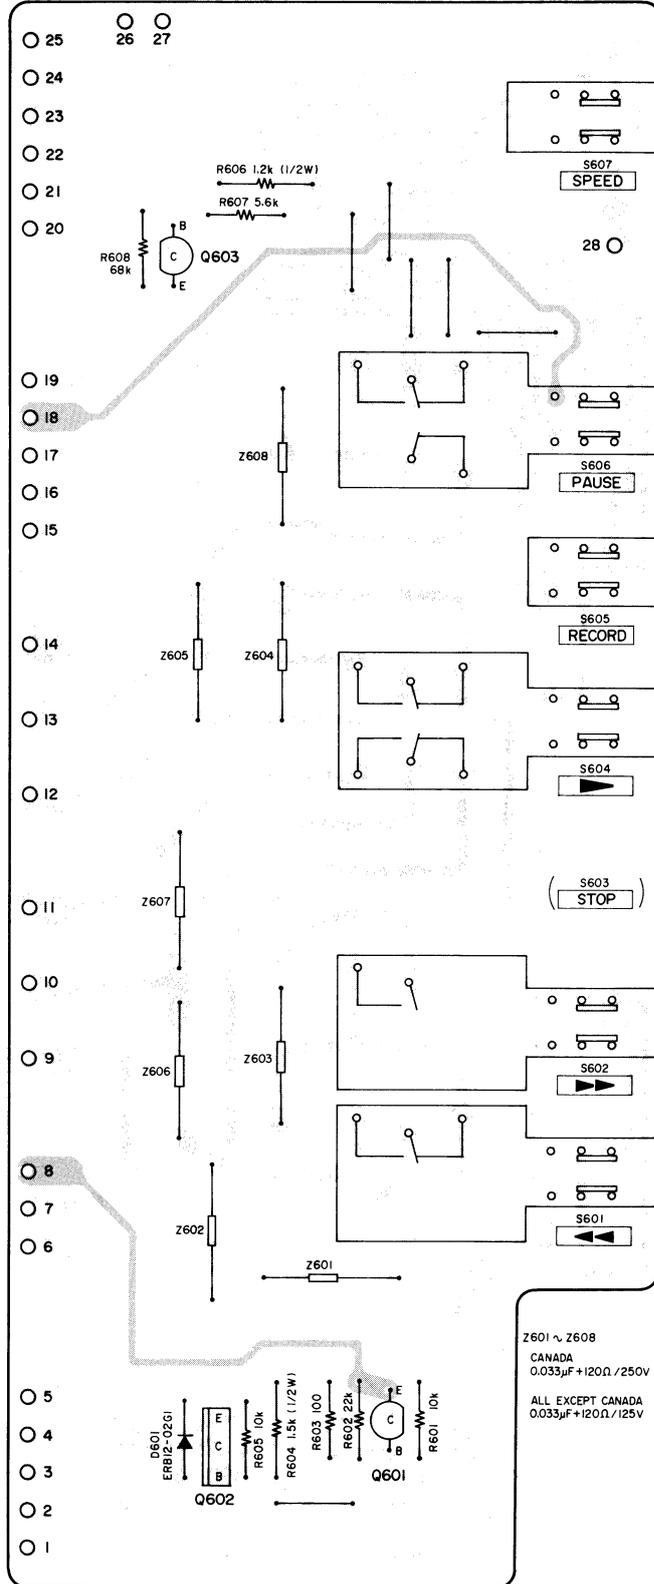


## CONTROL PCB B ASSY

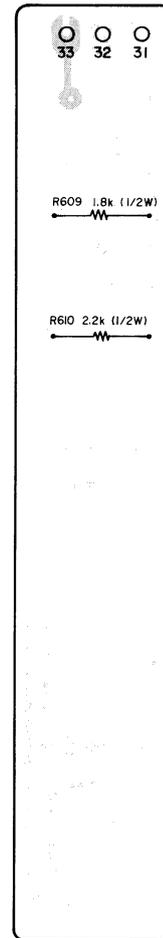


PC Board shown viewed from component side.

REC/PLAY AMPL PCB ASSY

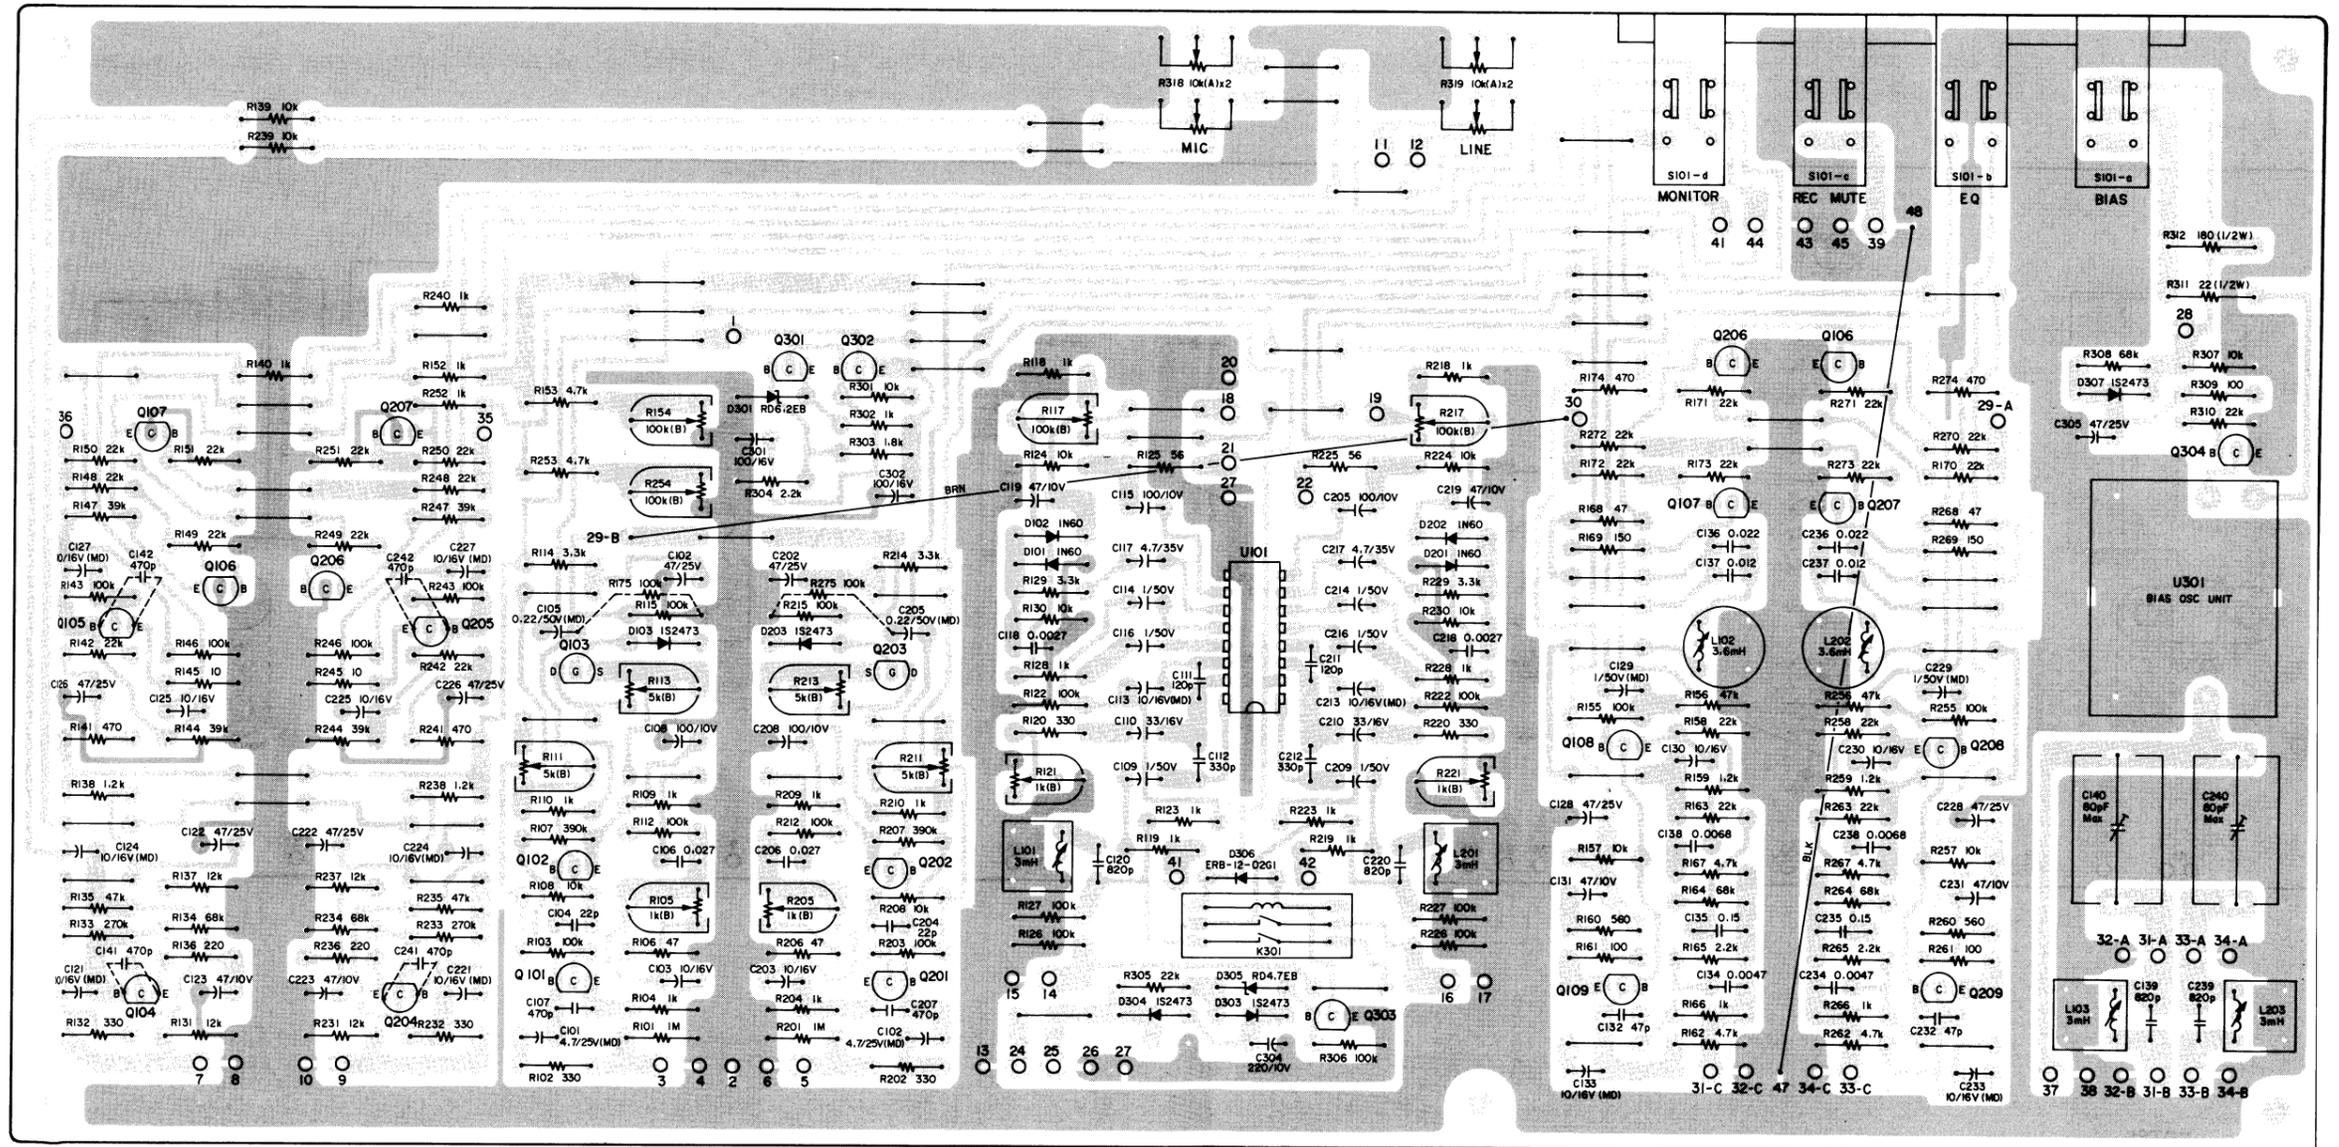

POWER SUPPLY PCB ASSY

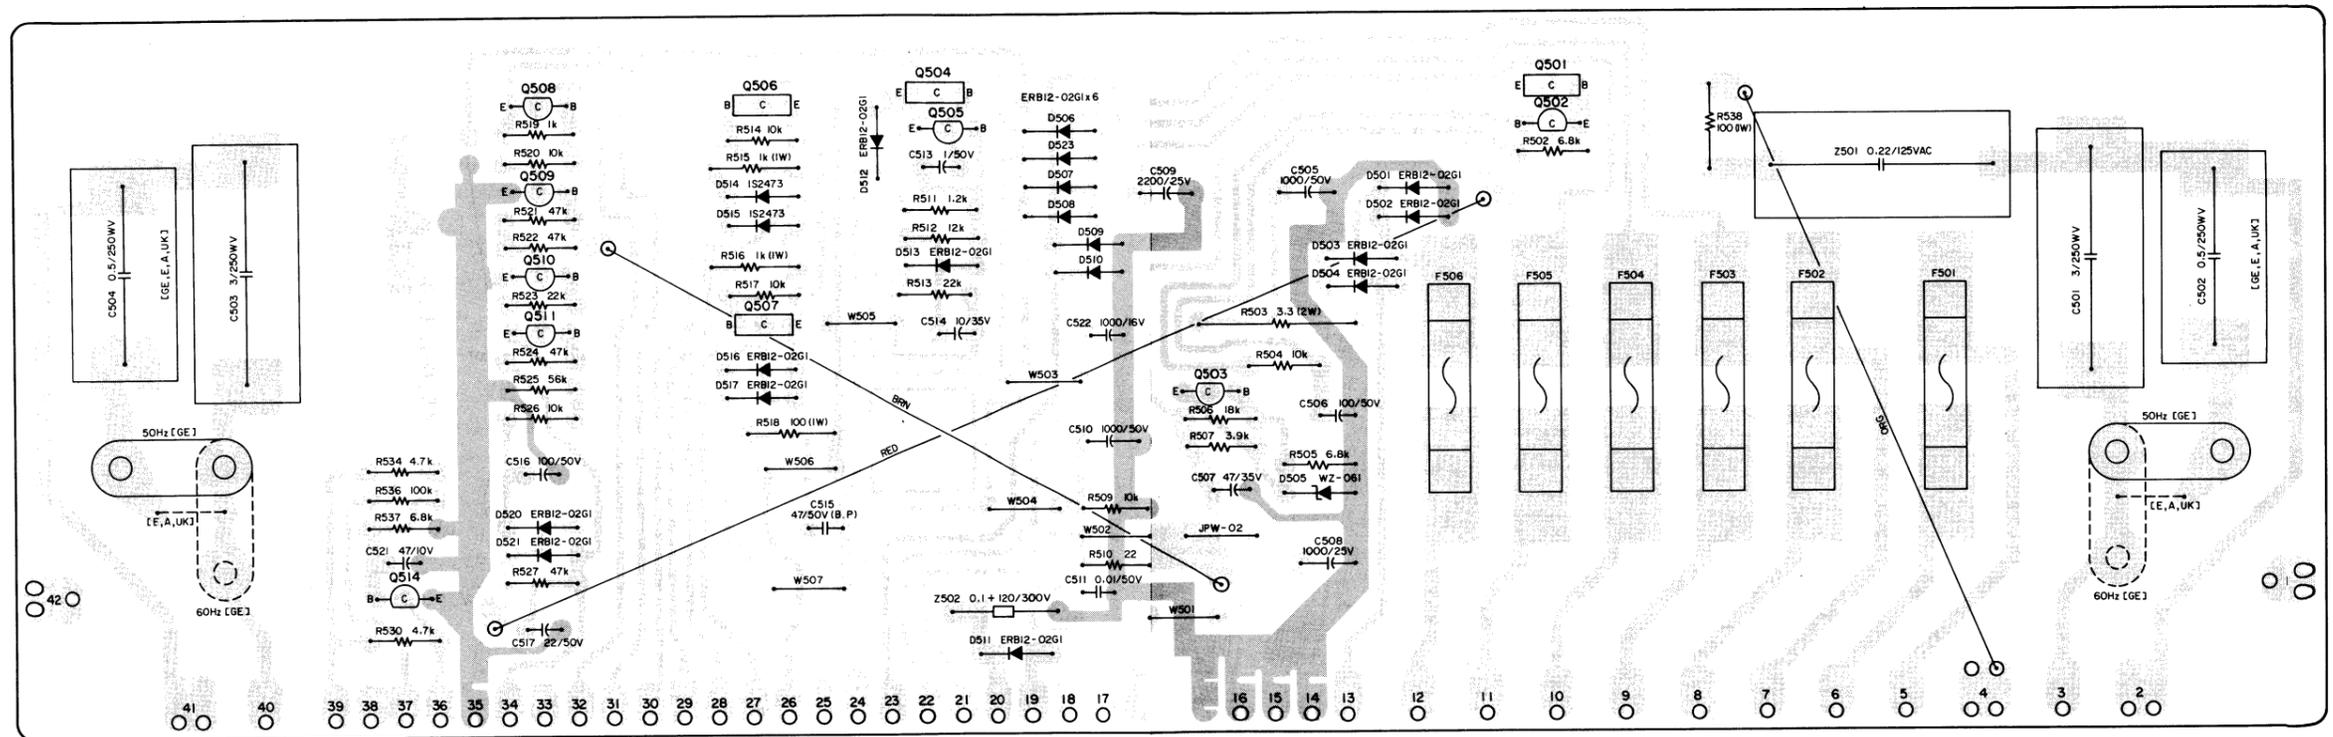

NOTES

1. The colors used on the PCB illustrations have the following significance:
  - +B power supply circuit
  - : GND
  - : Other
2. Resistor values are in ohms (k = 1,000 ohms, M = 1,000,000 ohms).
3. All capacitor values are in microfarads (p = picofarads).

**CONTROL PCB A ASSY**

| REF. NO.   | PARTS NO.           | DESCRIPTION  |
|--|---------------------|--|
|  | 5200019500          | PCB Assy [All except C]                              |
|  | 5200019510          | PCB Assy [C]   |
|  | 5157109000          | PCB A  |
| <b>TRANSISTORS</b>   |                     |  |
| Q601   | 5042625000          | 2SC1318S   |
| Q602   | 5145078000          | 2SD600F  |
| Q603   | 5042553000          | 2SA733P  |
| <b>DIODE</b>   |                     |  |
| D501   | 5143243000          | ERB12-02G1   |
| <b>RESISTORS</b>   |                     |  |
| All resistors are rated $\pm 5\%$ tolerance, $\frac{1}{4}$ watt and of carbon type unless otherwise noted. |                     |  |
| R601   | 5183106000          | 10k $\Omega$   |
| R602   | 5183114000          | 22k $\Omega$   |
| R603   | 5183058000          | 100 $\Omega$   |
| R604   | 5180086000          | 1.5k $\Omega$ $\frac{1}{2}W$                         |
| R605   | 5183106000          | 10k $\Omega$   |
| R606   | 5180084000          | 1.2k $\Omega$ $\frac{1}{2}W$                         |
| R607   | 5183100000          | 5.6k $\Omega$  |
| R608   | 5183126000          | 68k $\Omega$   |
| <b>MISCELLANEOUS</b>   |                     |  |
| Z601~Z608  | $\Delta$ 5052910000 | Spark Killer 0.033 $\mu F$ + 120/125V [All except C] |
| Z601~Z608  | $\Delta$ 5052914000 | Spark Killer 0.033 $\mu F$ + 120/250V [C]            |
| S601~S607  | $\Delta$ 5134123000 | Switch, Push; 7-gang                                 |

**CONTROL PCB B ASSY (PC Board omitted)**

| REF. NO.         | PARTS NO.  | DESCRIPTION                     |
|------------------|------------|---------------------------------|
|                  | 5158110000 | PCB B Assy                      |
|                  | 5157110000 | PCB B                           |
| <b>RESISTORS</b> |            |                                 |
| R609             | 5180088000 | 1.8k $\Omega$ $\frac{1}{2}W$ 5% |
| R610             | 5180090000 | 2.2k $\Omega$ $\frac{1}{2}W$ 5% |

**REC/PLAY AMPL PCB ASSY**

| REF. NO.   | PARTS NO.  | DESCRIPTION       |
|--|------------|-------------------|
|  | 5200024510 | PCB Assy          |
|  | 5157103001 | PCB               |
| <b>IC</b>  |            |                   |
| U101   | 5147053000 | HA-11122W         |
| <b>TRANSISTORS</b>   |            |                   |
| Q101, Q201   | 5042461000 | 2SC1327T          |
| Q102, Q202   | 5145092000 | 2SC1740LNS        |
| Q103, Q203   | 5145103000 | FET, 2SK68AM      |
| Q104, Q204   | 5042461000 | 2SC1327T          |
| Q105, Q205   | 5042495000 | 2SC1222E          |
| Q106, Q206   | 5145185000 | 2SD655E           |
| Q107, Q207   | 5145185000 | 2SD655E           |
| Q108, Q208   | 5042495000 | 2SC1222E          |
| Q109, Q209   | 5145094000 | 2SA826LNR         |
| Q110, Q210   | 5145092000 | 2SC1740LNS        |
| Q111, Q211   | 5145092000 | 2SC1740LNS        |
| Q301   | 5042475000 | 2SC1384Q          |
| Q302 ~ Q304  | 5145092000 | 2SC1740LNS        |
| <b>DIODES</b>  |            |                   |
| D101, D201   | 5042213000 | 1N60              |
| D102, D202   | 5042213000 | 1N60              |
| D103, D203   | 5143118000 | 1S2473HJ          |
| D301   | 5042554000 | Zener, RD6.2EB 3% |
| D303, D304   | 5143118000 | 1S2473HJ          |
| D305   | 5143121000 | Zener, RD4.7EB    |
| D306   | 5143243000 | ERB12-02G1        |
| D307   | 5143118000 | 1S2473HJ          |
| <b>RESISTORS</b>   |            |                   |
| All resistors are rated $\pm 5\%$ tolerance, $\frac{1}{4}$ watt and of carbon type unless otherwise noted. |            |                   |
| R101, R201   | 5181554000 | 1M $\Omega$       |
| R102, R202   | 5181470000 | 330 $\Omega$      |
| R103, R203   | 5181530000 | 100k $\Omega$     |
| R104, R204   | 5181482000 | 1k $\Omega$       |
| R106, R206   | 5181450000 | 47 $\Omega$       |
| R107, R207   | 5181544000 | 390k $\Omega$     |
| R108, R208   | 5181506000 | 10k $\Omega$      |
| R109, R209   | 5181482000 | 1k $\Omega$       |
| R110, R210   | 5181482000 | 1k $\Omega$       |
| R112, R212   | 5181530000 | 100k $\Omega$     |
| R114, R214   | 5181494000 | 3.3k $\Omega$     |
| R115, R215   | 5181530000 | 100k $\Omega$     |
| R118, R218   | 5181482000 | 1k $\Omega$       |
| R119, R219   | 5181482000 | 1k $\Omega$       |
| R120, R220   | 5181470000 | 330 $\Omega$      |
| R122, R222   | 5181530000 | 100k $\Omega$     |
| R123, R223   | 5181482000 | 1k $\Omega$       |
| R124, R224   | 5181506000 | 10k $\Omega$      |
| R125, R225   | 5181458000 | 100 $\Omega$      |
| R126, R226   | 5181530000 | 100k $\Omega$     |
| R127, R227   | 5181530000 | 100k $\Omega$     |
| R128, R228   | 5181482000 | 1k $\Omega$       |
| R129, R229   | 5181494000 | 3.3k $\Omega$     |
| R130, R230   | 5181506000 | 10k $\Omega$      |
| R131, R231   | 5181508000 | 12k $\Omega$      |

[U]: U.S.A.  
[A]: AUSTRALIA  
[L]: LIMITED AREA

[C]: CANADA  
[E]: EUROPE

[GE]: GENERAL EXPORT  
[UK]: U.K.

| REF. NO.   | PARTS NO.   | DESCRIPTION           |
|------------|-------------|-----------------------|
| R132, R232 | 5181470000  | 330Ω                  |
| R133, R233 | 5181540000  | 270kΩ                 |
| R134, R234 | 5181526000  | 68kΩ                  |
| R135, R235 | 5181522000  | 47kΩ                  |
| R136, R236 | 5181466000  | 220Ω                  |
| R137, R237 | 5181508000  | 12kΩ                  |
| R138, R238 | Δ5184175000 | 1.2kΩ Non Flammable   |
| R139, R239 | 5181506000  | 10kΩ                  |
| R140, R240 | 5181482000  | 1kΩ                   |
| R141, R241 | Δ5184165000 | 470Ω Non Flammable    |
| R142, R242 | 5181514000  | 22kΩ                  |
| R143, R243 | 5181530000  | 100kΩ                 |
| R144, R244 | 5181520000  | 39kΩ                  |
| R145, R245 | 5181434000  | 10Ω                   |
| R146, R246 | 5181530000  | 100kΩ                 |
| R147, R247 | 5181520000  | 39kΩ                  |
| R148, R248 | 5181514000  | 22kΩ                  |
| R149, R249 | 5181514000  | 22kΩ                  |
| R150, R250 | 5181514000  | 22kΩ                  |
| R151, R251 | 5181514000  | 22kΩ                  |
| R152, R252 | 5181482000  | 1kΩ                   |
| R153, R253 | 5181498000  | 4.7kΩ                 |
| R155, R255 | 5181530000  | 100kΩ                 |
| R156, R256 | 5181522000  | 47kΩ                  |
| R157, R257 | 5181506000  | 10kΩ                  |
| R158, R258 | 5181514000  | 22kΩ                  |
| R159, R259 | 5181484000  | 1.2kΩ                 |
| R160, R260 | 5181476000  | 560Ω                  |
| R161, R261 | 5181458000  | 100Ω                  |
| R162, R262 | 5181498000  | 4.7kΩ                 |
| R163, R263 | 5181514000  | 22kΩ                  |
| R164, R264 | 5181526000  | 68kΩ                  |
| R165, R265 | 5181490000  | 2.2kΩ                 |
| R166, R266 | 5181482000  | 1kΩ                   |
| R167, R267 | 5181498000  | 4.7kΩ                 |
| R168, R268 | 5181450000  | 47Ω                   |
| R169, R269 | 5181466000  | 220Ω                  |
| R170, R270 | 5181514000  | 22kΩ                  |
| R171, R271 | 5181514000  | 22kΩ                  |
| R172, R272 | 5181514000  | 22kΩ                  |
| R173, R273 | 5181514000  | 22kΩ                  |
| R174, R274 | Δ5181465000 | 470Ω Non Flammable    |
| R175, R275 | 5181330000  | 100kΩ                 |
| R176       | 5181330000  | 100kΩ                 |
| R270       | 5181330000  | 100kΩ                 |
| R301       | 5181506000  | 10kΩ                  |
| R302       | 5181482000  | 1kΩ                   |
| R303       | 5181488000  | 1.8kΩ                 |
| R304       | 5181490000  | 2.2kΩ                 |
| R305       | 5181514000  | 22kΩ                  |
| R306       | 5181530000  | 100kΩ                 |
| R307       | 5181506000  | 10kΩ                  |
| R308       | 5181502000  | 6.8kΩ                 |
| R309       | 5181458000  | 100Ω                  |
| R310       | 5181514000  | 22kΩ                  |
| R311       | Δ5181982000 | 22Ω ½W Non Flammable  |
| R312       | Δ5182004000 | 180Ω ½W Non Flammable |

| REF. NO.          | PARTS NO.  | DESCRIPTION             |
|-------------------|------------|-------------------------|
| <b>CAPACITORS</b> |            |                         |
| C101, C201        | 5173564800 | Elec. 4.7μF 25V (MD)    |
| C102, C202        | 5173037800 | Elec. 47μF 25V (USM)    |
| C103, C203        | 5173010800 | Elec. 10μF 16V (USM)    |
| C104, C204        | 5172304000 | Ceramic 22pF 50V 10%    |
| C105, C205        | 5173552800 | Elec. 0.22μF 50V (MD)   |
| C106, C206        | 5154899500 | Mylar 0.027μF 100V 5%   |
| C107, C207        | 5172320000 | Ceramic 470pF 50V 10%   |
| C108, C208        | 5173044800 | Elec. 100μF 10V (USM)   |
| C109, C209        | 5172992800 | Elec. 1μF 50V (USM)     |
| C110, C210        | 5173027800 | Elec. 33μF 16V (USM)    |
| C111, C211        | 5172320000 | Ceramic 470pF 50V 10%   |
| C112, C212        | 5172318000 | Ceramic 330pF 50V 10%   |
| C113, C213        | 5173571800 | Elec. 10μF 16V (MD)     |
| C114, C214        | 5172992800 | Elec. 1μF 50V (USM)     |
| C115, C215        | 5173044800 | Elec. 100μF 10V (USM)   |
| C116, C216        | 5172992800 | Elec. 1μF 50V (USM)     |
| C117, C217        | 5173005800 | Elec. 4.7μF 35V (USM)   |
| C118, C218        | 5154893500 | Mylar 0.0068μF 100V 5%  |
| C119, C219        | 5173044800 | Elec. 100μF 10V (USM)   |
| C120, C220        | 5054312000 | Polyst. 820pF 250V 10%  |
| C121, C221        | 5173571800 | Elec. 10μF 16V (MD)     |
| C122, C222        | 5173037800 | Elec. 47μF 25V (USM)    |
| C123, C223        | 5173035800 | Elec. 47μF 10V (USM)    |
| C124, C224        | 5173571800 | Elec. 10μF 16V (MD)     |
| C125, C225        | 5173010800 | Elec. 10μF 16V (USM)    |
| C126, C226        | 5173037800 | Elec. 47μF 25V (USM)    |
| C127, C227        | 5173571800 | Elec. 10μF 16V (MD)     |
| C128, C228        | 5173037800 | Elec. 47μF 25V (USM)    |
| C129, C229        | 5172992800 | Elec. 1μF 50V (USM)     |
| C130, C230        | 5173010800 | Elec. 10μF 16V (USM)    |
| C131, C231        | 5173035800 | Elec. 47μF 10V (USM)    |
| C132, C232        | 5172308000 | Ceramic 47pF 50V 10%    |
| C133, C233        | 5173571800 | Elec. 10μF 16V (MD)     |
| C134, C234        | 5054891500 | Mylar 0.0047μF 100V 5%  |
| C135, C235        | 5170453000 | Mylar 0.15μF 100V 5%    |
| C136, C236        | 5170431000 | Mylar 0.018μF 100V 5%   |
| C137, C237        | 5170425000 | Mylar 0.01μF 100V 5%    |
| C138, C238        | 5170421000 | Mylar 0.0068μF 100V 5%  |
| C139, C239        | 5054312000 | Polyst. 820pF 250V 10%  |
| C141, C241        | 5172320000 | Ceramic 470pF 50V 10%   |
| C142, C242        | 5172320000 | Ceramic 470pF 50V 10%   |
| C301, C302        | 5173045800 | Elec. 100μF 16V (USM)   |
| C304              | 5173053800 | Elec. 220μF 10V (USM)   |
| C305              | 5173037800 | Elec. 47μF 25V (USM)    |
| C306              | 5054204000 | Ceramic 0.01μF 50V 10%  |
| C307, C308        | 5054204000 | Ceramic 0.001μF 50V 10% |

**POWER SUPPLY PCB ASSY**

| REF. NO.                  | PARTS NO.  | DESCRIPTION              |
|---------------------------|------------|--------------------------|
| <b>VARIABLE RESISTORS</b> |            |                          |
| R105, R205                | 5053446000 | Semifixed 1kΩ(B)         |
| R111, R211                | 5150097000 | Semifixed 5kΩ(B)         |
| R113, R213                | 5150097000 | Semifixed 5kΩ(B)         |
| R117, R217                | 5150096000 | Semifixed 100kΩ(B)       |
| R121, R221                | 5053446000 | Semifixed 1kΩ(B)         |
| R154, R254                | 5150096000 | Semifixed 100kΩ(B)       |
| R317, R318                | 5282705900 | 10kΩ(A) x 2              |
| <b>COILS</b>              |            |                          |
| L101, L201                | 5056659000 | Trap, 3mH 20%            |
| L102, L202                | 5160042000 | Rec EQ, 3.6mH 20%        |
| <b>MISCELLANEOUS</b>      |            |                          |
| C140, C240                | 5054707000 | Trimmer Capacitor 5-80pF |
| K301                      | 5061137000 | Relay, Lead; 12V LAB21   |
| U301                      | 5040090000 | Bias Oscillator Unit     |
| S101                      | 5134124000 | Switch, Push; 4-gang     |

| REF. NO.   | PARTS NO.   | DESCRIPTION                       |
|--|-------------|-----------------------------------|
|  | 5200018700  | PCB Assy [U, C]                   |
|  | 5200018710  | PCB Assy [E, UK, A]               |
|  | 5200018720  | PCB Assy [GE, L]                  |
|  | 5210018700  | PCB                               |
| <b>TRANSISTORS</b>   |             |                                   |
| Q501   | 5145087000  | 2SD313E                           |
| Q502   | 5042625000  | 2SC1318S                          |
| Q503   | 5042383000  | 2SC536F                           |
| Q504   | 5145087000  | 2SD313E                           |
| Q505   | 5145043000  | 2SA720Q                           |
| Q506, Q507   | 5145078000  | 2SD600F                           |
| Q508   | 5145043000  | 2SA720Q                           |
| Q509, Q510   | 5145091000  | 2SC945AK                          |
| Q511   | 5042553000  | 2SA733P                           |
| Q514   | 5145091000  | 2SC945AK                          |
| <b>DIODES</b>  |             |                                   |
| D501 ~ D504  | 5143243000  | ERB12-02G1                        |
| D505   | 5042514000  | Zener, WZ-061                     |
| D506 ~ D513  | 5143243000  | ERB12-02G1                        |
| D514, D515   | 5143118000  | 1S2473HJ                          |
| D516, D517   | 5143243000  | ERB12-02G1                        |
| D520, D521   | 5143243000  | ERB12-02G1                        |
| D523   | 5143243000  | ERB12-02G1                        |
| <b>RESISTORS</b>   |             |                                   |
| All resistors are rated ±5% tolerance, ¼ watt and of carbon type unless otherwise noted. |             |                                   |
| R502   | 5183102000  | 6.8kΩ                             |
| R503   | △5184306000 | 3.3Ω10% 2W, Cement                |
| R504   | 5183106000  | 10kΩ                              |
| R505   | 5183102000  | 6.8kΩ                             |
| R506   | 5183112000  | 18kΩ                              |
| R507   | 5183096000  | 3.9kΩ                             |
| R509   | 5183106000  | 10kΩ                              |
| R510   | △5184233000 | 22ΩNon Flammable                  |
| R511   | 5183084000  | 1.2kΩ                             |
| R512   | 5183108000  | 12kΩ                              |
| R513   | 5183114000  | 22kΩ                              |
| R514   | 5183106000  | 10kΩ                              |
| R515, R516   | △5185790000 | 1kΩ1W Metal Film, Non Flammable   |
| R517   | 5183106000  | 10kΩ                              |
| R518   | △5184755000 | 100Ω1W Metal Film, Non Flammable  |
| R519   | 5183082000  | 1kΩ                               |
| R520   | 5183106000  | 10kΩ                              |
| R521, R522   | 5183122000  | 47kΩ                              |
| R523   | 5183114000  | 22kΩ                              |
| R524   | 5183122000  | 47kΩ                              |
| R525   | 5183124000  | 56kΩ                              |
| R526   | 5183106000  | 10kΩ                              |
| R527   | 5183122000  | 47kΩ                              |
| R530   | 5183098000  | 4.7kΩ                             |
| R534   | 5183098000  | 4.7kΩ                             |
| R536   | 5183130000  | 100kΩ                             |
| R537   | 5183102000  | 6.8kΩ                             |
| R538   | △5184755000 | 100Ω 1W Metal Film, Non Flammable |

[U]: U.S.A.  
[A]: AUSTRALIA  
[L]: LIMITED AREA


[C]: CANADA  
[E]: EUROPE

[GE]: GENERAL EXPORT  
[UK]: U.K.



# TEAC SCHEMATIC DIAGRAM (AMPLIFIER)

X-3

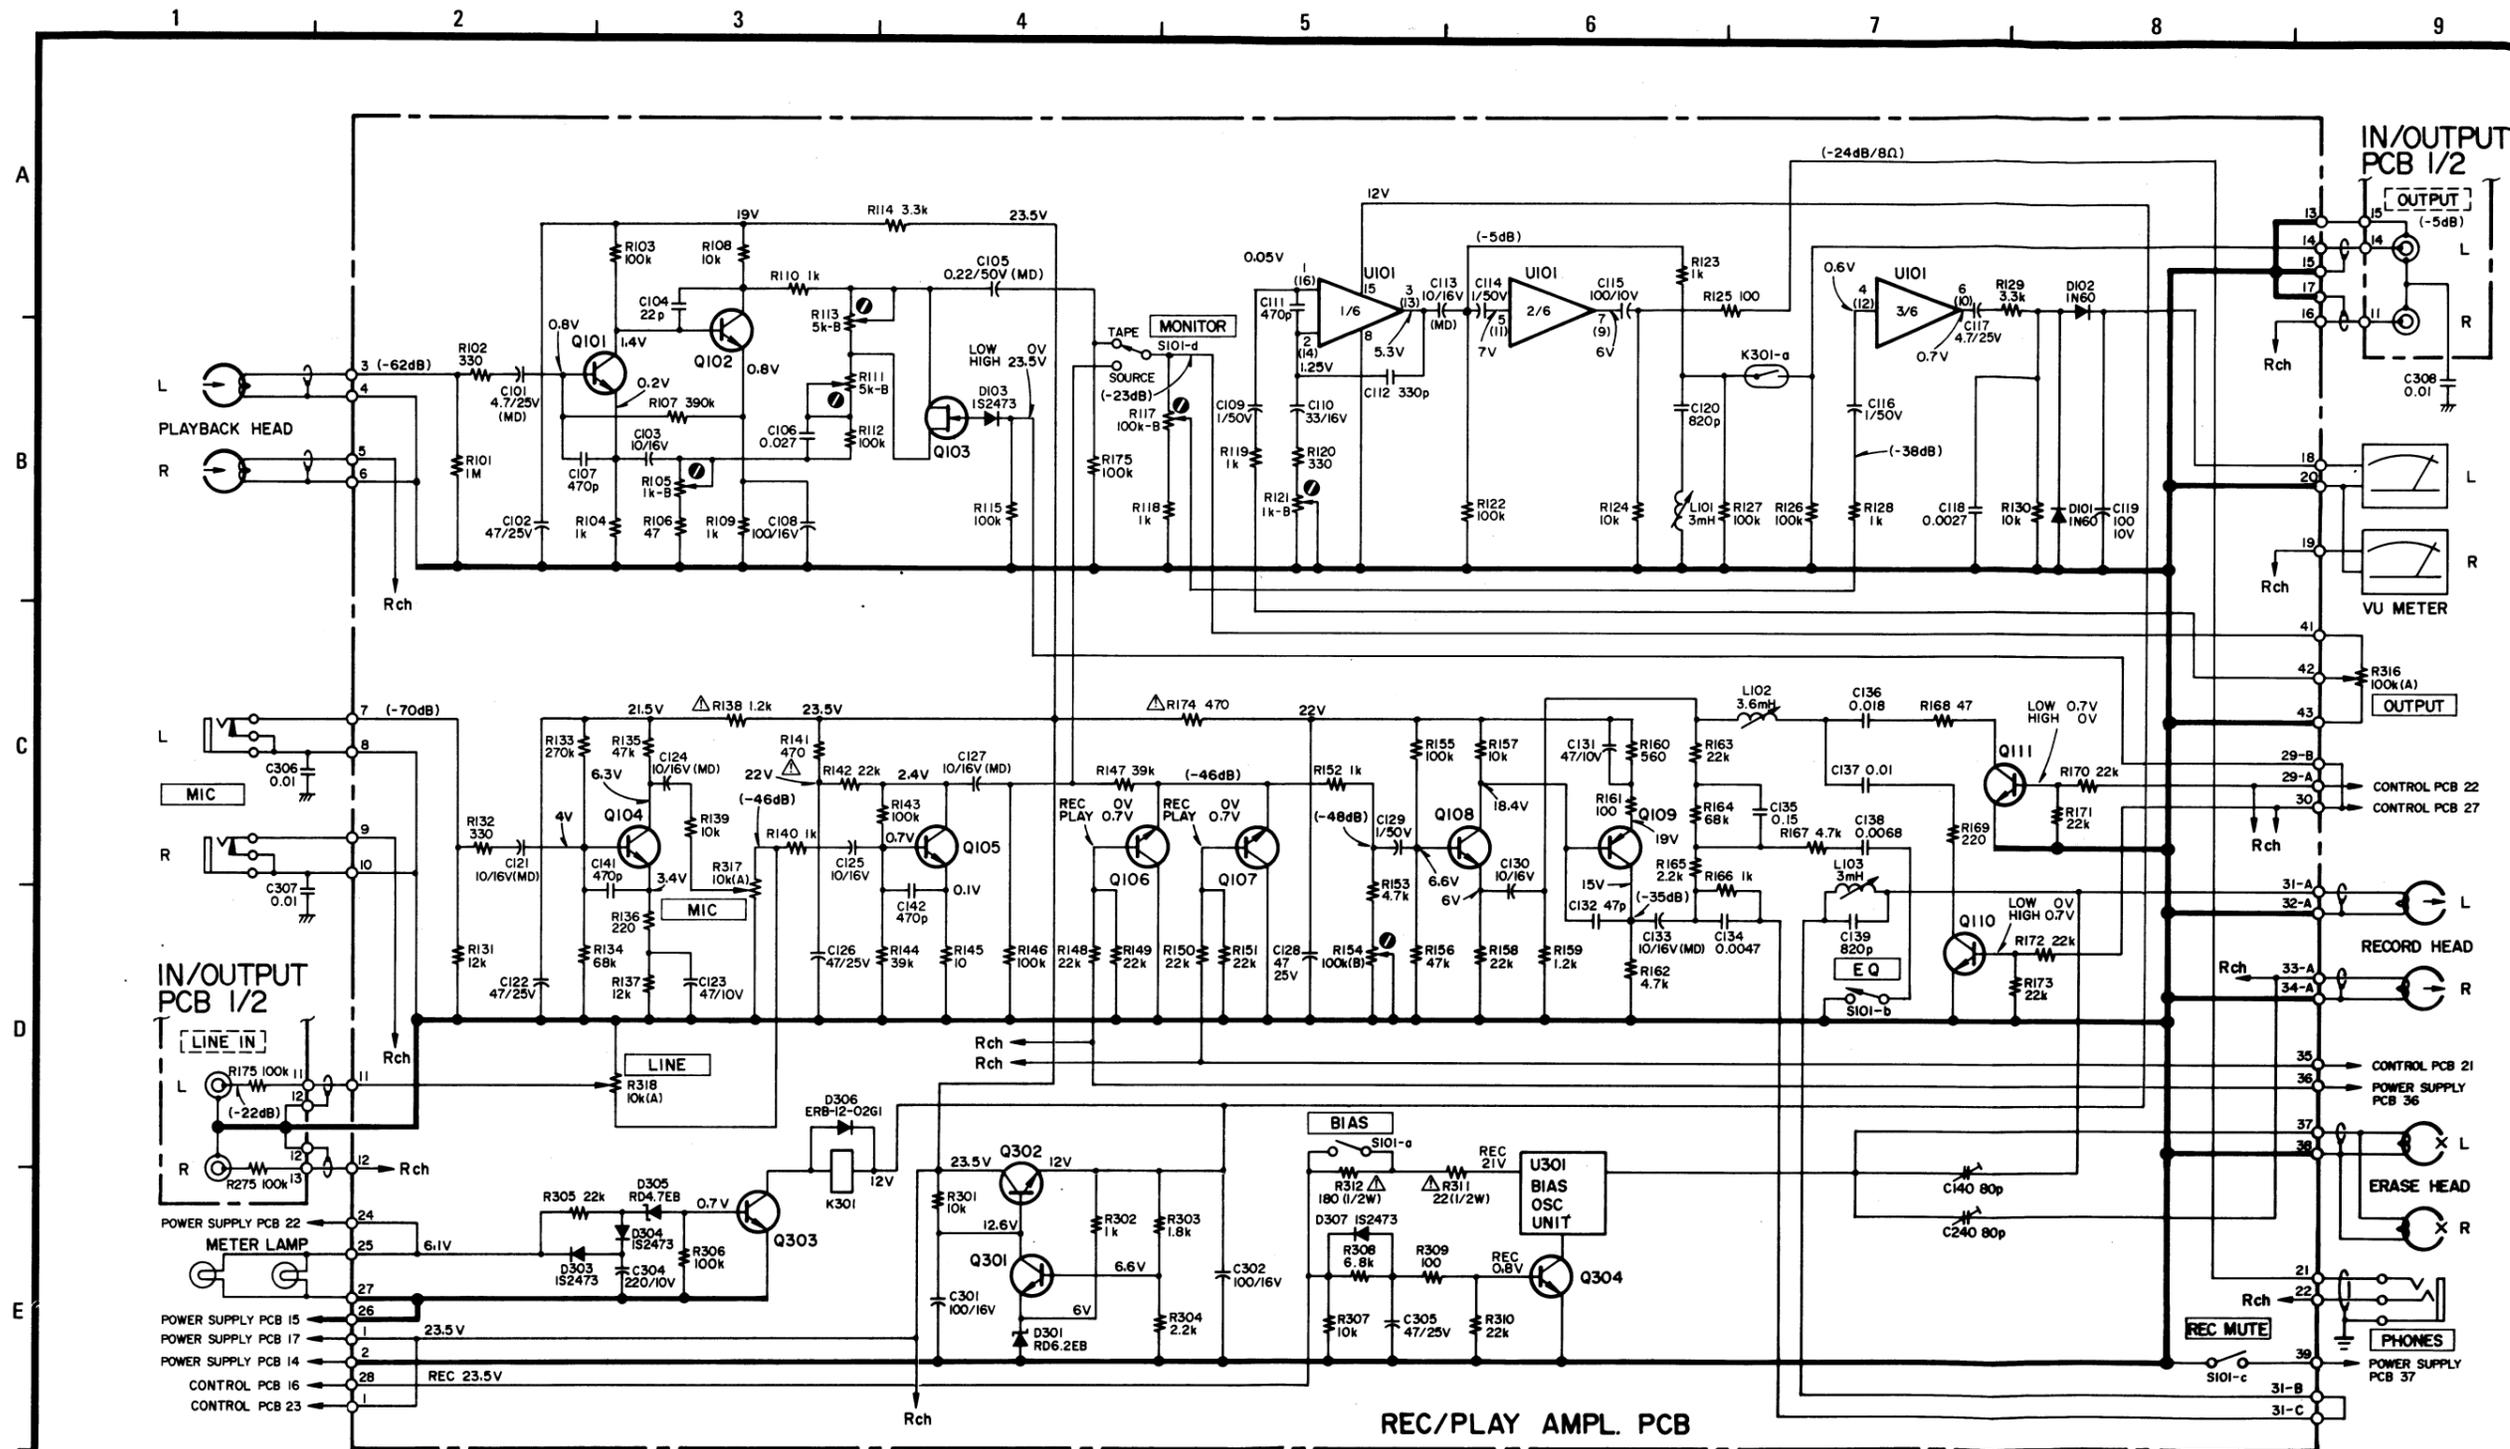


|           |               |             |               |
|-----------|---------------|-------------|---------------|
| U101      | HA1122W       | Q301        | 2SC1384 (Q)   |
| U301      | BIAS OSC UNIT | Q302 ~ Q304 | 2SC1740LN (S) |
| Q101/Q201 | 2SC1327LN (T) | D101/D201   | 1N60          |
| Q102/Q202 | 2SC1740LN (S) | D102/D202   | 1N60          |
| Q103/Q203 | 2SK68 (M)     | D103/D203   | 1S2473        |
| Q104/Q204 | 2SC1327 (T)   |             |               |
| Q105/Q205 | 2SC1222 (E)   | D301        | RD6.2EB       |
|           |               | D302        | (Not used)    |
| Q106/Q206 | 2SD655 (E)    | D303, D304  | 1S2473        |
| Q107/Q207 | 2SD655 (E)    | D305        | RD4.7EB       |
| Q108/Q208 | 2SC1222 (E)   | D306        | ERB-12-02G1   |
| Q109/Q209 | 2SA826LN (S)  | D307        | 1S2473        |
| Q110/Q210 | 2SC1740LN (S) |             |               |
| Q111/Q211 | 2SC1740LN (S) |             |               |


- NOTES**
- Schematic diagram shown for left channel except for some of the components.
  - All resistors are 1/4 watt, ±5%, unless marked otherwise. Resistor values are in ohms (k = 1,000 ohms, M = 1,000,000 ohms).
  - All capacitor values are in microfarads (p = picofarads).
  - △ Parts marked with this sign are safety critical components. They must always be replaced with identical components—refer to the TEAC parts list and ensure exact replacement.
  - Voltage and level values are for reference only.
  - DC voltages were measured during REC/PAUSE mode unless otherwise noted.
  - 0 dB = 0.775V
  - +B power supply circuit
  - : front panel indication
  - : rear panel indication

Stereo Tape Deck

# TEAC SCHEMATIC DIAGRAM (CONTROL)

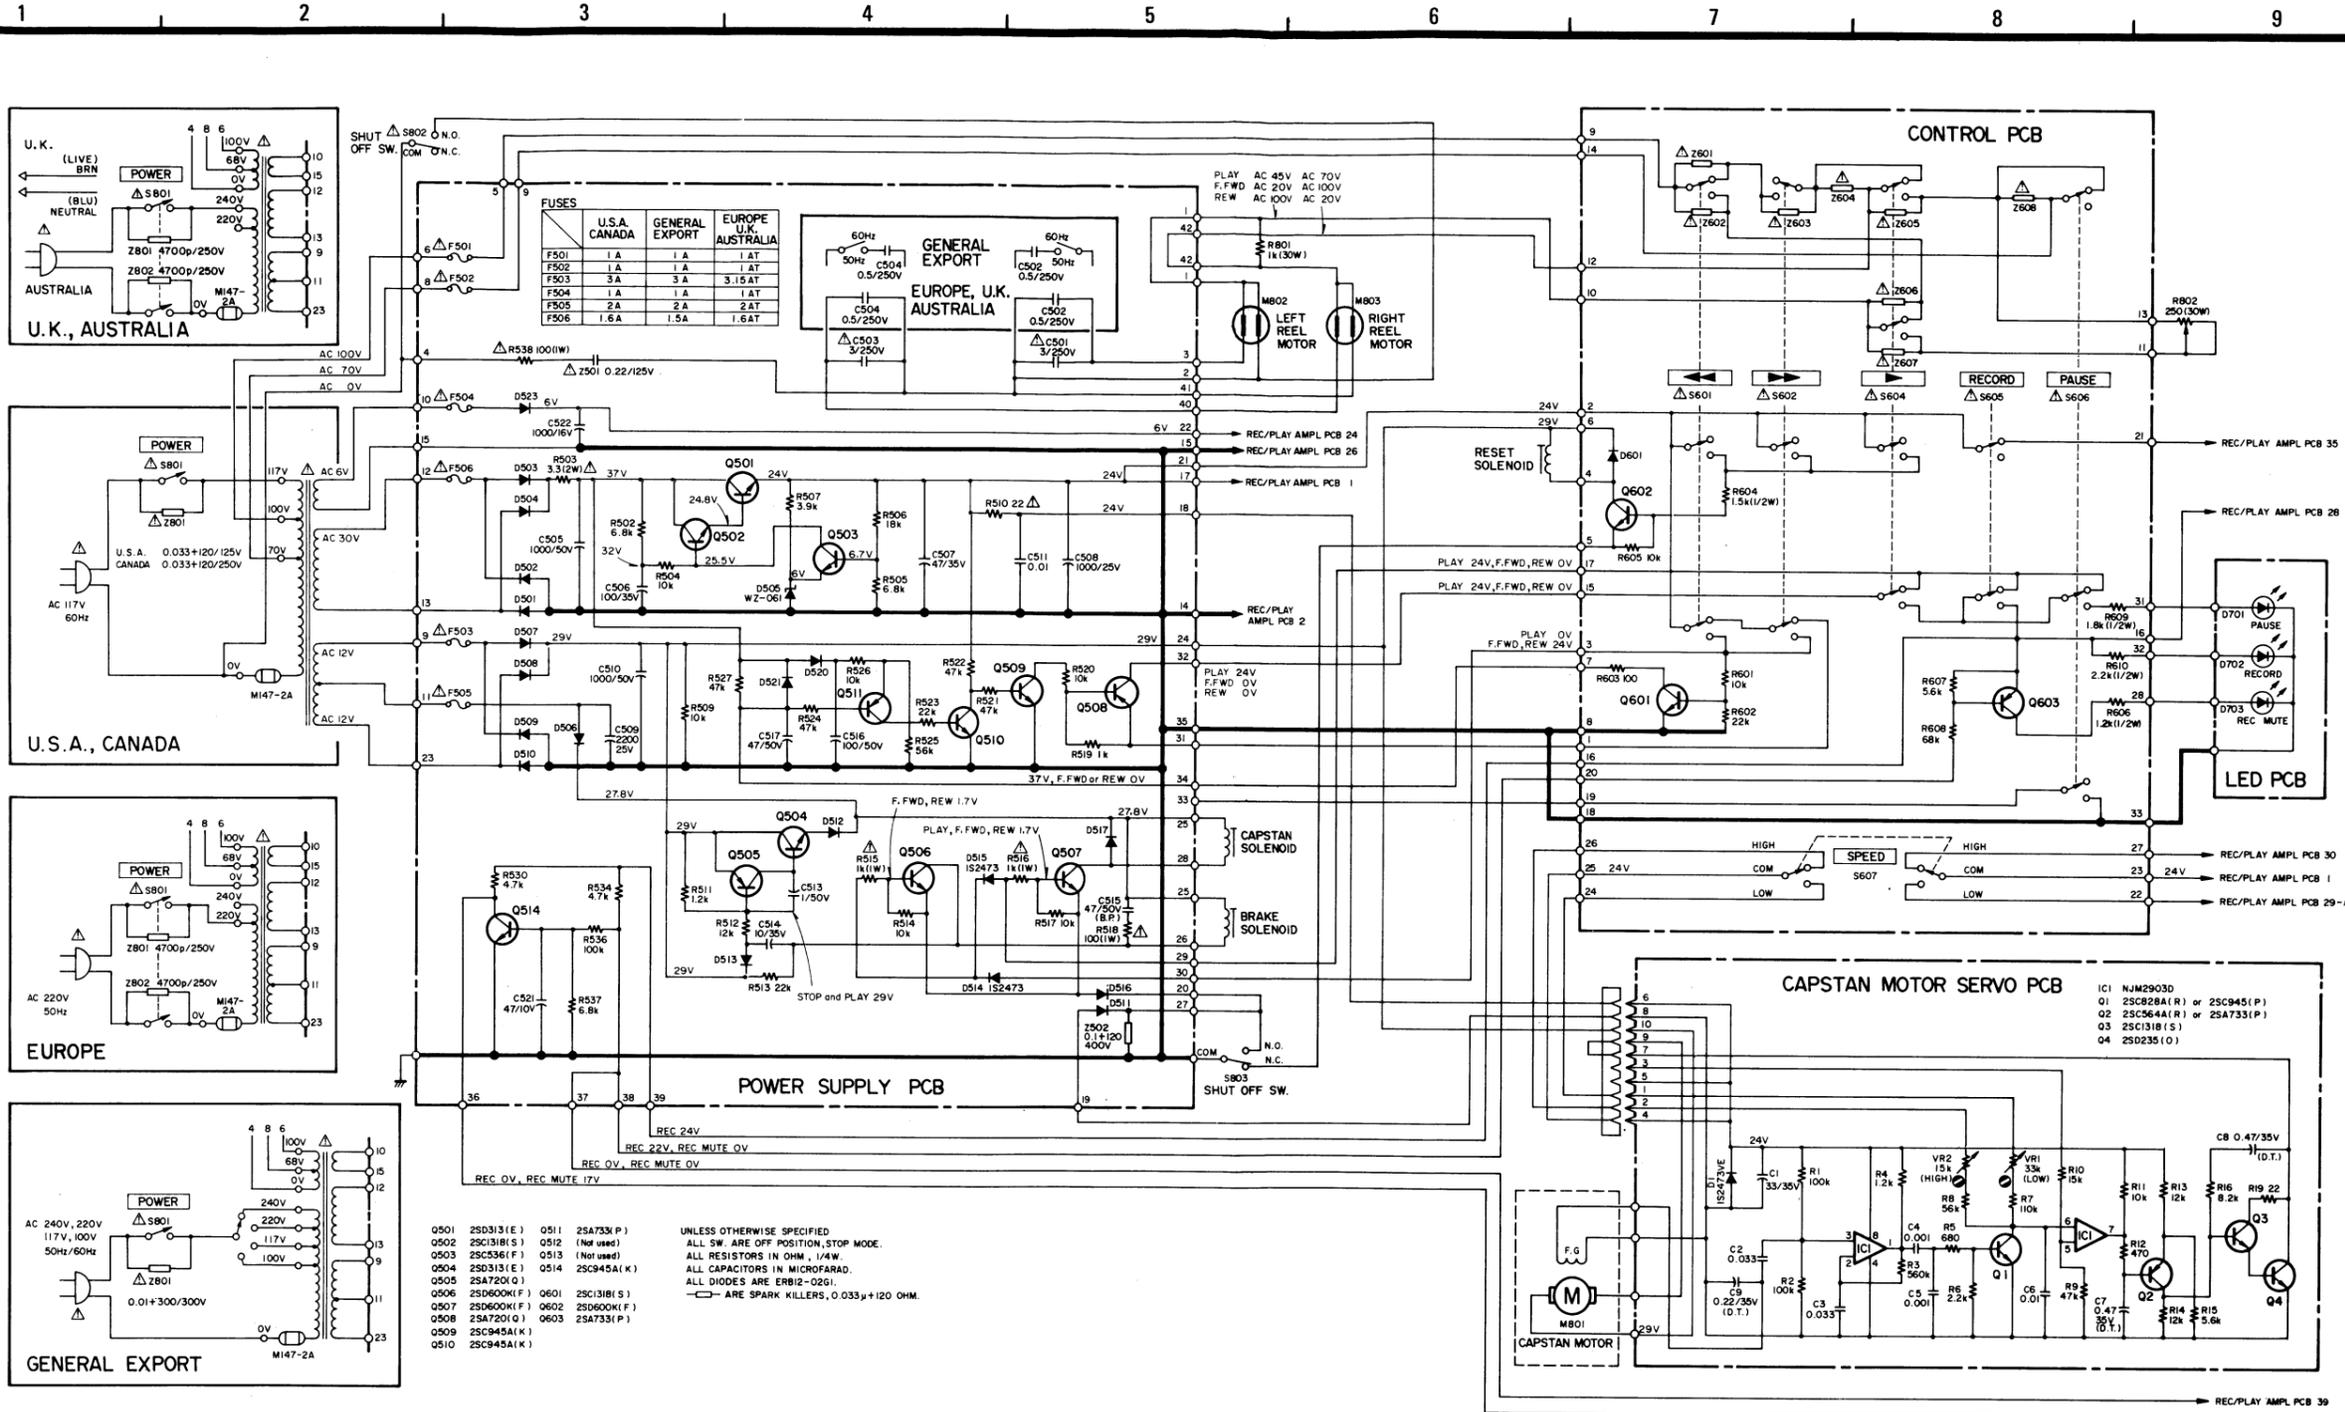

- UNLESS OTHERWISE SPECIFIED  
ALL SW. ARE OFF POSITION, STOP MODE.  
ALL RESISTORS IN OHM, 1/4W.  
ALL CAPACITORS IN MICROFARAD.  
ALL DIODES ARE ERB12-02G1.  
— ARE SPARK KILLERS, 0.033µ+120 OHM.
- Q501 2SD313(E) Q511 2SA733(P)
  - Q502 2SC1318(S) Q512 (Not used)
  - Q503 2SC536(F) Q513 (Not used)
  - Q504 2SD313(E) Q514 2SC945A(K)
  - Q505 2SA720(Q) Q515 2SC1318(S)
  - Q506 2SD600K(F) Q601 2SC1318(S)
  - Q507 2SD600K(F) Q602 2SD600K(F)
  - Q508 2SA720(Q) Q603 2SA733(P)
  - Q509 2SC945A(K) Q604 2SA733(P)
  - Q510 2SC945A(K)

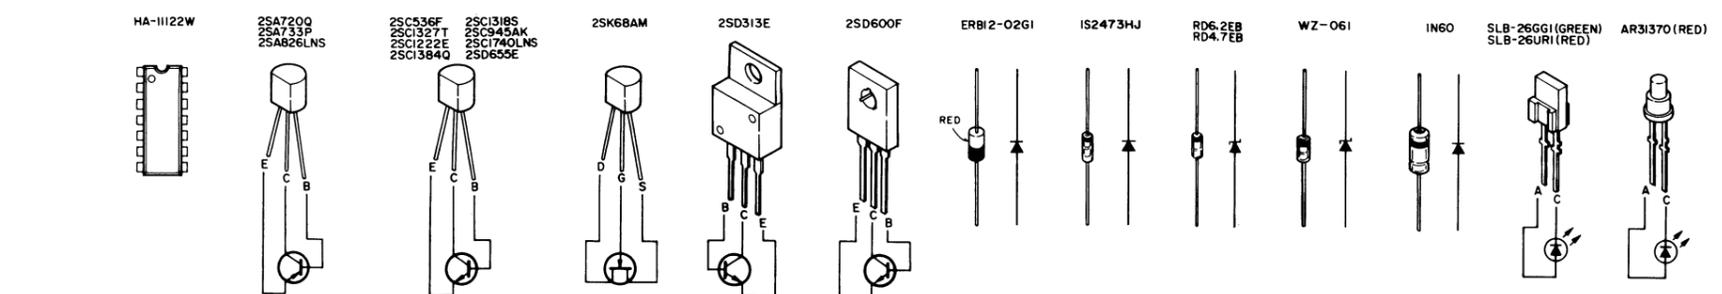

- NOTES**
- All resistors are 1/4 watt, ±5%, unless marked otherwise. Resistor values are in ohms (k = 1,000 ohms, M = 1,000,000 ohms).
  - All capacitor values are in microfarads (p = picofarads).
  - All diodes are ERB12-02G1 unless otherwise specified.
  - Parts marked with this sign are safety critical components. They must always be replaced with identical components - refer to the TEAC parts list and ensure exact replacement.
  - DC voltages were measured during REC/PAUSE mode unless otherwise noted.
  - +B power supply circuit
  - front panel indication
  - rear panel indication