

# Astatic Microphone Cartridges and Accessories

## Replacement Microphone Cartridges



MC-151  
MC-127



MC-451



MC-563



MC-320  
MC-321



MC-564-1



MC-558  
MC-559-2



MC-560

- MC-151** Replacement for Astatic Models T-3, JT-30, JT-30F, JT-40, 200, 241, CX and CX-1.
- MC-127** Replacement for Astatic Models T-3C, JT-30C, JT-30CF, JT-40C, CC, CC-1, VC and VC-1.
- MC-451** Replacement for Astatic Models 10M5 and 11M5.
- MC-563** Replacement for Astatic Models DN-50, DN-HZ, DN-500, DN-MZ and 10-DA.
- MC-320** Replacement for Astatic Model D-104 (Crystal).

- MC-321** Replacement for Astatic Model D-104C (Ceramic).
- MC-558\*** Replacement for Astatic Model 332.
- MC-559-2\*** Replacement for Astatic Model 331.
- MC-560\*** Replacement for Astatic Models 335H and 335L.
- MC-564-1** Replacement of Astatic Models 531, TMD-107, and TMD-107-E.

\*Microphone without screw fastened caps should be returned to factory for repairs.

## Microphone Accessories



SC-11  
SC-12




TG and TU

LT-6



ABB

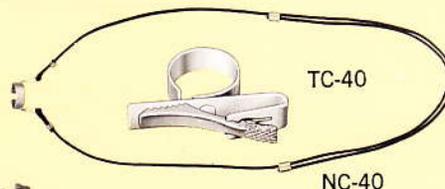

TC-40

NC-40

### TG and TU Conversion Kits

See page 16.

### Switch Connectors

**MODEL SC-11 SWITCH CONNECTOR (less cable):** Bright chrome with standard receptacles to receive the interchangeable connector used on many Astatic microphones. Also have connection for standard concentric cable connector. Used with Astatic microphone Models T-3, DN-HZ, 10-C, 10-DA, and D-104.

**MODEL SC-12 SWITCH CONNECTOR (less cable):** Same as SC-11 except for use with Astatic microphone Model DN-50 and 77L.

### Neck Cord and Tie Clip

**MODEL NC-40 NECK CORD and TC-40 TIE CLIP:** Made especially to convert Astatic 840 Series Microphone from hand held to lavalier use.

### Transformer

**MODEL LT-6 TRANSFORMER:** Matches low impedance microphones to high impedance of amplifier. Permits use of long cable with minimum signal loss. Eliminates high frequency loss and objectionable hum pickup where long length of microphone cable is required. Completely shielded, sturdy construction, finished in opalescent gray. Furnished complete with Amphenol 91-852 and 75-MCIF connectors. Input: 30-50 ohms or 150-250 ohms. Output: High impedance (EIA 40,000 ohms). Response: 20-20,000 Hz  $\pm$  1 db.

### Baby Boom

**MODEL ABB:** Attaches to any adjustable microphone stand. All chrome, including counterweight.

(continued on page 18)



FRONT

BACK

HEAD

SOCK COVER

WIND SOCK

ACUSTIC  
MC-320

R-77

105

ASTATIC

MC-321



