

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

**SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER**

**DESCRIPTION**

The 7532 Group is the 8-bit microcomputer based on the 740 family core technology.

The 7532 Group has a USB, 8-bit timers, and an A-D converter, and is useful for an input device for personal computer peripherals.

**FEATURES**


- Basic machine-language instructions ..... 69
- The minimum instruction execution time ..... 0.34  $\mu$ s  
(at 6 MHz oscillation frequency for the shortest instruction)
- Memory size .....  
     ROM ..... 8K to 16K bytes  
     RAM ..... 256 to 384 bytes
- Programmable I/O ports ..... 28
- Interrupts ..... 11 sources, 7 vectors
- Timers ..... 8-bit X 3

- Serial I/O1 ..... used only for Low Speed in USB  
     (USB/UART)
- Serial I/O2 ..... 8-bit X 1  
     (Clock-synchronized)
- A-D converter ..... 10-bit X 8 channels
- Clock generating circuit ..... Built-in type  
     (connect to external ceramic resonator or quartz-crystal oscillator )
- Watchdog timer ..... 16-bit X 1
- Power source voltage ..... 4.1 to 5.5 V  
     At 6 MHz X<sub>IN</sub> oscillation frequency at ceramic resonator
- Power dissipation ..... 40 mW (standard)
- Operating temperature range ..... -20 to 85 °C

**APPLICATION**

Input device for personal computer peripherals

**PIN CONFIGURATION (TOP VIEW)**

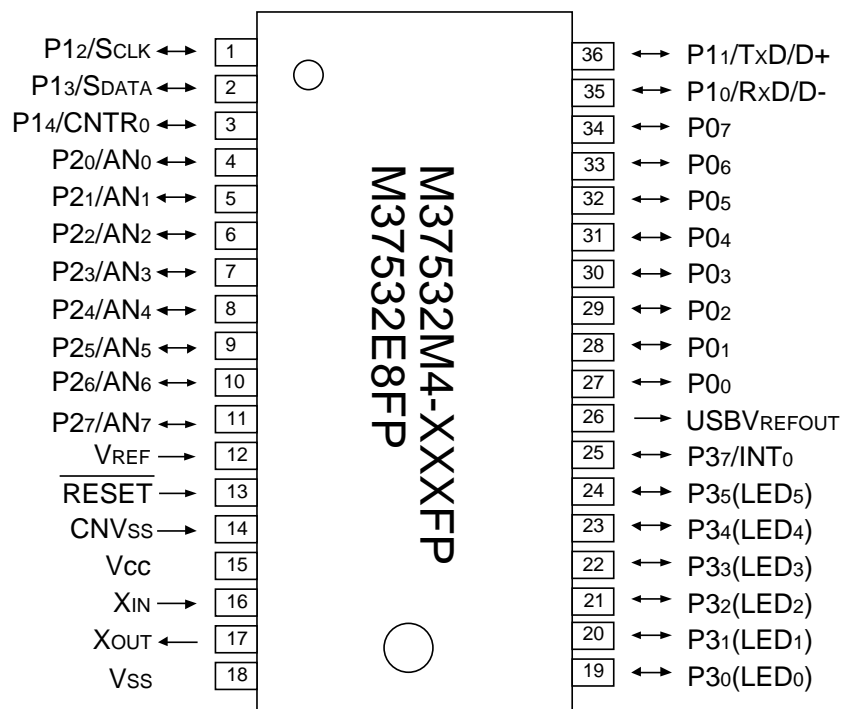


Package type: 36P2R-A

Fig. 1 Pin configuration of M37532M4-XXXXFP, M37532E8FP

*Notice: This is not a final specification.*

*Some parametric limits are subject to change.*

## FUNCTIONAL BLOCK



# PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### PIN DESCRIPTION

Table 1 Pin description

| Pin                      | Name                         | Function  | Function expect a port function                  |
|--------------------------|------------------------------|---|--|
| Vcc, Vss                 | Power source                 | •Apply voltage of 4.1 to 5.5 V to Vcc, and 0 V to Vss.  |  |
| VREF                     | Analog reference voltage     | •Reference voltage input pin for A-D converter  |  |
| USBVREFOUT               | USB reference voltage output | •Output pin for pulling up a D- line with 1.5 kΩ external resistor  |  |
| CNVss                    | CNVss                        | •Chip operating mode control pin, which is always connected to Vss.   |  |
| RESET                    | Reset input                  | •Reset input pin for active "L"   |  |
| XIN                      | Clock input                  | •Input and output pins for main clock generating circuit  |  |
| XOUT                     | Clock output                 | •Connect a ceramic resonator or quartz crystal oscillator between the XIN and XOUT pins.<br>•If an external clock is used, connect the clock source to the XIN pin and leave the XOUT pin open.   |  |
| P00–P07                  | I/O port P0                  | •8-bit I/O port.<br>•I/O direction register allows each pin to be individually programmed as either input or output.<br>•CMOS compatible input level<br>•CMOS 3-state output structure<br>•Whether a built-in pull-up resistor is to be used or not can be determined by program.   | •Key-input (key-on wake up interrupt input) pins |
| P10/RxD/D-<br>P11/TxD/D+ | I/O port P1                  | •5-bit I/O port<br>•I/O direction register allows each pin to be individually programmed as either input or output.<br>•CMOS compatible input level<br>•CMOS 3-state output structure<br>•CMOS/TTL level can be switched for P10, P12, P13.<br>•When using the USB function, input level of ports P10 and P11 becomes USB input level, and output level of them becomes USB output level. | •Serial I/O1 function pin                        |
| P12/SCLK<br>P13/SDATA    |                              |   | •Serial I/O2 function pin                        |
| P14/CNTR0                |                              |   | •Timer X function pin                            |
| P20/AN0–<br>P27/AN7      | I/O port P2                  | •8-bit I/O port having almost the same function as P0<br>•CMOS compatible input level<br>•CMOS 3-state output structure   | •Input pins for A-D converter                    |
| P30–P35                  | I/O port P3                  | •7-bit I/O port<br>•I/O direction register allows each pin to be individually programmed as either input or output.<br>•CMOS compatible input level (CMOS/TTL level can be switched for P37).<br>•CMOS 3-state output structure<br>•P30 to P35 can output a large current for driving LED.<br>•Whether a built-in pull-up resistor is to be used or not can be determined by program.     |  |
| P37/INT0                 |                              |   | •Interrupt input pins                            |

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**GROUP EXPANSION**

Mitsubishi plans to expand the 7532 group as follow:

**Memory type**

Support for Mask ROM version, One Time PROM version, and Emulator MCU .

**Memory size**

ROM/PROM size ..... 8 K to 16 K bytes

RAM size ..... 256 to 384 bytes

**Package**

36P2R-A ..... 0.8 mm-pitch plastic molded SOP

42SIM ..... 42 pin shrink ceramic PIGGY BACK

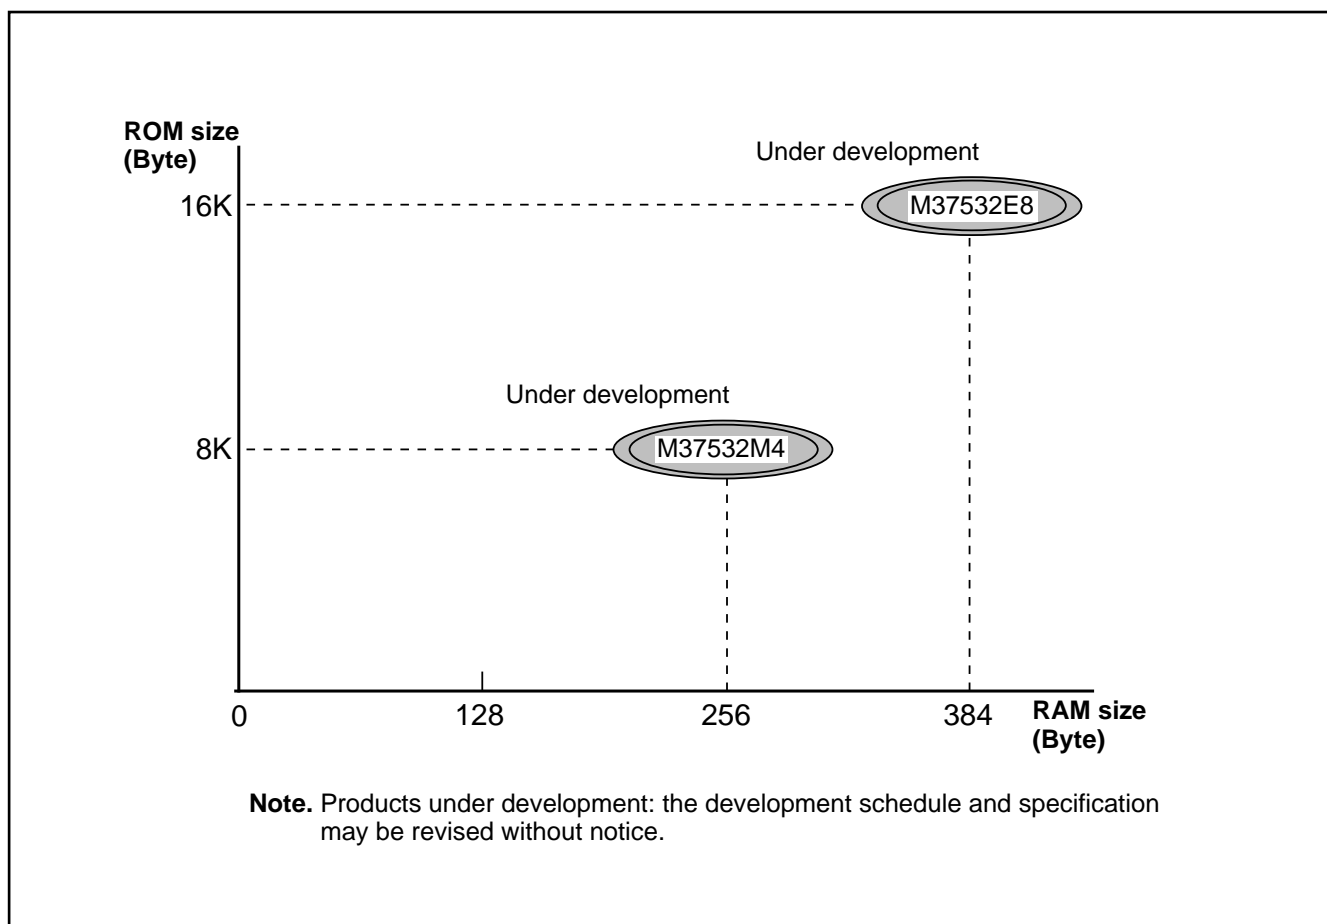


Fig. 3 Memory expansion plan

Currently supported products are listed below.

Table 2 List of supported products

| Product        | (P) ROM size (bytes)<br>ROM size for User ( ) | RAM size<br>(bytes) | Package | Remarks                       |
|----------------|---|---------------------|---------|-------------------------------|
| M37532M4-XXXFP | 8192 (8062)                                   | 256                 | 36P2R-A | Mask ROM version              |
| M37532E8FP     | 16384 (16254)                                 | 384                 | 36P2R-A | One Time PROM version (blank) |
| M37532RSS      | —   | 384                 | 42S1M   | Emulator MCU                  |

**PRELIMINARY**  
*Notice: This is not a final specification.  
Some parametric limits are subject to change.*

FUNCTIONAL DESCRIPTION

Central Processing Unit (CPU)

The 7532 Group uses the standard 740 family instruction set. Refer to the table of 740 family addressing modes and machine-language instructions or the SERIES 740 <SOFTWARE> USER'S MANUAL for details on each instruction set.

Machine-resident 740 family instructions are as follows:

- 1. The FST and SLW instructions cannot be used.
- 2. The MUL and DIV instructions cannot be used.
- 3. The WIT instruction can be used.
- 4. The STP instruction can be used.

[CPU Mode Register] CPUM

The CPU mode register contains the stack page selection bit. This register is allocated at address 003B<sub>16</sub>.

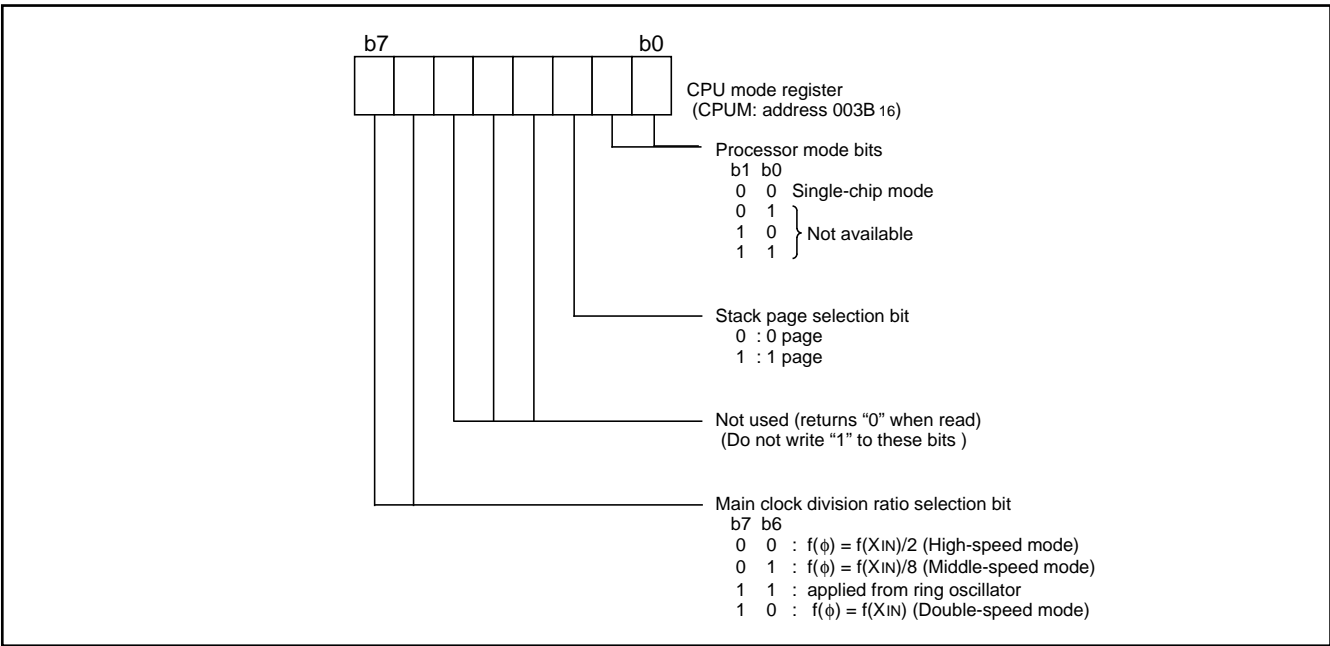


Fig. 4 Structure of CPU mode register

Switching method of CPU mode register

Switch the CPU mode register (CPUM) at the head of program after releasing Reset in the following method.

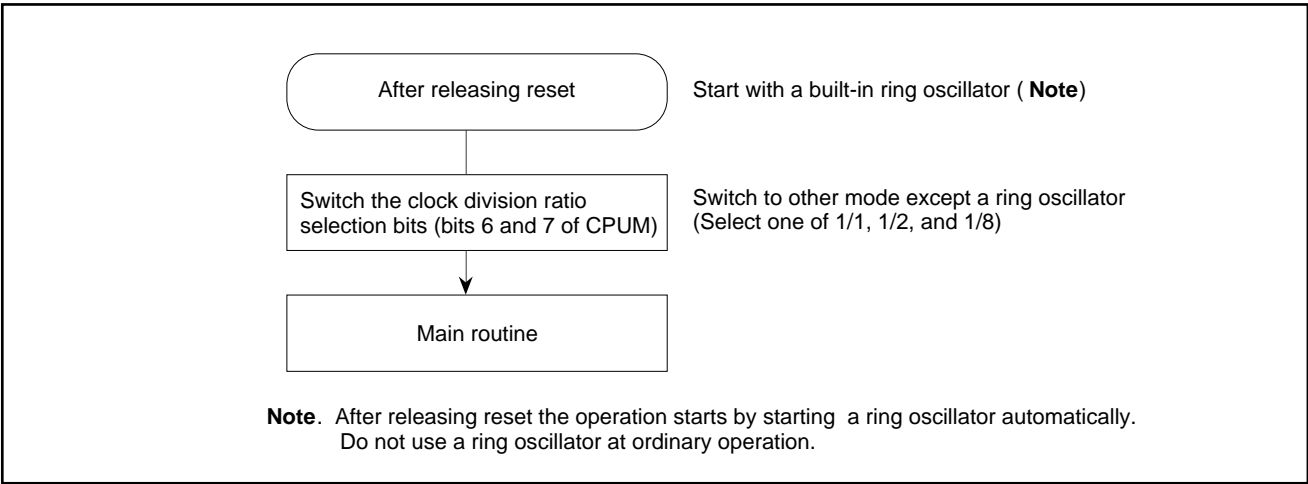


Fig. 5 Switching method of CPU mode register

PRELIMINARY

Notice: This is not a final specification.  
Some parametic limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

Memory

Special function register (SFR) area

The SFR area in the zero page contains control registers such as I/O ports and timers.

RAM

RAM is used for data storage and for a stack area of subroutine calls and interrupts.

ROM

The first 128 bytes and the last 2 bytes of ROM are reserved for device testing and the rest is a user area for storing programs.

Interrupt vector area

The interrupt vector area contains reset and interrupt vectors.

Zero page

The 256 bytes from addresses 0000<sub>16</sub> to 00FF<sub>16</sub> are called the zero page area. The internal RAM and the special function registers (SFR) are allocated to this area.

The zero page addressing mode can be used to specify memory and register addresses in the zero page area. Access to this area with only 2 bytes is possible in the zero page addressing mode.

Special page

The 256 bytes from addresses FF00<sub>16</sub> to FFFF<sub>16</sub> are called the special page area. The special page addressing mode can be used to specify memory addresses in the special page area. Access to this area with only 2 bytes is possible in the special page addressing mode.

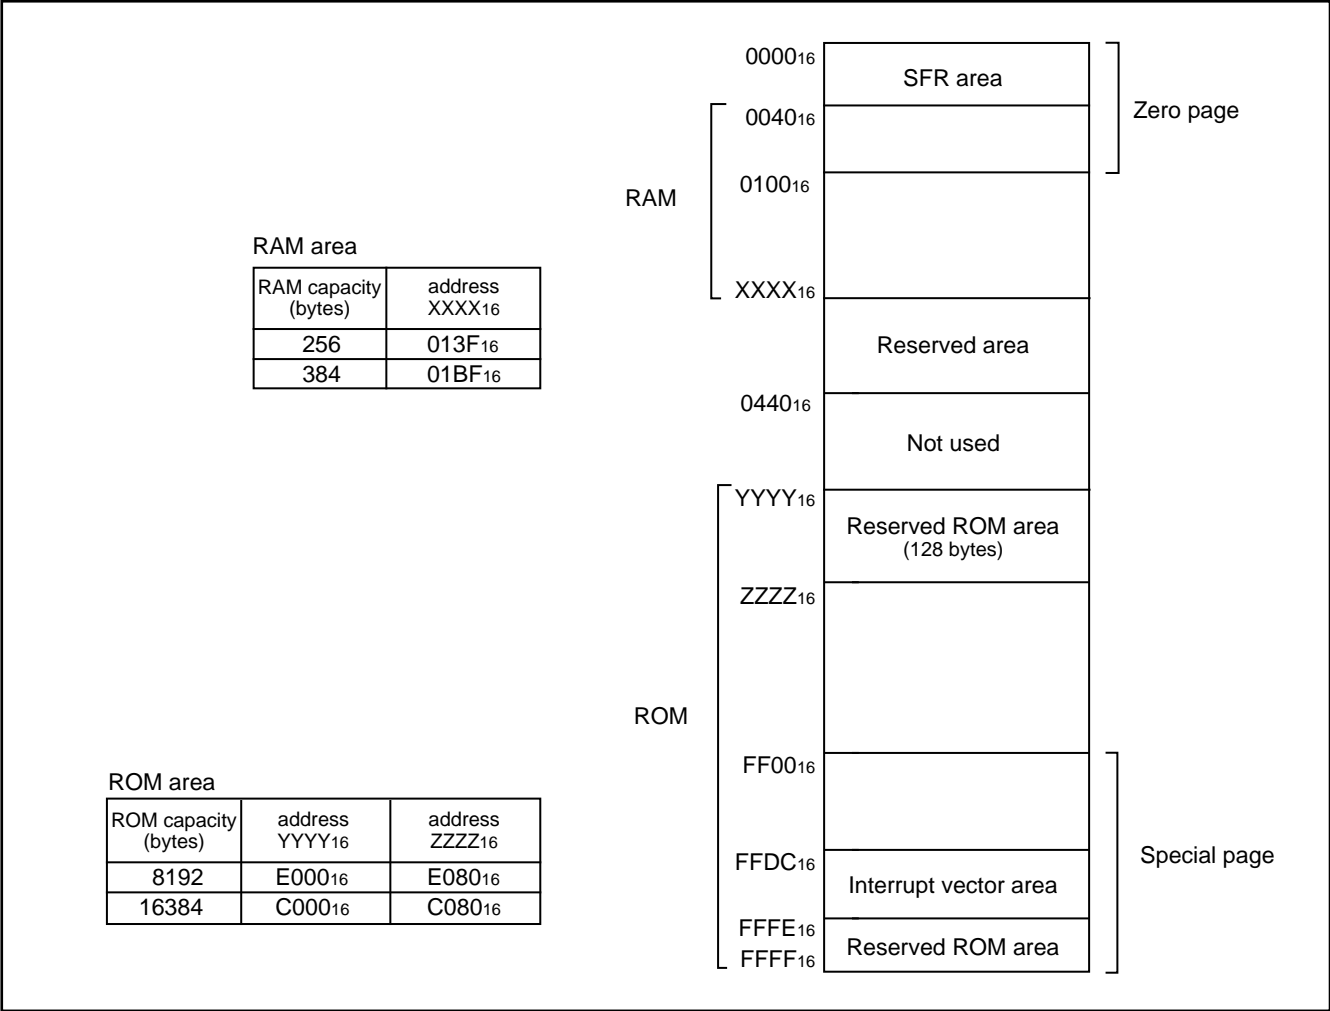


Fig. 6 Memory map diagram

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

|                    |   |                    |  |
|--------------------|---|--------------------|--|
| 0000 <sub>16</sub> | Port P0 (P0)  | 0020 <sub>16</sub> | USB interrupt control register (USBICON)               |
| 0001 <sub>16</sub> | Port P0 direction register (P0D)                        | 0021 <sub>16</sub> | USB transmit data byte number set register 0 (EP0BYTE) |
| 0002 <sub>16</sub> | Port P1 (P1)  | 0022 <sub>16</sub> | USB transmit data byte number set register 1 (EP1BYTE) |
| 0003 <sub>16</sub> | Port P1 direction register (P1D)                        | 0023 <sub>16</sub> | USBPID control register 0 (EP0PID)                     |
| 0004 <sub>16</sub> | Port P2 (P2)  | 0024 <sub>16</sub> | USBPID control register 1 (EP1PID)                     |
| 0005 <sub>16</sub> | Port P2 direction register (P2D)                        | 0025 <sub>16</sub> | USB address register (USBA)                            |
| 0006 <sub>16</sub> | Port P3 (P3)  | 0026 <sub>16</sub> | USB sequence bit initialization register (INISQ1)      |
| 0007 <sub>16</sub> | Port P3 direction register (P3D)                        | 0027 <sub>16</sub> | USB control register (USBCON)                          |
| 0008 <sub>16</sub> |   | 0028 <sub>16</sub> | Prescaler 12 (PRE12)                                   |
| 0009 <sub>16</sub> |   | 0029 <sub>16</sub> | Timer 1 (T1)   |
| 000A <sub>16</sub> |   | 002A <sub>16</sub> | Timer 2 (T2)   |
| 000B <sub>16</sub> |   | 002B <sub>16</sub> | Timer X mode register (TM)                             |
| 000C <sub>16</sub> |   | 002C <sub>16</sub> | Prescaler X (PREX)                                     |
| 000D <sub>16</sub> |   | 002D <sub>16</sub> | Timer X (TX)   |
| 000E <sub>16</sub> |   | 002E <sub>16</sub> | Timer count source setting register (TCSS)             |
| 000F <sub>16</sub> |   | 002F <sub>16</sub> |  |
| 0010 <sub>16</sub> |   | 0030 <sub>16</sub> | Serial I/O2 control register (SIO2CON)                 |
| 0011 <sub>16</sub> |   | 0031 <sub>16</sub> | Serial I/O2 register (SIO2)                            |
| 0012 <sub>16</sub> |   | 0032 <sub>16</sub> |  |
| 0013 <sub>16</sub> |   | 0033 <sub>16</sub> |  |
| 0014 <sub>16</sub> |   | 0034 <sub>16</sub> | A-D control register (ADCON)                           |
| 0015 <sub>16</sub> |   | 0035 <sub>16</sub> | A-D conversion register (low-order) (ADL)              |
| 0016 <sub>16</sub> | Pull-up control register (PULL)                         | 0036 <sub>16</sub> | A-D conversion register (high-order) (ADH)             |
| 0017 <sub>16</sub> | Port P1P3 control register (P1P3C)                      | 0037 <sub>16</sub> |  |
| 0018 <sub>16</sub> | Transmit/Receive buffer register (TB/RB)                | 0038 <sub>16</sub> | MISRG  |
| 0019 <sub>16</sub> | Serial I/O1 status register (SIO1STS)                   | 0039 <sub>16</sub> | Watchdog timer control register (WDTCN)                |
| 001A <sub>16</sub> | Serial I/O1 control register (SIO1CON)                  | 003A <sub>16</sub> | Interrupt edge selection register (INTEDGE)            |
| 001B <sub>16</sub> | UART control register (UARTCON)                         | 003B <sub>16</sub> | CPU mode register (CPUM)                               |
| 001C <sub>16</sub> | Baud rate generator (BRG)                               | 003C <sub>16</sub> | Interrupt request register 1 (IREQ1)                   |
| 001D <sub>16</sub> | USB data toggle synchronization register (TRSYNC)       | 003D <sub>16</sub> |  |
| 001E <sub>16</sub> | USB interrupt source discrimination register 1 (USBIR1) | 003E <sub>16</sub> | Interrupt control register 1 (ICON1)                   |
| 001F <sub>16</sub> | USB interrupt source discrimination register 2 (USBIR2) | 003F <sub>16</sub> |  |

Fig. 7 Memory map of special function register (SFR)

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**I/O Ports**

**[Direction registers] PiD**

The I/O ports have direction registers which determine the input/output direction of each pin. Each bit in a direction register corresponds to one pin, and each pin can be set to be input or output.

When "1" is set to the bit corresponding to a pin, this pin becomes an output port. When "0" is set to the bit, the pin becomes an input port. When data is read from a pin set to output, not the value of the pin itself but the value of port latch is read. Pins set to output are floating, and permit reading pin values.

If a pin set to input is written to, only the port latch is written to and the pin remains floating.

**[Pull-up control] PULL**

By setting the pull-up control register (address 0016<sub>16</sub>), ports P0 and P3 can exert pull-up control by program. However, pins set to output are disconnected from this control and cannot exert pull-up control.

**[Port P1P3 control] P1P3C**

By setting the port P1P3 control register (address 0017<sub>16</sub>), a CMOS input level or a TTL input level can be selected for ports P1<sub>0</sub>, P1<sub>2</sub>, P1<sub>3</sub>, and P3<sub>7</sub> by program.

Then, set "1" to each bit 6 of the port P3 direction register and port P3 register.

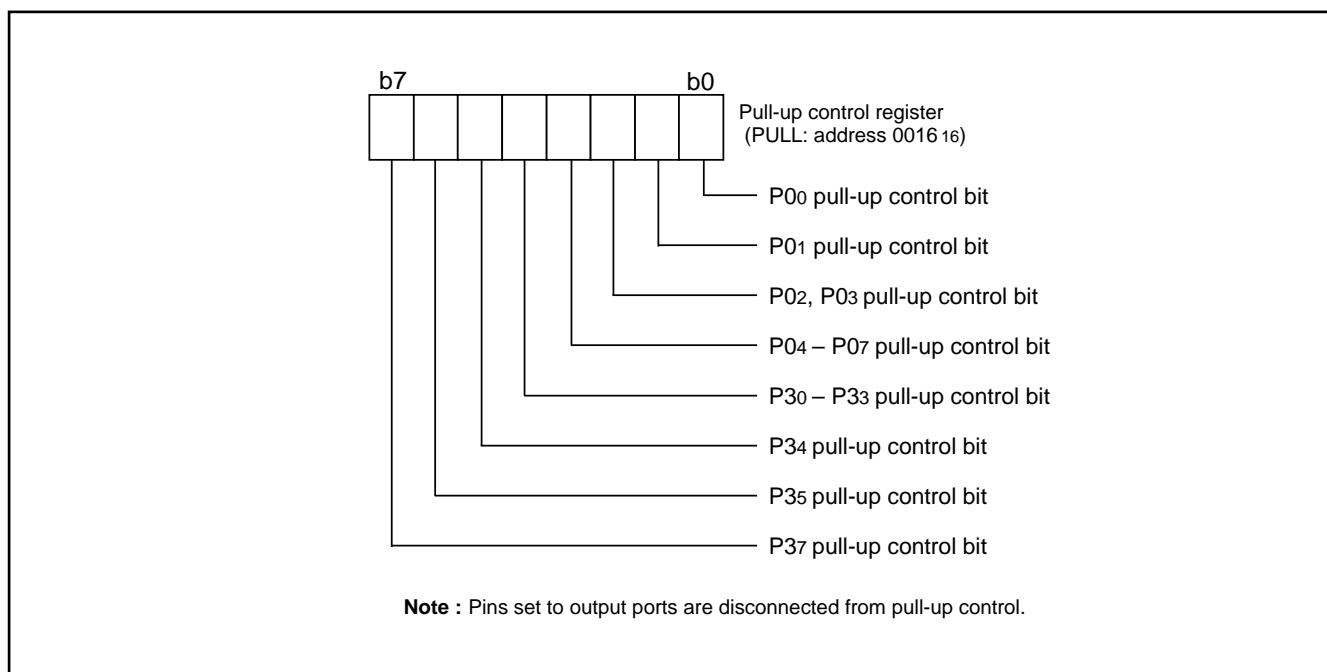


Fig. 8 Structure of pull-up control register

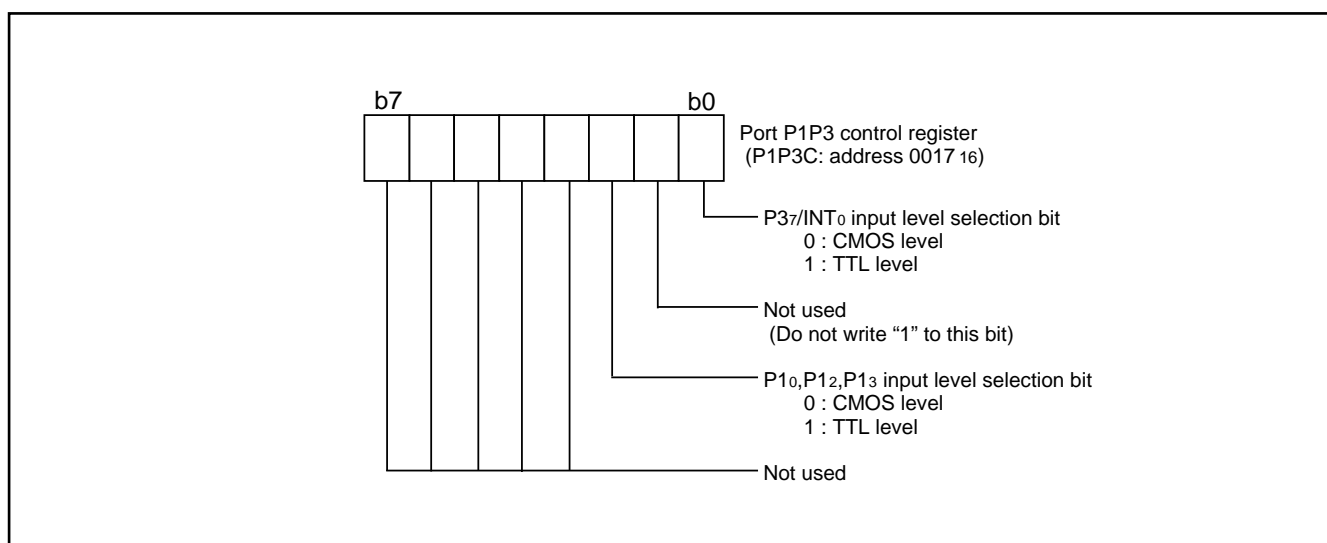


Fig. 9 Structure of port P3 control register



**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

**SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER**
**Table 3 I/O port function table**

| Pin                      | Name        | Input/output        | I/O format   | Non-port function                 | Related SFRs                 | Diagram No.          |
|--------------------------|-------------|---------------------|--|-----------------------------------|------------------------------|----------------------|
| P00–P07                  | I/O port P0 | I/O individual bits | •CMOS compatible input level<br>•CMOS 3-state output           | Key input interrupt               | Pull-up control register     | (1)                  |
| P10/RxD/D-<br>P11/TxD/D+ | I/O port P1 |                     | •USB input/output level when selecting USB function            | Serial I/O1 function input/output | Serial I/O1 control register | (2)<br>(3)           |
| P12/SCLK<br>P13/SDATA    |             |                     | •CMOS compatible input level<br>•CMOS 3-state output<br>(Note) | Serial I/O2 function input/output | Serial I/O2 control register | (4)<br>(5)           |
| P14/CNTR0                |             |                     |  | Timer X function input/output     | Timer X mode register        | (6)                  |
| P20/AN0–<br>P27/AN7      |             |                     |  | I/O port P2                       | A-D conversion input         | A-D control register |
| P30–P35                  | I/O port P3 |                     |  |                                   |                              | (8)                  |
| P37/INT0                 |             |                     | External interrupt input                                       | Interrupt edge selection register | (9)                          |                      |

**Note:** Port P37 is CMOS/TTL level.

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER


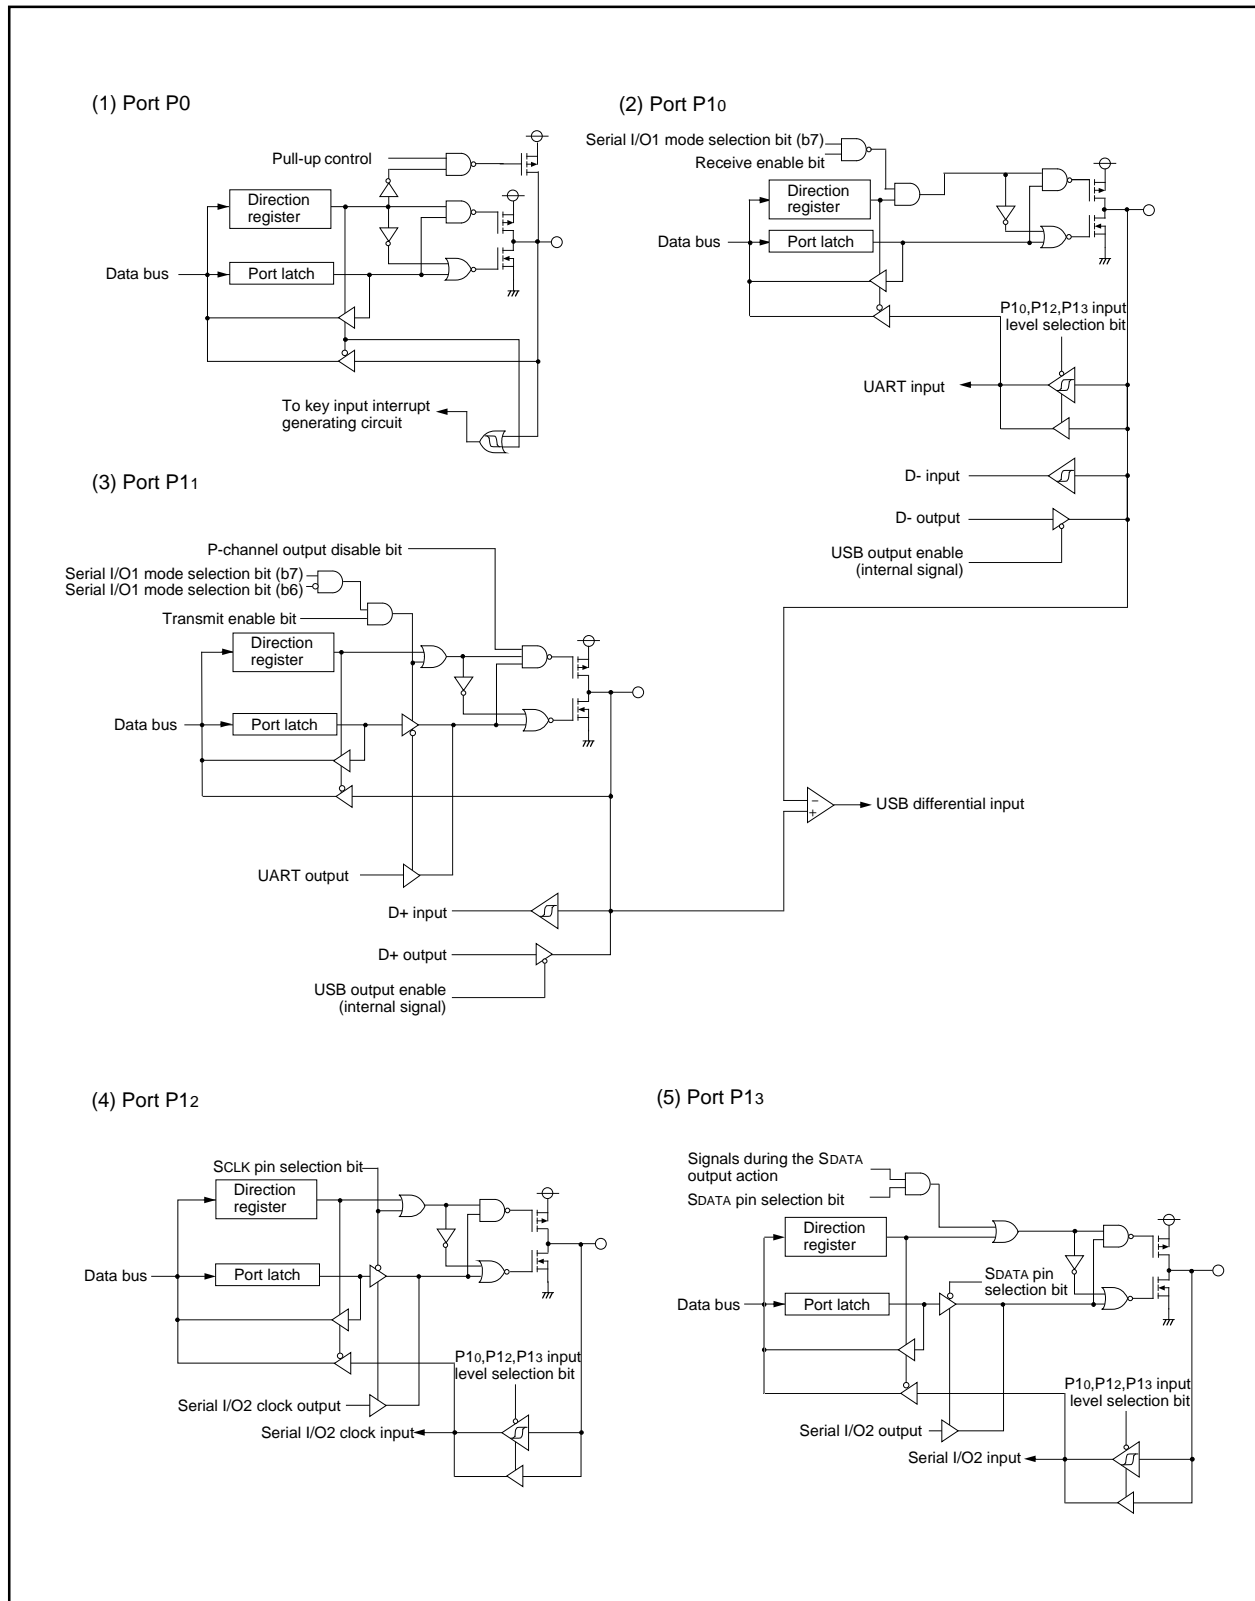


Fig. 10 Block diagram of ports (1)

*Notice: This is not a final specification.*

*Some parametric limits are subject to change.*

# SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER



## PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### Interrupts

Interrupts occur by 11 different sources : 3 external sources, 7 internal sources and 1 software source.

#### Interrupt control

All interrupts except the BRK instruction interrupt have an interrupt request bit and an interrupt enable bit, and they are controlled by the interrupt disable flag. When the interrupt enable bit and the interrupt request bit are set to "1" and the interrupt disable flag is set to "0", an interrupt is accepted.

The interrupt request bit can be cleared by program but not be set. The interrupt enable bit can be set and cleared by program.

It becomes usable by switching CNTR0 and AD interrupt sources with bit 7 of the interrupt edge selection register, timer 2 and serial I/O2 interrupt sources with bit 6, and timer X and key-on wake-up interrupt sources with bit 5.

The reset and BRK instruction interrupt can never be disabled with any flag or bit. All interrupts except these are disabled when the interrupt disable flag is set.

When several interrupts occur at the same time, the interrupts are received according to priority

#### Interrupt operation

Upon acceptance of an interrupt the following operations are automatically performed:

1. The processing being executed is stopped.
2. The contents of the program counter and processor status register are automatically pushed onto the stack.
3. Concurrently with the push operation, the interrupt destination address is read from the vector table into the program counter.
4. The interrupt disable flag is set and the corresponding interrupt request bit is cleared.

#### Notes on use

When the active edge of an external interrupt (INT0, CNTR0) is set, the interrupt request bit may be set.

Therefore, please take following sequence:

1. Disable the external interrupt which is selected.
2. Change the active edge in interrupt edge selection register. (in case of CNTR0: Timer X mode register)
3. Clear the set interrupt request bit to "0".
4. Enable the external interrupt which is selected.

**Table 4** Interrupt vector address and priority

| Interrupt source                            | Priority | Vector addresses (Note 1) |                    | Interrupt request generating conditions                                      | Remarks                                     |
|---|----------|---------------------------|--------------------|--|---|
|   |          | High-order                | Low-order          |  |   |
| Reset (Note 2)                              | 1        | FFFD <sub>16</sub>        | FFFC <sub>16</sub> | At reset input   | Non-maskable                                |
| UART receive                                | 2        | FFFB <sub>16</sub>        | FFFA <sub>16</sub> | At completion of UART data receive   | Valid in UART mode                          |
| USB IN token                                |          |                           |                    | At detection of IN token   | Valid in USB mode                           |
| UART transmit                               | 3        | FFF9 <sub>16</sub>        | FFF8 <sub>16</sub> | At completion of UART transmit shift or when transmit buffer is empty        | Valid in UART mode                          |
| USB SETUP/OUT token<br>Reset/Suspend/Resume |          |                           |                    | At detection of SETUP/OUT token or<br>At detection of Reset/ Suspend/ Resume | Valid in USB mode                           |
| INT0  | 4        | FFF7 <sub>16</sub>        | FFF6 <sub>16</sub> | At detection of either rising or falling edge of INT0 input                  | External interrupt (active edge selectable) |
| Timer X                                     | 5        | FFF5 <sub>16</sub>        | FFF4 <sub>16</sub> | At timer X underflow   |   |
| Key-on wake-up                              |          |                           |                    | At falling of conjunction of input logical level for port P0 (at input)      | External interrupt (valid at falling)       |
| Timer 1                                     | 6        | FFF3 <sub>16</sub>        | FFF2 <sub>16</sub> | At timer 1 underflow   | STP release timer underflow                 |
| Timer 2                                     | 7        | FFF1 <sub>16</sub>        | FFF0 <sub>16</sub> | At timer 2 underflow   |   |
| Serial I/O2                                 |          |                           |                    | At completion of transmit/receive shift                                      |   |
| CNTR0                                       | 8        | FFEF <sub>16</sub>        | FFEE <sub>16</sub> | At detection of either rising or falling edge of CNTR0 input                 | External interrupt (valid at falling)       |
| A-D conversion                              |          |                           |                    | At completion of A-D conversion  |   |
| BRK instruction                             | 9        | FFED <sub>16</sub>        | FFEC <sub>16</sub> | At BRK instruction execution   | Non-maskable software interrupt             |

**Note 1:** Vector addressed contain internal jump destination addresses.

**2:** Reset function in the same way as an interrupt with the highest priority.

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

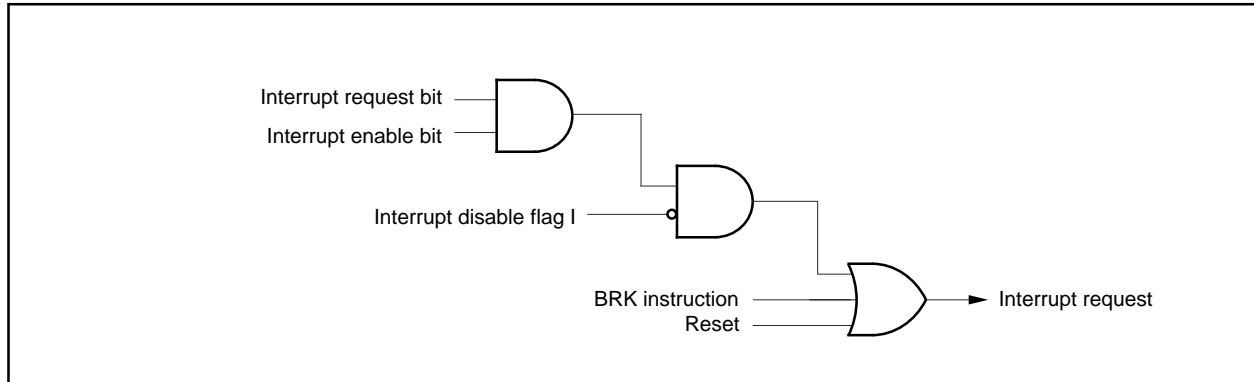


Fig. 12 Interrupt control

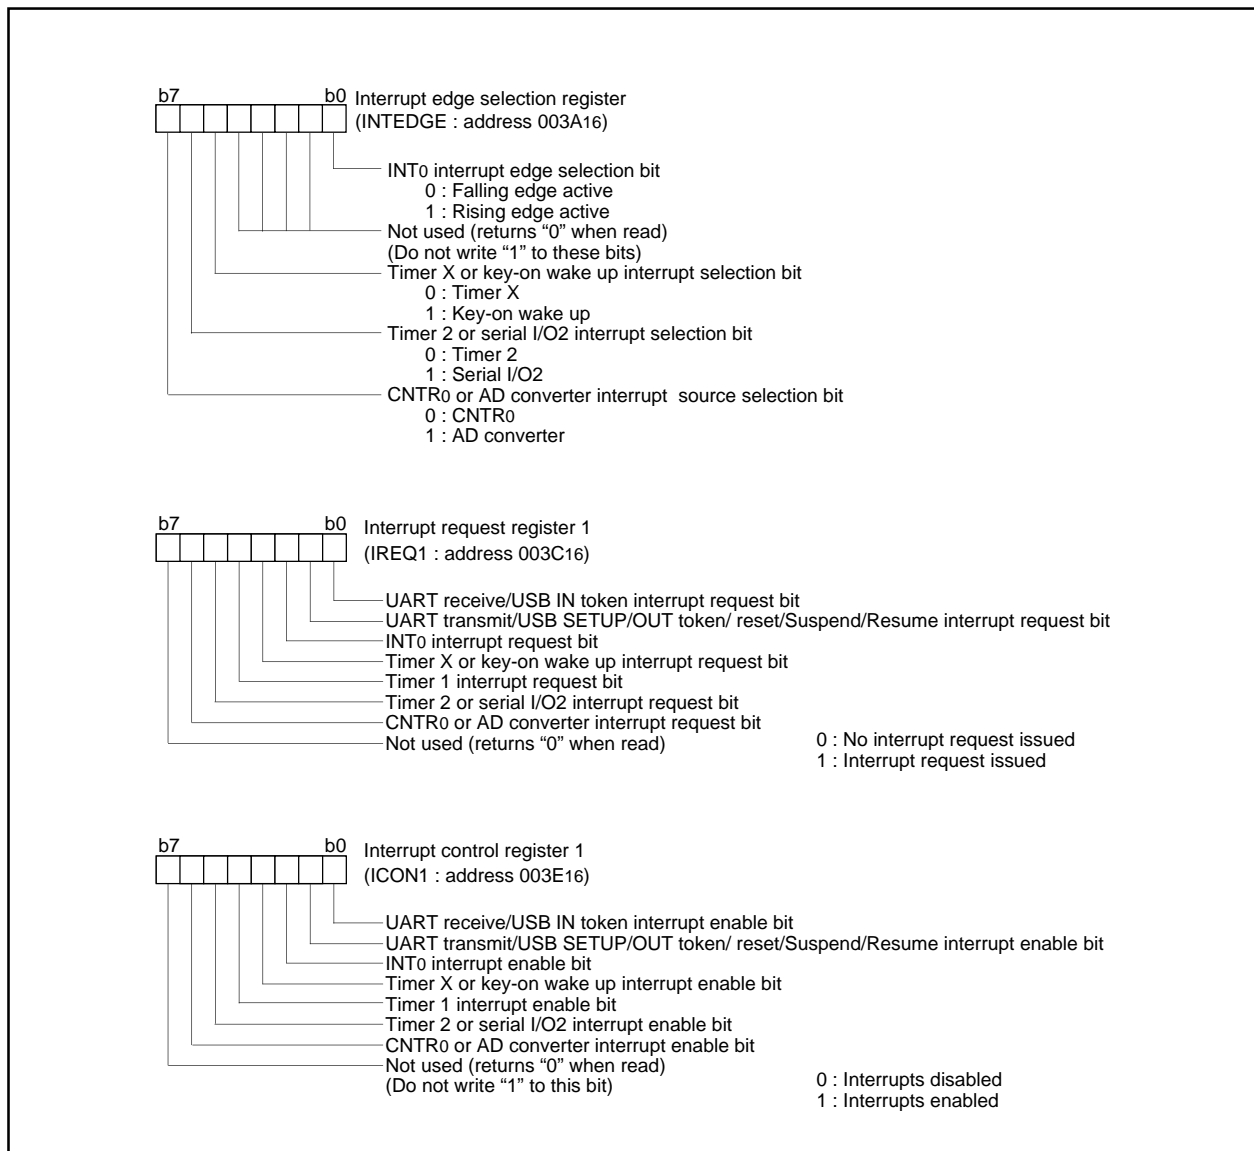


Fig. 13 Structure of Interrupt-related registers

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Key Input Interrupt (Key-On Wake-Up)**

A key-on wake-up interrupt request is generated by applying "L" level to any pin of port P0 that has been set to input mode.

In other words, it is generated when the AND of input level goes from "1" to "0". An example of using a key input interrupt is shown in Figure 14, where an interrupt request is generated by pressing one of the keys provided as an active-low key matrix which uses ports P00 to P04 as input ports.

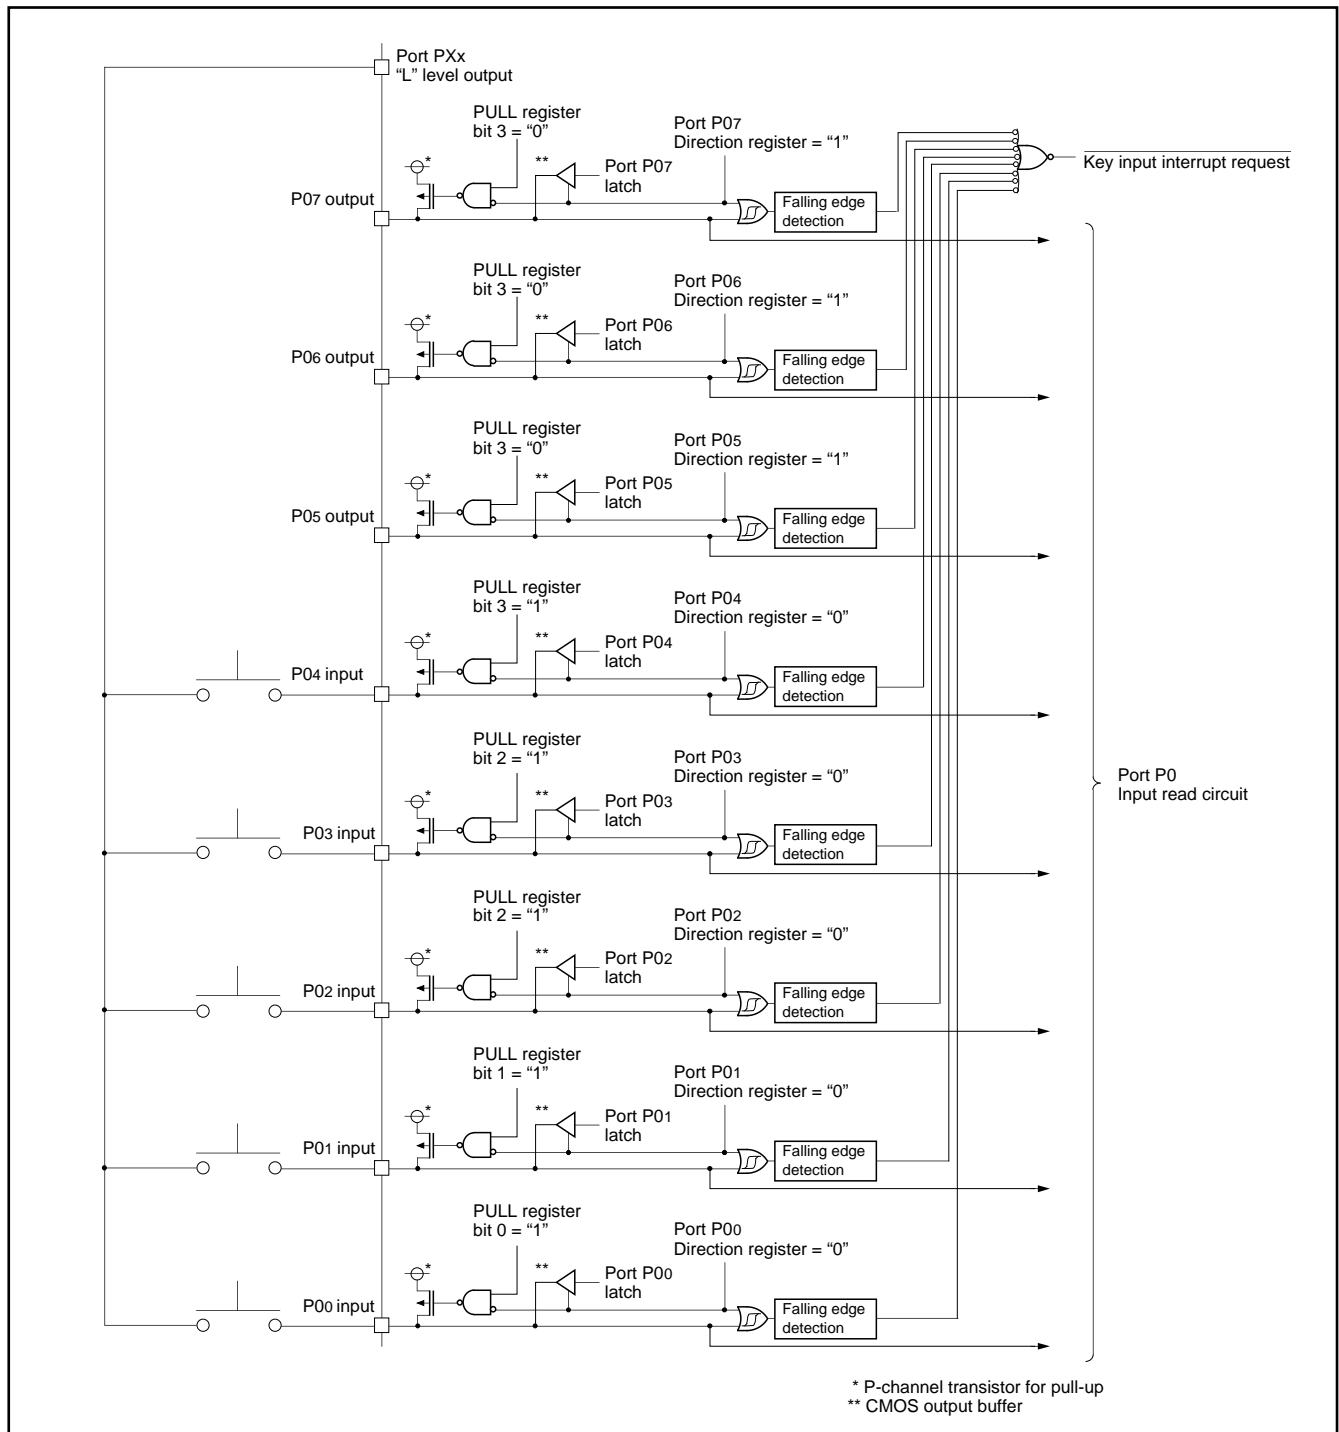


Fig. 14 Connection example when using key input interrupt and port P0 block diagram

## PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### Timers

The 7532 Group has 3 timers: timer X, timer 1 and timer 2.

The division ratio of every timer and prescaler is  $1/(n+1)$  provided that the value of the timer latch or prescaler is  $n$ .

All the timers are down count timers. When a timer reaches "0", an underflow occurs at the next count pulse, and the corresponding timer latch is reloaded into the timer. When a timer underflows, the interrupt request bit corresponding to each timer is set to "1".

#### ●Timer 1, Timer 2

Prescaler 12 always counts  $f(X_{IN})/16$ . Timer 1 and timer 2 always count the prescaler output and periodically sets the interrupt request bit.

#### ●Timer X

Timer X can be selected in one of 4 operating modes by setting the timer X mode register.

##### • Timer Mode

The timer counts the signal selected by the timer X count source selection bit.

##### • Pulse Output Mode

The timer counts the signal selected by the timer X count source selection bit, and outputs a signal whose polarity is inverted each time the timer value reaches "0", from the CNTR<sub>0</sub> pin.

When the CNTR<sub>0</sub> active edge switch bit is "0", the output of the CNTR<sub>0</sub> pin is started with an "H" output.

At "1", this output is started with an "L" output. When using a timer in this mode, set the port P14 direction register to output mode.

##### • Event Counter Mode

The operation in the event counter mode is the same as that in the timer mode except that the timer counts the input signal from the CNTR<sub>0</sub> pin.

When the CNTR<sub>0</sub> active edge switch bit is "0", the timer counts the rising edge of the CNTR<sub>0</sub> pin. When this bit is "1", the timer counts the falling edge of the CNTR<sub>0</sub> pin.

##### • Pulse Width Measurement Mode

When the CNTR<sub>0</sub> active edge switch bit is "0", the timer counts the signal selected by the timer X count source selection bit while the CNTR<sub>0</sub> pin is "H". When this bit is "1", the timer counts the signal while the CNTR<sub>0</sub> pin is "L".

In any mode, the timer count can be stopped by setting the timer X count stop bit to "1". Each time the timer overflows, the interrupt request bit is set.


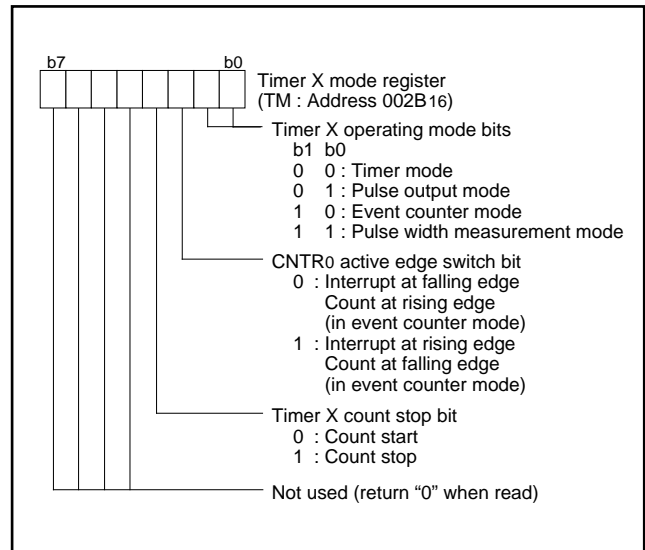


Fig. 15 Structure of timer X mode register

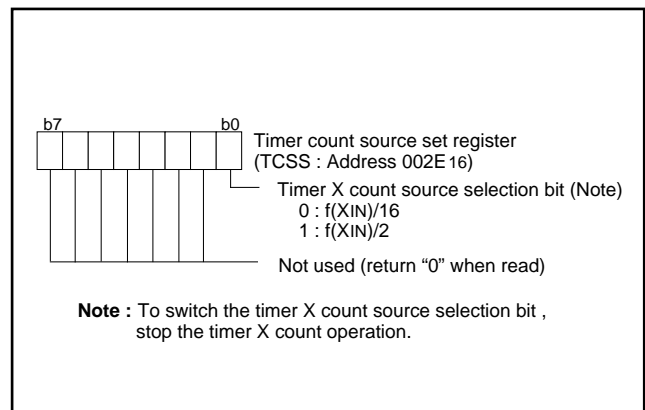

**Note :** To switch the timer X count source selection bit , stop the timer X count operation.

Fig. 16 Timer count source setting register

*Notice: This is not a final specification.*

# SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER





**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Serial I/O**

**●Serial I/O1**

**• Asynchronous serial I/O (UART) mode**

Serial I/O1 can be used as an asynchronous (UART) serial I/O. A dedicated timer (baud rate generator) is also provided for baud rate generation when serial I/O1 is in operation.


Eight serial data transfer formats can be selected, and the transfer formats to be used by a transmitter and a receiver must be identical.

Each of the transmit and receive registers has a buffer register (the


same address on memory). Since the shift register cannot be written to or read from directly, transmit data is written to the transmit buffer, and receive data is read from the respective buffer registers. These buffer registers can also hold the next data to be transmitted and receive 2-byte receive data in succession.

By selecting "1" for continuous transmit valid bit (bit 2 of SIO1CON), continuous transmission of the same data is made possible.

This can be used as a simplified PWM.

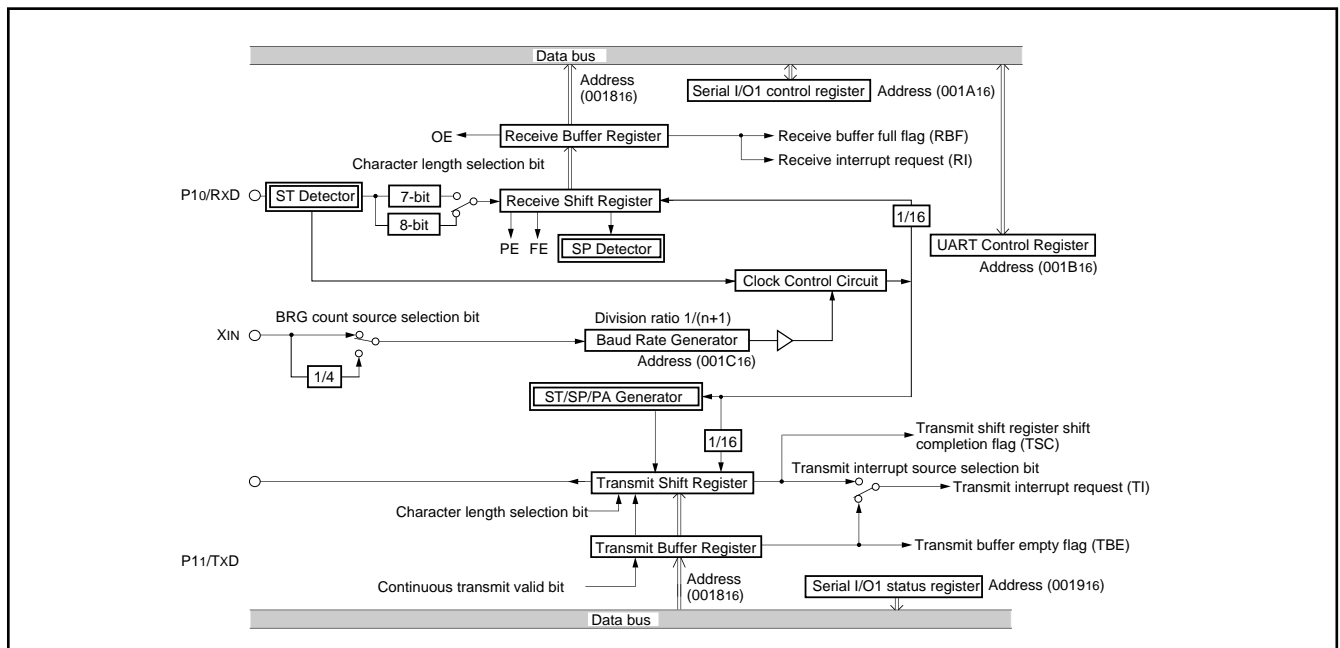

**Fig. 18 Block diagram of UART serial I/O**

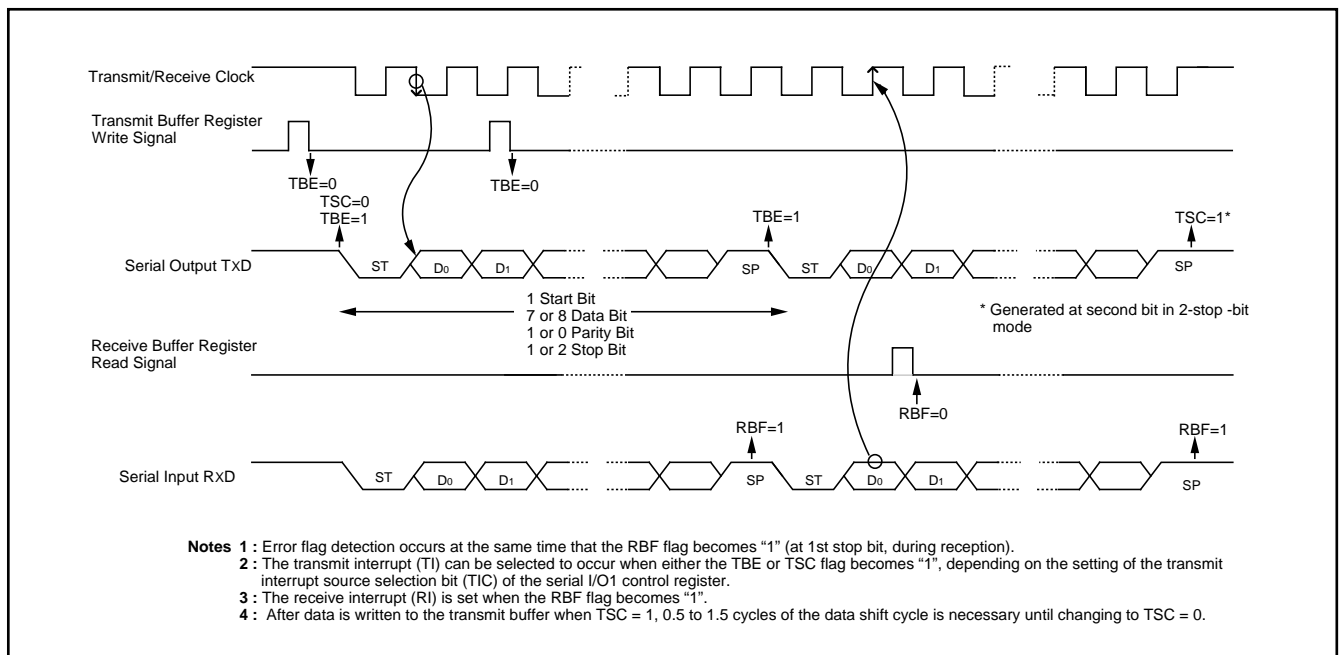

**Fig. 19 Operation of UART serial I/O function**

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**[Serial I/O1 control register] SIO1CON**

The serial I/O1 control register consists of eight control bits for the serial I/O1 function.

**[UART control register] UARTCON**

The UART control register consists of four control bits (bits 0 to 3) which are valid when asynchronous serial I/O is selected and set the data format of an data transfer. One bit in this register (bit 4) is always valid and sets the output structure of the P11/TxD pin.

**[Serial I/O1 status register] SIO1STS**

The read-only serial I/O1 status register consists of seven flags (bits 0 to 6) which indicate the operating status of the UART function and various errors. This register functions as the UART status register (UARTSTS) when selecting the UART.

The receive buffer full flag (bit 1) is cleared to "0" when the receive buffer is read.

If there is an error, it is detected at the same time that data is transferred from the receive shift register to the receive buffer, and the receive buffer full flag is set. A write to the serial I/O1 status register clears all the error flags OE, PE, FE, and SE (bit 3 to bit 6, respectively). Writing "0" to the serial I/O1 mode selection bits MOD1 and MOD0 (bit 7 and 6 of the Serial I/O1 control register ) also clears all the status flags, including the error flags.

All bits of the serial I/O1 status register are initialized to "8116" at reset, but if the transmit enable bit (bit 4) of the serial I/O1 control register has been set to "1", the continuous transmit valid bit (bit 2) becomes "1".


**[Transmit/Receive buffer register] TB/RB**

The transmit buffer and the receive buffer are located at the same address. The transmit buffer is write-only and the receive buffer is read-only. If a character bit length is 7-bit, the MSB of data stored in the receive buffer is "0".

**[Baud Rate Generator] BRG**

The baud rate generator determines the baud rate for serial transfer.

The baud rate generator divides the frequency of the count source by  $1/(n + 1)$ , where n is the value written to the baud rate generator.

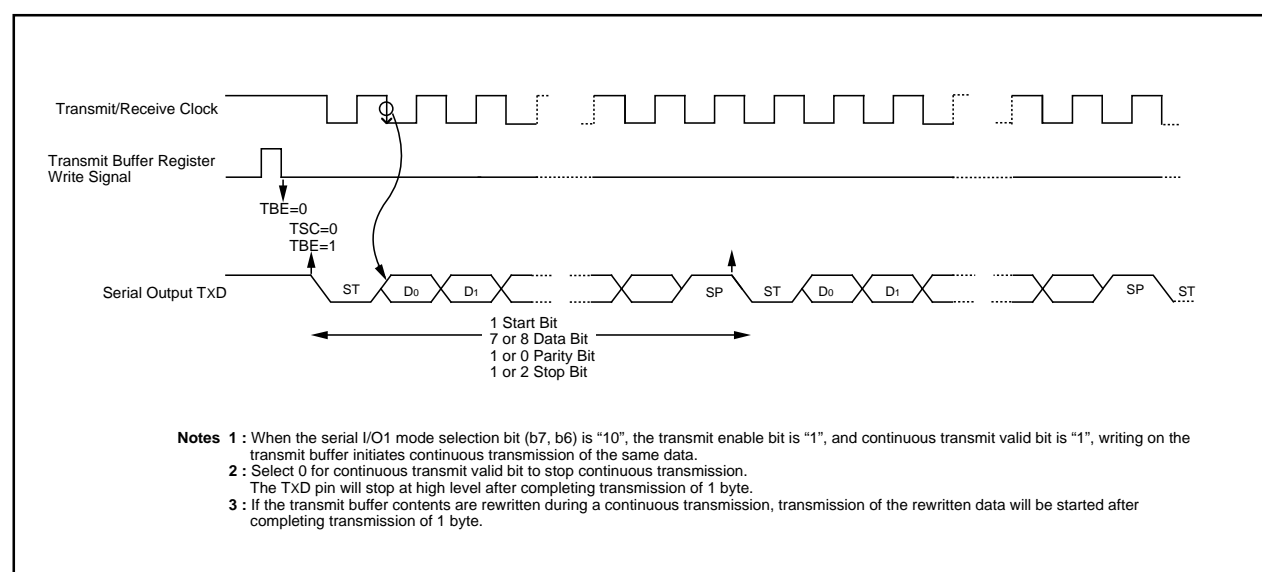

**Fig. 20 Continuous transmission operation of UART serial I/O**

# PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### • Universal serial bus (USB) mode

By setting bits 7 and 6 of the serial I/O1 control register (address 001A16) to "11", the USB mode is selected.

This mode conforms to "Low Speed device" of USB Specification 1.0. In this mode serial I/O1 interrupt have 5 sources; USB in and out token receive, USB reset, suspend, and resume. The serial

I/O1 status register (SIO1STS) functions as the USB status register (USBSTS). There is the USBVREFOUT pin for the USB reference voltage output, and a D-line with 1.5 kΩ external resistor can be pull up.

USB mode block and USB transceiver block show in figures 21 and 22.

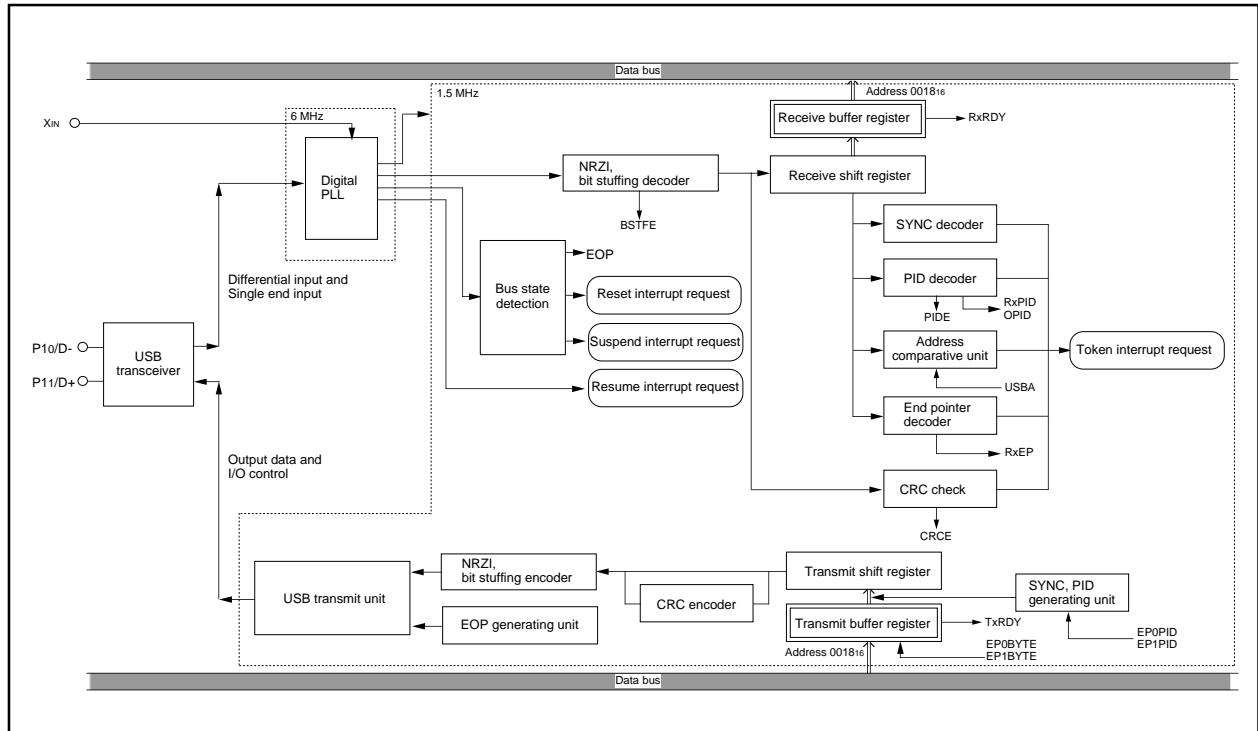


Fig. 21 USB mode block diagram

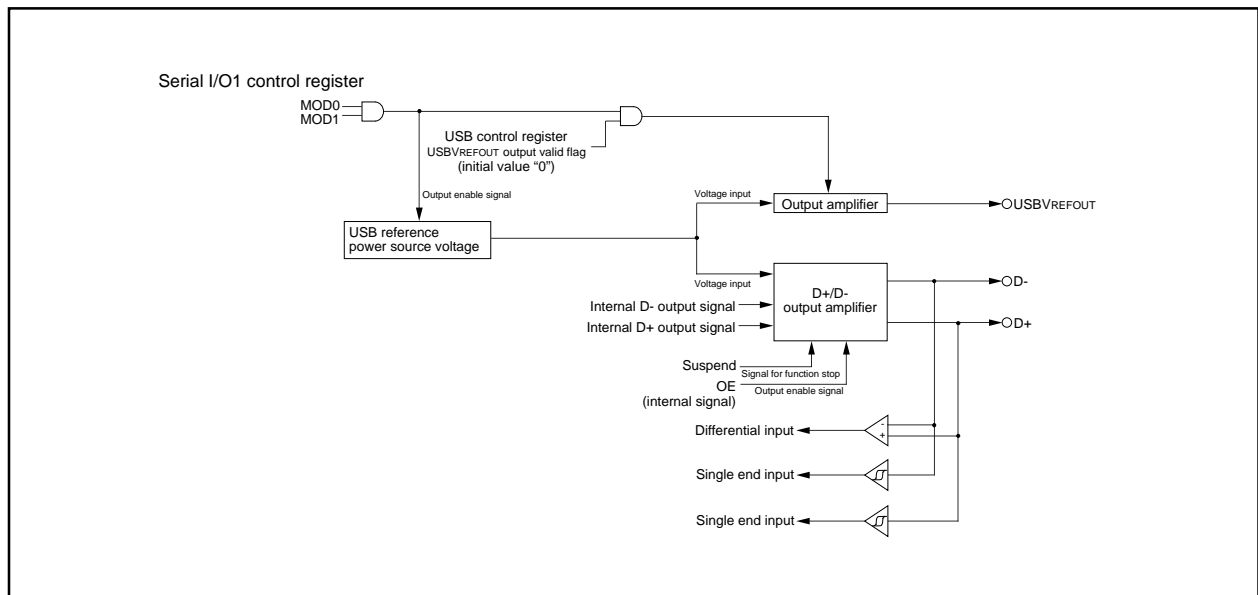


Fig. 22 USB transceiver block diagram

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

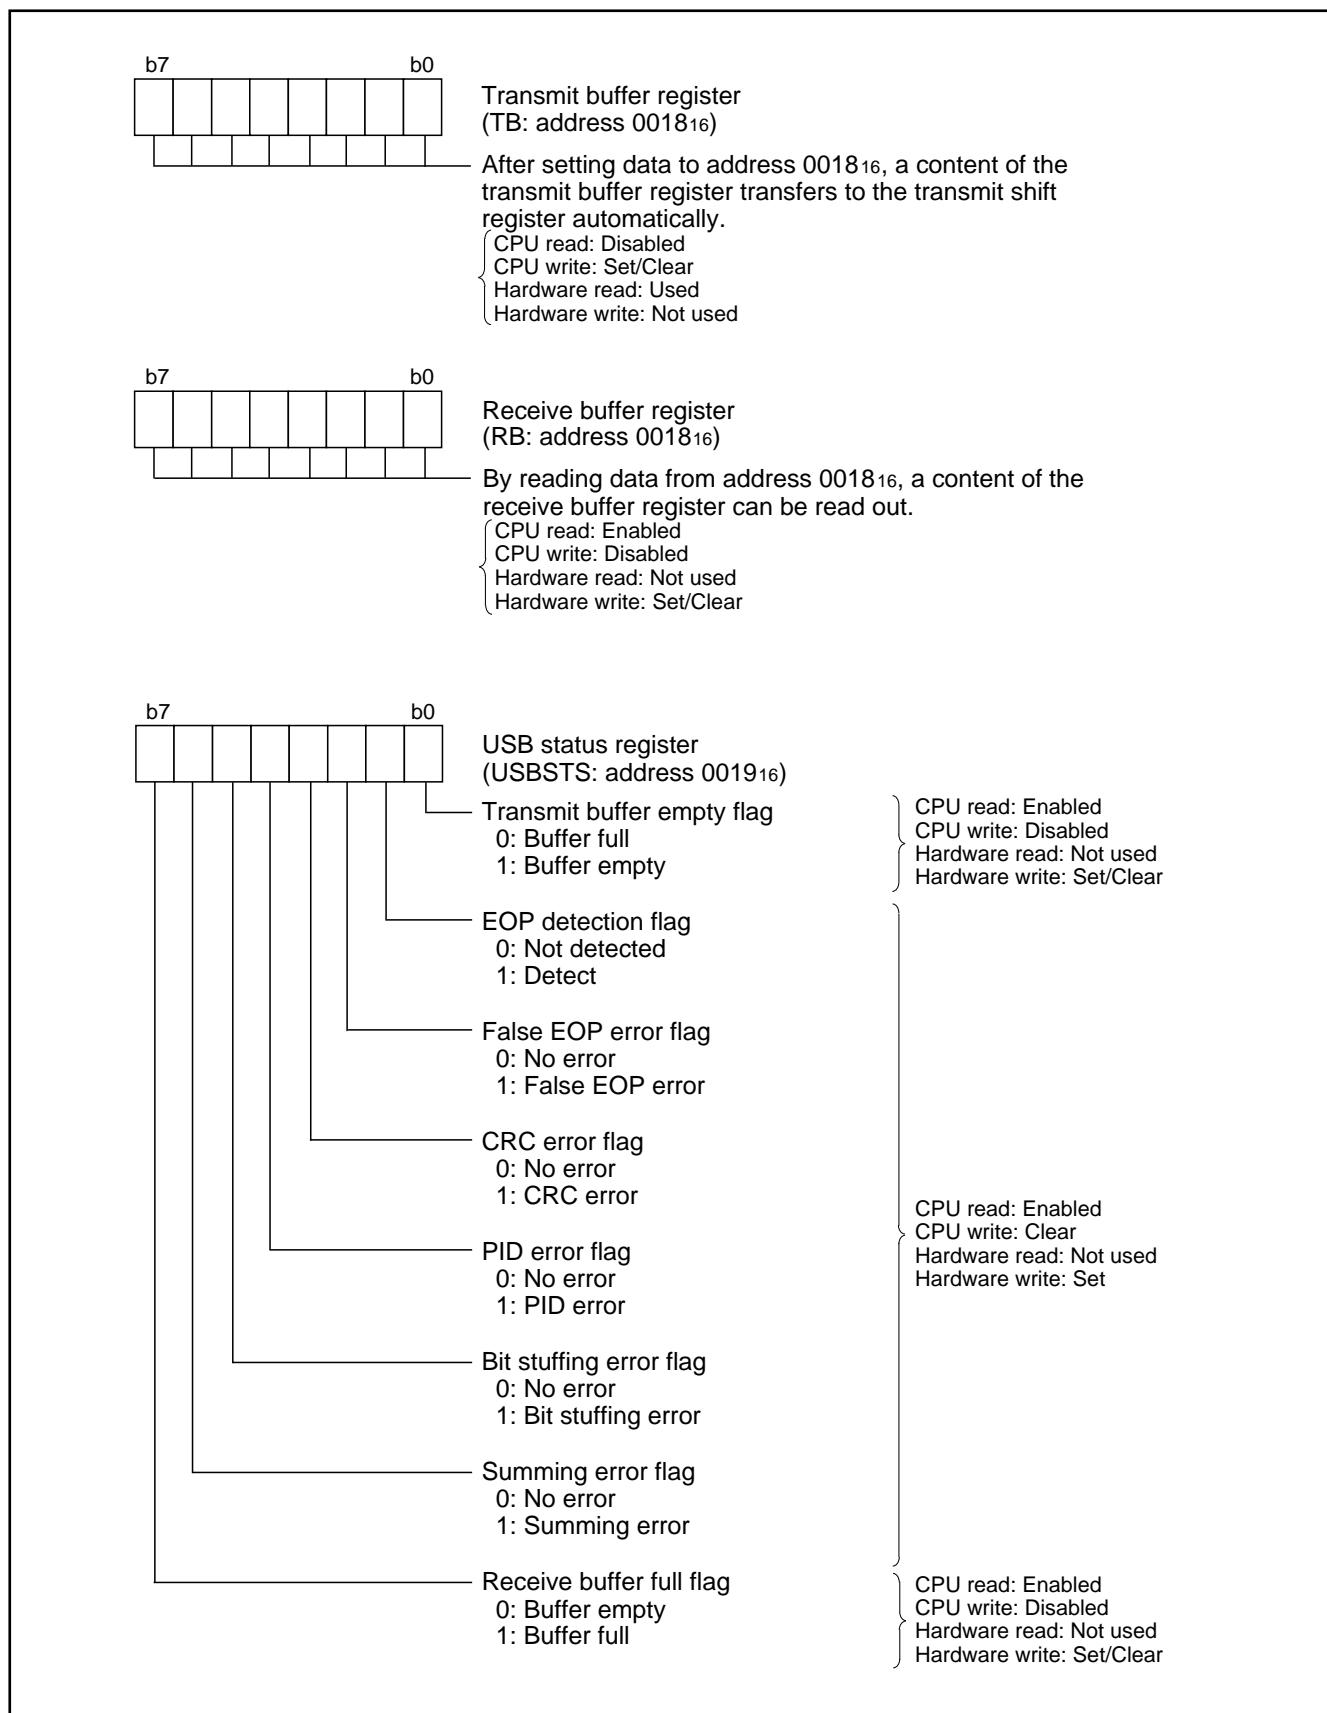


Fig. 23 Structure of serial I/O1-related registers (1)

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

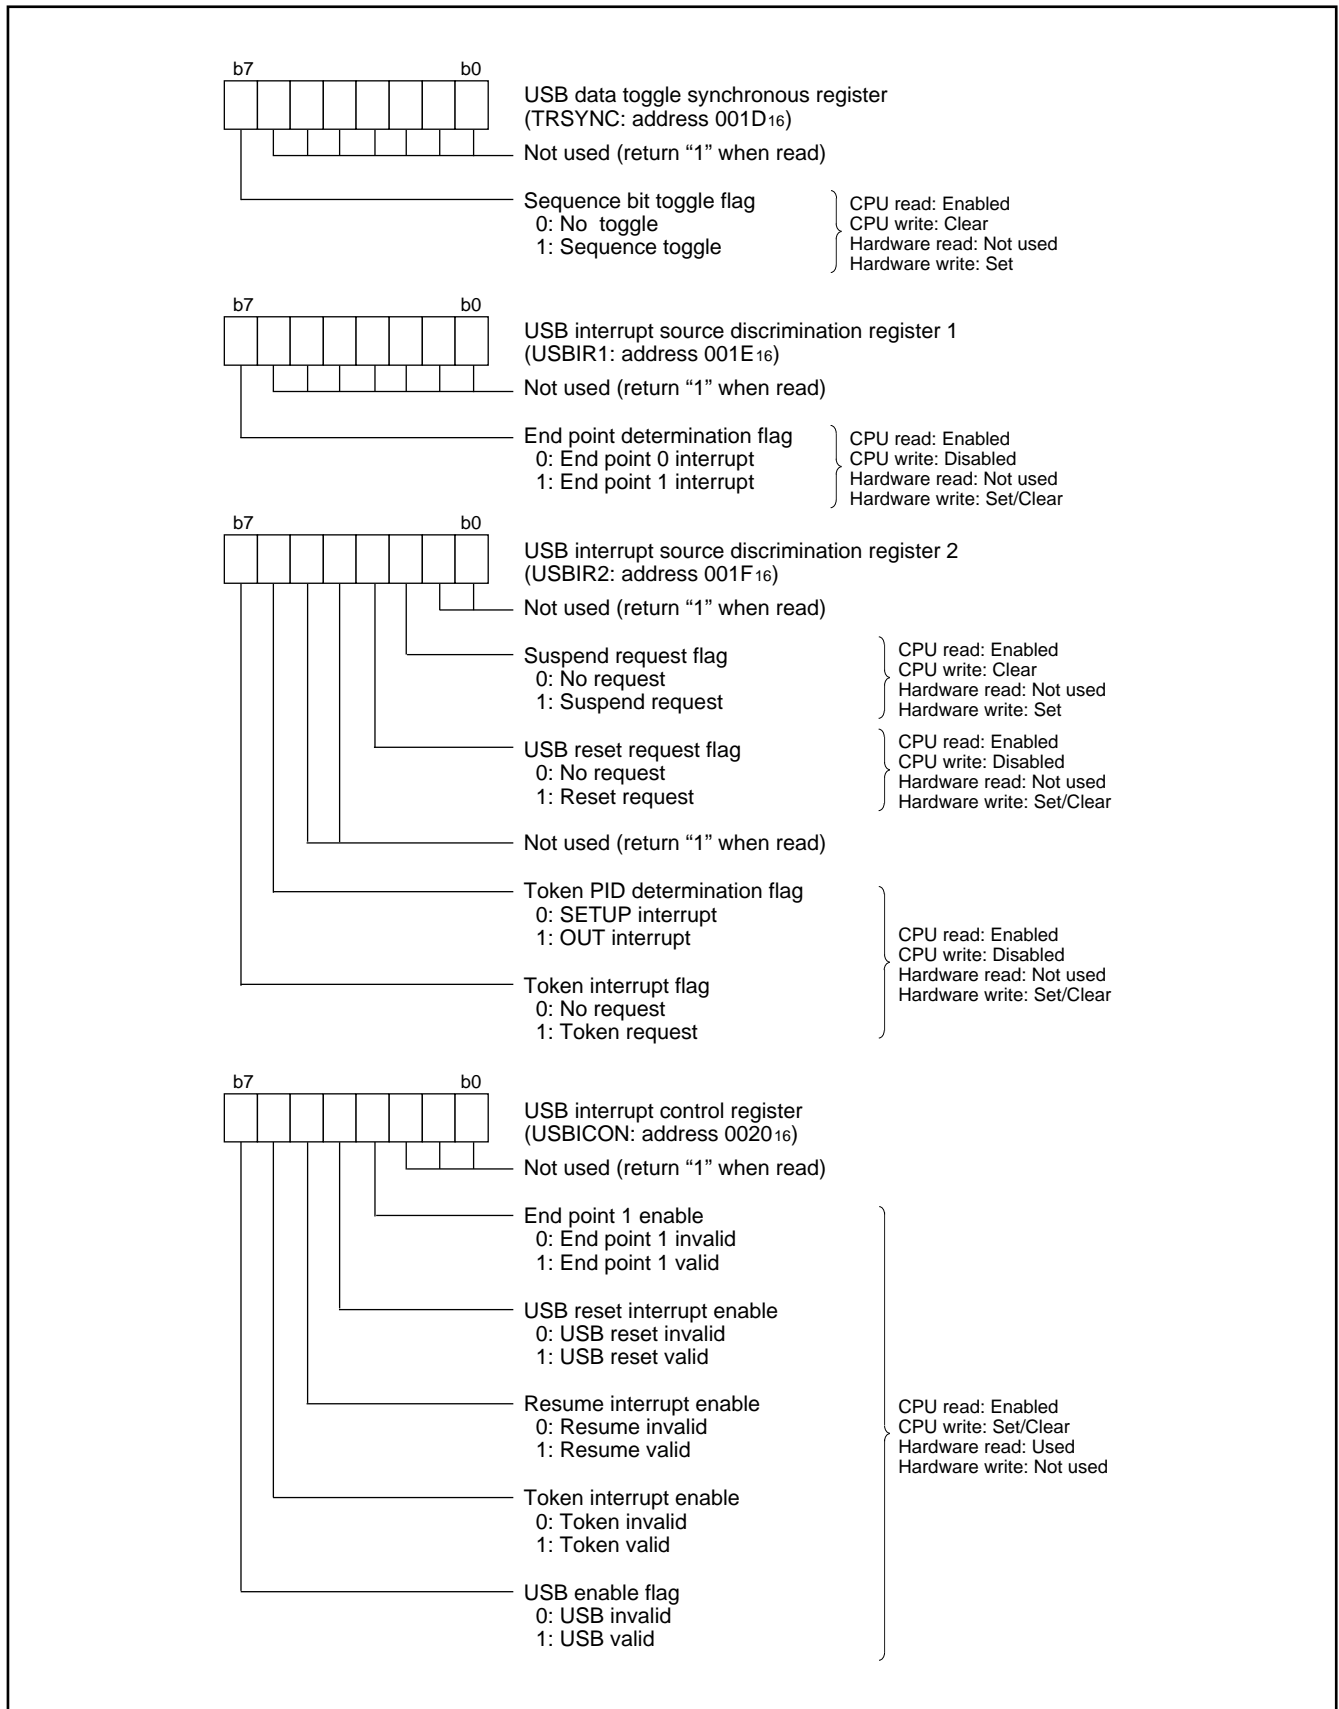


Fig. 24 Structure of serial I/O1-related registers (2)

# PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

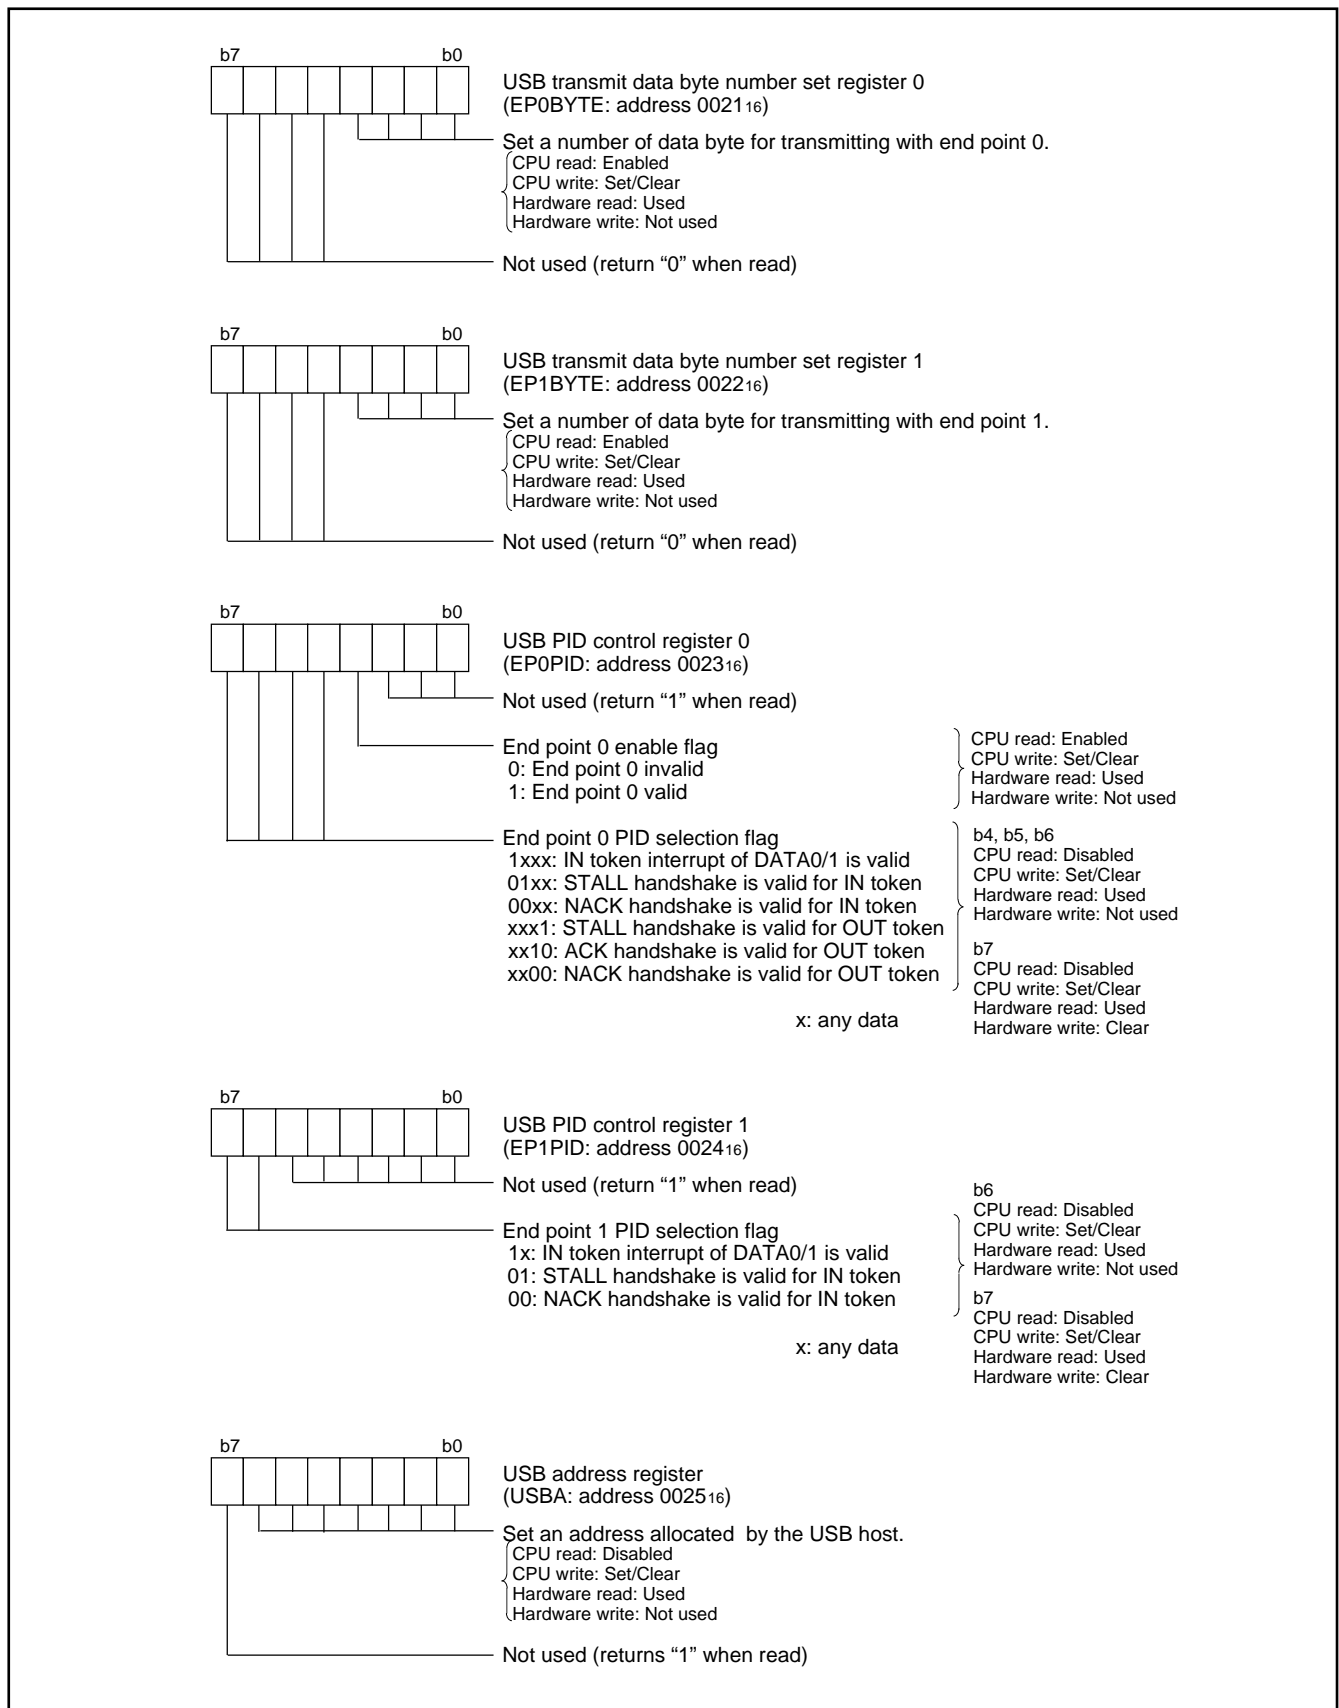


Fig. 25 Structure of serial I/O1-related registers (3)

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

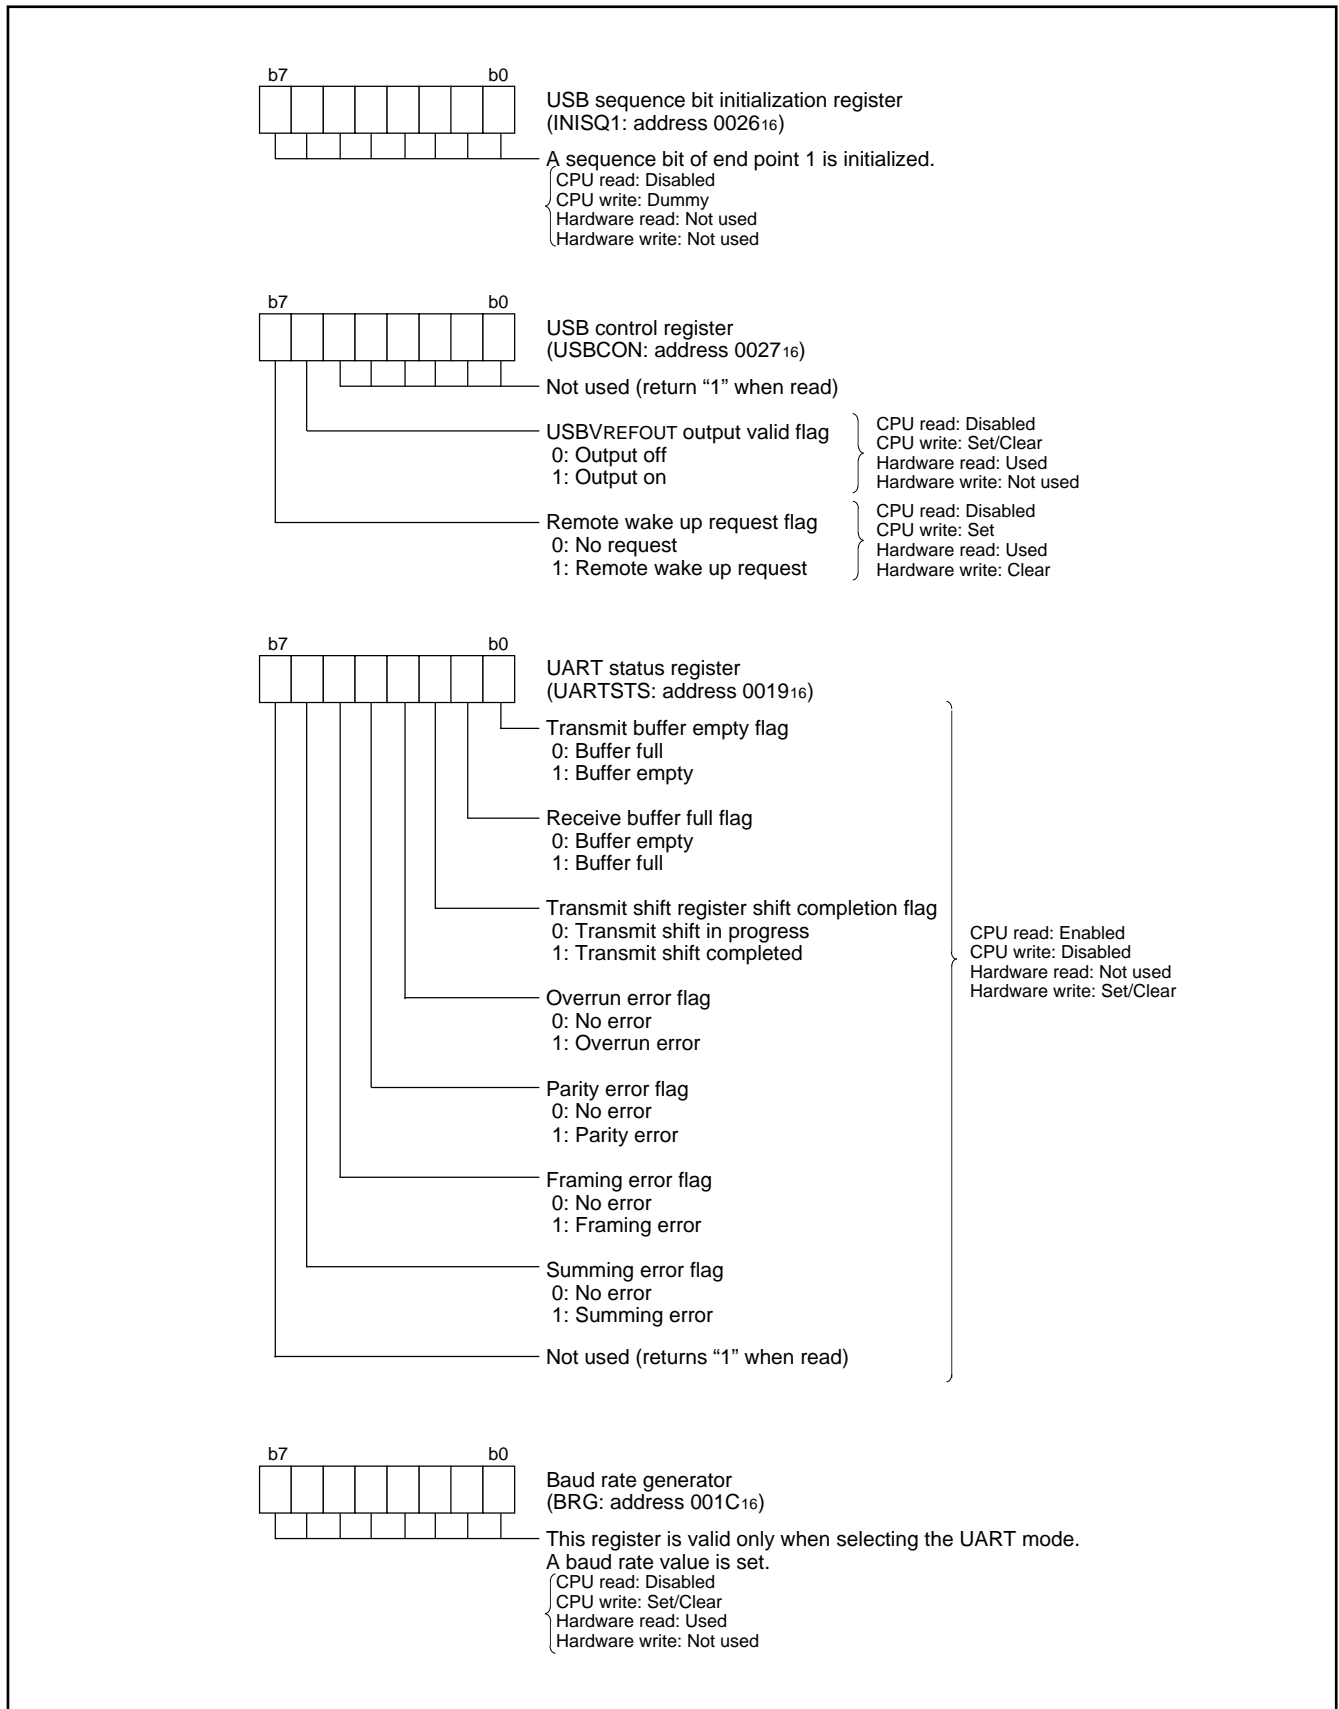


Fig. 26 Structure of serial I/O1-related registers (4)

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

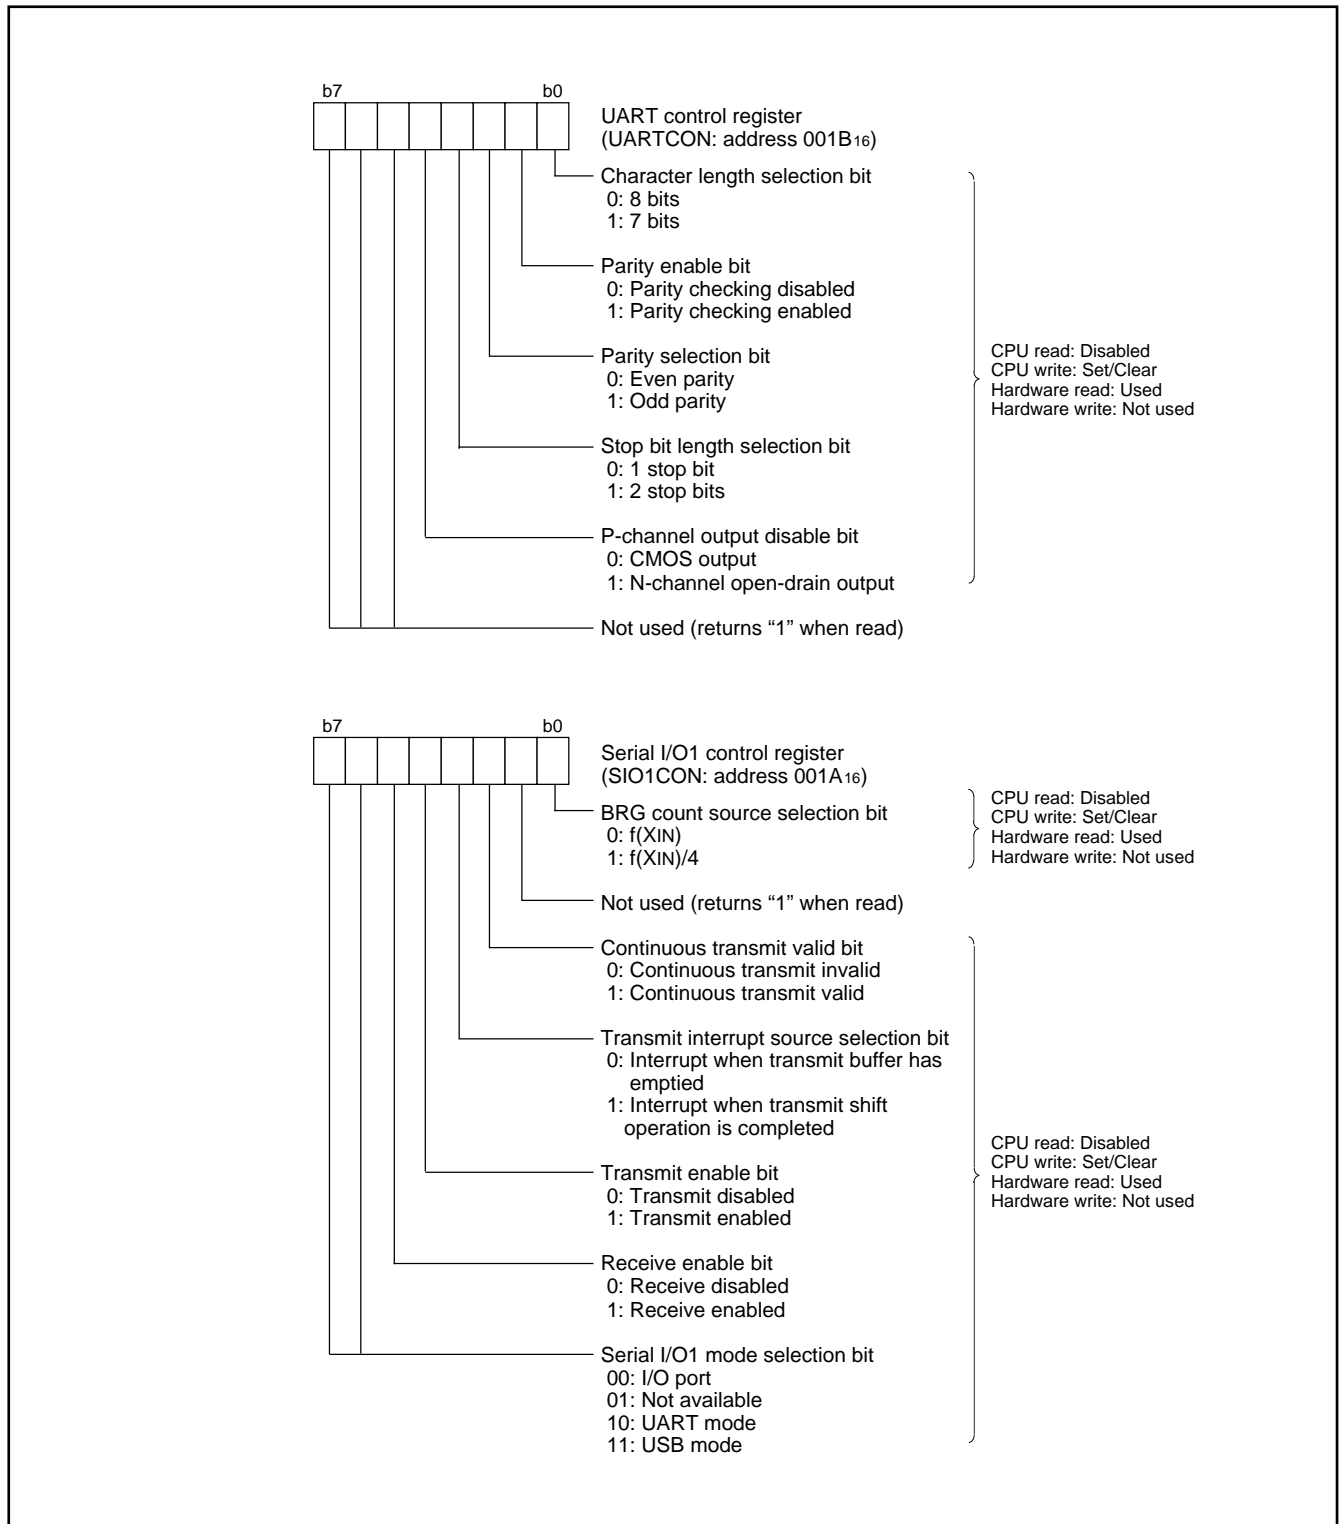


Fig. 27 Structure of serial I/O1-related registers (5)



**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Note on using USB mode**

**Handling of SE0 signal in program (at receiving)**

7532 group has the border line to detect as USB RESET or EOP (End of Packet) on the width of SE0 (Single Ended 0).

A response apposite to a state of the device is expected.

The name of the following short words which is used in table 5 shows as follow.

- TKNE: Token interrupt enable (bit 6 of address 20<sub>16</sub>)
- RSME: Resume interrupt enable (bit 5 of address 20<sub>16</sub>)
- RSTE: USB reset interrupt enable (bit 4 of address 20<sub>16</sub>)
- Spec: A response of the device requested by USB Specification 1.0
- SIE: Hardware operation in 7532 group
- F/W: Recommendation process in the program
- FEOPE: False EOP error flag (bit 2 of address 19<sub>16</sub>)
- RxPID: Token interrupt flag (bit 7 of address 1F<sub>16</sub>)

**Table 5 Relation of the width of SE0 and the state of the device**

|                           |      | State of device   |  |  |  |
|---------------------------|------|---|--|--|--|
| Width of SE0              |      | Idle state<br>TKNE = X<br>RSME = 0<br>RSTE = 1  | End of Token in transaction<br>TKNE = 1<br>RSME = 0<br>RSTE = 1  | End of data or handshake<br>in transaction<br>TKNE = 0<br>RSME = 0<br>RSTE = 0 or 1                      | Suspend state<br>TKNE = 0<br>RSME = 1<br>RSTE = 0                |
|                           |      |   |  |  |  |
| 0 μ sec.<br>0.5 μ sec.    | Spec | Ignore  | Ignore   | Ignore   | Spec<br>Reset or resume  |
|                           | SIE  | Keep counting suspend timer   | Not detected as EOP(in case of no detection EOP, SIE returns idle state as time out. FEOPE flag is set.) | Not detected as EOP(in case of no detection EOP, SIE returns idle state as timeup. FEOPE flag is set.)   |  |
|                           | F/W  | Not acknowledge   | Not acknowledge  | Wait for the next EOP flag   |  |
| 0.5 μ sec.<br>2.5 μ sec.  | Spec | Keep alive  | EOP  | EOP  | SIE<br>Reset interrupt request                                   |
|                           | SIE  | Initialize suspend timer count value  | Token interrupt request  | Set EOP flag   |  |
|                           | F/W  | Not acknowledge   | Token interrupt processing execute   | After checking the set of EOP flag, go to the next processing  |  |
| 2.5 μ sec.<br>2.67 μ sec. | Spec | Keep alive or Reset   | EOP or Reset   | EOP or Reset   | F/W<br>Reset interrupt processing<br>Resume interrupt processing |
|                           | SIE  | may determine as keep alive and Reset interrupt   | may determine as EOP and Reset interrupt   | may determine as EOP and Reset interrupt   |  |
|                           | F/W  | Keep alive in case of no interrupt request<br>Reset processing in case of interrupt request | RxPID = 1> Token interrupt processing<br>RxPID = 0> Reset interrupt processing                           | Continue the processing in case of no interrupt request<br>Reset processing in case of interrupt request |  |
| 2.67 μ sec.               | Spec | Reset   | Reset  | Reset  |  |
|                           | SIE  | Reset interrupt request   | Reset interrupt request  | Reset interrupt request  |  |
|                           | F/W  | Reset processing  | Reset processing   | Reset processing   |  |

# PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### Serial I/O2

The serial I/O2 function can be used only for clock synchronous serial I/O.

For clock synchronous serial I/O the transmitter and the receiver must use the same clock. When the internal clock is used, transfer is started by a write signal to the serial I/O2 register.

#### [Serial I/O2 control register] SIO2CON

The serial I/O2 control register contains 8 bits which control various serial I/O functions.

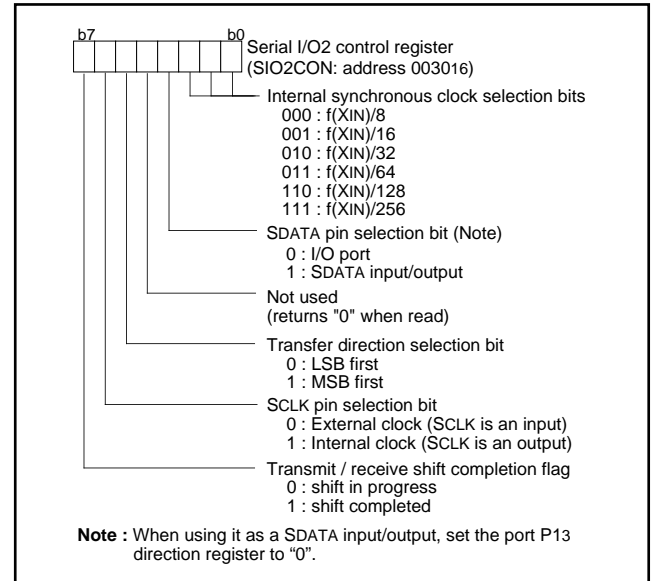


Fig. 28 Structure of serial I/O2 control registers

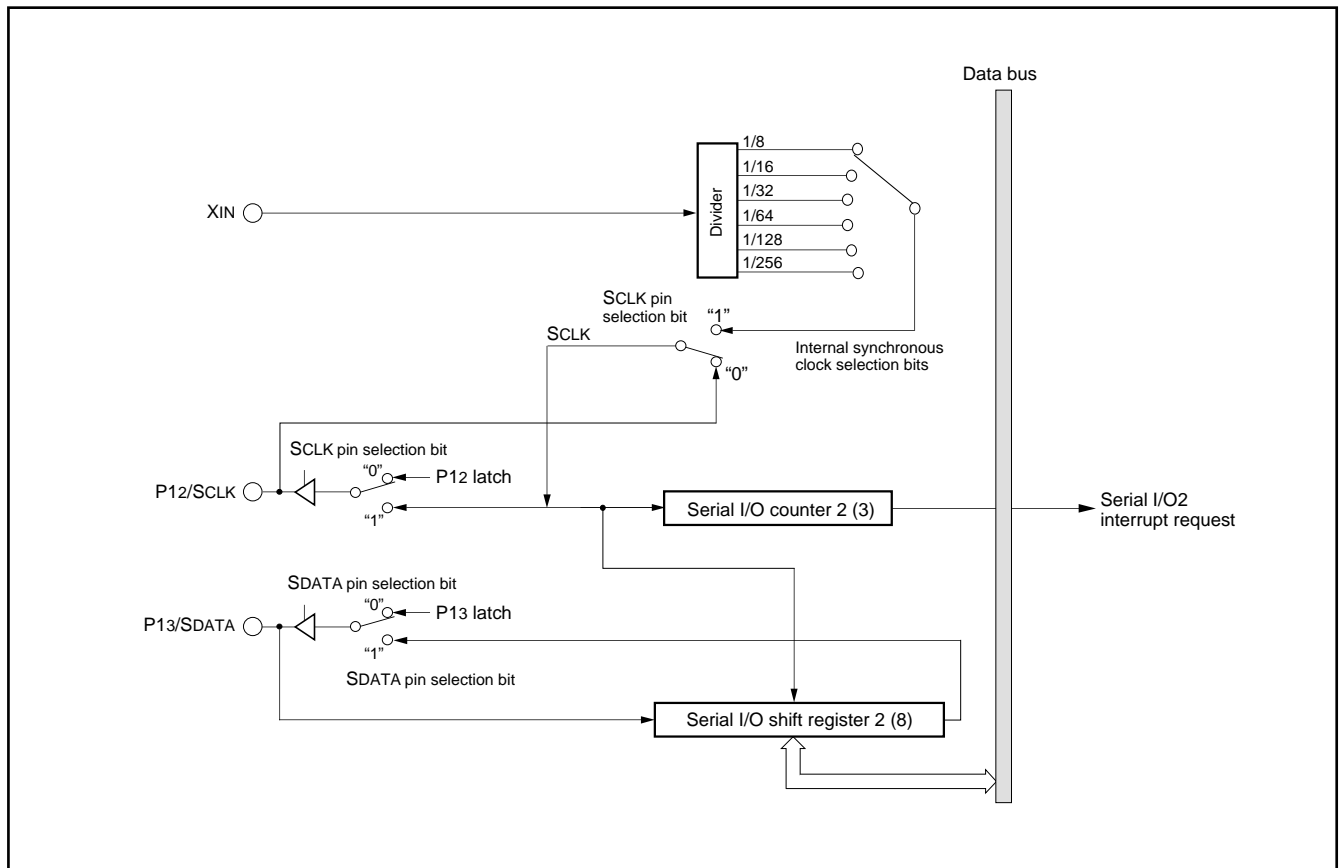


Fig. 29 Block diagram of serial I/O2

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Serial I/O2 operation**

By writing to the serial I/O2 register(address 0031<sub>16</sub>) the serial I/O2 counter is set to "7".

After writing, the SDATA pin outputs data every time the transfer clock shifts from a high to a low level. And, as the transfer clock shifts from a low to a high, the SDATA pin reads data, and at the same time the contents of the serial I/O2 register are shifted by 1 bit.

When the internal clock is selected as the transfer clock source, the following operations execute as the transfer clock counts up to 8.

- Serial I/O2 counter is cleared to "0".
- Transfer clock stops at an "H" level.
- Interrupt request bit is set.
- Shift completion flag is set.

Also, the SDATA pin is in a high impedance state after the data transfer is complete.

When the external clock is selected as the transfer clock source, the interrupt request bit is set as the transfer clock counts up to 8, but external control of the clock is required since it does not stop. Notice that the SDATA pin is not in a high impedance state on the completion of data transfer.

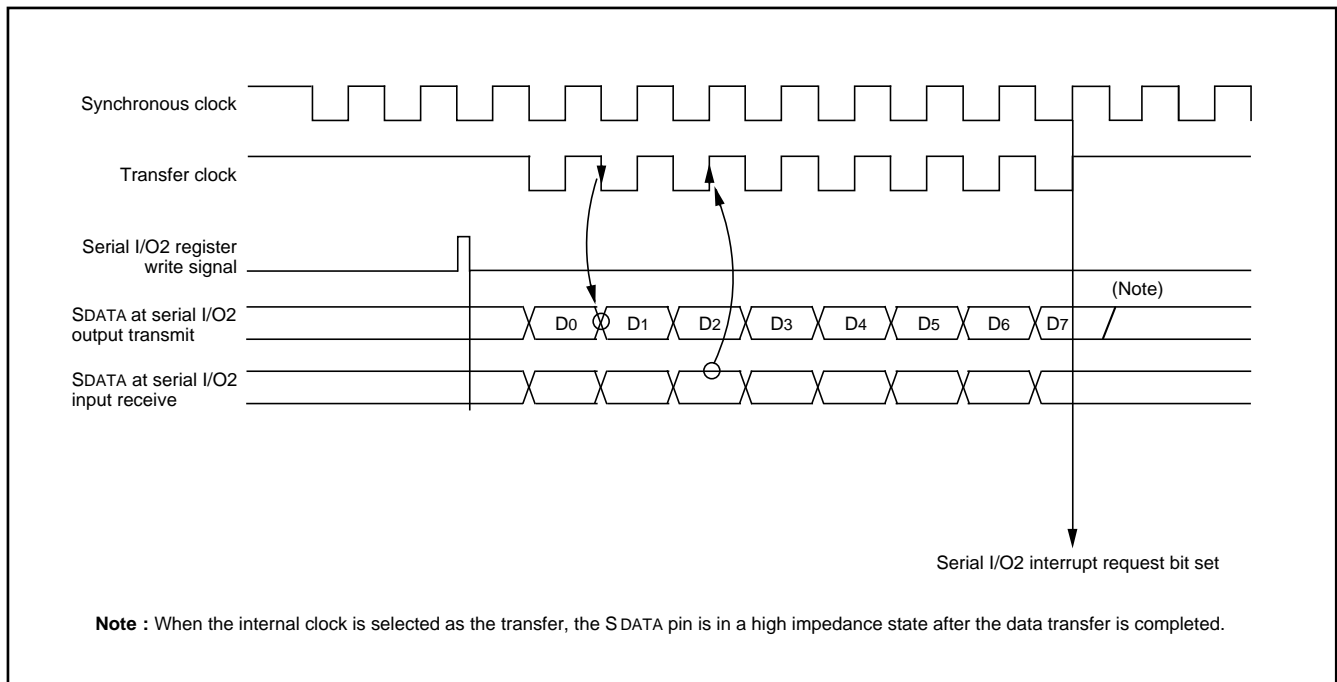


Fig. 30 Serial I/O2 timing (LSB first)

# PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### A-D Converter

The functional blocks of the A-D converter are described below.

#### [A-D conversion register] AD

The A-D conversion register is a read-only register that stores the result of A-D conversion. When reading this register during an A-D conversion, the previous conversion result is read.

#### [A-D control register] ADCON

The A-D control register controls the A-D converter. Bit 2 to 0 are analog input pin selection bits. Bit 4 is the AD conversion completion bit. The value of this bit remains at "0" during A-D conversion, and changes to "1" at completion of A-D conversion.

A-D conversion is started by setting this bit to "0".

#### [Comparison voltage generator]

The comparison voltage generator divides the voltage between AVSS and VREF by 1024, and outputs the divided voltages.

#### [Channel Selector]

The channel selector selects one of ports P27/AN7 to P20/AN0, and inputs the voltage to the comparator.

#### [Comparator and control circuit]

The comparator and control circuit compares an analog input voltage with the comparison voltage and stores its result into the A-D conversion register. When A-D conversion is completed, the control circuit sets the AD conversion completion bit and the AD interrupt request bit to "1". Because the comparator is constructed linked to a capacitor, set f(XIN) to 500 kHz or more during A-D conversion.

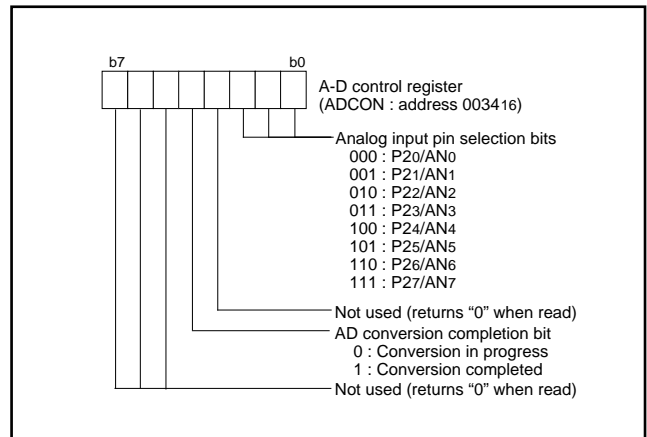


Fig. 31 Structure of A-D control register

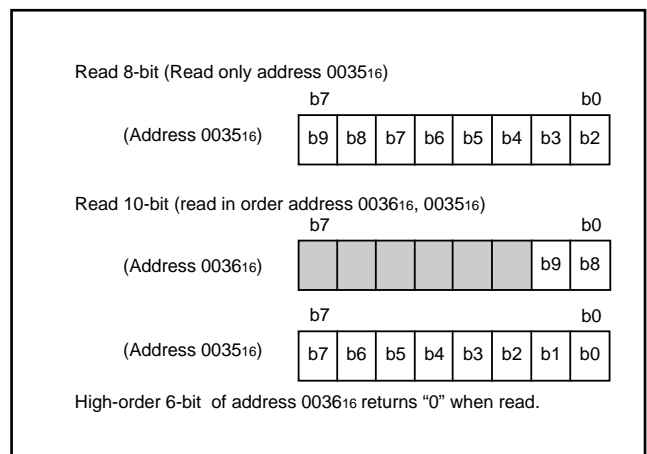


Fig. 32 Structure of A-D conversion register

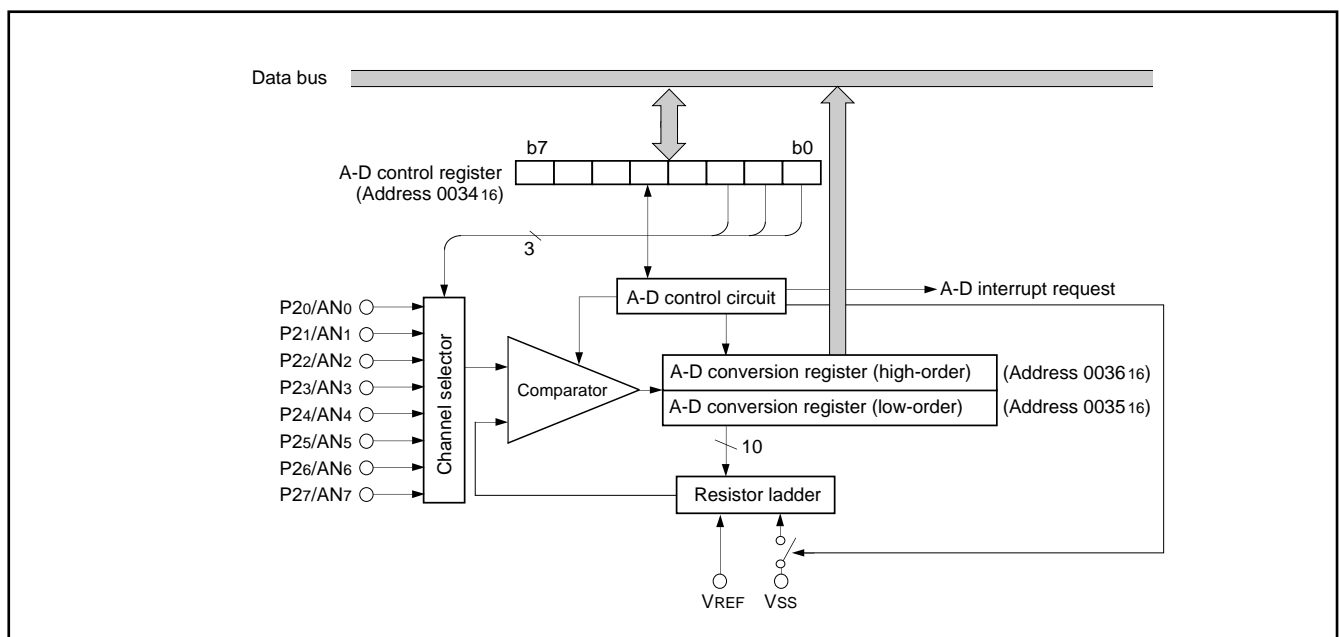


Fig. 33 Block diagram of A-D converter

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Watchdog Timer**

The watchdog timer gives a means for returning to a reset status when the program fails to run on its normal loop due to a runaway. The watchdog timer consists of an 8-bit watchdog timer H and an 8-bit watchdog timer L, being a 16-bit counter.

**Standard operation of watchdog timer**

The watchdog timer stops when the watchdog timer control register (address 0039<sub>16</sub>) is not set after reset. Writing an optional value to the watchdog timer control register (address 0039<sub>16</sub>) causes the watchdog timer to start to count down. When the watchdog timer H underflows, an internal reset occurs. Accordingly, it is programmed that the watchdog timer control register (address 0039<sub>16</sub>) can be set before an underflow occurs.

When the watchdog timer control register (address 0039<sub>16</sub>) is read, the values of the high-order 6-bit of the watchdog timer H, STP instruction disable bit and watchdog timer H count source selection bit are read.

**Initial value of watchdog timer**

By a reset or writing to the watchdog timer control register (address 0039<sub>16</sub>), the watchdog timer H is set to "FF<sub>16</sub>" and the watchdog timer L is set to "FF<sub>16</sub>".

**Operation of watchdog timer H count source selection bit**

A watchdog timer H count source can be selected by bit 7 of the watchdog timer control register (address 0039<sub>16</sub>). When this bit is "0", the count source becomes a watchdog timer L underflow signal. The detection time is 174.763 ms at f(XIN)=6 MHz.

When this bit is "1", the count source becomes f(XIN)/16. In this case, the detection time is 683 μs at f(XIN)=6 MHz.

This bit is cleared to "0" after reset.

**Operation of STP instruction disable bit**

When the watchdog timer is in operation, the STP instruction can be disabled by bit 6 of the watchdog timer control register (address 0039<sub>16</sub>).

When this bit is "0", the STP instruction is enabled.

When this bit is "1", the STP instruction is disabled, and an internal reset occurs if the STP instruction is executed.

Once this bit is set to "1", it cannot be changed to "0" by program.

This bit is cleared to "0" after reset.

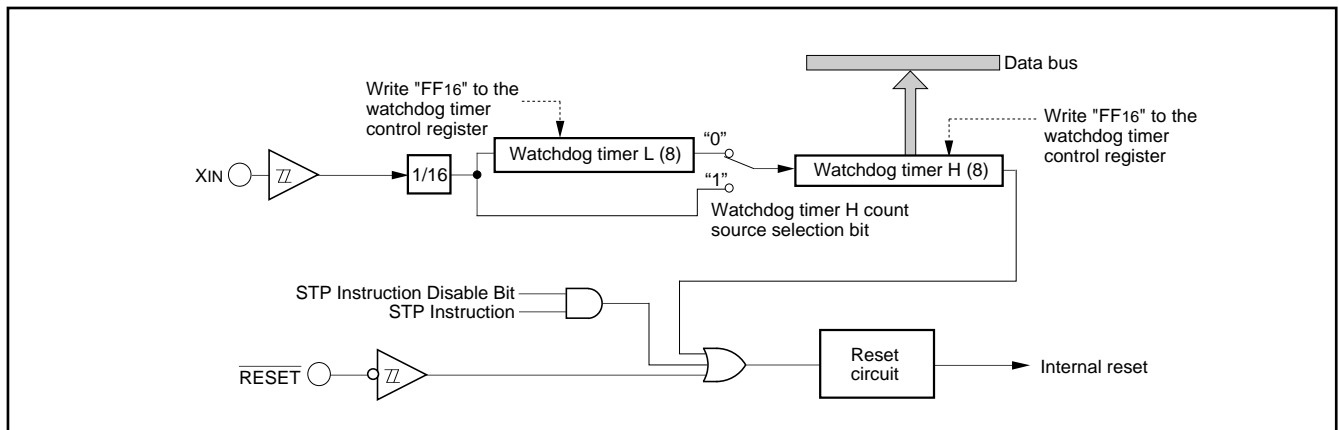


Fig. 34 Block diagram of watchdog timer

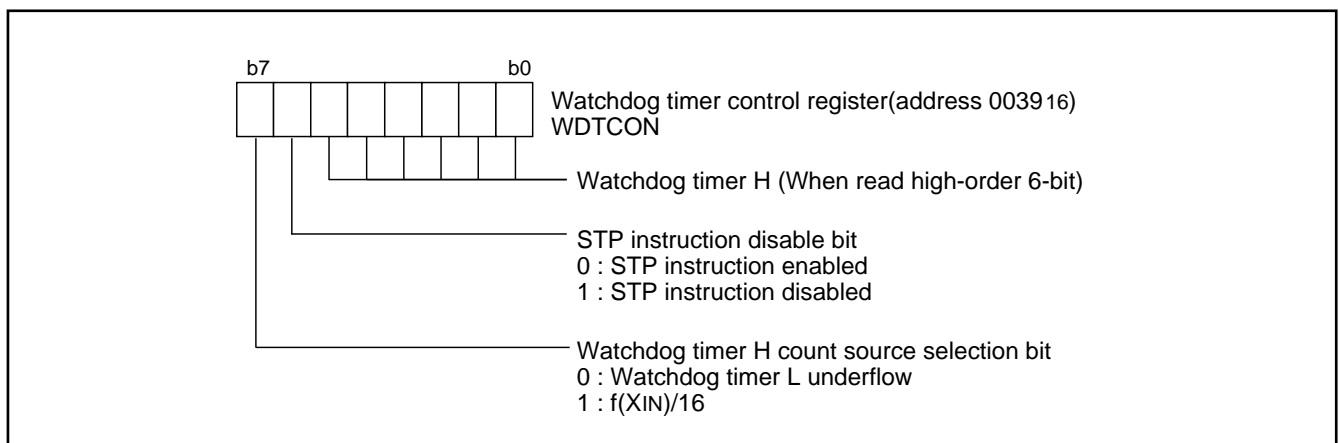


Fig. 35 Structure of watchdog timer control register

# PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### Reset Circuit

The microcomputer is put into a reset status by holding the RESET pin at the "L" level for 2  $\mu$ s or more when the power source voltage is 4.1 to 5.5 V and X<sub>IN</sub> is in stable oscillation.

After that, this reset status is released by returning the RESET pin to the "H" level. The program starts from the address having the contents of address FFFD<sub>16</sub> as high-order address and the contents of address FFFC<sub>16</sub> as low-order address.

Note that the reset input voltage should be 0.82 V or less when the power source voltage passes 4.1 V.

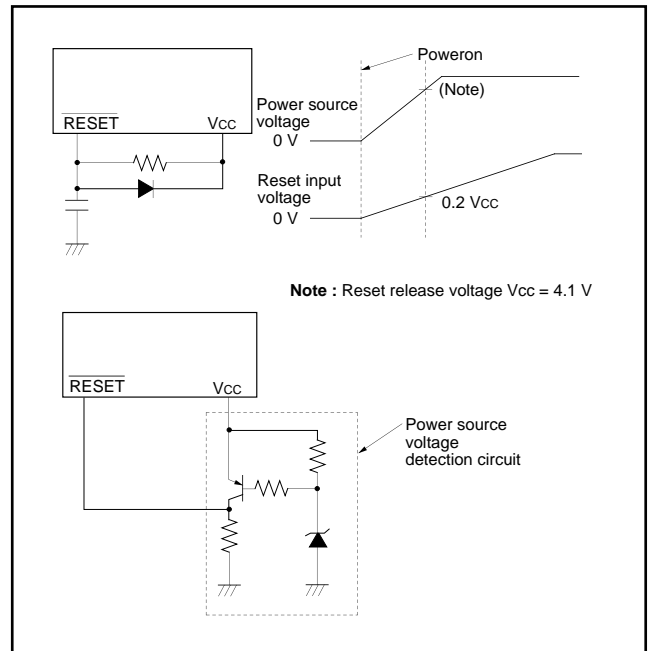


Fig. 36 Example of reset circuit

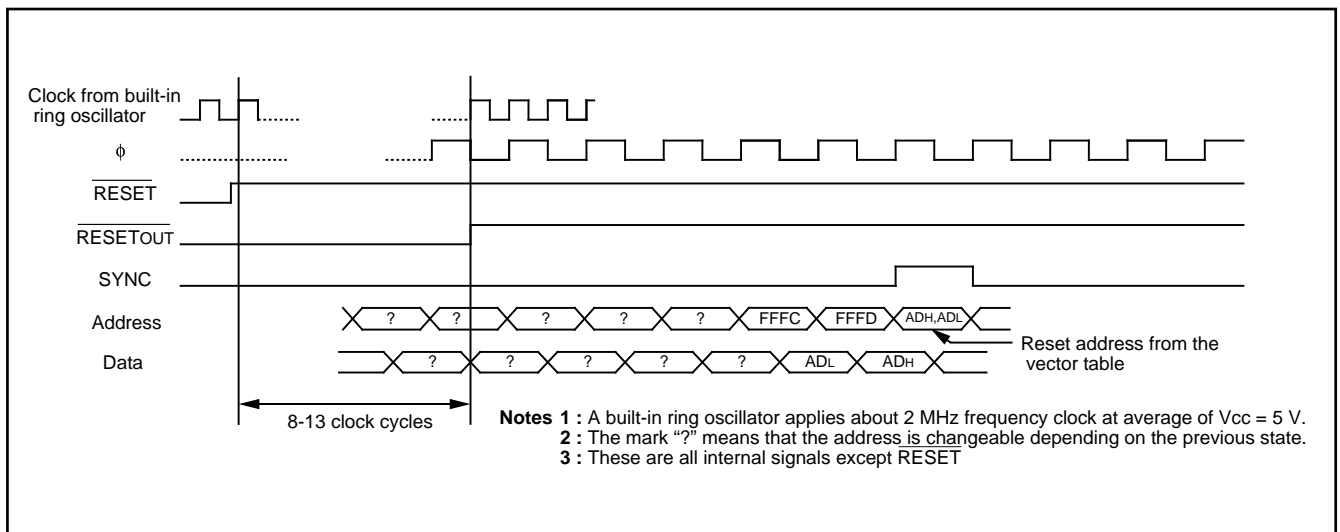


Fig. 37 Timing diagram at reset

# PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

|   | Address            | Register contents                      |
|---|--------------------|--|
| (1) Port P0 direction register                      | 0001 <sub>16</sub> | 00 <sub>16</sub>                       |
| (2) Port P1 direction register                      | 0003 <sub>16</sub> | X X X 0 0 0 0 0                        |
| (3) Port P2 direction register                      | 0005 <sub>16</sub> | 00 <sub>16</sub>                       |
| (4) Port P3 direction register                      | 0007 <sub>16</sub> | 00 <sub>16</sub>                       |
| (5) Pull-up control register                        | 0016 <sub>16</sub> | FF <sub>16</sub>                       |
| (6) Transmit/Receive buffer register                | 0018 <sub>16</sub> | 0 0 0 0 0 0 0 0                        |
| (7) Serial I/O1 status register                     | 0019 <sub>16</sub> | 1 0 0 0 0 0 0 1                        |
| (8) Serial I/O1 control register                    | 001A <sub>16</sub> | 02 <sub>16</sub>                       |
| (9) UART control register                           | 001B <sub>16</sub> | 1 1 1 0 0 0 0 0                        |
| (10) USB data toggle synchronization register       | 001D <sub>16</sub> | 0 1 1 1 1 1 1 1                        |
| (11) USB interrupt source discrimination register 1 | 001E <sub>16</sub> | 0 1 1 1 1 1 1 1                        |
| (12) USB interrupt source discrimination register 2 | 001F <sub>16</sub> | 0 1 1 1 0 0 1 1                        |
| (13) USB interrupt control register                 | 0020 <sub>16</sub> | 0 0 0 0 0 1 1 1                        |
| (14) USB transmit data byte number set register 0   | 0021 <sub>16</sub> | 00 <sub>16</sub>                       |
| (15) USB transmit data byte number set register 1   | 0022 <sub>16</sub> | 00 <sub>16</sub>                       |
| (16) USBPID control register 0                      | 0023 <sub>16</sub> | 0 0 0 0 0 1 1 1                        |
| (17) USBPID control register 1                      | 0024 <sub>16</sub> | 0 0 1 1 1 1 1 1                        |
| (18) USB address register                           | 0025 <sub>16</sub> | 1 0 0 0 0 0 0 0                        |
| (19) USB sequence bit initialization register       | 0026 <sub>16</sub> | 1 1 1 1 1 1 1 1                        |
| (20) USB control register                           | 0027 <sub>16</sub> | 0 0 1 1 1 1 1 1                        |
| (21) Prescaler 12                                   | 0028 <sub>16</sub> | FF <sub>16</sub>                       |
| (22) Timer 1  | 0029 <sub>16</sub> | 01 <sub>16</sub>                       |
| (23) Timer 2  | 002A <sub>16</sub> | 00 <sub>16</sub>                       |
| (24) Timer X mode register                          | 002B <sub>16</sub> | 00 <sub>16</sub>                       |
| (25) Prescaler X                                    | 002C <sub>16</sub> | FF <sub>16</sub>                       |
| (26) Timer X  | 002D <sub>16</sub> | FF <sub>16</sub>                       |
| (27) Timer count source set register                | 002E <sub>16</sub> | 00 <sub>16</sub>                       |
| (28) Serial I/O2 control register                   | 0030 <sub>16</sub> | 00 <sub>16</sub>                       |
| (29) A-D control register                           | 0034 <sub>16</sub> | 10 <sub>16</sub>                       |
| (30) MISRG  | 0038 <sub>16</sub> | 00 <sub>16</sub>                       |
| (31) Watchdog timer control register                | 0039 <sub>16</sub> | 0 0 1 1 1 1 1 1                        |
| (32) Interrupt edge selection register              | 003A <sub>16</sub> | 00 <sub>16</sub>                       |
| (33) CPU mode register                              | 003B <sub>16</sub> | 1 0 0 0 0 0 0 0                        |
| (34) Interrupt request register 1                   | 003C <sub>16</sub> | 00 <sub>16</sub>                       |
| (35) Interrupt control register 1                   | 003E <sub>16</sub> | 00 <sub>16</sub>                       |
| (36) Processor status register                      | (PS)               | X X X X X 1 X X                        |
| (37) Program counter                                | (PCH)              | Contents of address FFFD <sub>16</sub> |
|   | (PCL)              | Contents of address FFFC <sub>16</sub> |

Note X : Undefined

Fig. 38 Internal status of microcomputer at reset

## PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### Clock Generating Circuit

An oscillation circuit can be formed by connecting a resonator between XIN and XOUT.

Use the circuit constants in accordance with the resonator manufacturer's recommended values. No external resistor is needed between XIN and XOUT since a feed-back resistor exists on-chip.

### ● Oscillation control

#### • Stop mode

When the STP instruction is executed, the internal clock  $\phi$  stops at an "H" level and the XIN oscillator stops. At this time, timer 1 is set to "0116" and prescaler 12 is set to "FF16" when the oscillation stabilization time set bit after release of the STP instruction is "0". On the other hand, timer 1 and prescaler 12 are not set when the above bit is "1". Accordingly, set the wait time fit for the oscillation stabilization time of the oscillator to be used.

$f(XIN)/16$  is forcibly connected to the input of prescaler 12.

When an external interrupt is accepted, oscillation is restarted but the internal clock  $\phi$  remains at "H" until timer 1 underflows. As soon as timer 1 underflows, the internal clock  $\phi$  is supplied. This is because when a ceramic oscillator is used, some time is required until a start of oscillation.

In case oscillation is restarted by reset, no wait time is generated. So apply an "L" level to the RESET pin while oscillation becomes stable.

#### • Wait mode

If the WIT instruction is executed, the internal clock  $\phi$  stops at an "H" level, but the oscillator does not stop. The internal clock restarts if a reset occurs or when an interrupt is received.

Since the oscillator does not stop, normal operation can be started immediately after the clock is restarted.

To ensure that interrupts will be received to release the STP or WIT state, interrupt enable bits must be set to "1" before the STP or WIT instruction is executed.

When the STP status is released, prescaler 12 and timer 1 will start counting and reset will not be released until timer 1 underflows, so set the timer 1 interrupt enable bit to "0" before the STP instruction is executed.

#### Note

For use with the oscillation stabilization set bit after release of the STP instruction set to "1", set values in timer 1 and prescaler 12 after fully appreciating the oscillation stabilization time of the oscillator to be used.

#### • Clock mode

Operation is started by a built-in ring oscillator after releasing reset. A division ratio (1/1, 1/2, 1/8) is selected by setting bits 7 and 6 of the CPU mode register after releasing it.

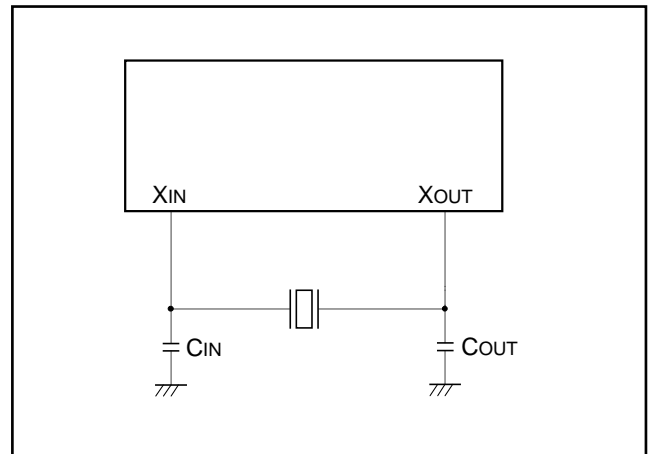


Fig. 39 External circuit of ceramic resonator

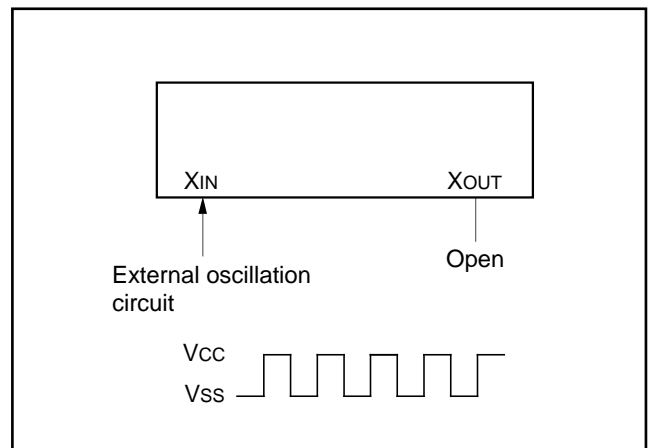


Fig. 40 External clock input circuit

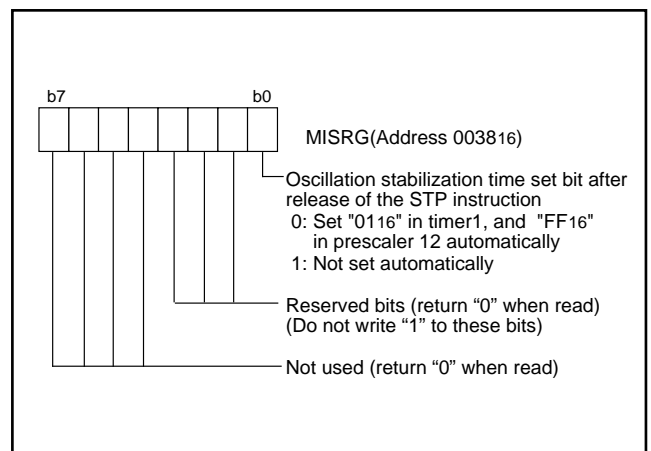



Fig. 41 Structure of MISRG



*Notice: This is not a final specification.*

*Some parametric limits are subject to change.*

# SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

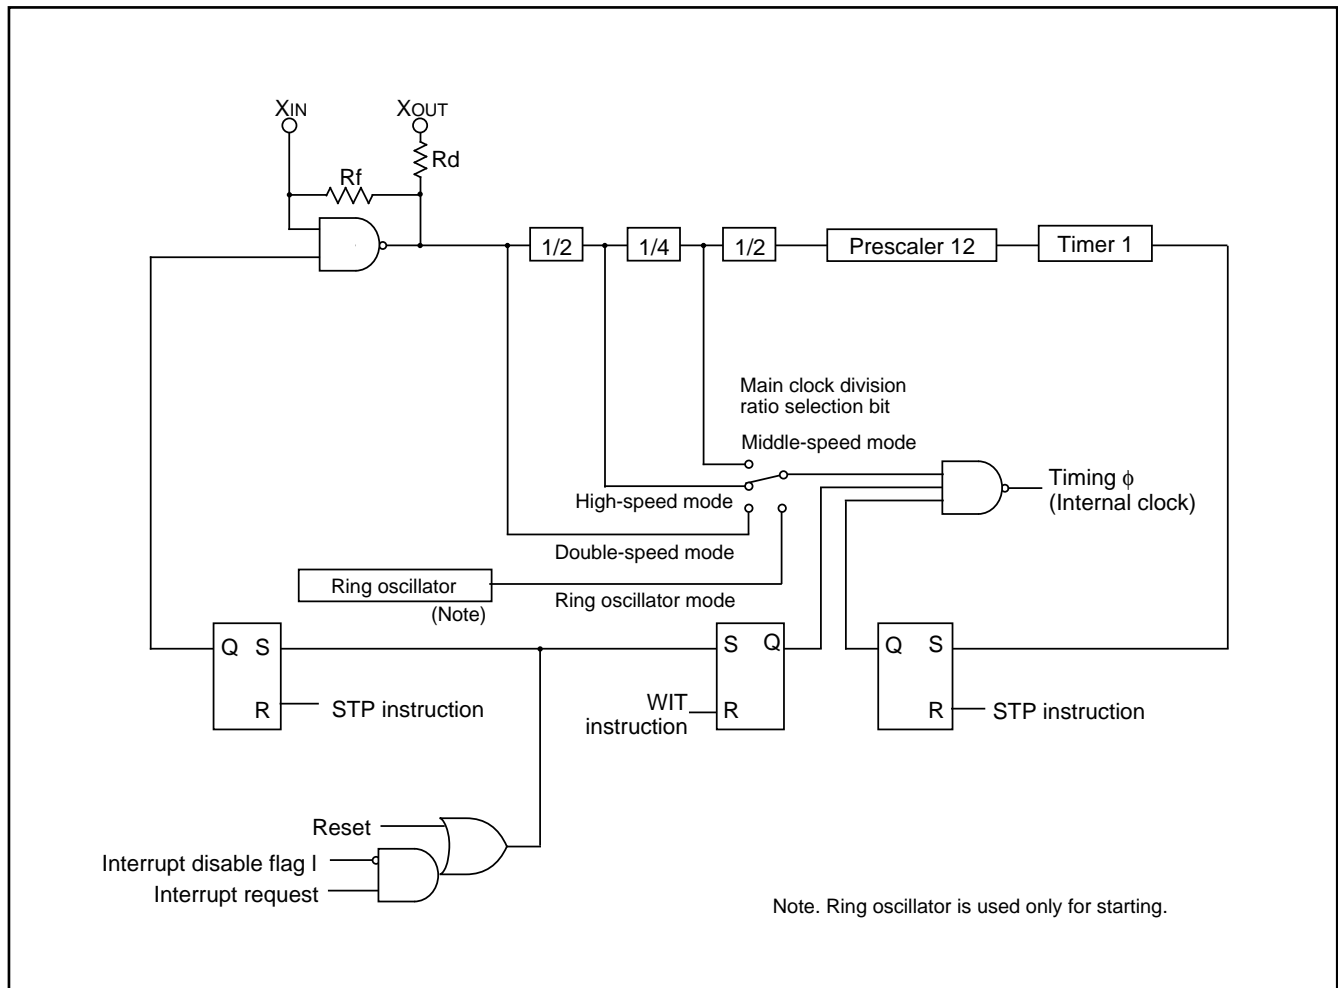

**Fig. 42 Block diagram of system clock generating circuit (for ceramic resonator)**

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**NOTES ON PROGRAMMING****Processor Status Register**

The contents of the processor status register (PS) after reset are undefined except for the interrupt disable flag I which is "1". After reset, initialize flags which affect program execution. In particular, it is essential to initialize the T flag and the D flag because of their effect on calculations.

**Interrupts**

The contents of the interrupt request bit do not change even if the BBC or BBS instruction is executed immediately after they are changed by program because this instruction is executed for the previous contents. For executing the instruction for the changed contents, execute one instruction before executing the BBC or BBS instruction.

**Decimal Calculations**

- For calculations in decimal notation, set the decimal mode flag D to "1", then execute the ADC instruction or SBC instruction. In this case, execute SEC instruction, CLC instruction or CLD instruction after executing one instruction before the ADC instruction or SBC instruction.
- In the decimal mode, the values of the N (negative), V (overflow) and Z (zero) flags are invalid.

**Timers**

- When n (0 to 255) is written to a timer latch, the frequency division ratio is  $1/(n+1)$ .
- When a count source of timer X is switched, stop a count of timer X.

**Ports**

- The values of the port direction registers cannot be read.  
That is, it is impossible to use the LDA instruction, memory operation instruction when the T flag is "1", addressing mode using direction register values as qualifiers, and bit test instructions such as BBC and BBS.  
It is also impossible to use bit operation instructions such as CLB and SEB and read/modify/write instructions of direction registers for calculations such as ROR.  
For setting direction registers, use the LDM instruction, STA instruction, etc.
- Set "1" to each bit 6 of the port P3 direction register and the port P3 register.

**A-D Converter**

The comparator uses internal capacitors whose charge will be lost if the clock frequency is too low.  
Make sure that  $f(X_{IN})$  is 500kHz or more during A-D conversion.  
Do not execute the STP or WIT instruction during A-D conversion.

**Instruction Execution Timing**

The instruction execution time can be obtained by multiplying the frequency of the internal clock  $\phi$  by the number of cycles mentioned in the machine-language instruction table.  
The frequency of the internal clock  $\phi$  is the same as that of the  $X_{IN}$  in double-speed mode, twice the  $X_{IN}$  cycle in high-speed mode and 8 times the  $X_{IN}$  cycle in middle-speed mode.

**NOTES ON USE****Handling of Power Source Pin**

In order to avoid a latch-up occurrence, connect a capacitor suitable for high frequencies as bypass capacitor between power source pin ( $V_{CC}$  pin) and GND pin ( $V_{SS}$  pin). Besides, connect the capacitor to as close as possible. For bypass capacitor which should not be located too far from the pins to be connected, a ceramic capacitor of 0.01  $\mu F$  to 0.1  $\mu F$  is recommended.

**One Time PROM Version**

The  $CNV_{SS}$  pin is connected to the internal memory circuit block by a low-ohmic resistance, since it has the multiplexed function to be a programmable power source pin ( $V_{PP}$  pin) as well.  
To improve the noise reduction, connect a track between  $CNV_{SS}$  pin and  $V_{SS}$  pin or  $V_{CC}$  pin with 1 to 10 k $\Omega$  resistance.  
The mask ROM version track of port  $CNV_{SS}$  has no operational interference even if it is connected via a resistor.

PRELIMINARY

Notice: This is not a final specification.  
Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

DATA REQUIRED FOR MASK ORDERS

The following are necessary when ordering a mask ROM production:

- (1) Mask ROM Order Confirmation Form
- (2) Mask Specification Form
- (3) Data to be written to ROM, in EPROM form  
(three identical copies)

ROM PROGRAMMING METHOD

The built-in PROM of the blank One Time PROM version can be read or programmed with a general-purpose PROM programmer using a special programming adapter. Set the address of PROM programmer in the user ROM area.

Table 6 Special programming adapter

| Package | Name of Programming Adapter |
|---------|-----------------------------|
| 36P2R-A | PCA7535FP                   |

The PROM of the blank One Time PROM version is not tested or screened in the assembly process and following processes. To ensure proper operation after programming, the procedure shown in Figure 43 is recommended to verify programming.

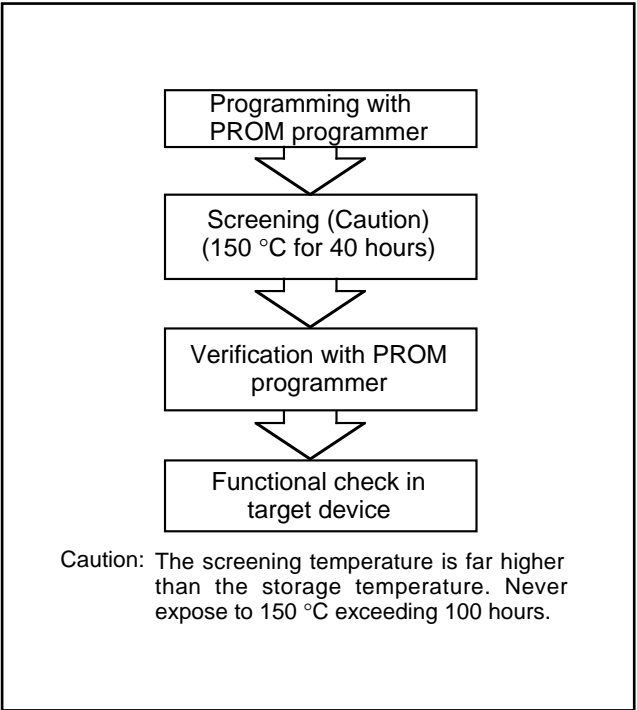


Fig. 43 Programming and testing of One Time PROM version

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**ELECTRICAL CHARACTERISTICS**
**Absolute Maximum Ratings**
**Table 7 Absolute maximum ratings**

| Symbol | Parameter  | Conditions   | Ratings           | Unit |
|--------|--|--|-------------------|------|
| VCC    | Power source voltage   | All voltages are based on VSS. Output transistors are cut off. | −0.3 to 7.0       | V    |
| VI     | Input voltage P00–P07, P10–P14, P20–P27, P30–P37, VREF                   |  | −0.3 to VCC + 0.3 | V    |
| VI     | Input voltage RESET, XIN   |  | −0.3 to VCC + 0.3 | V    |
| VI     | Input voltage CNVSS (Note)   |  | −0.3 to 13        | V    |
| VO     | Output voltage P00–P07, P10–P14, P20–P27, P30–P35, P37, XOUT, USBVREFOUT |  | −0.3 to VCC + 0.3 | V    |
| Pd     | Power dissipation  | Ta = 25°C  | 300               | mW   |
| Topr   | Operating temperature  |  | −20 to 85         | °C   |
| Tstg   | Storage temperature  |  | −40 to 125        | °C   |

**Note:** It is a rating only for the one Time PROM version connect to VSS.

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Recommended Operating Conditions**

**Table 8 Recommended operating conditions (V<sub>CC</sub> = 4.1 to 5.5 V, T<sub>a</sub> = –20 to 85 °C, unless otherwise noted)**

| Symbol           | Parameter   |   | Limits              |      |                     | Unit |
|------------------|---|---|---------------------|------|---------------------|------|
|                  |   |   | Min.                | Typ. | Max.                |      |
| V <sub>CC</sub>  | Power source voltage  | f(XIN) = 6 MHz                                      | 4.1                 | 5.0  | 5.5                 | V    |
| V <sub>SS</sub>  | Power source voltage  |   |                     | 0    |                     | V    |
| V <sub>REF</sub> | Analog reference voltage  |   | 2.0                 |      | V <sub>CC</sub>     | V    |
| V <sub>IH</sub>  | "H" input voltage   | P00–P07, P10–P14, P20–P27, P30–P35, P37             | 0.8 V <sub>CC</sub> |      | V <sub>CC</sub>     | V    |
| V <sub>IH</sub>  | "H" input voltage (TTL input level selected)  | P10, P12, P13, P37                                  | 2.0                 |      | V <sub>CC</sub>     | V    |
| V <sub>IH</sub>  | "H" input voltage   | RESET, XIN  | 0.8 V <sub>CC</sub> |      | V <sub>CC</sub>     | V    |
| V <sub>IH</sub>  | "H" input voltage   | D+, D-  | 2.0                 |      | V <sub>CC</sub>     | V    |
| V <sub>IL</sub>  | "L" input voltage   | P00–P07, P10–P14, P20–P27, P30–P35, P37             | 0                   |      | 0.3 V <sub>CC</sub> | V    |
| V <sub>IL</sub>  | "L" input voltage (TTL input level selected)  | P10, P12, P13, P37                                  | 0                   |      | 0.8                 | V    |
| V <sub>IL</sub>  | "L" input voltage   | RESET, CNVss  | 0                   |      | 0.2 V <sub>CC</sub> | V    |
| V <sub>IL</sub>  | "L" input voltage   | D+, D-  | 0                   |      | 0.8                 | V    |
| V <sub>IL</sub>  | "L" input voltage   | XIN   | 0                   |      | 0.16V <sub>CC</sub> | V    |
| ΣIOH(peak)       | "H" total peak output current (Note 1)  | P00–P07, P10–P14, P20–P27, P30–P35, P37             |                     |      | –80                 | mA   |
| ΣIOL(peak)       | "L" total peak output current (Note 1)  | P00–P07, P10–P14, P20–P27, P37                      |                     |      | 80                  | mA   |
| ΣIOL(peak)       | "L" total peak output current (Note 1)  | P30–P35   |                     |      | 60                  | mA   |
| ΣIOH(avg)        | "H" total average output current (Note 1)   | P00–P07, P10–P14, P20–P27, P30–P35, P37             |                     |      | –40                 | mA   |
| ΣIOL(avg)        | "L" total average output current (Note 1)   | P00–P07, P10–P14, P20–P27, P37                      |                     |      | 40                  | mA   |
| ΣIOL(avg)        | "L" total average output current (Note 1)   | P30–P35   |                     |      | 30                  | mA   |
| IOH(peak)        | "H" peak output current (Note 2)  | P00–P07, P10–P14, P20–P27, P30–P35, P37             |                     |      | –10                 | mA   |
| IOL(peak)        | "L" peak output current (Note 2)  | P00–P07, P10–P14, P20–P27, P37                      |                     |      | 10                  | mA   |
| IOL(peak)        | "L" peak output current (Note 2)  | P30–P35   |                     |      | 30                  | mA   |
| IOH(avg)         | "H" average output current (Note 3)   | P00–P07, P10–P14, P20–P27, P30–P35, P37             |                     |      | –5                  | mA   |
| IOL(avg)         | "L" average output current (Note 3)   | P00–P07, P10–P14, P20–P27, P37                      |                     |      | 5                   | mA   |
| IOL(avg)         | "L" average output current (Note 3)   | P30–P35   |                     |      | 15                  | mA   |
| f(XIN)           | Internal clock oscillation frequency (Note 4)<br>at ceramic oscillation or external clock input | V <sub>CC</sub> = 4.1 to 5.5 V<br>Double-speed mode |                     |      | 6                   | MHz  |

**Note 1:** The total output current is the sum of all the currents flowing through all the applicable ports. The total average current is an average value measured over 100 ms. The total peak current is the peak value of all the currents.

**2:** The peak output current is the peak current flowing in each port.

**3:** The average output current IOL (avg), IOH (avg) in an average value measured over 100 ms.

**4:** When the oscillation frequency has a duty cycle of 50 %.

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Electrical Characteristics****Table 9 Electrical characteristics (1) (VCC = 4.1 to 5.5 V, VSS = 0 V, Ta = -20 to 85 °C, unless otherwise noted)**

| Symbol  | Parameter   | Test conditions  | Limits  |      |      | Unit |
|---------|---|--|---------|------|------|------|
|         |   |  | Min.    | Typ. | Max. |      |
| VOH     | “H” output voltage P00–P07, P10–P14, P20–P27, P30–P35, P37 (Note 1) | IOH = -5 mA<br>VCC = 4.1 to 5.5 V  | VCC-1.5 |      |      | V    |
|         |   | IOH = -1.0 mA<br>VCC = 4.1 to 5.5 V  | VCC-1.0 |      |      | V    |
| VOH     | “H” output voltage D+, D-   | VCC = 4.1 to 5.5 V<br>Pull-down through 15kΩ for D+, D-<br>Pull-up through 1.5kΩ by USBVREFOUT for D-<br>(Ta = 0 to 70 °C) | 2.8     |      | 3.6  | V    |
| VOL     | “L” output voltage P00–P07, P10–P14, P20–P27, P37                   | IOL = 5 mA<br>VCC = 4.1 to 5.5 V   |         |      | 1.5  | V    |
|         |   | IOL = 1.5 mA<br>VCC = 4.1 to 5.5 V   |         |      | 0.3  | V    |
|         |   | IOL = 1.0 mA<br>VCC = 4.1 to 5.5 V   |         |      | 1.0  | V    |
| VOL     | “L” output voltage D+, D-   | VCC = 4.1 to 5.5 V<br>Pull-down through 15kΩ for D+, D-<br>Pull-up through 1.5kΩ by USBVREFOUT for D-<br>(Ta = 0 to 70 °C) |         |      | 0.3  | V    |
| VOL     | “L” output voltage P30–P35  | IOL = 15 mA<br>VCC = 4.1 to 5.5 V  |         |      | 2.0  | V    |
|         |   | IOL = 1.5 mA<br>VCC = 4.1 to 5.5 V   |         |      | 0.3  | V    |
|         |   | IOL = 10 mA<br>VCC = 4.1 to 5.5 V  |         |      | 1.0  | V    |
| VT+–VT– | Hysteresis CNTR0, INT0 (Note 2), P00–P07 (Note 3)                   |  |         | 0.4  |      | V    |
| VT+–VT– | Hysteresis RXD, SCLK, SDATA (Note 2)                                |  |         | 0.5  |      | V    |
| VT+–VT– | Hysteresis RESET  |  |         | 0.5  |      | V    |
| IIH     | “H” input current P00–P07, P10–P14, P20–P27, P30–P35, P37           | VI = VCC<br>(Pin floating. Pull up transistors “off”)  |         |      | 5.0  | μA   |
| IIH     | “H” input current RESET   | VI = VCC   |         |      | 5.0  | μA   |
| IIH     | “H” input current XIN   | VI = VCC   |         | 4    |      | μA   |
| IIL     | “L” input current P00–P07, P10–P14, P20–P27, P30–P35, P37           | VI = VSS<br>(Pin floating. Pull up transistors “off”)  |         |      | -5.0 | μA   |
| IIL     | “L” input current RESET, CNVSS                                      | VI = VSS   |         |      | -5.0 | μA   |
| IIL     | “L” input current XIN   | VI = VSS   |         | -4   |      | μA   |
| IIL     | “L” input current P00–P07, P30–P35, P37                             | VI = VSS<br>(Pull up transistors “on”)   |         | -0.2 | -0.5 | mA   |
| VRAM    | RAM hold voltage  | When clock stopped   | 2.0     |      | 5.5  | V    |

**Note 1:** P11 is measured when the P-channel output disable bit of the UART control register (bit 4 of address 001B16) is “0”.**2:** RXD, SCLK, SDATA, and INT0 have hysteresises only when bits 0 and 2 of the port P1P3 control register are set to “0” (CMOS level).**3:** It is available only when operating key-on wake-up.

**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Table 10 Electrical characteristics (2) (V<sub>CC</sub> = 4.1 to 5.5 V, V<sub>SS</sub> = 0 V, T<sub>a</sub> = –20 to 85 °C, unless otherwise noted)**

| Symbol          | Parameter            | Test conditions   |                        | Limits                 |      |      | Unit |     |
|-----------------|----------------------|---|------------------------|------------------------|------|------|------|-----|
|                 |                      |   |                        | Min.                   | Typ. | Max. |      |     |
| I <sub>CC</sub> | Power source current | Double-speed mode, f(X <sub>IN</sub> ) = 6 MHz, V <sub>CC</sub> = 5 V<br>Output transistors “off” |                        |                        | 6    | 10   | mA   |     |
|                 |                      | f(X <sub>IN</sub> ) = 6 MHz, V <sub>CC</sub> = 5 V (in WIT state)<br>Output transistors “off”     |                        |                        | 1.6  |      | mA   |     |
|                 |                      | Increment when A-D conversion is executed<br>f(X <sub>IN</sub> ) = 6 MHz, V <sub>CC</sub> = 5 V   |                        |                        | 0.8  |      | mA   |     |
|                 |                      | All oscillation stopped (in STP state)<br>Output transistors “off”                                | T <sub>a</sub> = 25 °C |                        |      | 0.1  | 1.0  | μA  |
|                 |                      |   | T <sub>a</sub> = 85 °C |                        |      |      | 10   | μA  |
|                 |                      | Oscillation stopped in USB mode<br>USBV <sub>REFOUT</sub> “on” (contains 1.5 kΩ pull-up resistor) |                        | T <sub>a</sub> = 25 °C |      |      |      | 300 |

**A-D Converter Characteristics**

**Table 11 A-D Converter characteristics (1) (V<sub>CC</sub> = 4.1 to 5.5 V, V<sub>SS</sub> = 0 V, T<sub>a</sub> = –20 to 85 °C, unless otherwise noted)**

| Symbol             | Parameter  | Test conditions  | Limits |      |      | Unit                              |
|--------------------|--|--|--------|------|------|-----------------------------------|
|                    |  |  | Min.   | Typ. | Max. |                                   |
| —                  | Resolution                                       |  |        |      | 10   | Bits                              |
| —                  | Absolute accuracy (excluding quantization error) | V <sub>CC</sub> = 4.1 to 5.5 V<br>T <sub>a</sub> = 25 °C |        |      | ±3   | LSB                               |
| —                  | Differential nonlinear error                     | V <sub>CC</sub> = 4.1 to 5.5 V<br>T <sub>a</sub> = 25 °C |        |      | ±0.9 | LSB                               |
| V <sub>OT</sub>    | Zero transition voltage                          | V <sub>CC</sub> = V <sub>REF</sub> = 5.12 V              | 0      | 5    | 20   | mV                                |
|                    |  | V <sub>CC</sub> = V <sub>REF</sub> = 3.072 V             | 0      | 3    | 15   |                                   |
| V <sub>FST</sub>   | Full scale transition voltage                    | V <sub>CC</sub> = V <sub>REF</sub> = 5.12 V              | 5105   | 5115 | 5125 | mV                                |
|                    |  | V <sub>CC</sub> = V <sub>REF</sub> = 3.072 V             | 3060   | 3069 | 3075 |                                   |
| t <sub>CONV</sub>  | Conversion time                                  |  |        |      | 122  | t <sub>c</sub> (X <sub>IN</sub> ) |
| RLADDER            | Ladder resistor                                  |  |        | 55   |      | kΩ                                |
| I <sub>VREF</sub>  | Reference power source input current             | V <sub>REF</sub> = 5.0 V                                 |        | 90   | 150  | μA                                |
|                    |  | V <sub>REF</sub> = 3.0 V                                 |        | 50   | 100  |                                   |
| I <sub>I(AD)</sub> | A-D port input current                           |  |        |      | 5.0  | μA                                |

# PRELIMINARY

Notice: This is not a final specification.

Some parametric limits are subject to change.

## SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

### Timing Requirements

**Table 12 Timing requirements (V<sub>CC</sub> = 4.1 to 5.5 V, V<sub>SS</sub> = 0 V, T<sub>a</sub> = –20 to 85 °C, unless otherwise noted)**

| Symbol                       | Parameter  | Limits |      |      | Unit |
|------------------------------|--|--------|------|------|------|
|                              |  | Min.   | Typ. | Max. |      |
| t <sub>w</sub> (RESET)       | Reset input “L” pulse width                                | 2      |      |      | μs   |
| t <sub>c</sub> (XIN)         | External clock input cycle time                            | 125    |      |      | ns   |
| t <sub>WH</sub> (XIN)        | External clock input “H” pulse width                       | 50     |      |      | ns   |
| t <sub>WL</sub> (XIN)        | External clock input “L” pulse width                       | 50     |      |      | ns   |
| t <sub>c</sub> (CNTR)        | CNTR <sub>0</sub> input cycle time                         | 200    |      |      | ns   |
| t <sub>WH</sub> (CNTR)       | CNTR <sub>0</sub> , INT <sub>0</sub> input “H” pulse width | 80     |      |      | ns   |
| t <sub>WL</sub> (CNTR)       | CNTR <sub>0</sub> , INT <sub>0</sub> input “L” pulse width | 80     |      |      | ns   |
| t <sub>c</sub> (SCLK)        | Serial I/O2 clock input cycle time                         | 1000   |      |      | ns   |
| t <sub>WH</sub> (SCLK)       | Serial I/O2 clock input “H” pulse width                    | 400    |      |      | ns   |
| t <sub>WL</sub> (SCLK)       | Serial I/O2 clock input “L” pulse width                    | 400    |      |      | ns   |
| t <sub>su</sub> (SCLK–SDATA) | Serial I/O2 input set up time                              | 200    |      |      | ns   |
| t <sub>h</sub> (SCLK–SDATA)  | Serial I/O2 input hold time                                | 200    |      |      | ns   |

### Switching Requirements

**Table 13 Switching requirements (V<sub>CC</sub> = 4.1 to 5.5 V, V<sub>SS</sub> = 0 V, T<sub>a</sub> = –20 to 85 °C, unless otherwise noted)**

| Symbol                                   | Parameter   | Limits                     |      |      | Unit |
|--|---|----------------------------|------|------|------|
|  |   | Min.                       | Typ. | Max. |      |
| t <sub>WH</sub> (SCLK)                   | Serial I/O2 clock output “H” pulse width                                      | t <sub>c</sub> (SCLK)/2–30 |      |      | ns   |
| t <sub>WL</sub> (SCLK)                   | Serial I/O2 clock output “L” pulse width                                      | t <sub>c</sub> (SCLK)/2–30 |      |      | ns   |
| t <sub>d</sub> (SCLK–SDATA)              | Serial I/O2 output delay time   |                            |      | 140  | ns   |
| t <sub>v</sub> (SCLK–SDATA)              | Serial I/O2 output valid time   | 0                          |      |      | ns   |
| t <sub>r</sub> (SCLK)                    | Serial I/O2 clock output rising time  |                            |      | 30   | ns   |
| t <sub>f</sub> (SCLK)                    | Serial I/O2 clock output falling time   |                            |      | 30   | ns   |
| t <sub>r</sub> (CMOS)                    | CMOS output rising time (Note)  |                            | 10   | 30   | ns   |
| t <sub>f</sub> (CMOS)                    | CMOS output falling time (Note)   |                            | 10   | 30   | ns   |
| t <sub>r</sub> (D+), t <sub>r</sub> (D-) | USB output rising time, C <sub>L</sub> = 350 pF, T <sub>a</sub> = 0 to 70 °C  | 100                        | 200  | 300  | ns   |
| t <sub>f</sub> (D+), t <sub>f</sub> (D-) | USB output falling time, C <sub>L</sub> = 350 pF, T <sub>a</sub> = 0 to 70 °C | 100                        | 200  | 300  | ns   |

**Notes:** XOUT pin is excluded.



**PRELIMINARY**

Notice: This is not a final specification.

Some parametric limits are subject to change.

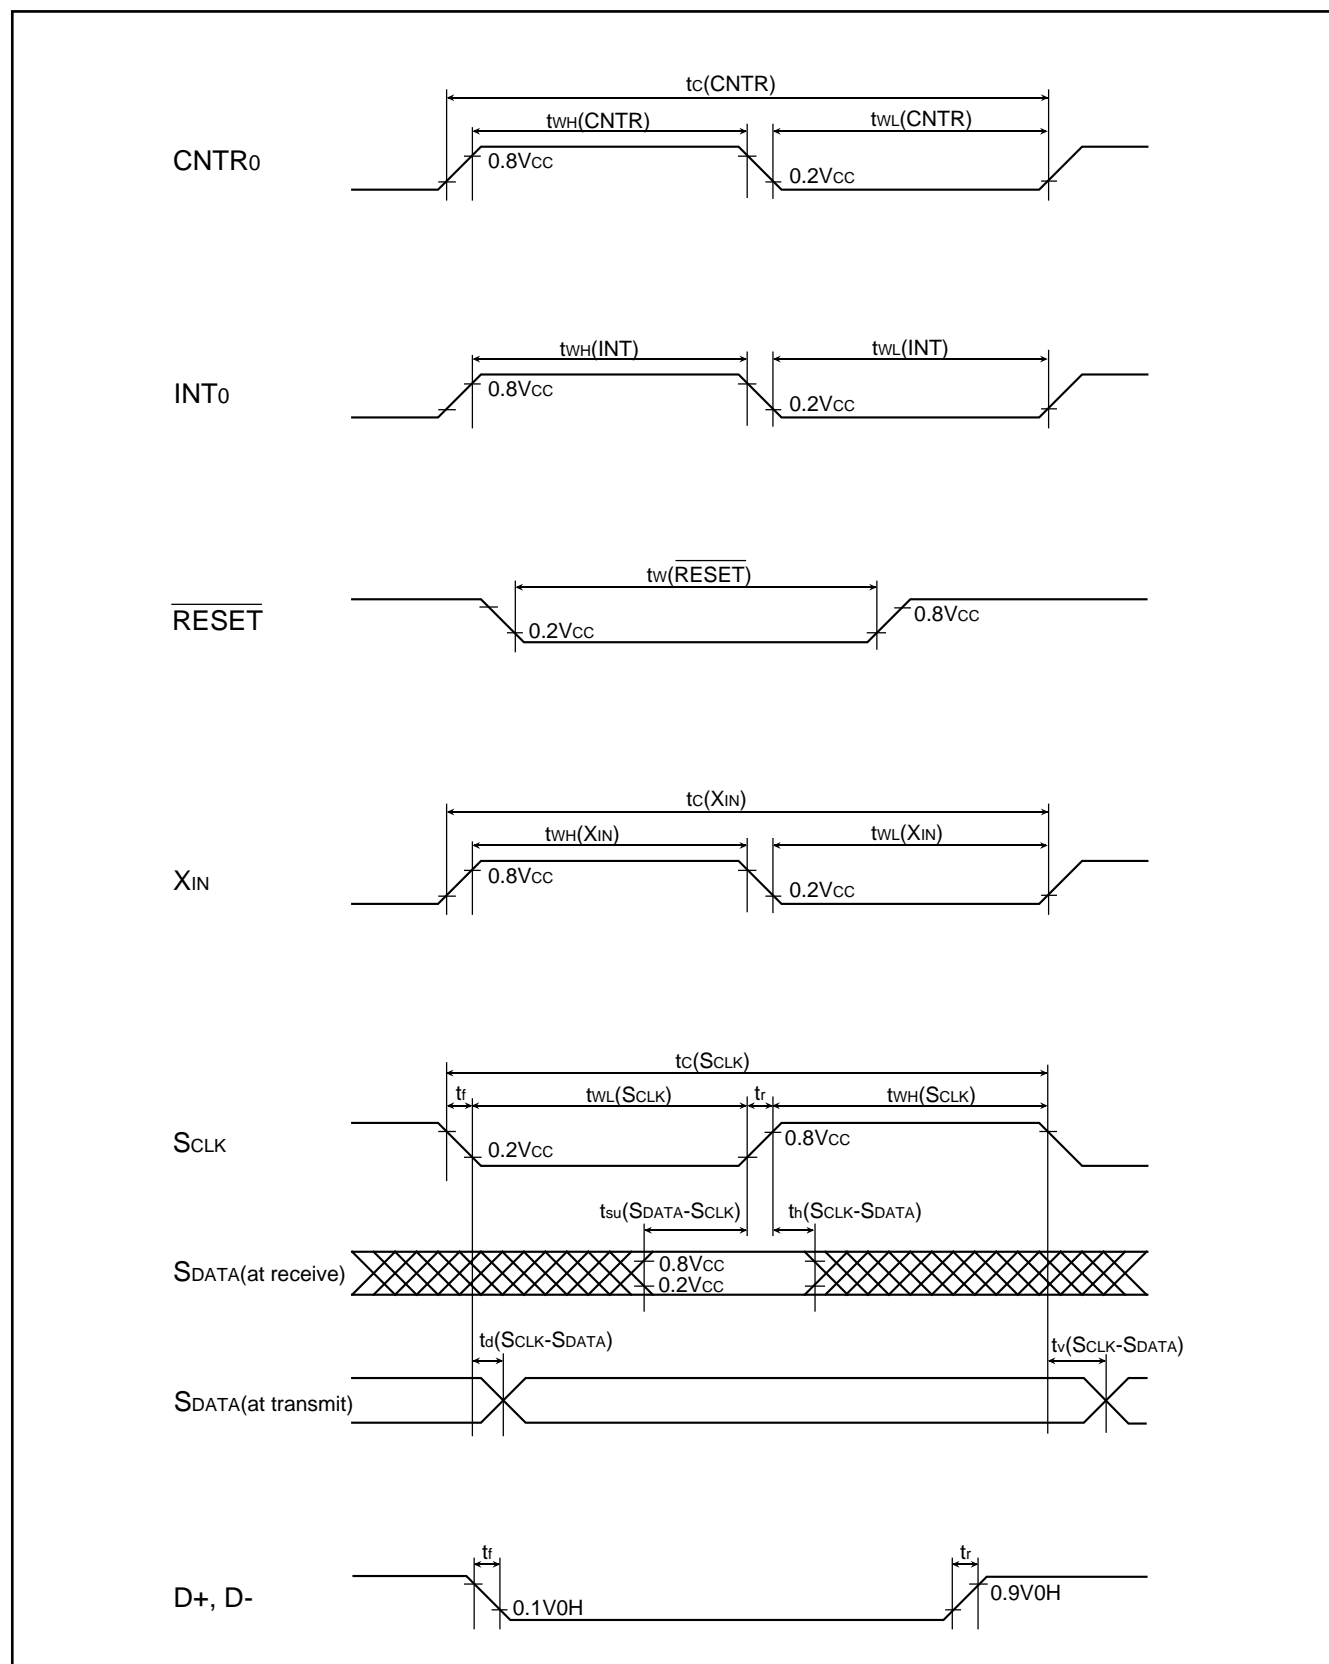
**SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER**


Fig. 44 Timing chart

**PRELIMINARY**

*Notice: This is not a final specification.*

*Some parametric limits are subject to change.*

SINGLE-CHIP 8-BIT CMOS MICROCOMPUTER

**Keep safety first in your circuit designs!**

- Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of non-flammable material or (iii) prevention against any malfunction or mishap.

**Notes regarding these materials**

- These materials are intended as a reference to assist our customers in the selection of the Mitsubishi semiconductor product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Mitsubishi Electric Corporation or a third party.
- Mitsubishi Electric Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams and charts, represent information on products at the time of publication of these materials, and are subject to change by Mitsubishi Electric Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for the latest product information before purchasing a product listed herein.
- Mitsubishi Electric Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Mitsubishi Electric Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.
- Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Mitsubishi Electric Corporation or an authorized Mitsubishi Semiconductor product distributor for further details on these materials or the products contained therein.

