

2-channel PRE/REC amplifier with auto-tracking interface

BA7182AS

The BA7182AS is a PRE/REC amplifier developed for use in video cassette recorders. It has been designed for use in two-head decks and features built-in FB damping, two preamplifiers, a chroma output amplifier, an FM output amplifier (with AGC), an envelope detector, a constant-current BTL-drive REC amplifier (with AGC) and built-in channel and REC/PB switches on a single monolithic IC.

●Applications

VCRs

●Features

- 1) The playback amplifier has a total gain of 59dB (Typ.), and has a low-noise preamplifier. Designed for VHS-band operation with low external parts count. The IC has 2 circuits for 2-head VCR applications.
- 2) Two playback output systems (through output and AGC output). The AGC output level is 270mV_{P-P} (Typ.); suitable for FM brightness signal output.
- 3) Auto-tracking interface for automated tracking adjustment. An integrate and hold detector is used to reduce the load on the microcontroller.
- 4) The recording amplifier uses constant-current BLT drive that handles load variations (i.e. head impedance) well, and gives stable recording characteristics. A single circuit is provided for 2-head VCR use.
- 5) Built-in recording level AGC means adjustment of FM recording current is not necessary.
- 6) Head switches for 2-channel PRE/REC system provided.
- 7) Operates off a single 5V power supply, with low power dissipation.

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Applied voltage	V _{CC}	7.0	V
Power dissipation	P _d	1100 *	mW
Operating temperature	T _{opr}	-20~75	°C
Storage temperature	T _{stg}	-55~125	°C


* Reduced by 11mW for each increase in Ta of 1°C over 25°C (free air).

●Recommended operating conditions (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Playback/recording	V _{CC}	4.5	5.0	5.5	V	12pin

© Not designed for radiation resistance.

- Block diagram

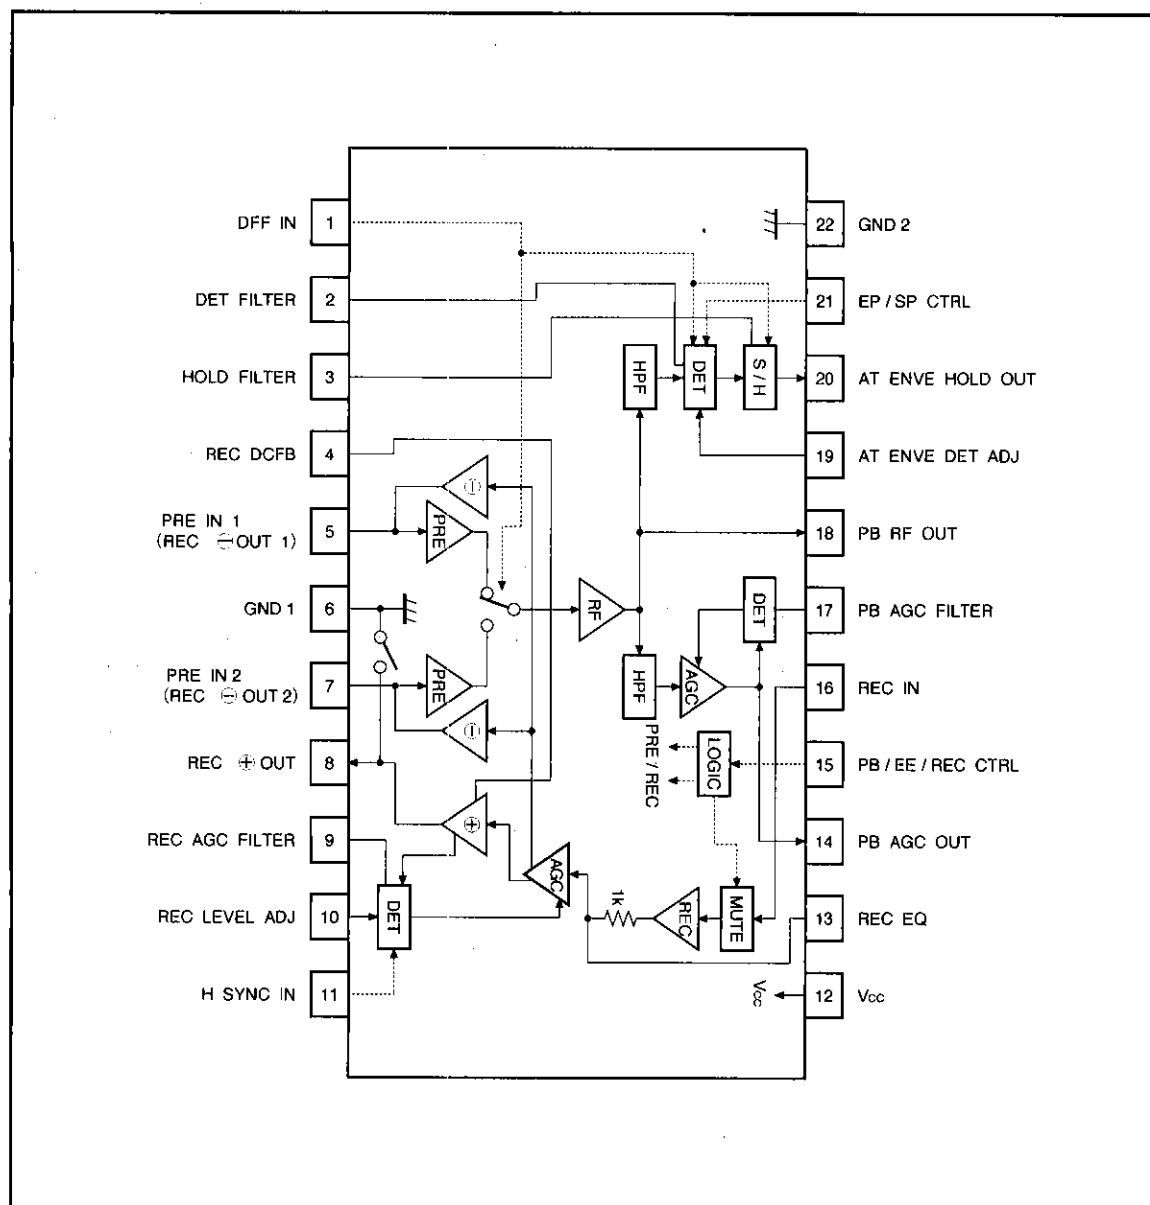

●Electrical characteristics (Unless otherwise specified, Ta=25°C, V_{CC}=5.0V and f=4.0MHz)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
〈Playback system〉						Pin 15: H	
Quiescent current	I _Q (P)	—	26	42	mA	No signal	Fig.1
Voltage gain CH-1	G _{VP1}	56.5	59	61.5	dB	Pin 5 input = 0.3mV _{P-P} , pin 1: L, pin 18 output measurement	Fig.1
Voltage gain CH-2	G _{VP2}	56.5	59	61.5	dB	Pin 7 input = 0.3mV _{P-P} , pin 1: H, pin 18 output measurement	Fig.1
Voltage gain differential	ΔG _{VP}	—1	0	1	dB	ΔG _{VP} = G _{VP1} — G _{VP2}	Fig.1
Frequency characteristic	ΔG _{VI}	—6	—3	—1	dB	Difference in pin 18 output level for f = 8.0/1.0MHz, V _{IN} = 0.3mV _{P-P}	Fig.1
2nd harmonic distortion	2HD _P	—	—45	—35	dBc	V _{IN} = 0.3mV _{P-P} , 8.0MHz spurious	Fig.1
3rd harmonic distortion	3HD _P	—	—50	—35	dBc	V _{IN} = 0.3mV _{P-P} , 12.0MHz spurious, guaranteed design value.	Fig.1
Maximum output level	V _{OMP}	1.0	1.5	—	V _{P-P}	When pin 18 output 2nd harmonic distortion is -30dBc	Fig.1
Crosstalk	CT _P	—	—38	—33	dBc	Difference in pin 18 output level for pin 1: H/L.	Fig.1
Output DC offset	ΔV _{ODC}	—150	0	150	mV _{P-P}	Pin 18 output DC offset for pin 1: H/L.	Fig.1
Input conversion noise	V _{NIN}	—	0.25	1.0	μVrms	R _g = 10Ω, input conversion of pin 18 output noise, guaranteed design value.	Fig.1
AGC output level	V _{AGC}	220	270	320	mV _{P-P}	V _{IN} = 0.3mV _{P-P} Pin 14 output measurement	Fig.1
AGC control sensitivity	ΔV _{AGC}	—	0.3	2	dB	Pin 14 output level difference for V _{IN} = 0.15 and 0.6mV _{P-P}	Fig.1
AGC frequency characteristic	ΔG _{VAF}	—2	0.5	2	dB	Difference in pin 14 output level for f = 8.0/1.0MHz V _{IN} = 0.3mV _{P-P} .	Fig.1
PB switch ON resistance	R _{ON8}	—	5	10	Ω	Pin 8 impedance	Fig.1
PRE CH 2 threshold voltage	V _{TH1H}	3.5	—	V _{CC}	V	Pin 1 DC voltage for CH 2 operation	Fig.1
PRE CH 1 threshold voltage	V _{TH1L}	0	—	1.2	V	Pin 1 DC voltage for CH 1 operation	Fig.1
ENVE output level SP-2	V _{EN-S2}	1.4	2.2	3.0	V	Pin 20 output measurement when pin 21 = L and pin 18 output = 250mV _{P-P}	Fig.1
ENVE sensitivity curve	P _{CRV}	150	200	250	%		Fig.1
ENVE saturation voltage	V _{EN-SA}	4.6	4.9	—	V	Pin 21 = L, Pin 20 output measurement for large signal	Fig.1
ENVE residual voltage	V _{EN-MI}	—	0.1	0.4	V	Pin 21 = L, Pin 20 output measurement for no signal	Fig.1
EP mode threshold voltage	V _{TH21H}	3.5	—	V _{CC}	V	Pin 21 DC voltage for EP mode	Fig.1
SP mode threshold voltage	V _{TH21L}	0	—	1.2	V	Pin 21 DC voltage for SP mode	Fig.1

PRE/REC amplifiers

VCR components

●Electrical characteristics (Unless otherwise specified, Ta=25°C, Vcc=5.0V, f=4.0MHz and IOAR=36mA_{P-P})

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions	Measurement Circuit
(Recording system)						Pin 15: L	
Quiescent current	I _Q (R)	—	72	108	mA	No signal	Fig.2
Recording AGC level	IOAR	30	36	42	mA _{P-P}	Pin 16 input = 400mV _{P-P} , pin 8 output measurement	Fig.2
AGC control sensitivity	ΔIOAR	—	0.15	2	dB	Pin 8 output level difference for f = 4.0MHz, pin 16 input = 225mV _{P-P} and 800mV _{P-P} .	Fig.2
AGC frequency characteristic	ΔIOAF	—2	0	2	dB	Pin 8 output level difference for f = 8.0/1.0MHz, pin 16 input = 400mV _{P-P}	Fig.2
2nd harmonic distortion	2HDr	—	—41	—35	dBc	Pin 16 input = 400mV _{P-P} , 8.0MHz spurious.	Fig.2
3rd harmonic distortion	3HDr	—	—50	—40	dBc	Pin 16 input = 400mV _{P-P} , 12.0MHz spurious, guaranteed design value.	Fig.2
Cross modulation distortion	CMDr	—	—43	—38	dBc	4.0MHz ± 630kHz spurious, guaranteed design value.	Fig.2
Maximum output level	IOmR	42	50	—	mA _{P-P}	When pin 8 output 2nd harmonic distortion is -30dB	Fig.2
Recording current load characteristic	ΔIORL	—2	—0.35	—	dB	Pin 8 output level difference for load L: 8.2 ~ 12 μH	Fig.2
Mute attenuation ratio	MUR	—	—44	—38	dBc	Pin 8 output level difference for pin 15: M/H.	Fig.2
Frequency characteristic	ΔIOEQ	—5.3	—7.8	—10.3	dB	Pin 8 output level difference for f = 8.0/1.0MHz, AGC OFF	Fig.2
AGC mode threshold voltage	V _{TH11H}	2.7	—	V _{CC}	V	Pin 11 DC voltage to maintain recording AGC operation	Fig.2
AGC mode threshold voltage	V _{TH11L}	0	—	1.2	V	Pin 11 DC voltage to maintain recording AGC stopped	Fig.2
PB mode threshold voltage	V _{TH15H}	3.8	—	V _{CC}	V	Pin 15 DC voltage for PB mode	Fig.2
EE mode threshold voltage	V _{TH15M}	2.2	—	2.8	V	Pin 15 DC voltage for REC MUTE mode	Fig.2
REC mode threshold voltage	V _{TH15L}	0	—	1.2	V	Pin 15 DC voltage for REC mode	Fig.2

* Note: dBc: dB below carrier (used to express relative level from carrier reference for convenience sake)

● Measurement circuit
Playback system

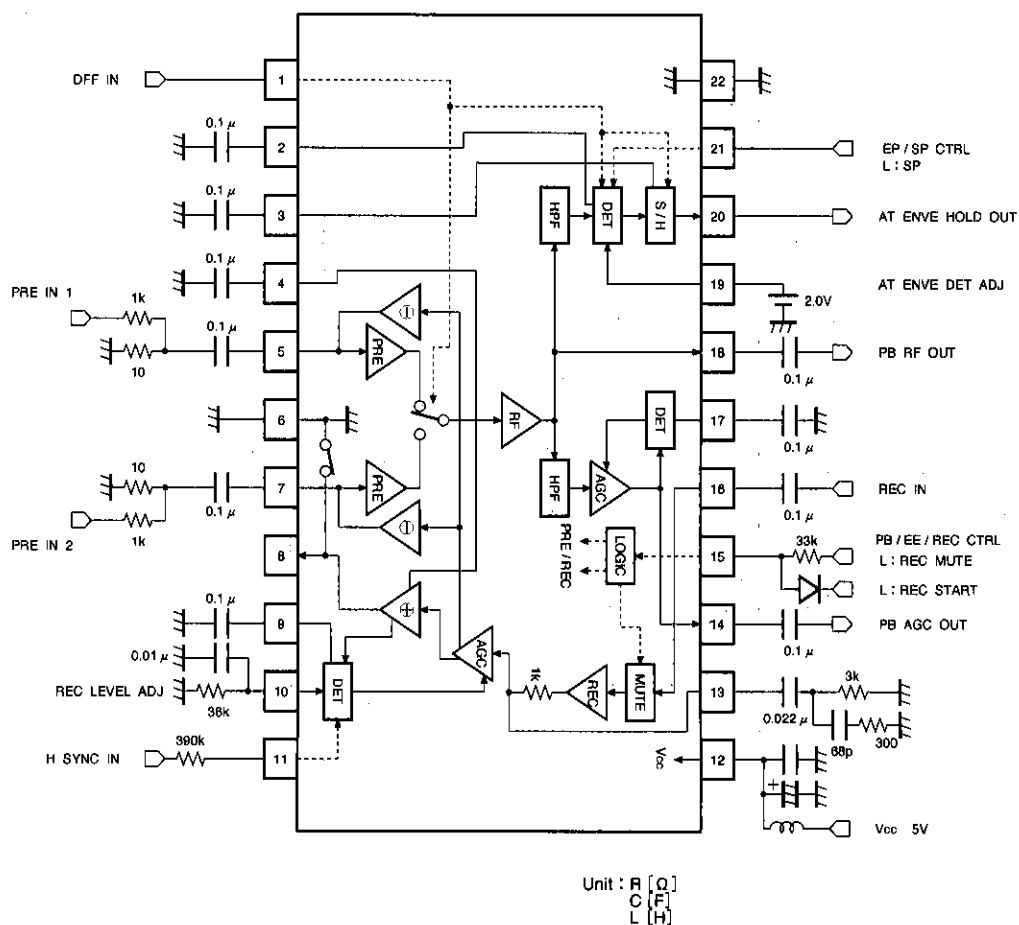


Fig.1

VCR components

PRE/REC amplifiers

Recording system

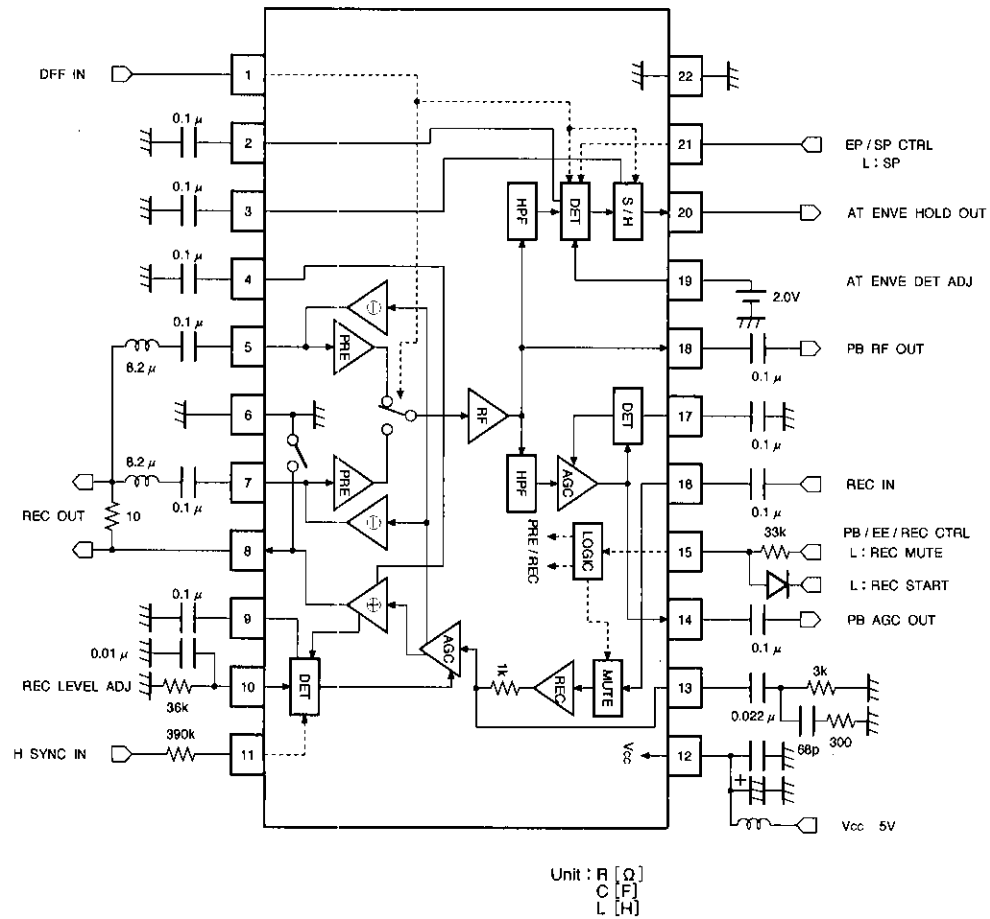


Fig.2

●Control mode table

(1) DFF IN (pin1)

- Playback input selection (head switching)
- Playback output envelope detection timing control (integrate and hold one frame)

Control pin	Function		Control voltage V _{CTRL1} [V]
DFF IN	Selected playback input	Envelope detect	
H	CH2 (PRE IN2 7pin)	Reset on rising edge	3.5 ~ V _{CC}
L	CH1 (PRE IN1 5pin)	—	0.0 ~ 1.2

(2) H SYNC IN (pin11)

- Controls recording AGC detector block operation.

Control pin	Function	Control voltage V _{CTRL11} [V]
H SYNC	AGC detect	
H	ON	2.7 ~ V _{CC}
L	OFF	0.0 ~ 1.2

(3) PB/EE/REC CTRL (pin15)

- Playback/recording mute/recording mode switching

Control pin	Mode	Function				Control voltage V _{CTRL15} [V]
PB/EE/REC		PRE AMP	AT ENVE	REC MUTE	REC AMP	
H	PB	ON	ON	OFF	OFF	3.8 ~ V _{CC}
M	REC MUTE	OFF	OFF	ON	ON	2.2 ~ 2.8
L	REC	OFF	OFF	OFF	ON	0.0 ~ 1.2

• Pin 15 is pulled up to V_{CC} via a 33kΩ resistor.

(4) EP/SP CTRL (pin21)

- Switching for the detector gain of the playback envelope detector

Control pin	Function	Control voltage V _{CTRL21} [V]
EP / SP	AT ENVE gain	
H	Typ. +6dB	3.5 ~ V _{CC}
L	Typ.	0.0 ~ 1.2

• Pin 21 is pulled up to V_{CC} via a 50kΩ resistor.

●Application example


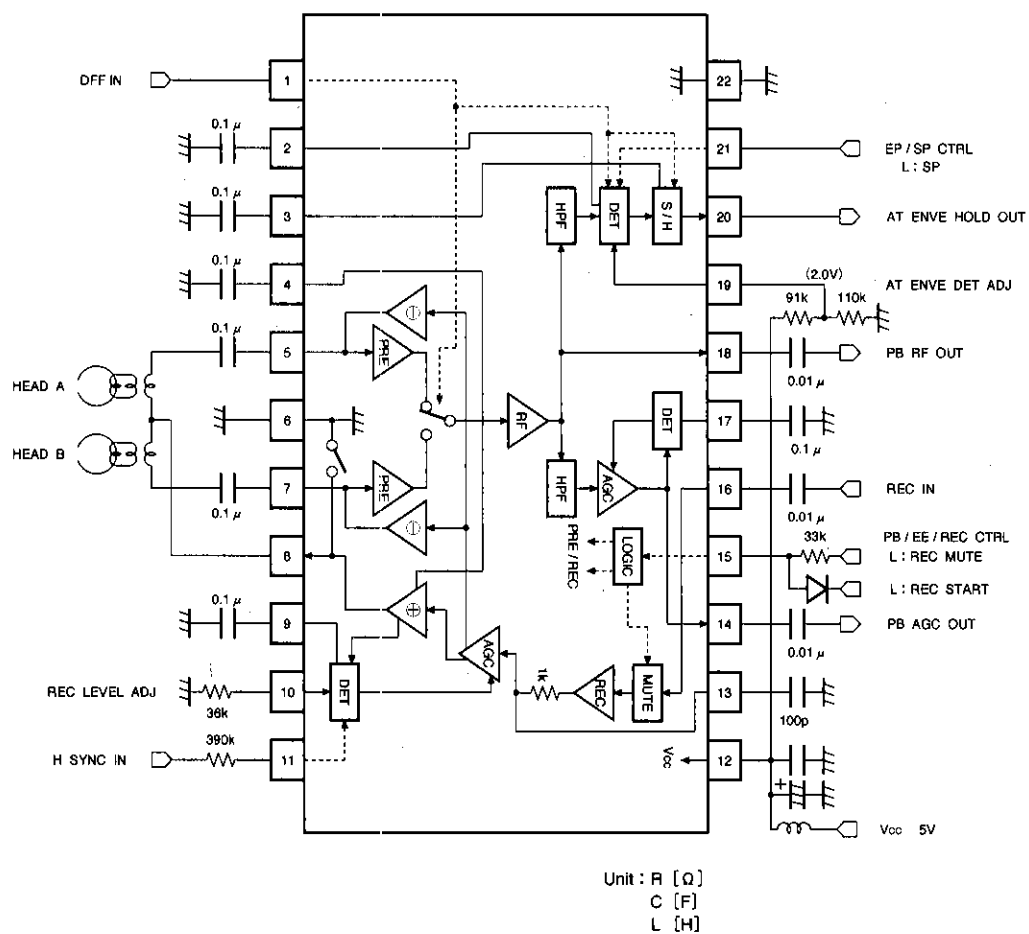


Fig.3

●External dimensions (Units: mm)

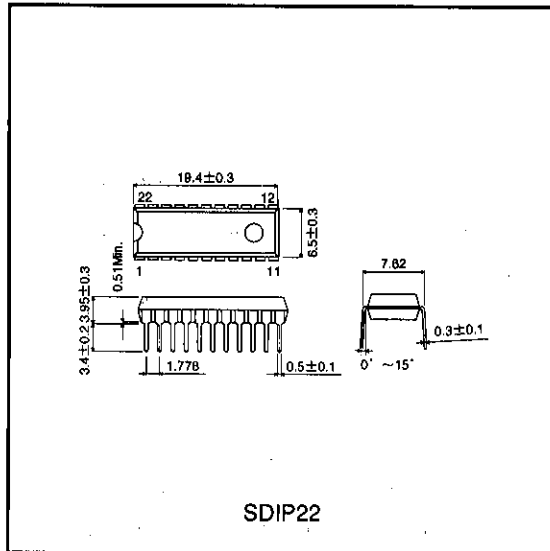

Notes

- The contents described in this catalogue are correct as of March 1997.
- No unauthorized transmission or reproduction of this book, either in whole or in part, is permitted.
- The contents of this book are subject to change without notice. Always verify before use that the contents are the latest specifications. If, by any chance, a defect should arise in the equipment as a result of use without verification of the specifications, ROHM CO., LTD., can bear no responsibility whatsoever.
- Application circuit diagrams and circuit constants contained in this data book are shown as examples of standard use and operation. When designing for mass production, please pay careful attention to peripheral conditions.
- Any and all data, including, but not limited to application circuit diagrams, information, and various data, described in this catalogue are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO., LTD., disclaims any warranty that any use of such device shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes absolutely no liability in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices; other than for the buyer's right to use such devices itself, resell or otherwise dispose of the same; no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD., is granted to any such buyer.
- The products in this manual are manufactured with silicon as the main material.
- The products in this manual are not of radiation resistant design.

The products listed in this catalogue are designed to be used with ordinary electronic equipment or devices (such as audio-visual equipment, office-automation equipment, communications devices, electrical appliances, and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers, or other safety devices) please be sure to consult with our sales representative in advance.

- Note when exporting
 - It is essential to obtain export permission when exporting any of the above products when it falls under the category of strategic material (or labor) as determined by foreign exchange or foreign trade control laws.
 - Please be sure to consult with our sales representatives to ascertain whether any product is classified as a strategic material.