

NOTES:

*1 : PART CAN BE REPLACED WITH 2SA1084 E

AC VOLTAGE 1000 HZ, MEASURED WITH VTVM

☐ DC VOLTAGE MEASURED WITH VOLTMETER 100kOHM/V

[] ADDITIONAL GAIN WITH FADER IN MAX. POSITION

 SAFETY COMPONENT
(MUST BE REPLACED BY ORIGINAL PART)


RATED CONDITIONS:

GAIN POTS MIN. OR MAX.

ALL POTS IN CENTER-POSITION

ALL FADERS AT 0dB

MASTER-FADER-L/R AT +6dB

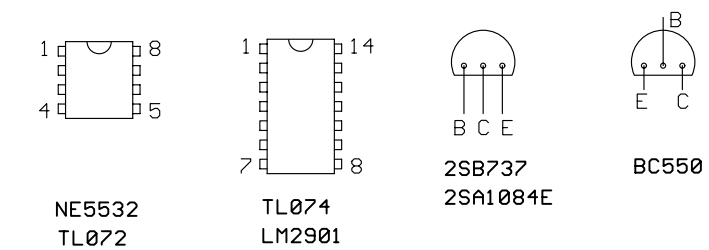

ALTERATIONS RESERVED				Last notified: 07.04.2004 13:25:01		81358C			
				Last plotted: 08.04.2004 14:03:46					
				DATE	NAME				
				DSC'D	Lang F.	CIRCUIT DIAGRAM		1/2	
				CHK'D					
				APP'D					
				EVI AUDIO		362 339		2-	
ISSUE	REVISION	DATE	NAME			PM1000/PM1600 -2			