

SYNTHESIZER

# SH-7 SERVICE NOTES




CONTENTS

SPECIFICATIONS .....	1
DISASSEMBLY .....	3
CIRCUIT DESCRIPTION .....	4
BLOCK DIAGRAM .....	8
CONTROL BOARD C (OPH-35) .....	8
KEY CONTROL VOLTAGE BOARD (CVH-1) .....	9
OPH-35/CVH-1 CIRCUIT .....	10
VCO-1 BOARD (VCOH-1) .....	11
VCO-1 CIRCUIT .....	12
VCO-2 BOARD (VCOH-2) .....	13
VCO-2 CIRCUIT .....	14
LFO BOARD (LFOH-1) .....	15
LFO CIRCUIT .....	16
VCF/VCA BOARD (OPH-14) .....	17
OPH-14 CIRCUIT .....	18
CONTROL BOARD A (OPH-33) .....	19
OPH-33 CIRCUIT .....	20
CONTROL BOARD B (OPH-34) .....	21
OPH-34 CIRCUIT .....	22
CONNECTION PANEL - SUB-CHASSIS .....	23
POWER SUPPLY BOARD (PSH-13/14) / CIRCUIT .....	24
POWER SUPPLY WIRING .....	25
ADJUSTMENT .....	26
PARTS .....	33
PARTS LIST .....	36
KEYBOARD PARTS	

## SPECIFICATIONS

- A. KEYBOARD: 44 Keys
- B. INPUT MODE: EXT CV Gate(S/H)/Two Note/One Note
- C. CONTROLLER
1. Portamento Mode: Down/Normal/Up  
Portamento Time: 0-3sec
  2. Transpose: Low/Medium/High(1 Oct Step)
  3. Bender Lever:  $-35^{\circ}$  -  $+35^{\circ}$ 
    - a. VCO  
Mode: LFO/OFF/CV  
Sensitivity: LFO:  $\pm 10$  Notes max CV:  $\pm 15$  Notes max
    - b. VCF  
Mode: LFO/OFF/CV  
Sensitivity: 0-10
    - c. VCA  
Mode: LFO/OFF/CV  
Sensitivity: LFO:  $-20\text{dB}$  -  $+15\text{dB}$  max CV:  $-30\text{dB}$  -  $+20\text{dB}$  max
  4. Autobend  
Time: 20ms-700ms  
Polarity:  $\curvearrowright$  (+) /  $\curvearrowleft$  (-)
  5. Total Tuning:  $\pm 3.5$  Notes
  6. VCO-2 Tuning:  $\pm 7.5$  Notes
- D. VCO-1(A) MIXER
- |        |      |   |                          |
|--------|------|---|--------------------------|
| □ 2':  | 0-10 | } | Mixing Level<br>+6dB max |
| □ 4':  | 0-10 |   |                          |
| □ 8':  | 0-10 |   |                          |
| □ 16': | 0-10 |   |                          |
| □ 32': | 0-10 |   |                          |
- E. VCO-1(B)
1. Range: 2'/4'/8'/16'/32'
  2. Waveform:  $\wedge$  /  $\nearrow$  /  $\square$  /  $\sqcup$
  3. PWM  
a. Modulation: 0(50%)-10(min)  
b. Mode: LFO(  $\wedge$  )/Manual/ENV-1(  $\curvearrowright$  )
  4. Control  
a. LFO: 0-10  
b. Autobend: 0-10  
c. S & H: 0-10
- F. VCO-2
1. Range: 2'/4'/8'/16'/32'
  2. Waveform:  $\wedge$  /  $\nearrow$  /  $\square$  /  $\sqcup$
  3. PWM  
a. Modulation: 0(50%)-10(min)  
b. Mode: LFO(  $\wedge$  )/Manual/ENV-1(  $\curvearrowright$  )
  4. Control  
a. LFO: 0-10  
b. Autobend: 0-10  
c. S & H: 0-10
  5. Synchro(with VCO-1): ON/OFF
- G. AUDIO MIXER
1. VCO-1(A): 0-10
  2. VCO-1(B): 0-10
  3. VCO-2: 0-10
  4. Noise: 0-10
  5. RING, EXT SIG: RING/EXT SIG  
RING, EXT SIG: 0-10
  6. Overload Indicator: LED
- H. HPF  
Cutoff Frequency: 10Hz-20KHz

- I. VCF
1. Cutoff Frequency: 5Hz-20KHz
  2. Resonance: Min - Self Oscillation
  3. Control
    - a. ENV-1:  /   
ENV-1: 0-10
    - b. LFO, S&H: LFO/S&H  
LFO, S&H: 0-10
    - c. KYBD, PEDAL: KYBD/PEDAL  
KYBD, PEDAL: 0-10
    - d. VCO-2, NOISE: VCO-2/NOISE  
VCO-2, NOISE: 0-10
    - e. ENV FOL'R:  /   
ENV FOL'R: 0-10
  4. EXT SIG Indicator: LED
- J. VCA
1. Hold: 0-10
  2. Control
    - a. LFO: 0-10
    - b. ENV-1, ENV-2: ENV-1/ENV-2
- K. SAMPLE & HOLD
1. Mode:  /  / Random
  2. Sample Time: 13ms-2s
  3. Output Lag: 0-2s
- L. LFO
1. Waveform:  /  / 
  2. Rate: 0.15Hz-25Hz
  3.  Delay Time: 0-3s
  4. KYBD TRIG: ON/OFF
- M. RING MODULATOR
- Input Mode: VCO-2/EXT SIG
- N. NOISE GENERATOR
- Output Mode: WHITE/PINK
- O. ENV-1
1. Trigger Mode: KYBD GATE+TRIG/KYBD GATE/LFO
  2. Attack Time: 1ms-4s
  3. Decay Time: 1ms-8s
  4. Sustain Level: 0-100%
  5. Release Time: 1ms-8s
- P. ENV-2
1. Trigger Mode: KYBD GATE+TRIG/KYBD GATE/LFO
  2. Attack Time: 1ms-4s
  3. Decay Time: 1ms-8s
  4. Sustain Level: 0-100%
  5. Release Time: 1ms-8s
- Q. INPUT
1. CV Input: 1 Volt/1 Oct
  2. GATE Input:  $V_g > 7V$
  3. TRIG Input:  $V_t > 5V, T_t > 0.1ms$
  4. EXT SIG Input  
EXT SIG Input Level: L(-43dB)/M(-18dB)/H(0dB)
  5. VCF PEDAL CONT Input:
- R. OUTPUT
1. CV Output: 1V/1 Oct.
  2. GATE output:  $V_g = 14V$
  3. PHONES Output:  
PHONES Output Level: L(-24dB)/M(-12dB)/H(CdE)
  4. Signal Output:  
Signal Output Level: L(-18dB)/M(-6dB)/H(+6dB)

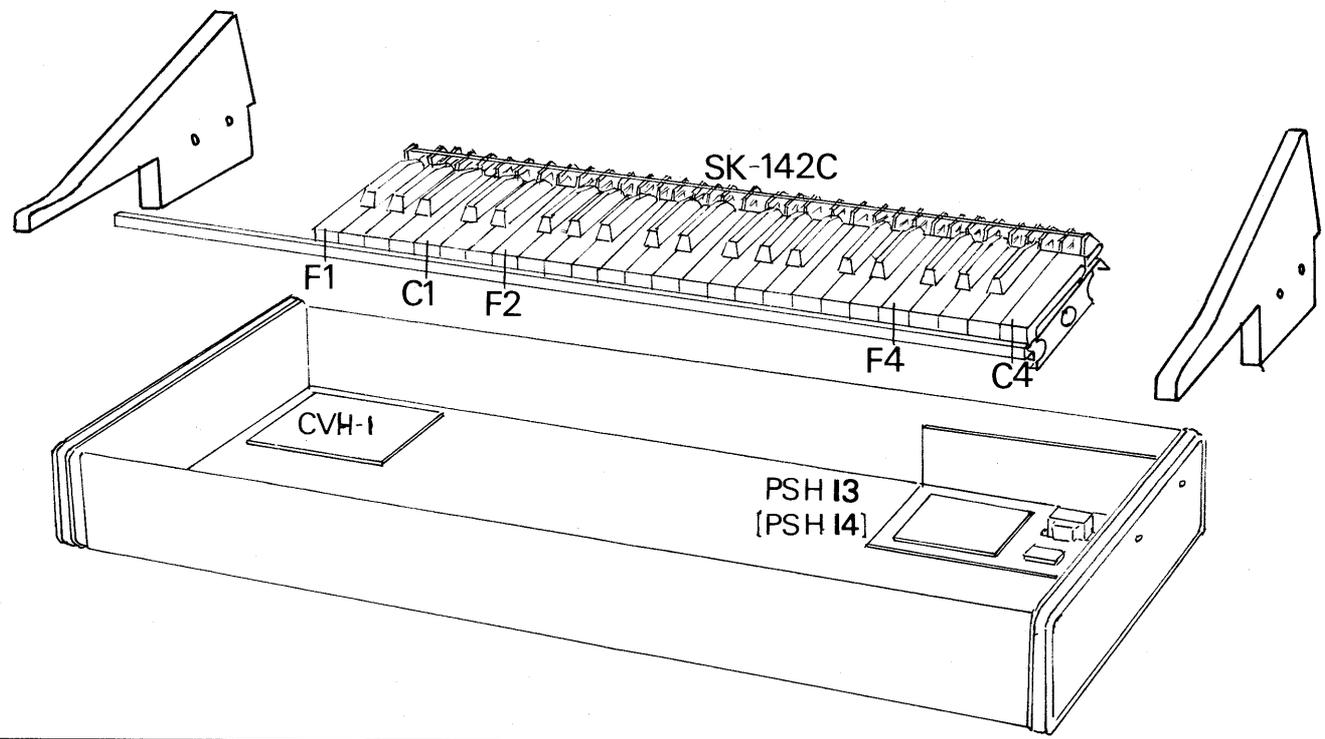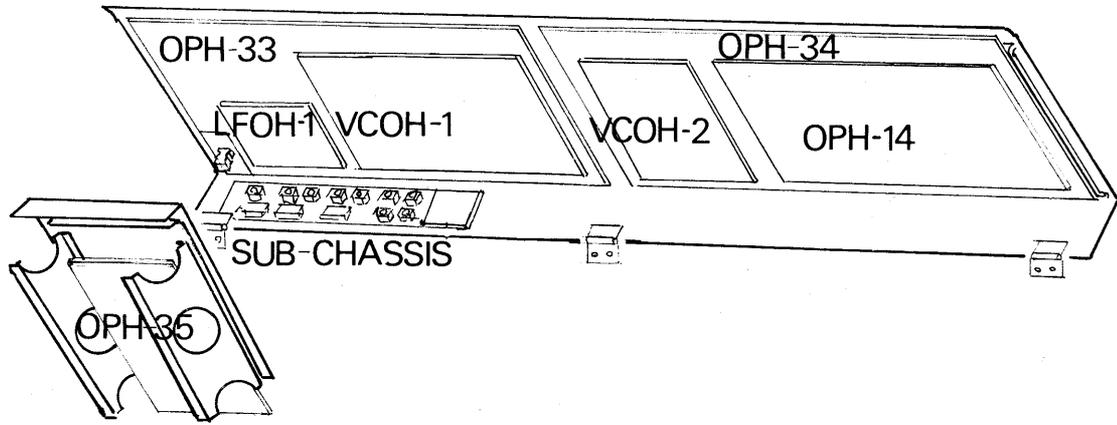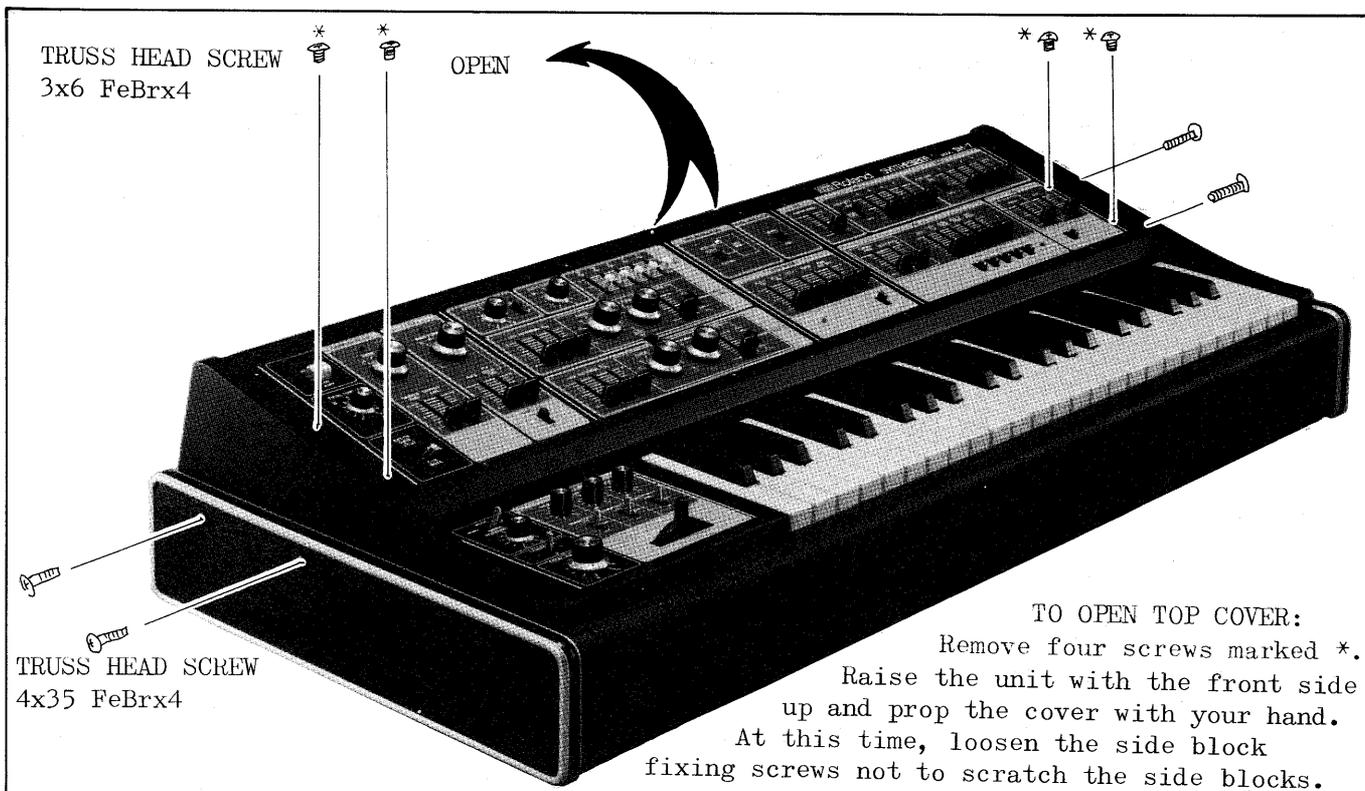

## CIRCUIT DESCRIPTION

## 1. KEYBOARD ASSEMBLY SK-142C

The keyboard has 44 keys which actuate the KCV circuit.

## 2. KCV BOARD CVH-1

CVH-1 includes the following circuits: CV, GATE, EXT GATE, RETRIGGER, BENDER, PHONES.

## 2. 1. Control Voltage Circuit

The SH-7 uses the relation of 1 volt/1 octave. When a key is depressed, the corresponding voltage develops across the resistor chain, which is held at the sample and hold circuit by the gate signals. This is the key control voltage.

To get two KCV's, one for the higher note and the other for lower note, two KCV circuits are provided at the both ends of the resistor chain. The two KCV's are sent to the portamento circuit to add portamento effect.

## 2. 2. Gate Circuit

The gate signal is generated when a key is depressed. It is used to sample the keyboard control voltage and to trigger the Retrigger, Autobend, LFO, ENV-1, and ENV-2 circuits.

## 2. 3. External Gate Circuit

The external gate input is shaped to a fixed form of gate signal. This circuit is activated with the external input level of +7 volts or over.

## 2. 4. Retrigger Circuit

With the Gate Trigger Selector Switch at the KYBD GATE+TRIG position, depress a key and the gate voltage develops to trigger the Envelope Generator. Next, with holding the key down, depress a new key and the Envelope Generator is retriggered.

(The change in key control voltage is detected and a pulse is generated, which retriggers the Envelope Generator.)

When using EXT TRIG input, the Retrigger circuit is activated with the external input level of +7 volts or over and the pulse width of 0.1 msec or over.

## 2. 5. Bender Circuit

The  $\pm$ DC voltage developed by the Bender unit is used as the Bender Control Voltage.

The voltage is also used to control the gain of the LFO, which results in Bender LFO output.

## 2. 6. Phones Circuit

This circuit amplifies the VCA output to drive the headphones. The output level of this circuit is independent of TOTAL VOLUME.

## 3. CONTROL BOARD ASSEMBLY OPH-35

Switches and controls for the functions described in 2. above, and TOTAL VOLUME control are mounted on this board.

## 4. BENDER UNIT PB-4

The Bender Control Voltage to control the VCO, VCF, and VCA is varied manually with the BENDER lever of the Bender Unit.

## 5. VCO-1 BOARD ASSEMBLY VCOH-1

This assembly includes the VCO-1 and AUTOBEND circuits.

## 5. 1. VCO-1

The VCO is an oscillator whose frequency is controlled by voltage. With the SH-7, the voltages include: keyboard control voltage, external control voltage, and other modulation voltage.

All voltages applied to the VCO are summed together and the linear relation between voltage and frequency is changed to anti-log relation by the anti-log converter.

Pulse wave with the frequency corresponding to the voltage is produced. It is sent to a frequency divider to obtain five square waves of feet series (2', 4', 8', 16', 32'). The VCO-1(A) is obtained by the feet series, either singly or by free mixing.

Selected feet series passes the shaping circuit to give the VCO-1(B) output (  $\wedge$ ,  $\nearrow$ ,  $\square$ ,  $\sqcap$  ). EXT CV or KCV (higher note) is applied to the VCO-1.

Pulse is also produced to synchronize the VCO-2 with the VCO-1.

## 5. 2. Autobend

Input gate signals are differentiated to give Autobend output. The autobend time is variable by controlling the discharge time of the capacitor which is charged with the pulse generated by differentiation. The output is applied to the VCO to bring characteristic effects by momentarily moving the frequency, at the instant a key is depressed.

## 6. VCO-2 BOARD ASSEMBLY VCOH-2

The VCO-2 works the same way as the VCO-1 except that VCO-2 does not contain output of mixed feet series. EXT CV, higher key voltage or lower key voltage is applied to control the VCO-2, depending on the Key Mode setting. The synchronization circuit is provided to synchronize the VCO-2 with the VCO-1.

## 7. LFO BOARD ASSEMBLY LFOH-1

This assembly contains the S & H and LFO circuits.

## 7. 1. S &amp; H

LFO output (  $\wedge$ ,  $\nearrow$  ) or Random Noise is applied to the S & H input. The input is sampled at the rate of sampling time. The resulting output is a sampled stepwise or random wave. When the lag time (R/C circuit time constant) is increased, each step of the stepwise waveform is rounded.

## 7. 2. LFO

The LFO is a low frequency oscillator which generates sawtooth, square, and sine waves for controlling or modulating the related circuits.

The waveforms include: (1) sawtooth, square, and sine waves for modulating VCO/VCF/VCA; (2) triangular and sawtooth wave for S & H; (3) triangular wave for PWM, and (4) square wave for triggering the Envelope Generator.

The delay time is adjustable. When the DELAY TIME control is raised, pressing a key on the keyboard will produce a delayed entry of a sine wave.

## 8. VCF/VCA BOARD ASSEMBLY OPH-14

This assembly includes Ring Modulator, Envelope Follower, EXT AMP, Audio Mixer, Noise Generator, ENV-1, ENV-2, HPF, VCF, and VCA circuits.

### 8. 1. Ring Modulator

The inputs for the Ring Modulator consisting of the balanced modulator IC are carrier input and signal input. When two different frequencies are given to the two inputs, the sum and difference frequencies of the two appear as the output. This circuit is used to obtain peculiar sounds like bells, gongs, and others.

### 8. 2. Envelope Follower

External signal is amplified by the external signal amplifier, full-wave rectified, and then filtered to obtain an envelope of the external signal.

When the envelope is applied as the control voltage of VCF, tone color and resonance are varied while the external signal passes through VCF. Thus synthesizer effects are added to the external signal from microphone or electric guitar.

### 8. 3. EXT AMP

This circuit amplifies low level signals from external sources by about +53dB to the level of the VCO signals.

### 8. 4. Audio Mixer

This circuit mixes outputs of the VCO-1(A), VCO-1(B), VCO-2, Noise Generator, Ring Modulator, and the external input signal. The indicator circuit works to light the lamp when the combination of mixing levels is excessively high.

### 8. 5. Noise Generator

Junction noise from a reversely biased transistor is used as the signal source and processed at the amplifier and filter to obtain white and pink noises.

### 8. 6. ENV-1

The ENV-1 generates an envelope for controlling the VCF to vary the tone color, the VCA to give loudness contour, and pulse width modulation of VCO.

The attack time, decay time, sustain level, and release time can be varied to synthesize sounds of instruments and effects.

Three trigger modes are available; GATE+TRIG, GATE, and GATE+LFO.

### 8. 7. ENV-2

The ENV-2 generates an envelope for controlling the VCA to give loudness contour. The operation is the same with the ENV-1.

### 8. 8. HPF

The HPF blocks lower frequencies than the cutoff frequency and passes higher frequencies only. Signals from the mixer passes through the HPF and the tone color is varied. The cutoff frequency is moved by changing the time constant with the slider.

### 8. 9. VCF

The VCF is a low pass filter whose cutoff frequency is controlled by means of a control voltage. It consists of the four-stage low pass filter of -6dB/oct, a feedback circuit which controls resonance, and a circuit which adds input control vol-

tages and converts the sum to anti-log current.

The OTA (Operational Transconductance Amplifier) is used for each stage of the low pass filter and the cutoff point is moved by changing the integration time constant with the control current.

Increasing the amount of feedback boosts the frequencies around the cutoff point. Further increasing it causes the VCF to self-oscillate. This oscillating frequency, independent of input signals, is controlled by the control voltage and works like a VCO.

When key voltage is applied as the control voltage, the cutoff point follows the change in the note scale. Thus the tone color is kept constant. The cutoff point is also controlled by the LFO, ENV, etc. to add effects sound to the tone.

#### 8.10. VCA

The VCA is an amplifier whose gain is controlled by a control voltage. Control voltages from the ENV-1, ENV-2, LFO, Bender, etc. are applied to give various loudness contours.

#### 9. CONTROL BOARD ASSEMBLY OPH-33

#### 10. CONTROL BOARD ASSEMBLY OPH-34

Switches and pots for the control panel are mounted on the OPH-33 and OPH-34.


#### 11. CONNECTION BOARD (Sub Board)

Input and output jacks, level selector switches, and trimmer pots for fine adjustment of VCO frequency and width are mounted.


#### 12. POWER SUPPLY BOARD ASSEMBLY PSH-13/PSH-14

Either PSH-13 (AC 100-117V) or PSH-14 (AC 220-240V) is mounted.

BLOCK DIAGRAM

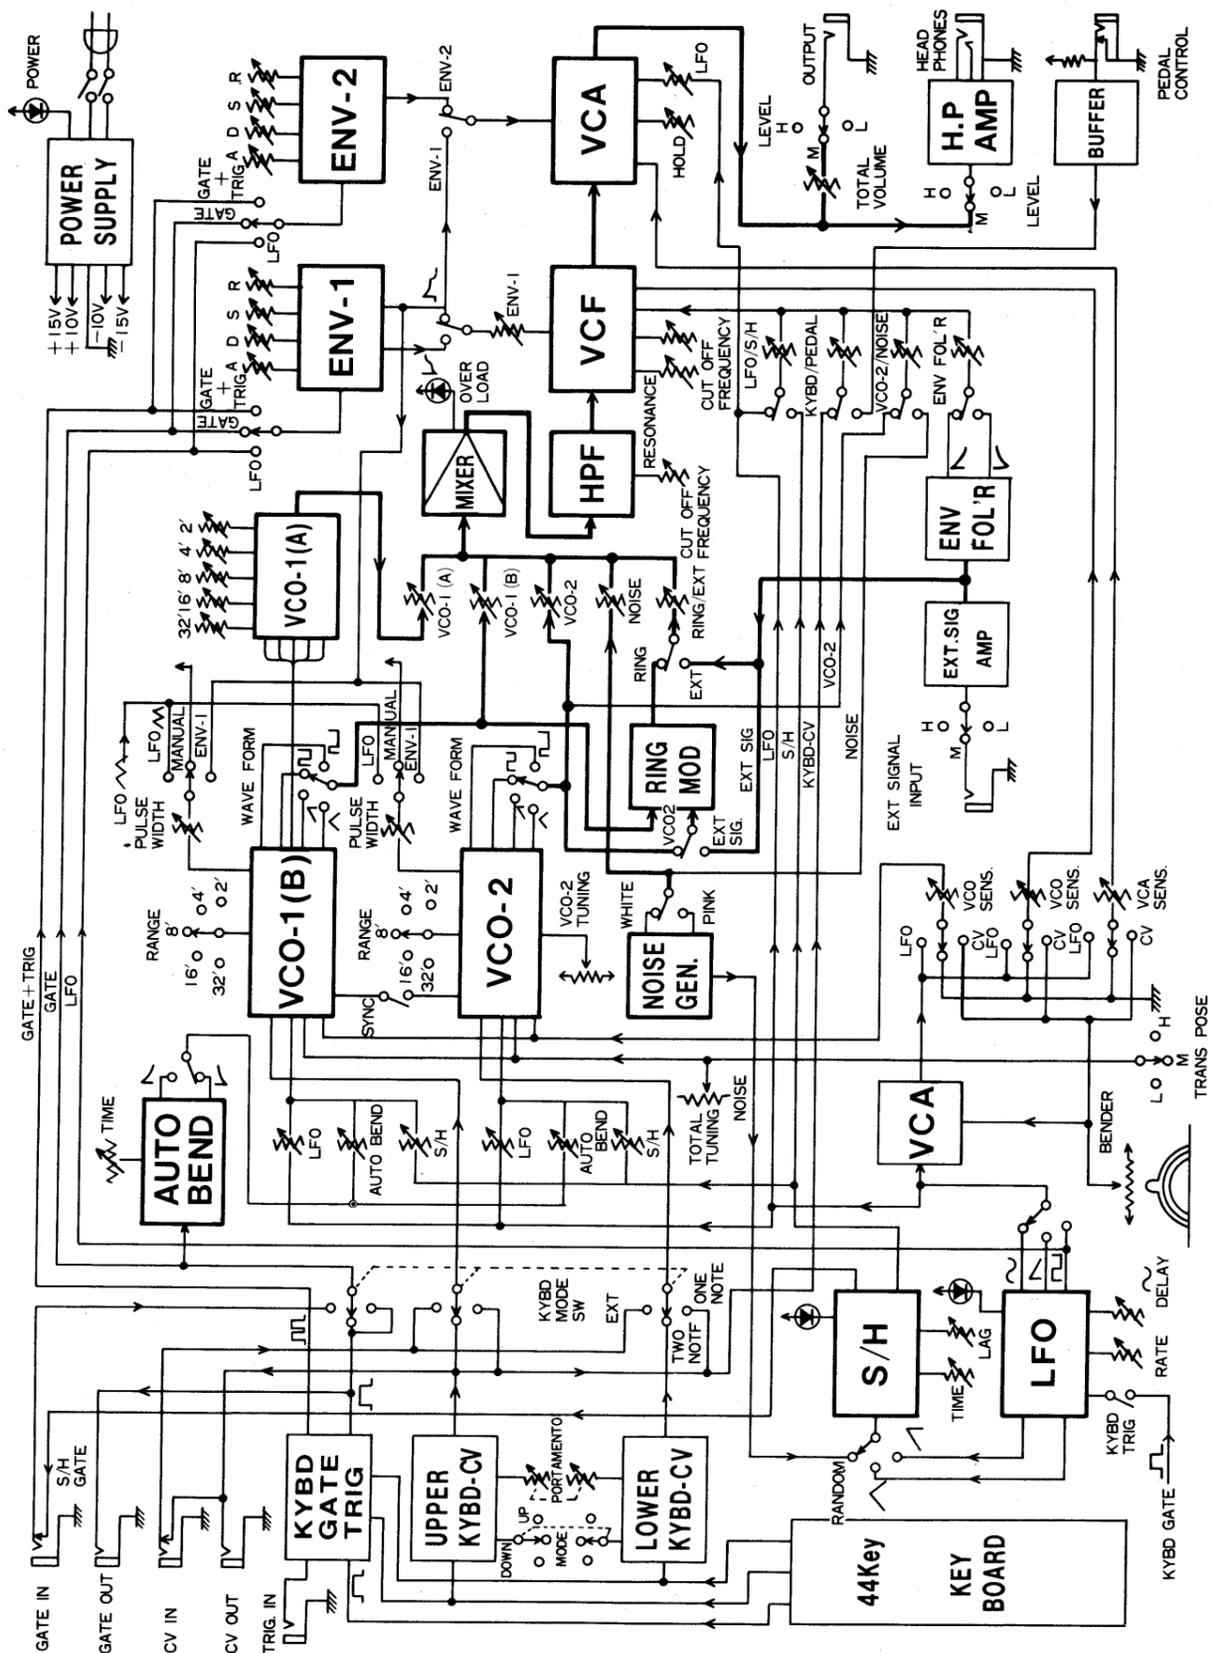


PARTS ON THE FOIL SIDE

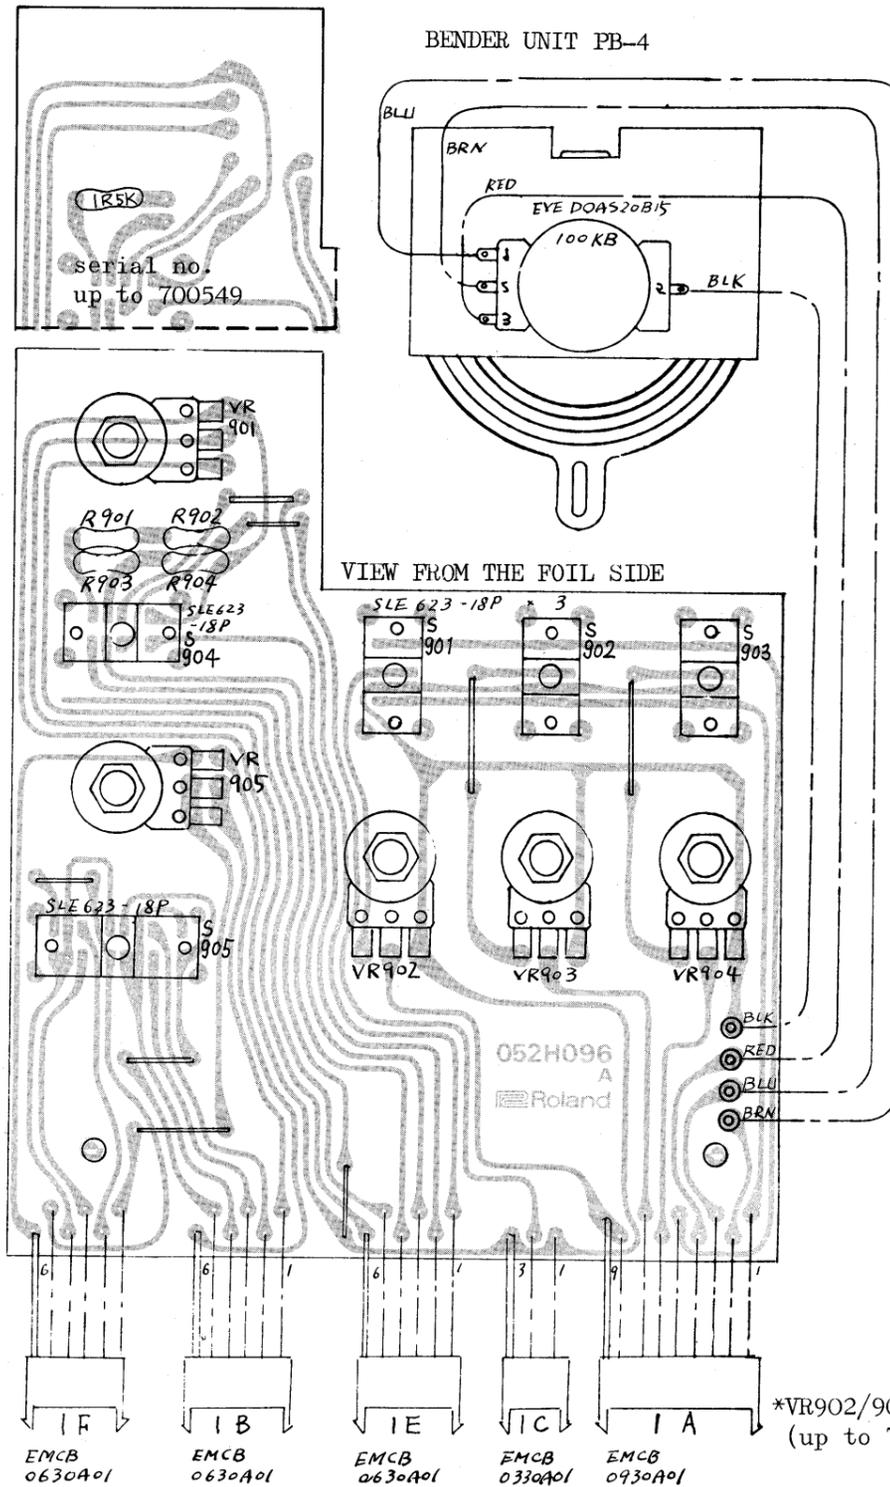


- VR901 (VM10R-K20B14 10KB) ..... TOTAL VOLUME
- VR902 (VM10R-S15B15 10KB\*) ..... VCO
- VR903 (VM10R-S15B15 10KB\*) ..... VCF
- VR904 (VM10R-S15B15 10KB\*) ..... VCA
- VR905 (GM70R-K15A26 2MA x 2) .. PORTAMENTO
- S901: VCO
- S902: VCF
- S903: VCA
- S904: TRANSPOSE
- S905: PORTAMENTO

\*VR902/903/904; 100KB (up to 710779)


CVH-1 (159H001)  
(SERIAL NO. UP TO 700549)

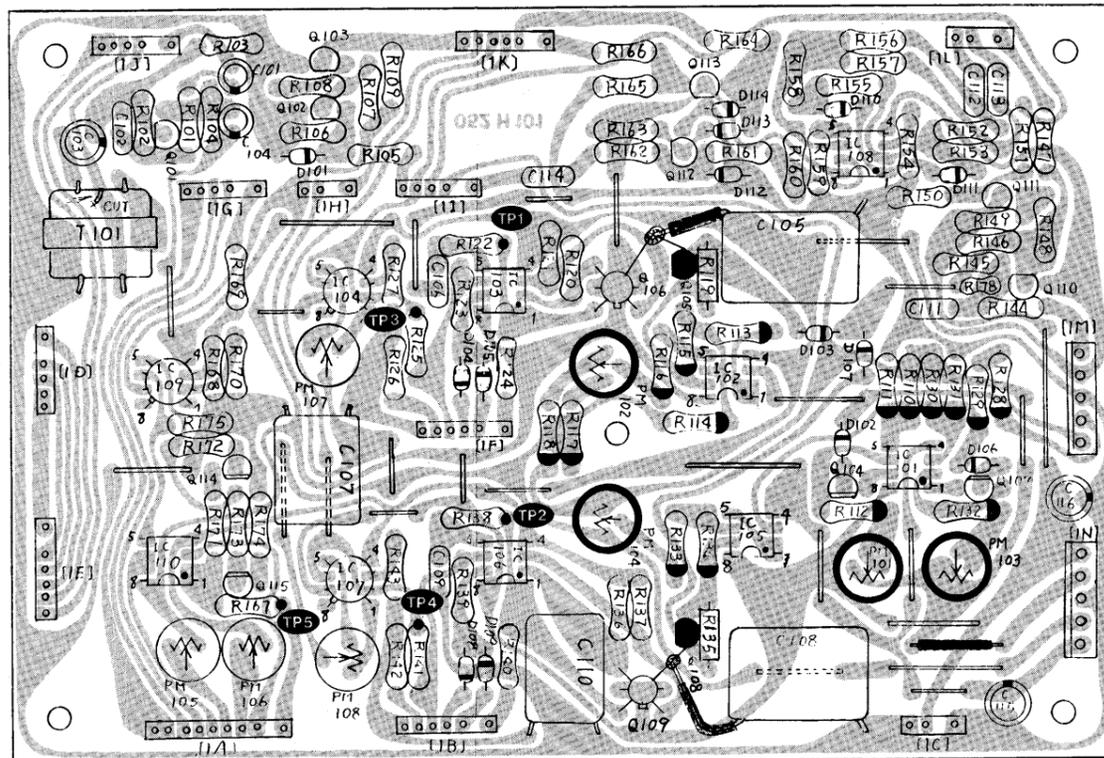


CVH-1A (159H001A)  
(SERIAL NO. 700550 AND HIGHER)

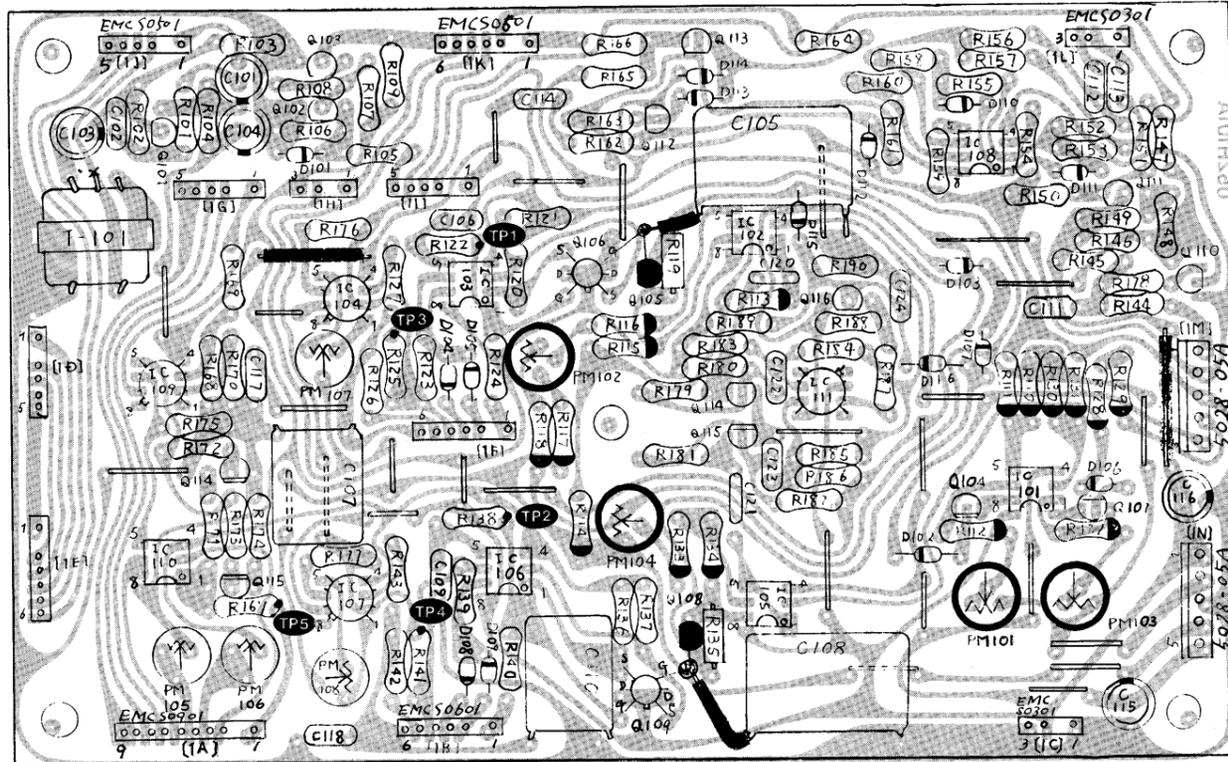


CVH-1 - PARTS ON THE FOIL SIDE

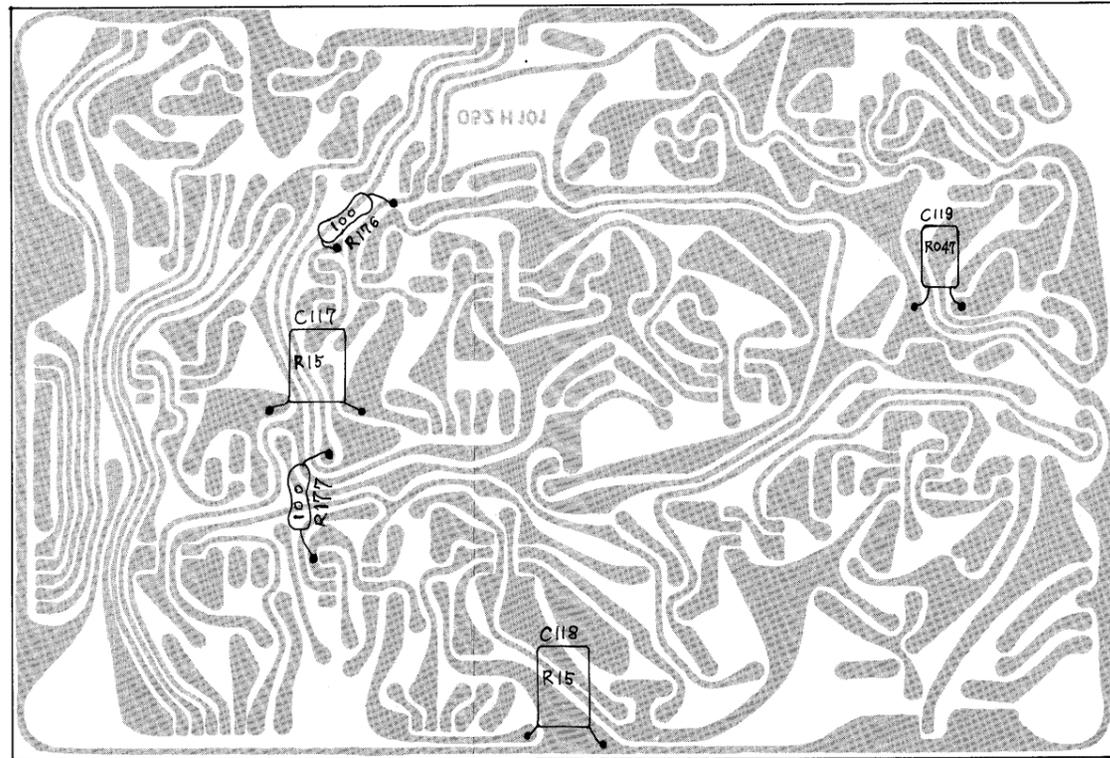

CVH-2 (159H002)

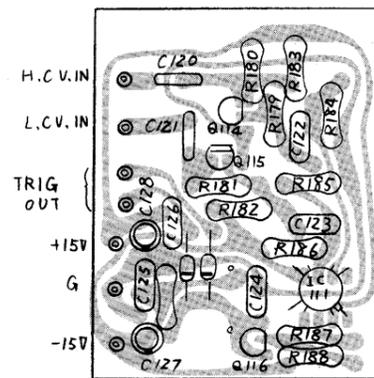


PARTS ON THE FOIL SIDE

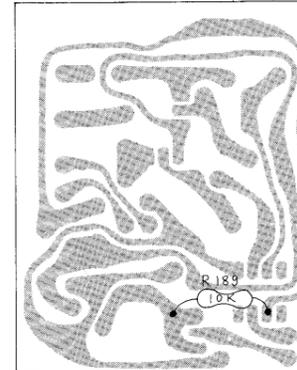

The CVH-2 Board is used with CVH-1 (serial no. up to 700549). CVH-1A (serial no. 700550 and higher) contains the part within itself.



- Resistor R50J
- Resistor CRB1/4FX
- Resistor 1/4RJ
- Mylar 50V-V-K
- Ceramic 50V-V-K
- Electrolytic ECEA
- Tr 2SC1740-Q
- Tr 2SA826-Q
- FET 2SK30A-GR
- Di 1S1555
- Trimmer Pot SR19R
- Trimmer Pot PNBO4

- PM101 (500B): H KCV WIDTH ADJ
- PM102 (500B): H KCV ADJ
- PM103 (500B): L KCV WIDTH ADJ
- PM104 (10KB): L KCV ADJ
- PM105 (10KB): BENDER OFFSET - H
- PM106 (10KB): BENDER OFFSET - L
- PM107 (100KB): PORTAMENTO OFFSET - H
- PM108 (100KB): PORTAMENTO OFFSET - L

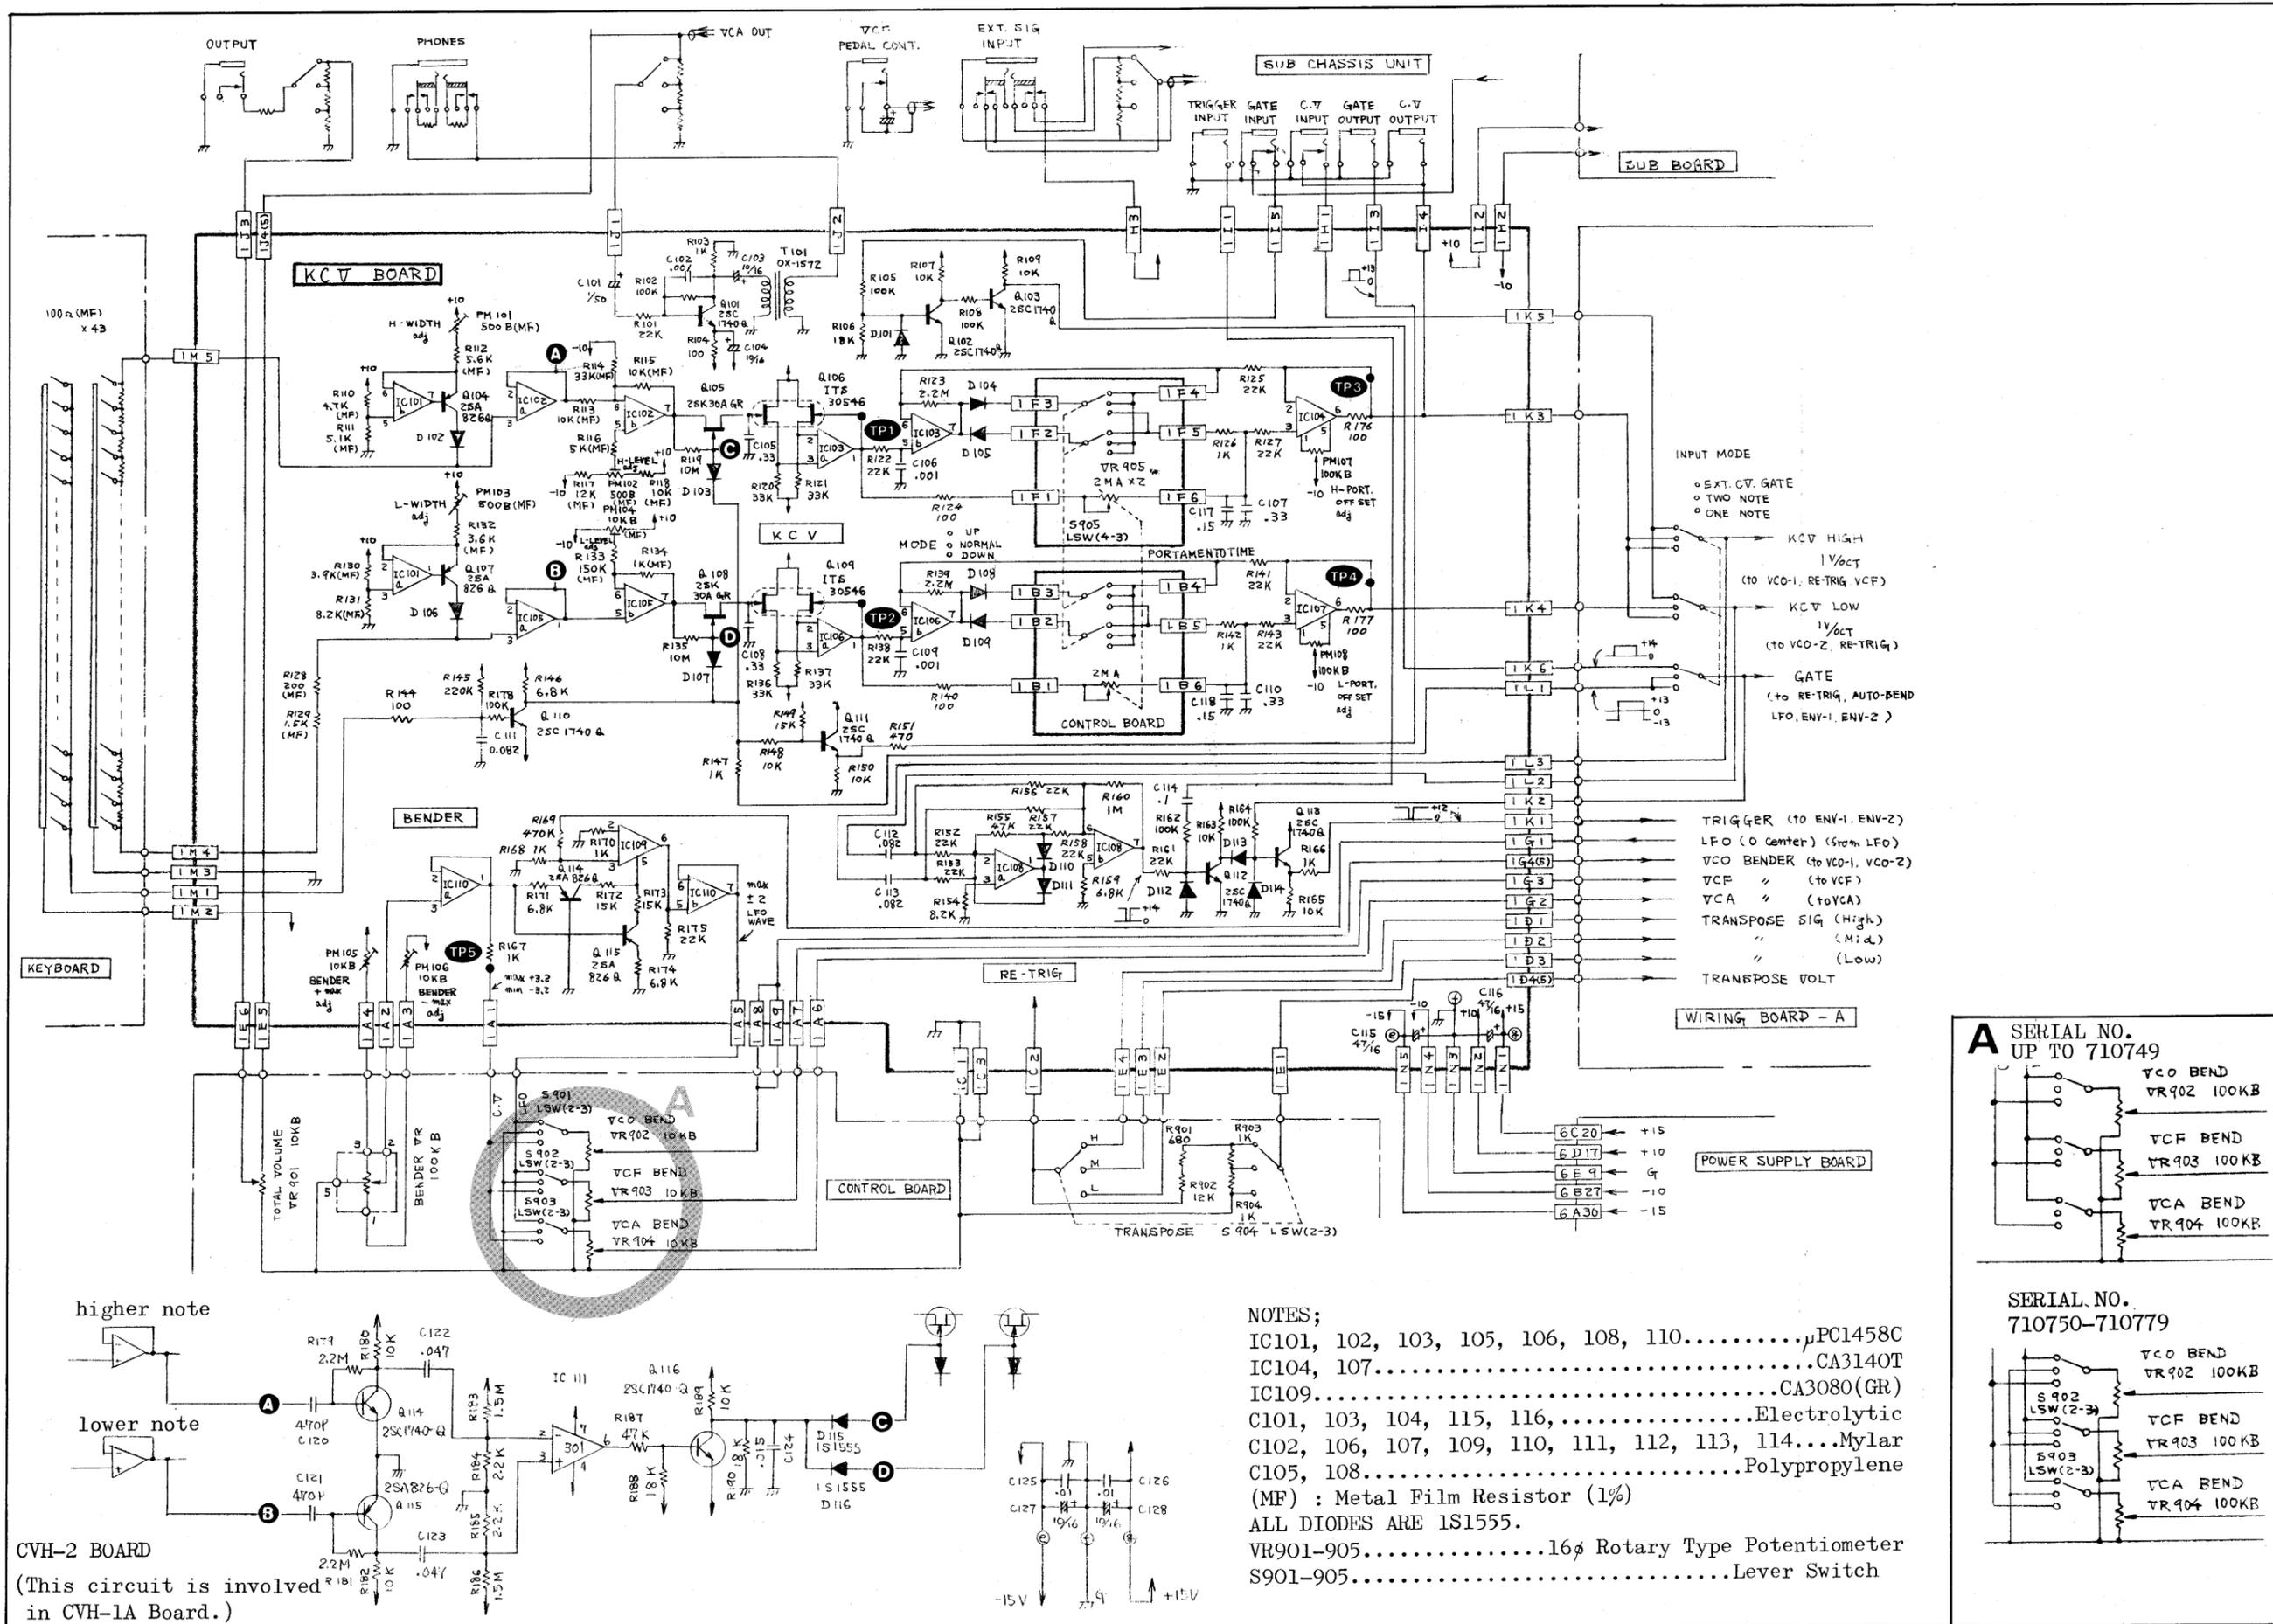


CVH-2 BOARD  
 (This circuit is involved  
 in CVH-1A Board.)


NOTES;  
 IC101, 102, 103, 105, 106, 108, 110..... $\mu$ PC1458C  
 IC104, 107.....CA3140T  
 IC109.....CA3080(GR)  
 C101, 103, 104, 115, 116.....Electrolytic  
 C102, 106, 107, 109, 110, 111, 112, 113, 114....Mylar  
 C105, 108.....Polypropylene  
 (MF) : Metal Film Resistor (1%)  
 ALL DIODES ARE 1S1555.  
 VR901-905.....16 $\phi$  Rotary Type Potentiometer  
 S901-905.....Lever Switch

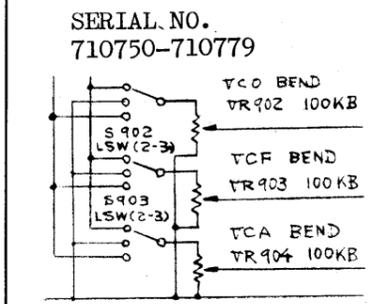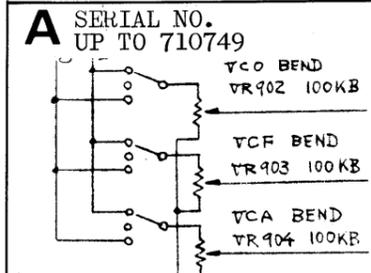


VCOH-1 (152H001) (SERIAL NO. UP TO 710749)

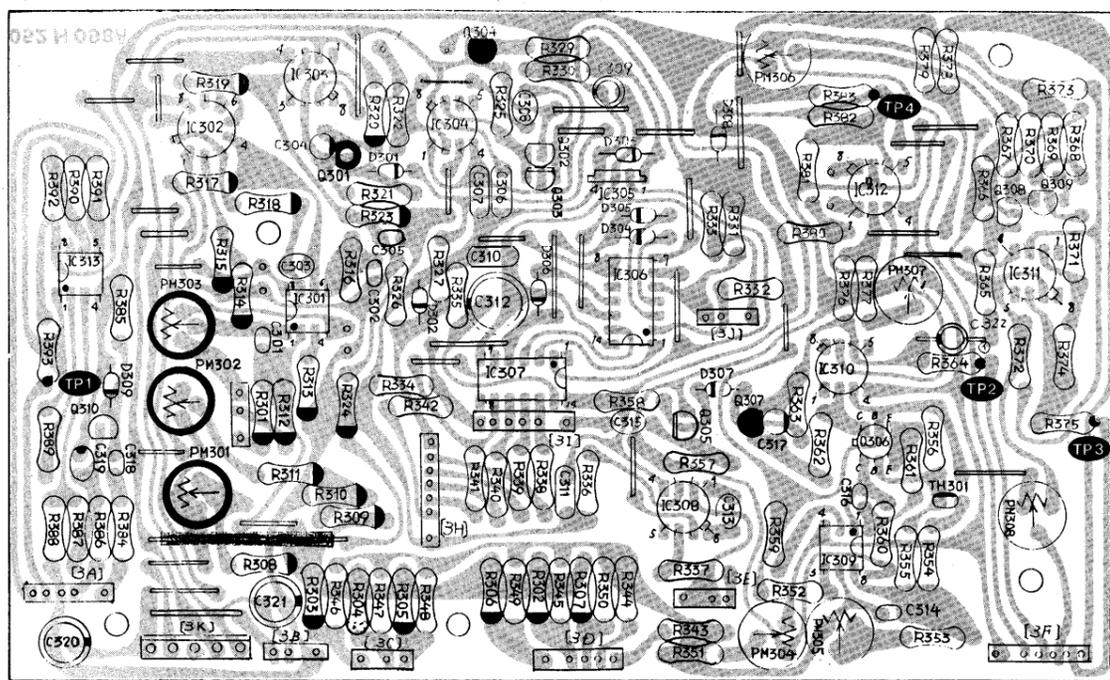


VCOH-1A(152H001A) (SERIAL NO. 720750 AND HIGHER)

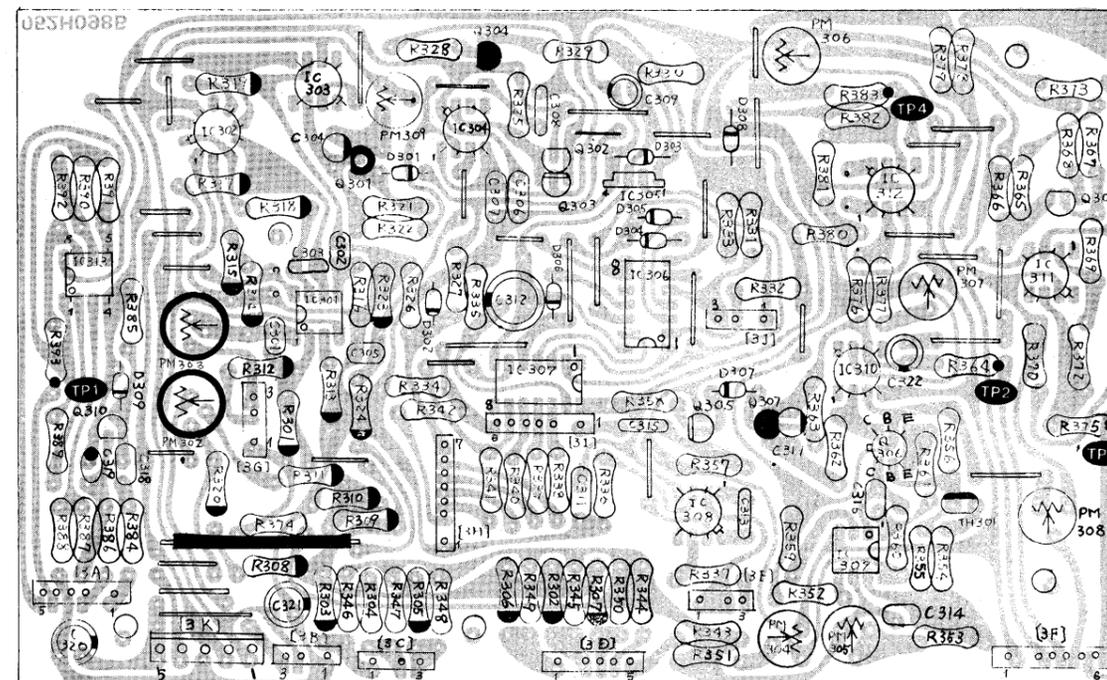

VCOH-1 - PARTS ON THE FOIL SIDE

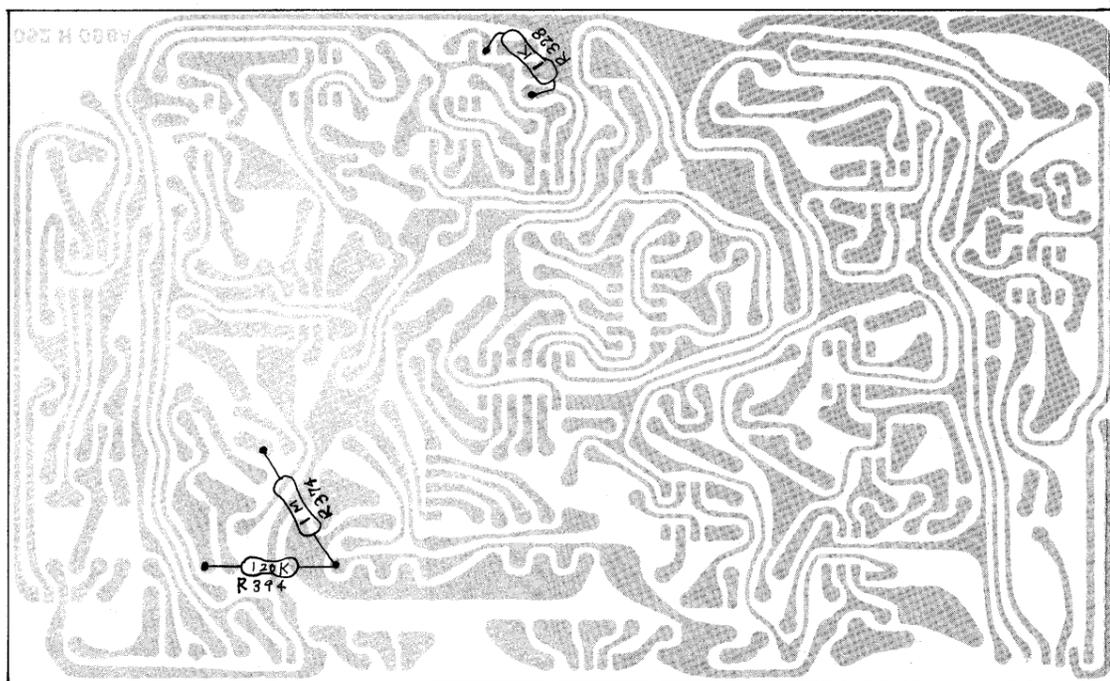


VCOH-1A




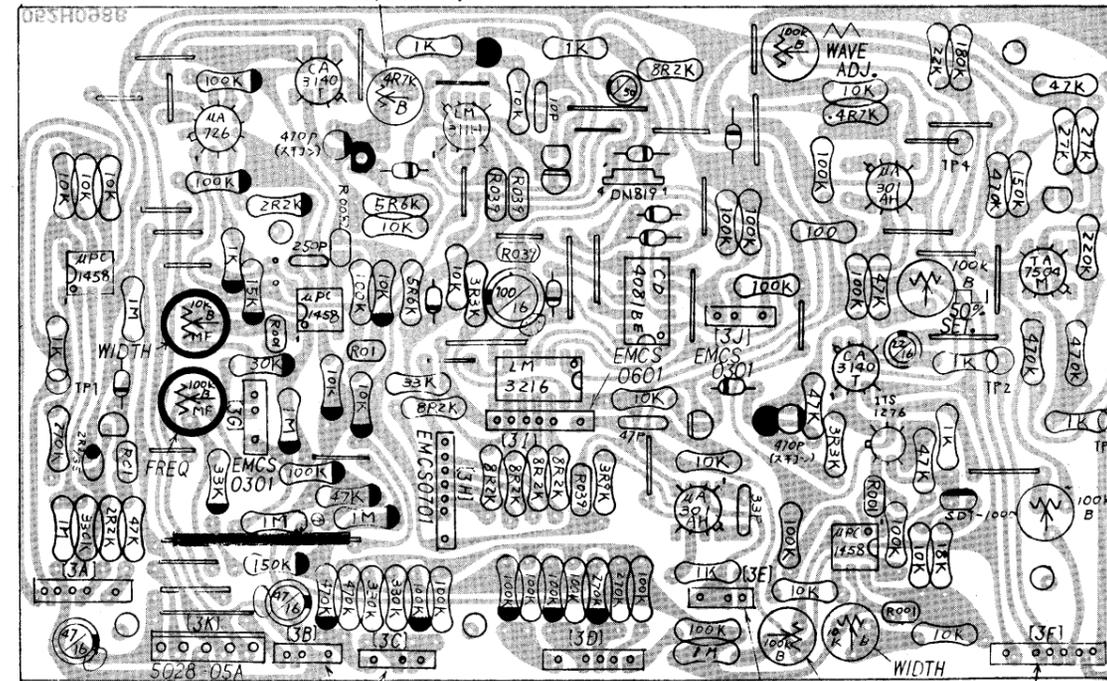


- Resistor CRB1/4FX
- Resistor 1/4RJ
- Mylar 50V-V-K
- Ceramic 50V-V-K
- Tantalum 35V-V-K
- Electrolytic ECEA
- Styrol 125V-V-K
- Tr 2SC1740-Q
- Tr 2SA826-Q
- FET 2SK30A-GR
- FET NF-510
- Di 1S1555
- Thermistor SDT1000
- Trimmer Pot SR19R
- Trimmer Pot PNB04


\* R394 mounted on the foil side of VCOH-1A.

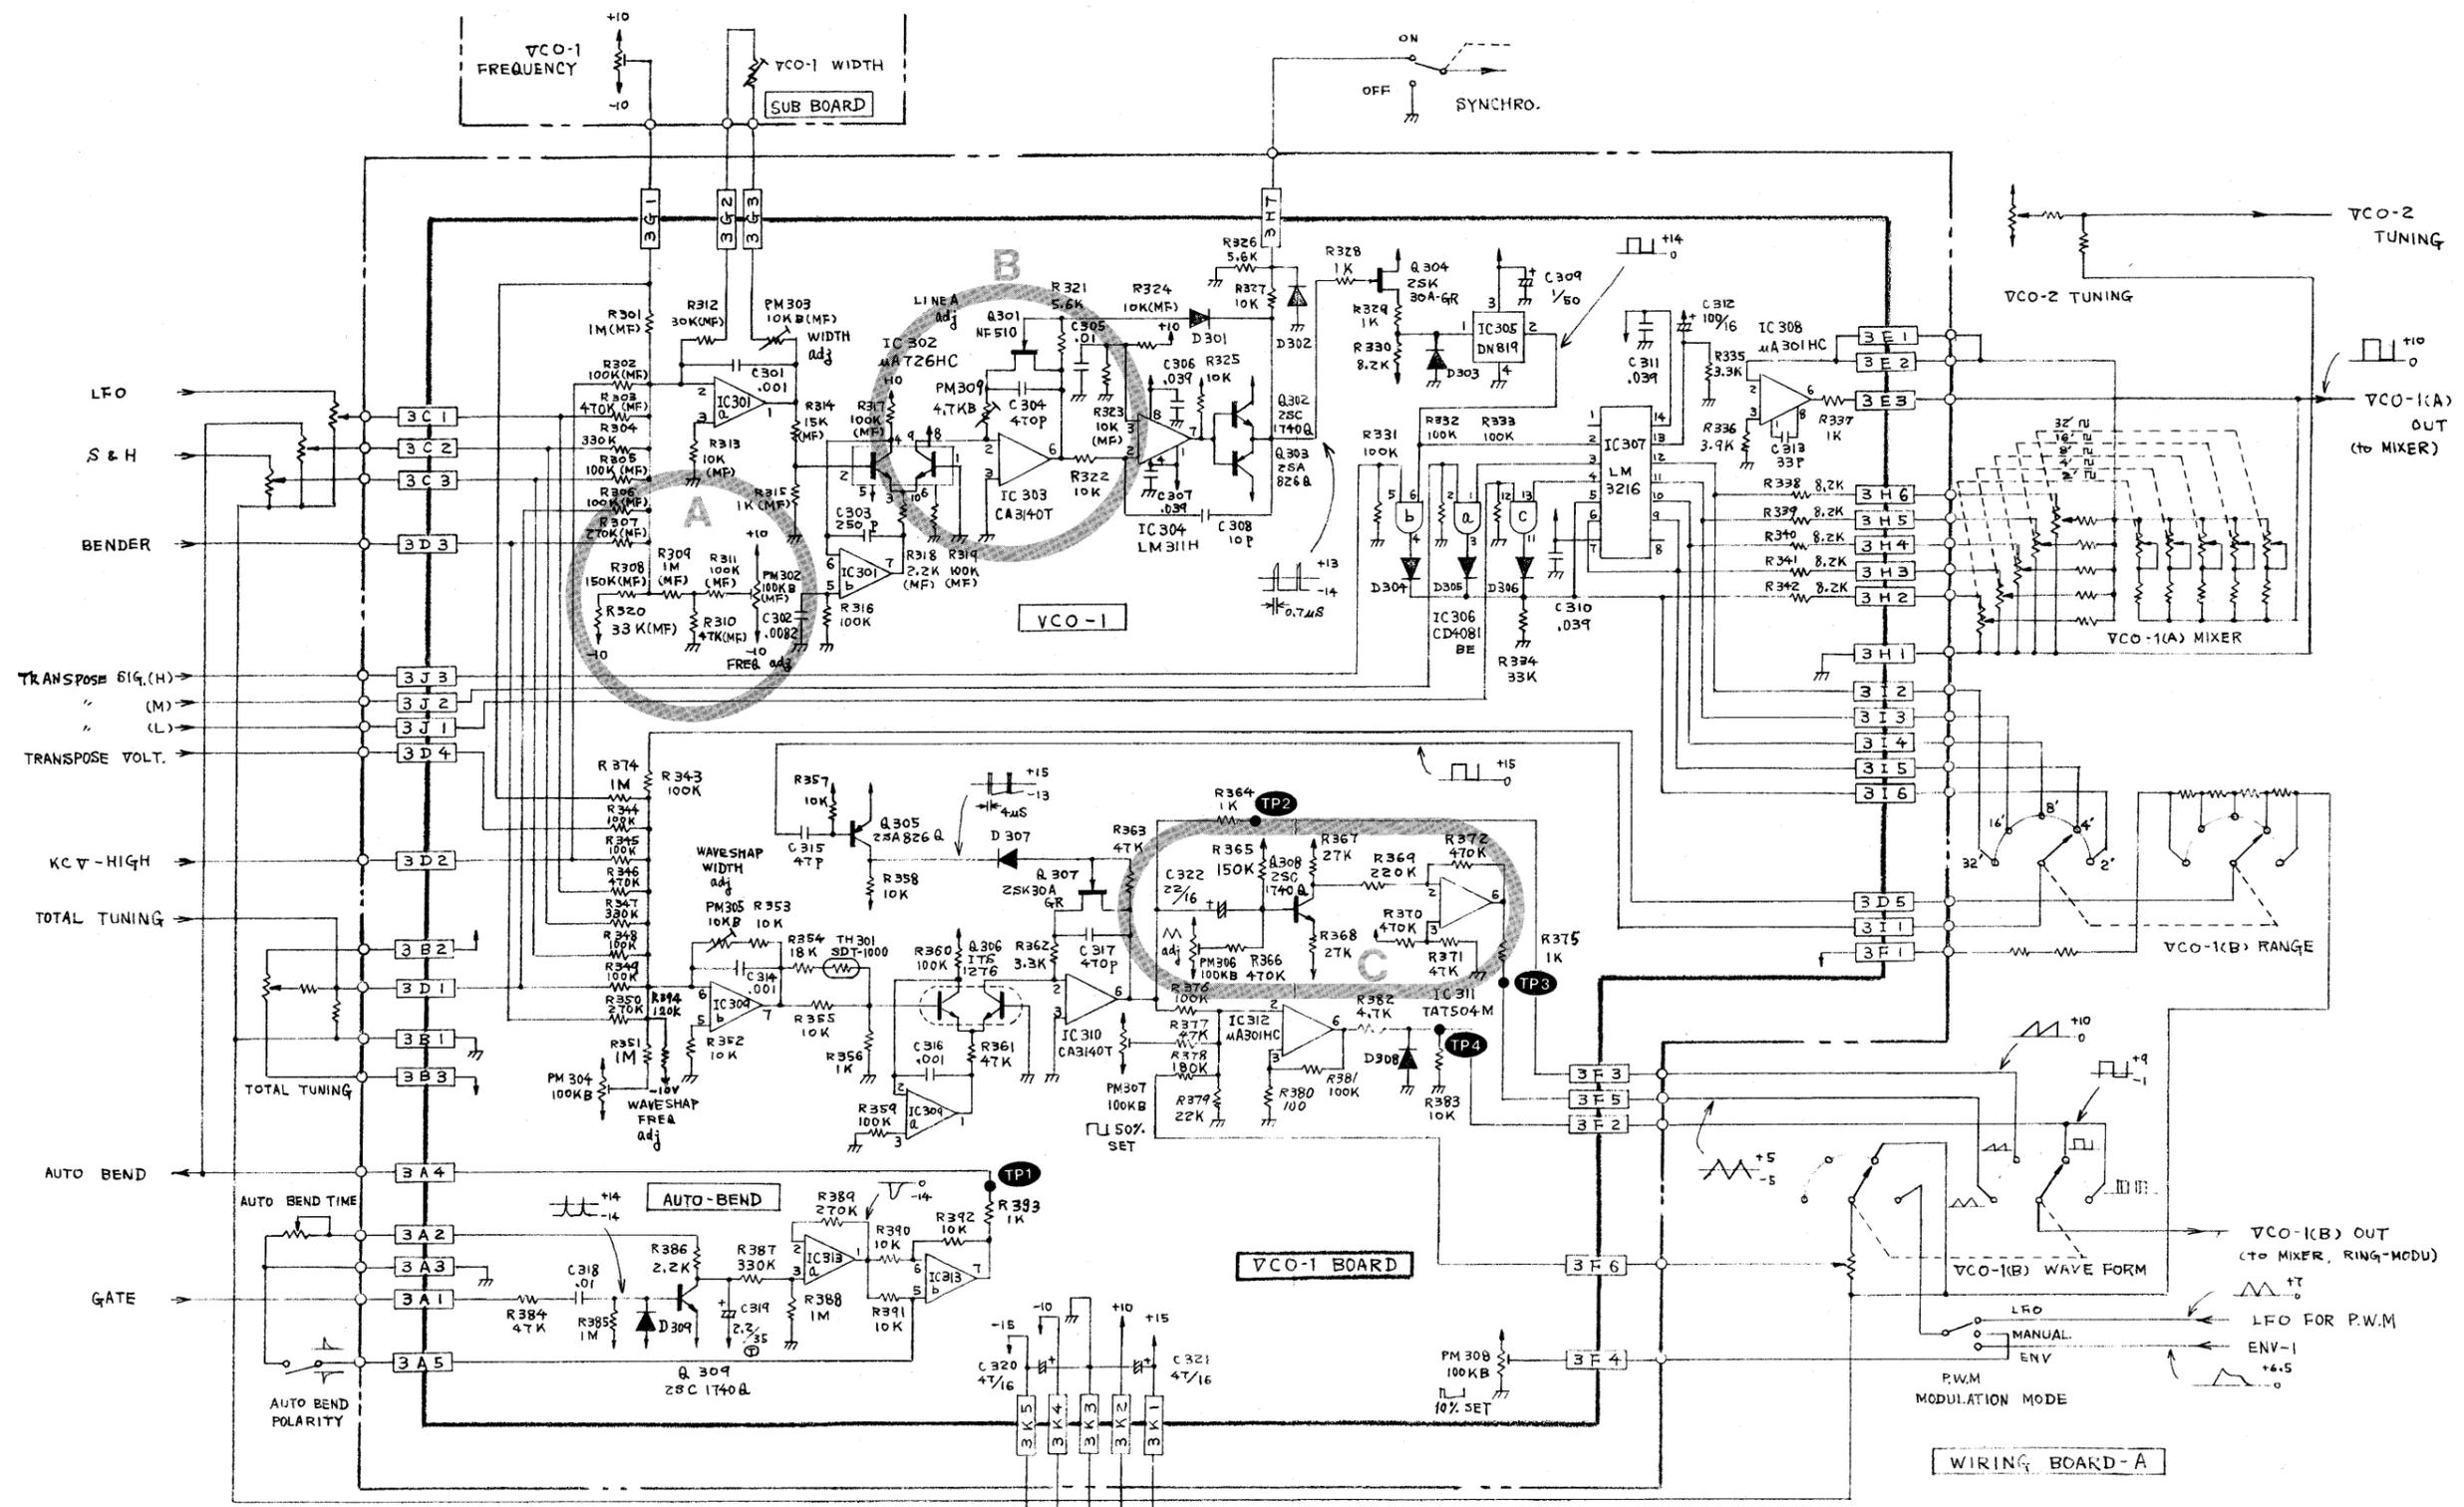

NOTES;  
 IC301, 309, 313..... $\mu$ PC1458C  
 C301, 302, 305, 306, 307, 310, 311,  
 314, 316, 318.....Mylar  
 C303, 308, 313, 315.....Ceramic  
 C304, 317.....Polystyrene  
 C309, 312, 320, 321.....Electrolytic  
 C319.....Tantalum  
 (MF) ; Metal Oxide Film Resistor (1%)  
 ALL DIODES ARE 1S1555.

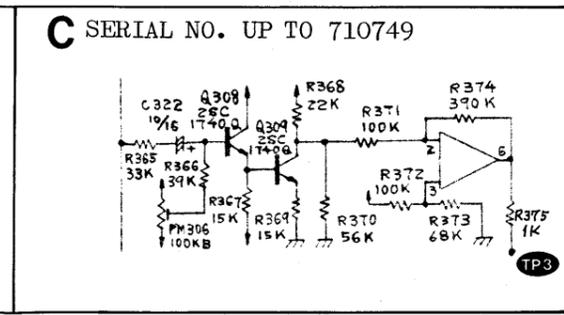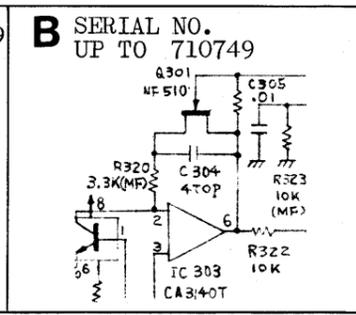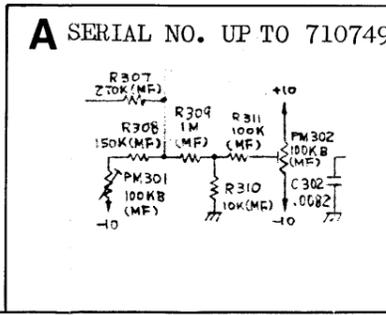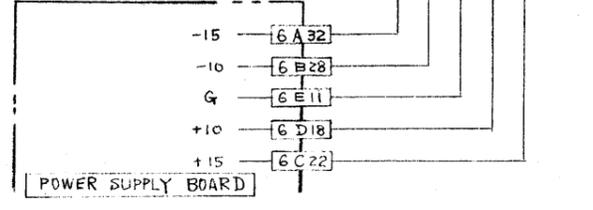


VCOH-2 (152H002) (SERIAL NO. UP TO 670199)

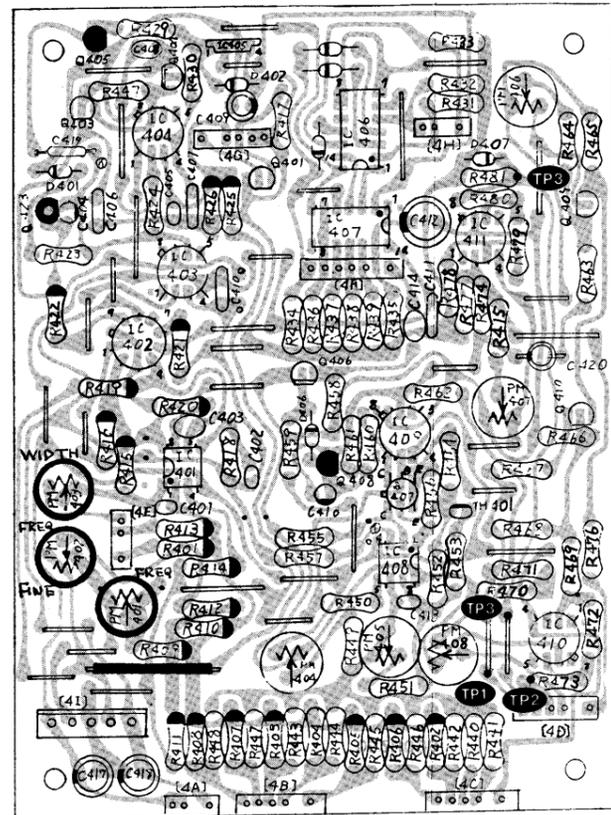

PM403:  
WIDTH  
PM402:  
FREQ  
(FINE)  
PM401:  
FREQ


VCOH-2A (152H002A) (SERIAL NO. 680200-710749)

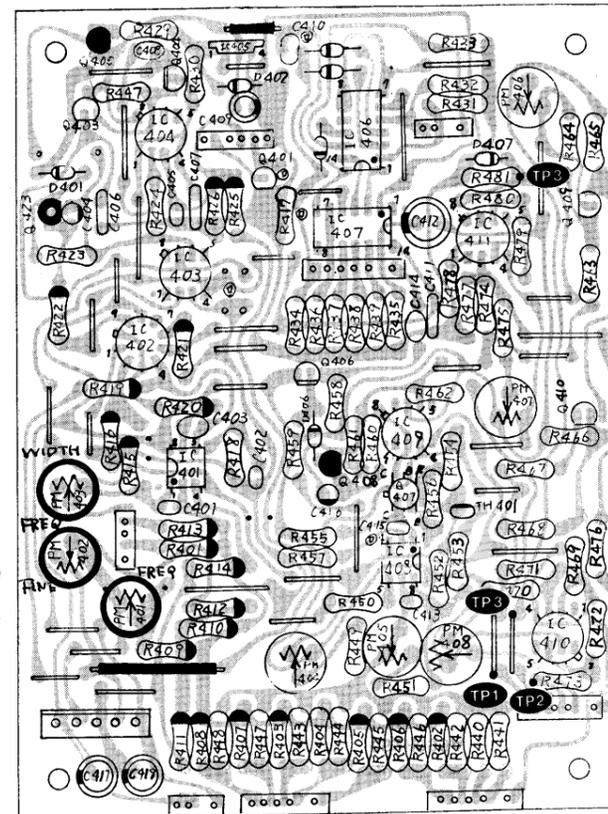

PM403:  
WIDTH  
PM402:  
FREQ  
(FINE)  
PM401:  
FREQ


PM409:  
LINEARITY  
PM403:  
WIDTH  
PM402:  
FREQ

VCOH-2B (152H002B) (SERIAL NO. 720750 AND HIGHER)

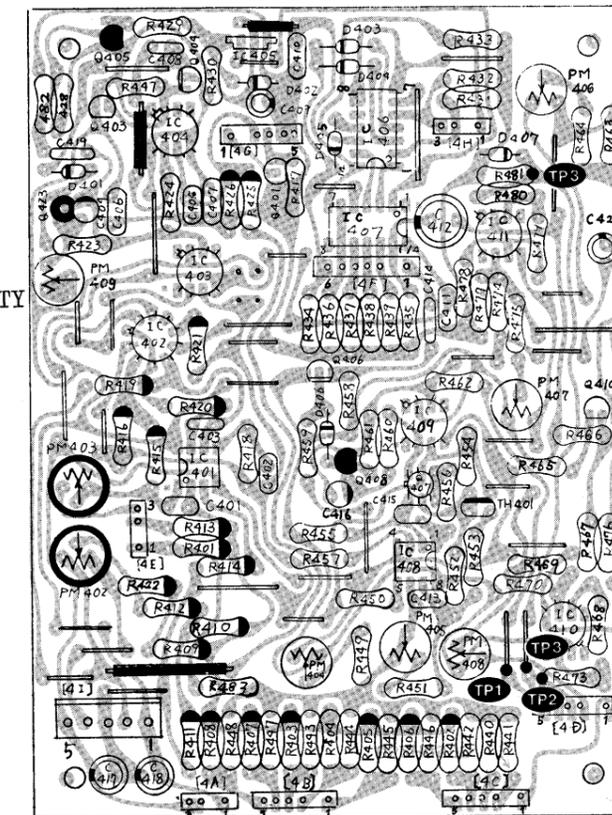


- Resistor CRB1/4FX
- Resistor 1/4RJ
- Mylar 50V-V-K
- Ceramic 50V-V-K
- Electrolytic ECEA
- Styrol 125V-V-K
- Thermistor SDT-1000
- Tr 2SC1740-Q
- Tr 2SA826-Q
- FET 2SK30A-GR
- FET NF-510
- Di 1S1555
- Trimmer Pot PNB04
- Trimmer Pot SR19R


VCOH-2 - PARTS ON THE FOIL SIDE

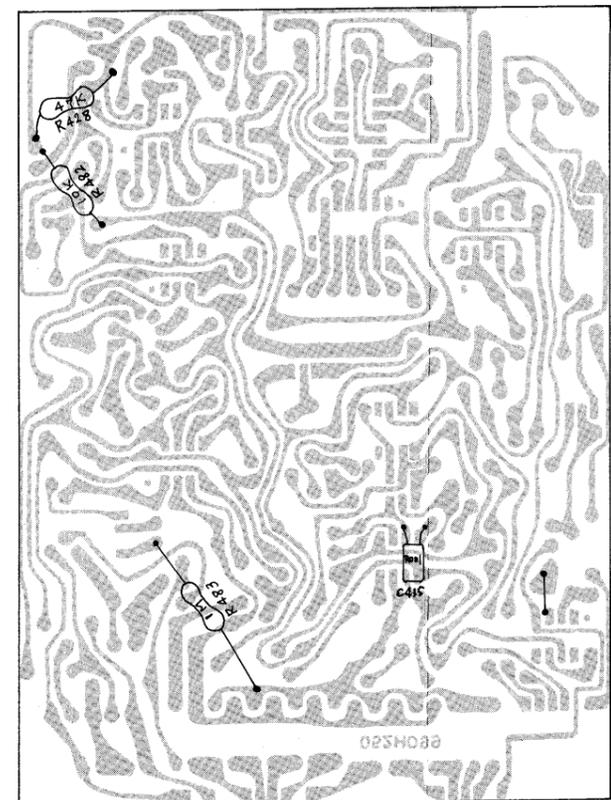

VCOH-2A - PARTS ON THE FOIL SIDE

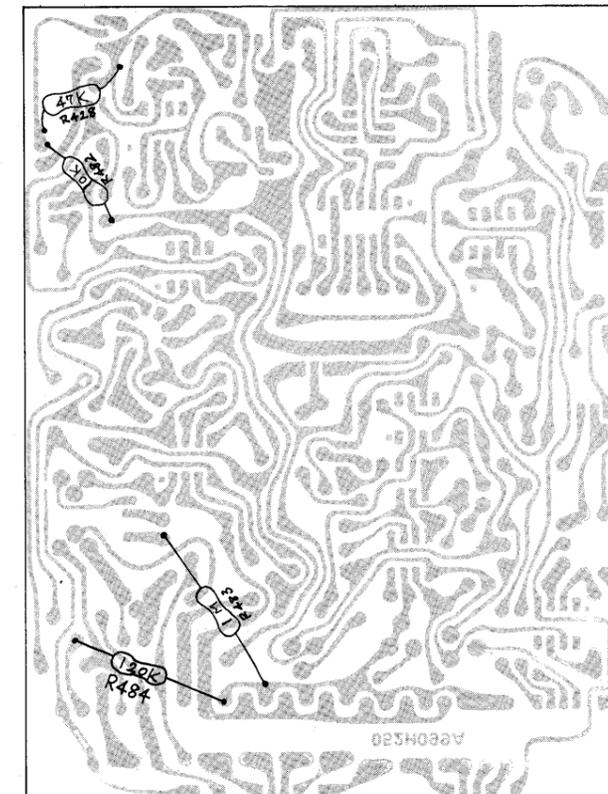


VCOH-2B




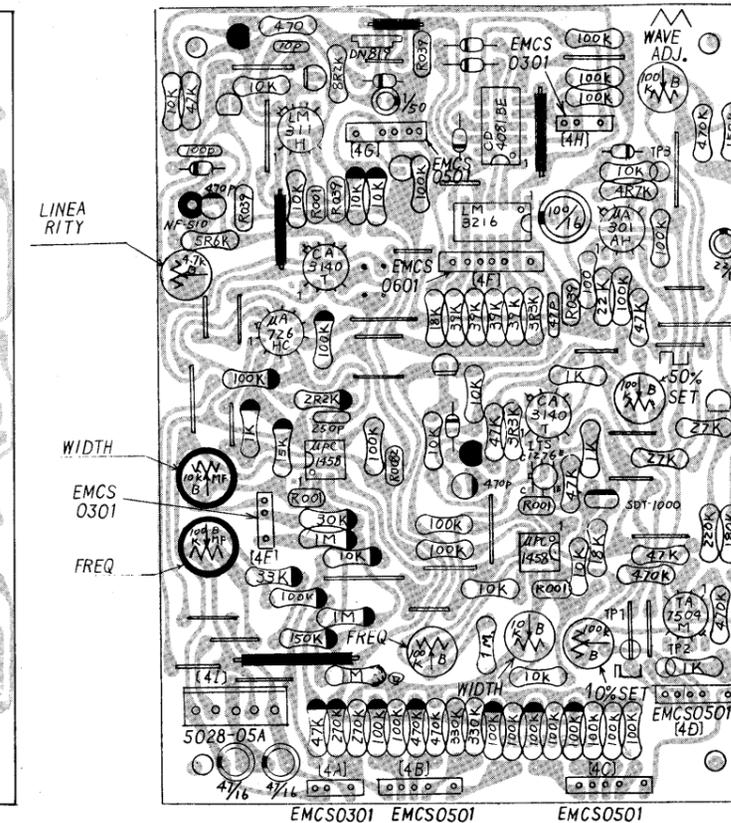


\* R484 mounted on the foil side of VCOH-2B.


NOTES;  
 O ----- WIRE SOLDERING POINT  
 4 A 1 ----- CONNECTOR POINT  
 ----- CONNECTOR PIN NUMBER  
 ----- CONNECTOR NAME  
 ----- P.C.B NUMBER

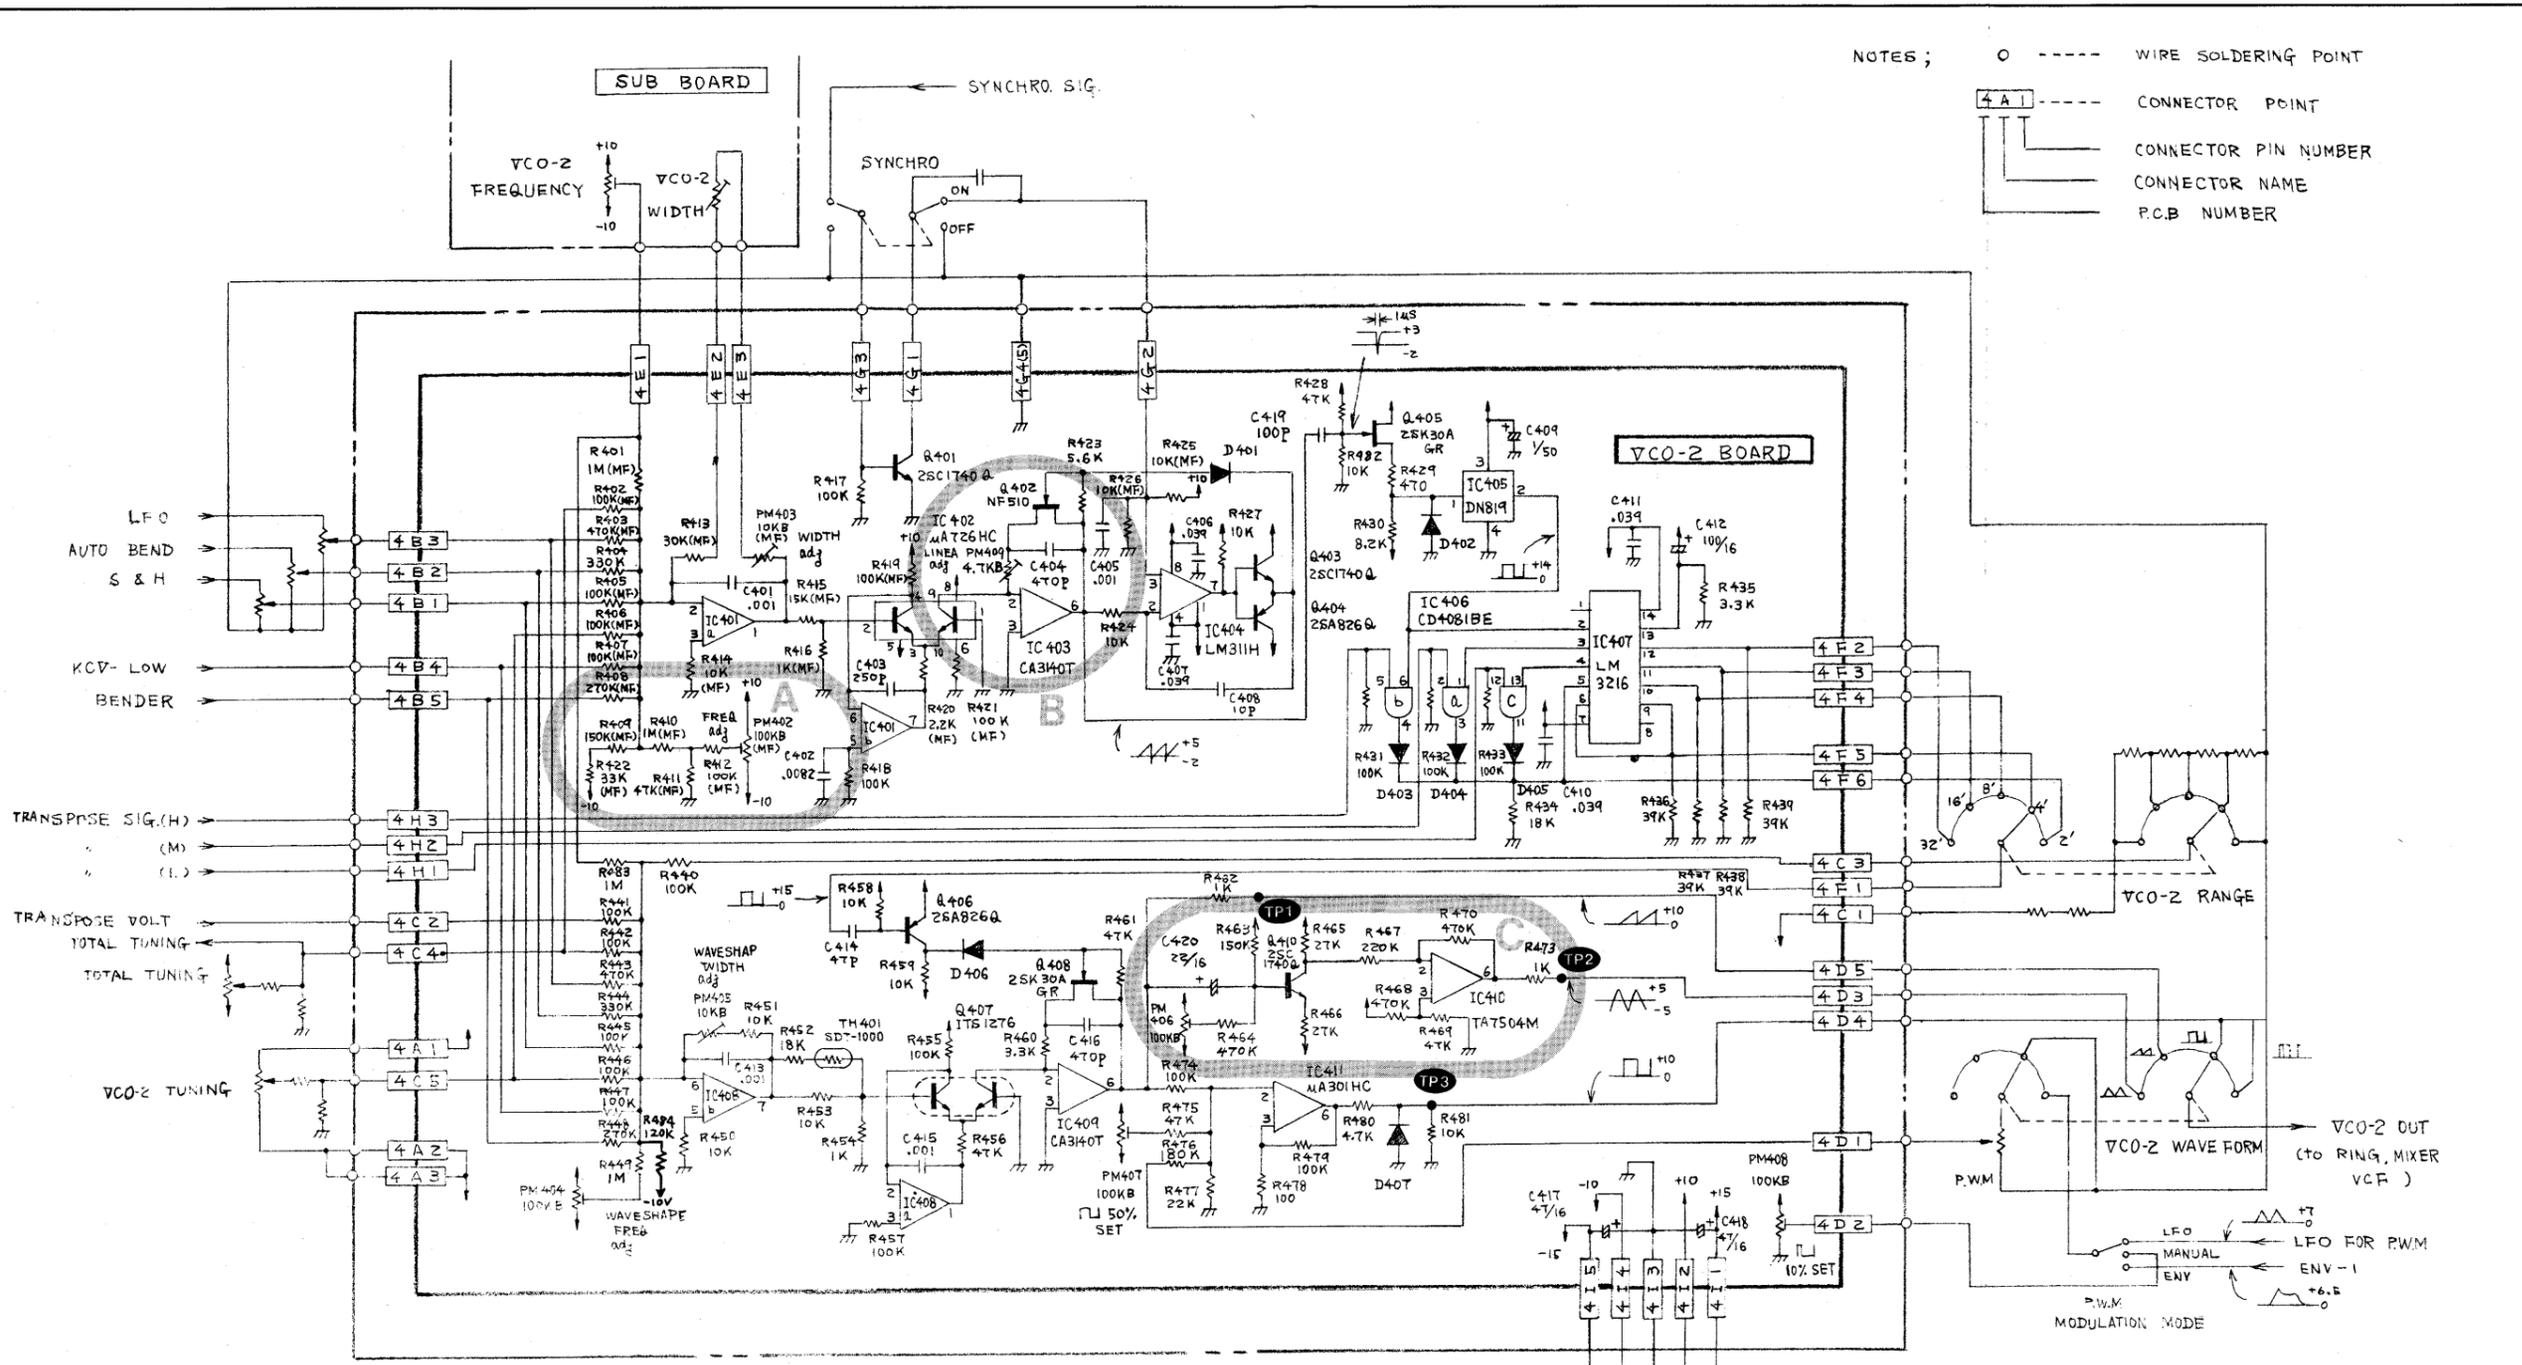

NOTES;  
 IC401, 408.....µPC1458C  
 C401, 402, 405, 406, 407, 410, 411, 413, 415.....Mylar  
 C403, 408, 414, 419.....Ceramic  
 C404, 416.....Polystyrene  
 C409, 412, 417, 418.....Electrolytic  
 (MF) ; Metal Oxide Film Resistor (1%)  
 ALL DIODES ARE IS1555.

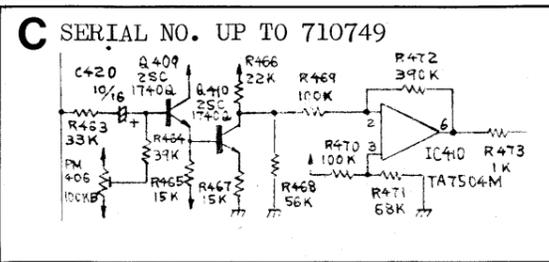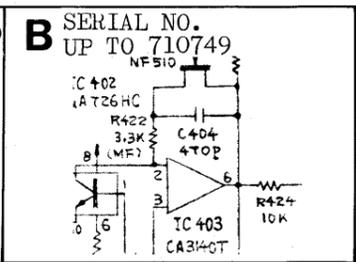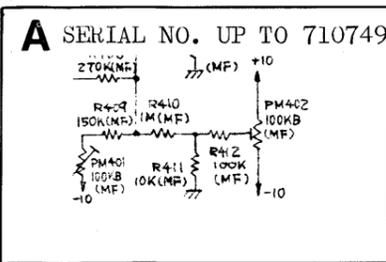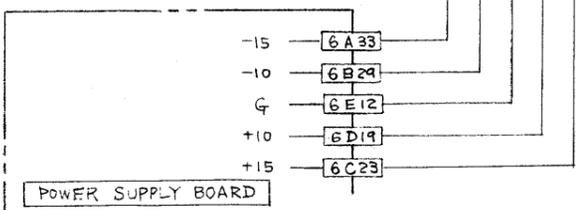




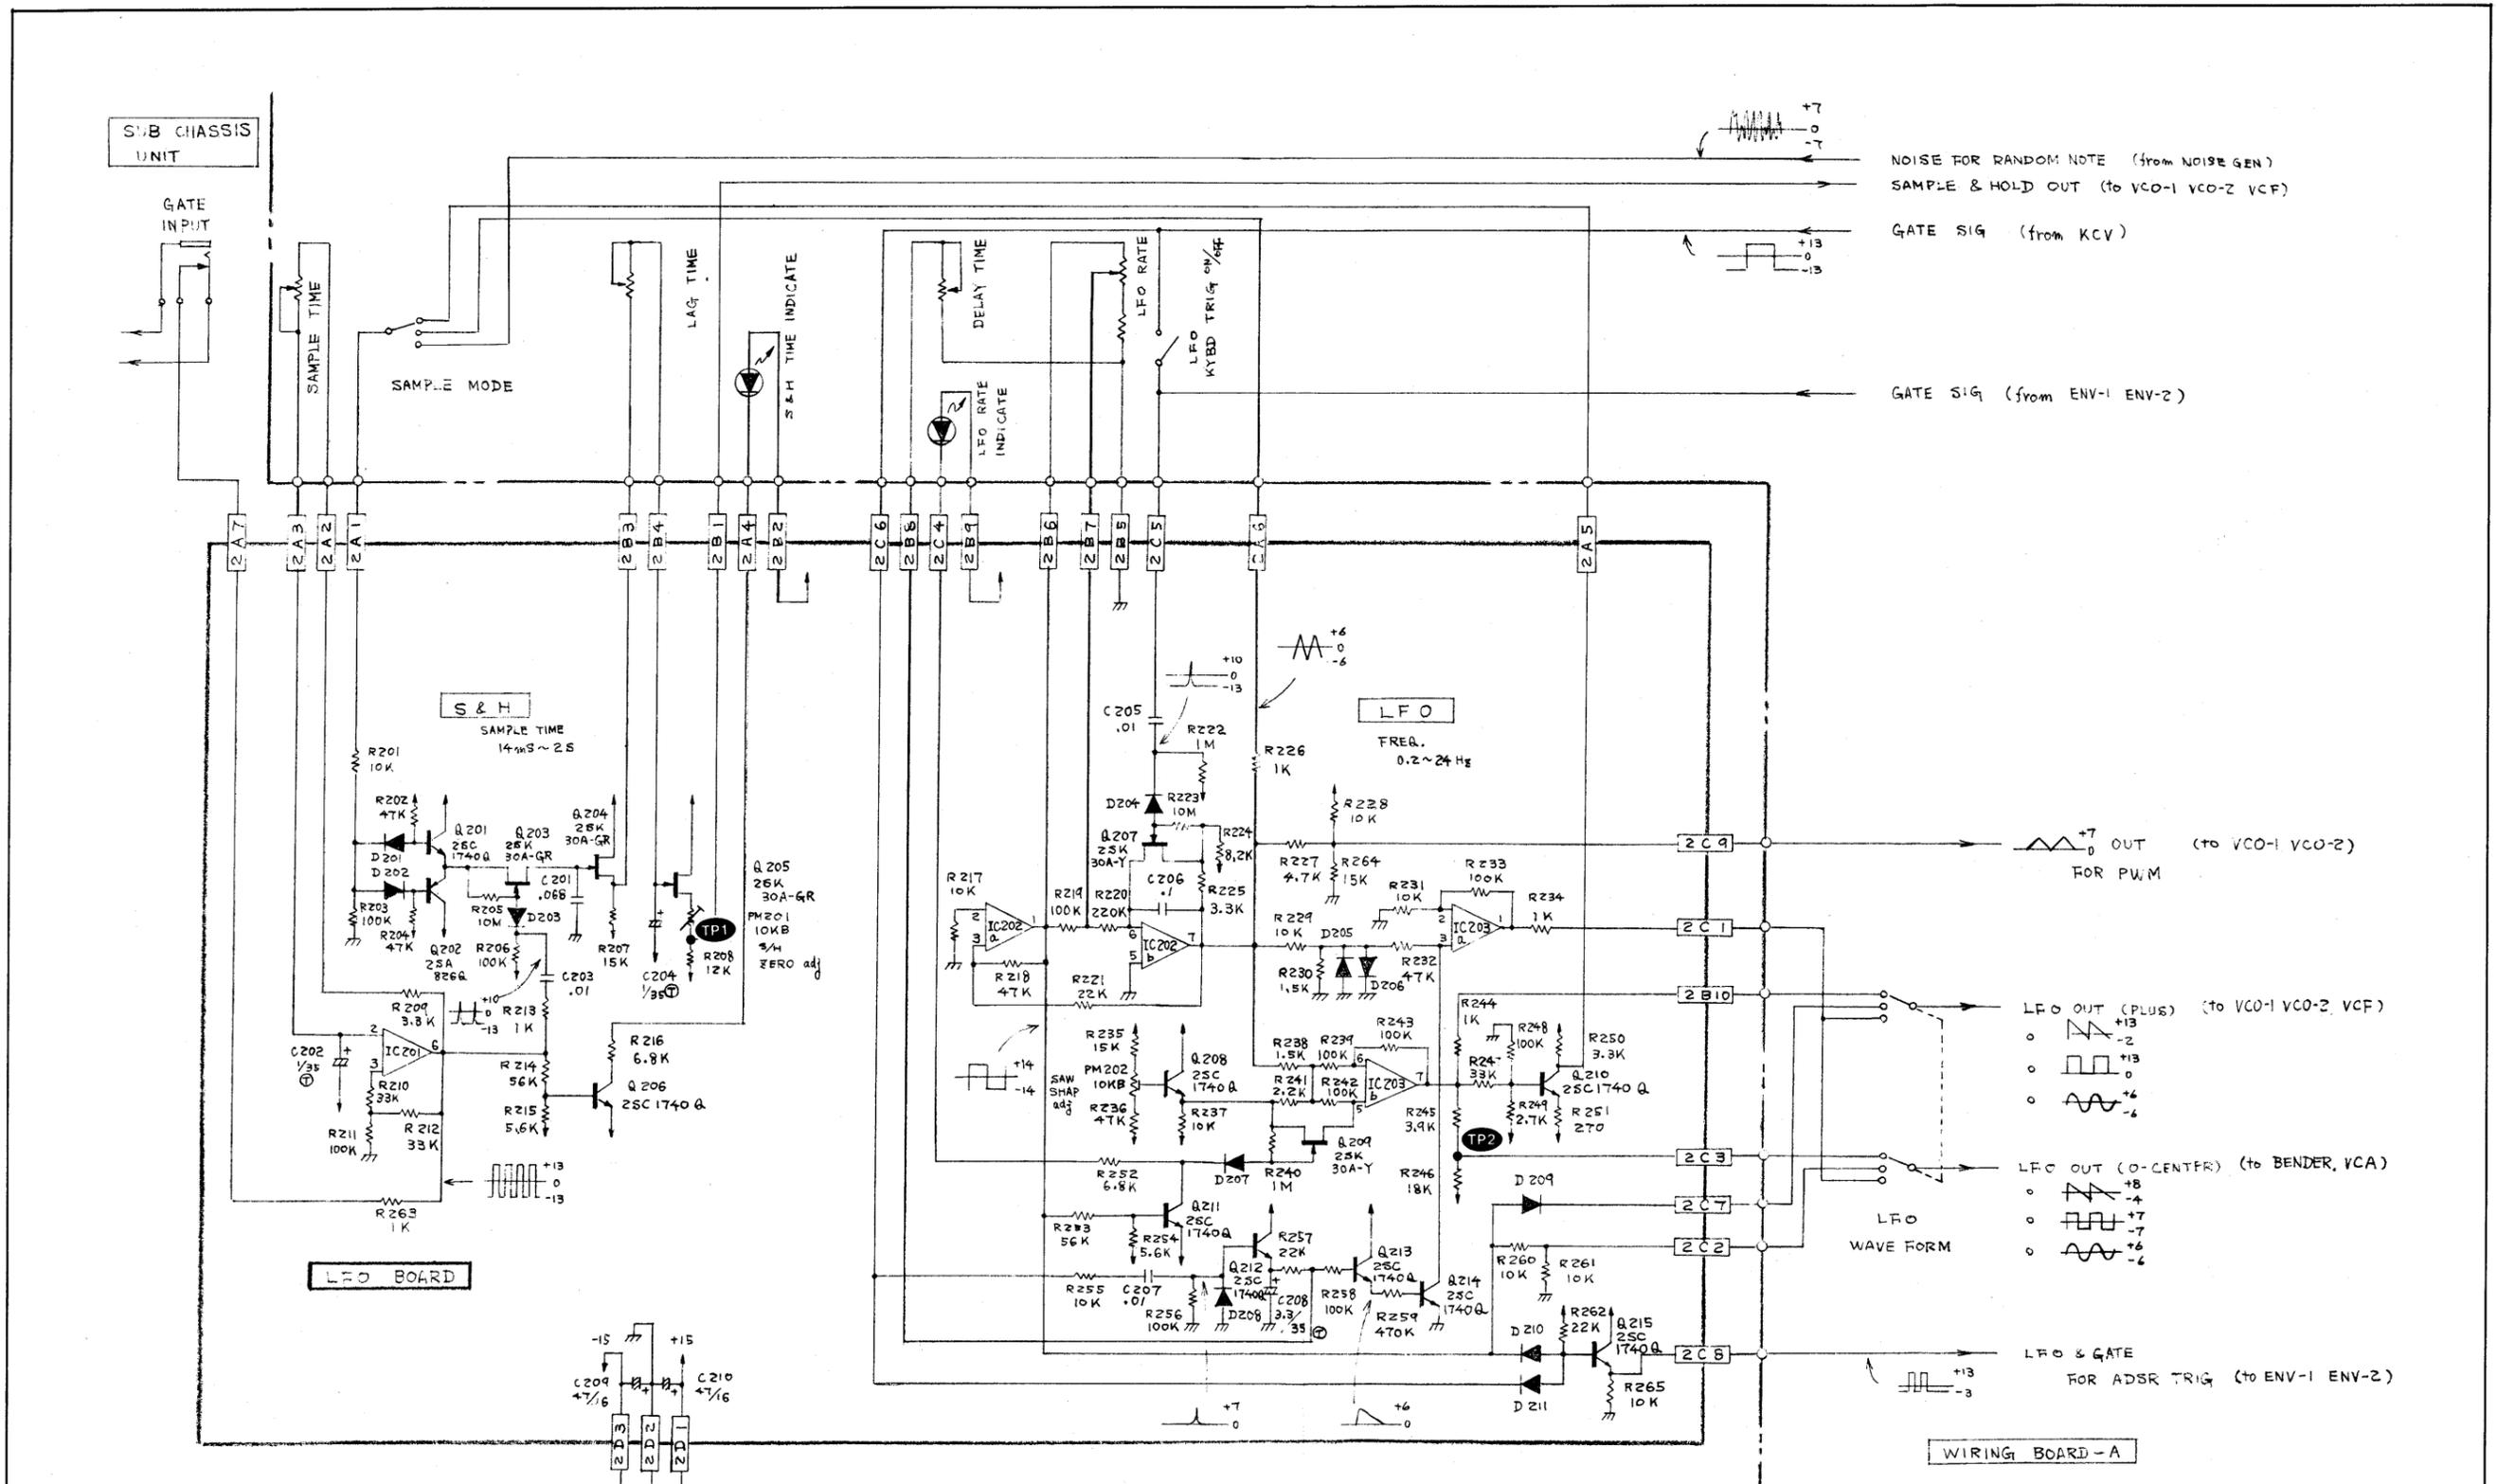


NOTES:  
 IC201.....TA7504M  
 IC202, 203.....μPC1458C  
 C201, 203, 205, 206, 207.....Mylar  
 C202, 204, 208.....Tantalum  
 C209, 210.....Electrolytic  
 (MF) ; Metal Oxide Film Resistor (1%)  
 ALL DIODES ARE 1S1555.


OPH-14 (149H014) (SERIAL NO. UP TO 710749)

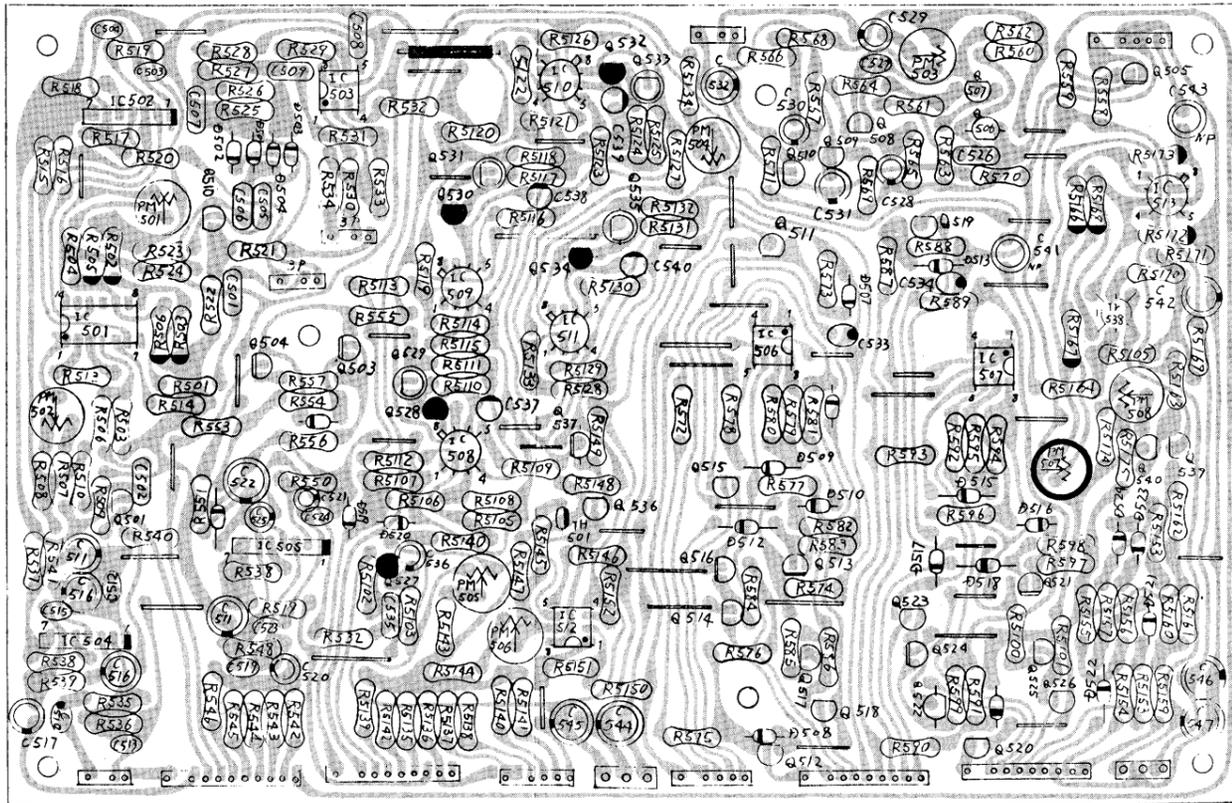


OPH-14 - PARTS ON THE FOIL SIDE

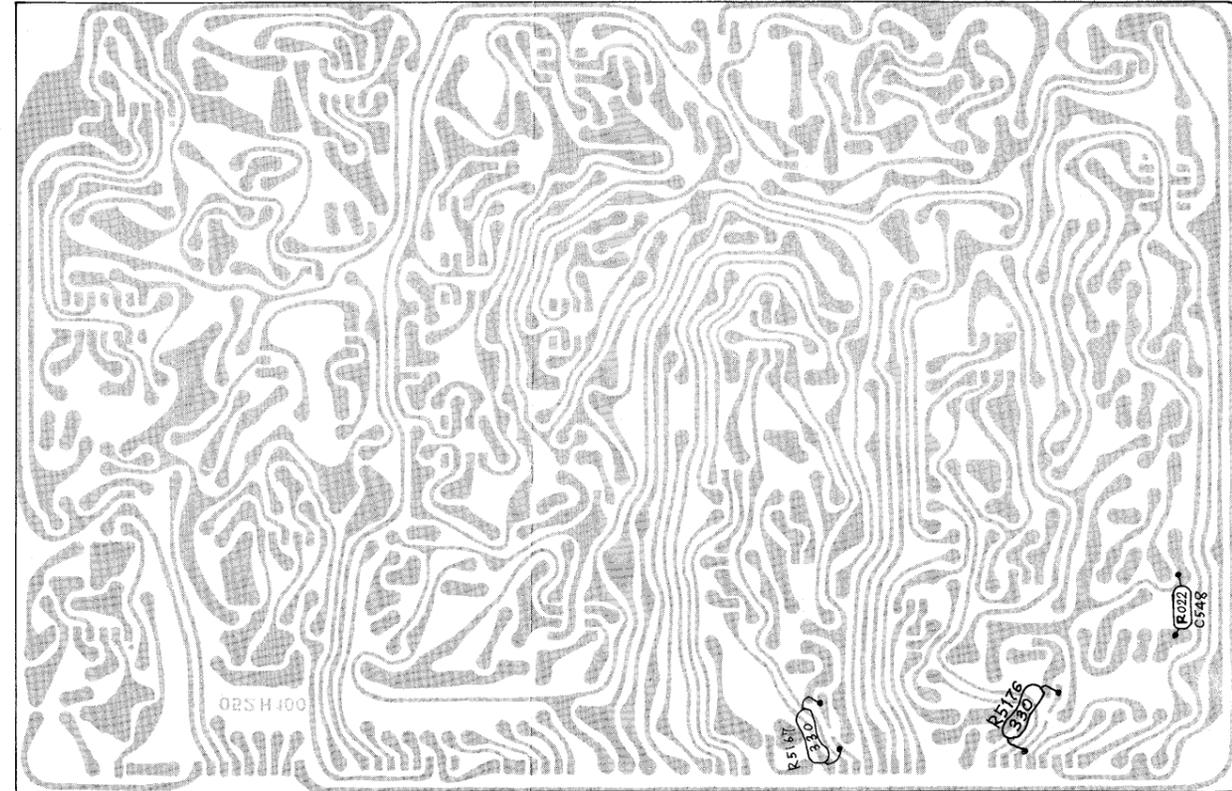

OPH-14A (149H014A) (SERIAL NO. 720750 AND HIGHER)

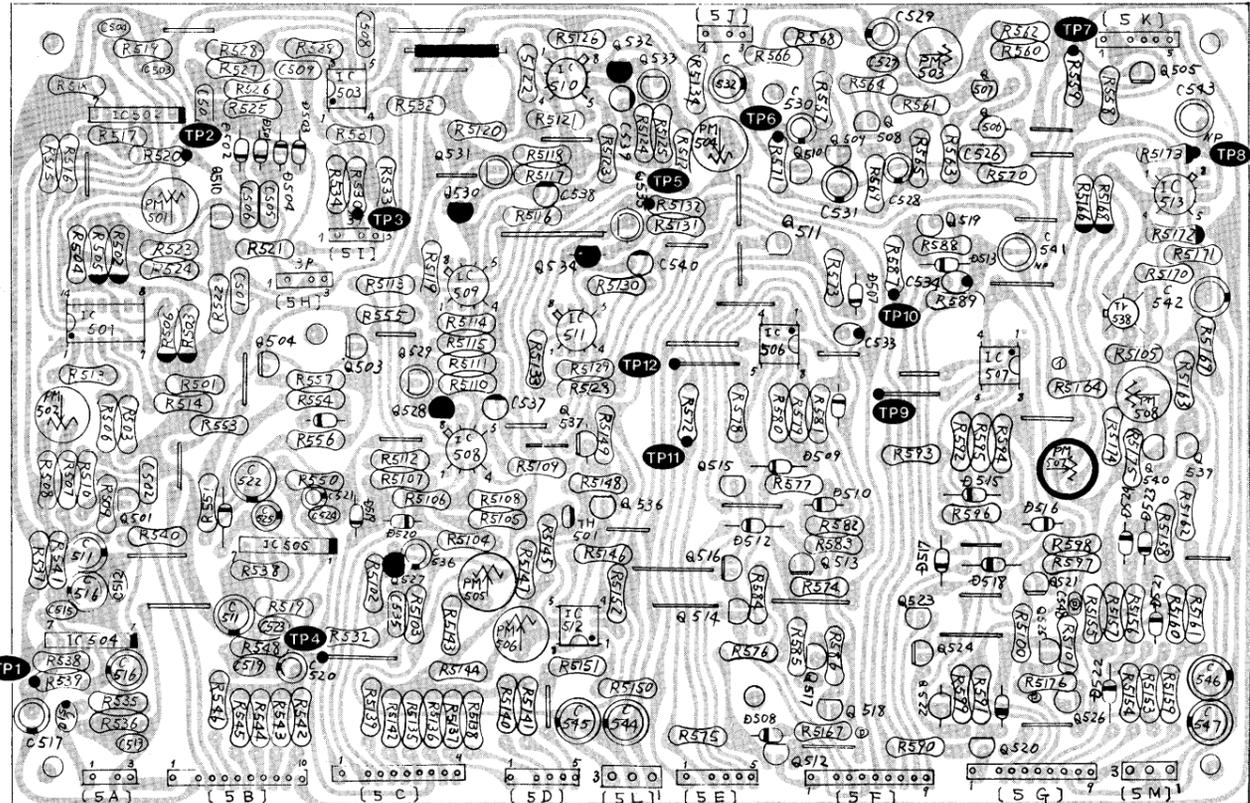

OPH-14A

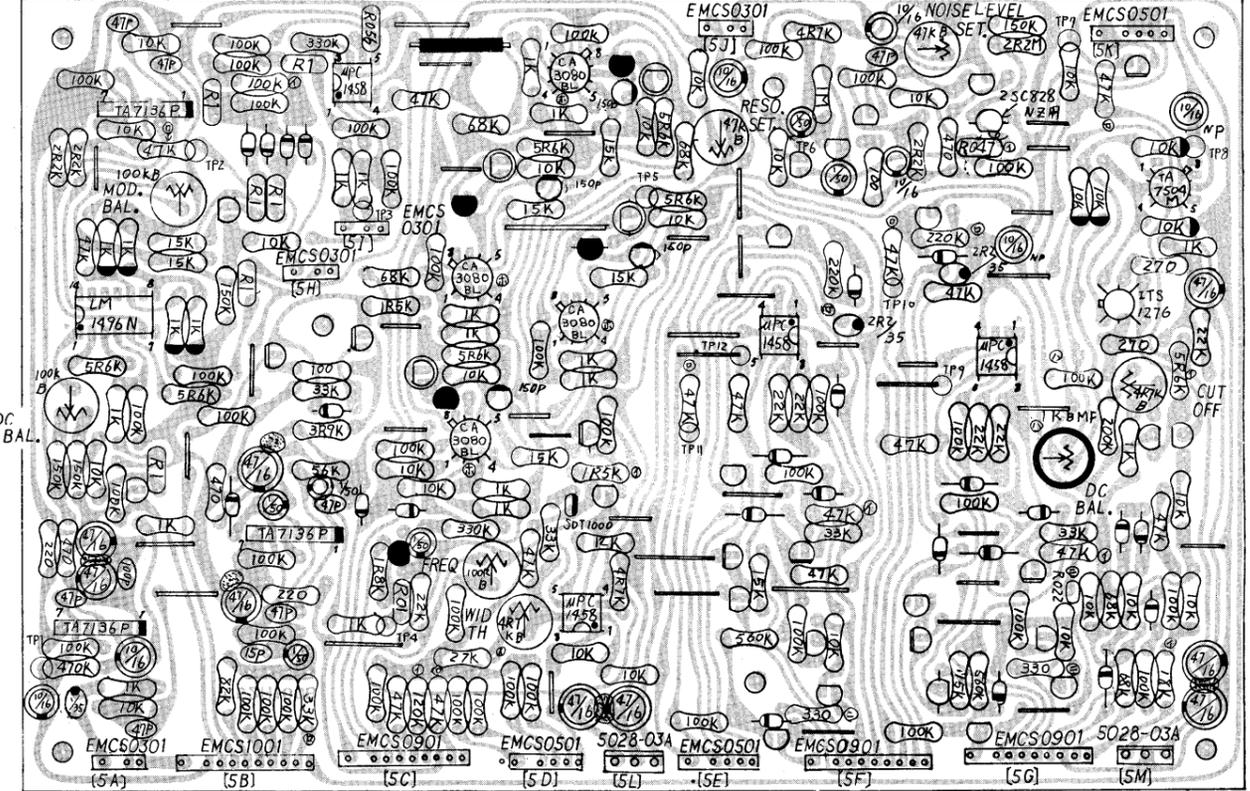

- Resistor CRB1/4FX
- Resistor 1/4RJ
- Mylar 50V-V-K
- Ceramic 50V-V-K
- Electrolytic ECEA
- Styrol 125V-V-K
- Tantalum 35V-V-K
- Thermistor SDT1000
- FET 2SK30A-GR
- Tr 2SC 1000-GR
- Tr 2SC 1740-Q
- Tr 2SA826-Q
- Di 1S1555
- Trimmer Pot PNBO4
- Trimmer Pot SR19R





S701 (SLE643-18P): INPUT MODE  
 S702 (SRN1023N-K25): SAMPLE MODE

S703 (SSB022-12PN): KYBD TRIG  
 S704 (SRN1023N-K25): WAVEFORM  
 S705 (SSB022-12PN): POLARITY  
 S706 (SRN1025N-K25): RANGE (VCO-1)  
 S707 (SRN1024N-K25): WAVEFORM (VCO-1)  
 S708 (SSB023-12PN): PWM MODE (VCO-1)  
 S709 (SSB022-12PN): SYNC  
 S710 (SRN1025N-K25): RANGE (VCO-2)  
 S711 (SRN1024N-K25): WAVEFORM (VCO-2)  
 S712 (SSB023-12PN): PWM MODE (VCO-2)

VR701 (EVA-QOAC16A55 500KA): SAMPLE TIME  
 VR702 (EVA-QOAC16A55 500KA): LAG TIME  
 VR703 (EVA-QOAC16A55 500KA): DELAY TIME  
 VR704 (EVA-QOAC16A15 100KA): LFO RATE  
 VR705 (VM10R-K15B15 100KB): AUTOBEND TIME  
 VR706 (VM10R-K15B15 100KB): TOTAL TUNING  
 VR707 (EVA-QOAC16A15 100KA): S&H (VCO-1)  
 VR708 (EVA-QOAC16A15 100KA): AUTOBEND (VCO-1)  
 VR709 (EVA-QOAC16D15 100KD): LFO (VCO-1)  
 VR710 (EVA-QOAC16B15 100KB): PWM (VCO-1)

VR711 (EVB-LOAC16A15 100KA x 2): 2' (VCO-1)  
 VR712 (EVB-LOAC16A15 100KA x 2): 4' (VCO-1)  
 VR713 (EVB-LOAC16A15 100KA x 2): 8' (VCO-1)  
 VR714 (EVB-LOAC16A15 100KA x 2): 16' (VCO-1)  
 VR715 (EVB-LOAC16A15 100KA x 2): 32' (VCO-1)  
 VR716 (VM10R-K15B15 100KB): VCO-2 TUNING  
 VR717 (EVA-QOAC16A15 100KA): S&H (VCO-2)  
 VR718 (EVA-QOAC16A15 100KA): AUTOBEND (VCO-2)  
 VR719 (EVA-QOAC16D15 100KD): LFO (VCO-2)  
 VR720 (EVA-QOAC16B15 100KB): PWM (VCO-2)

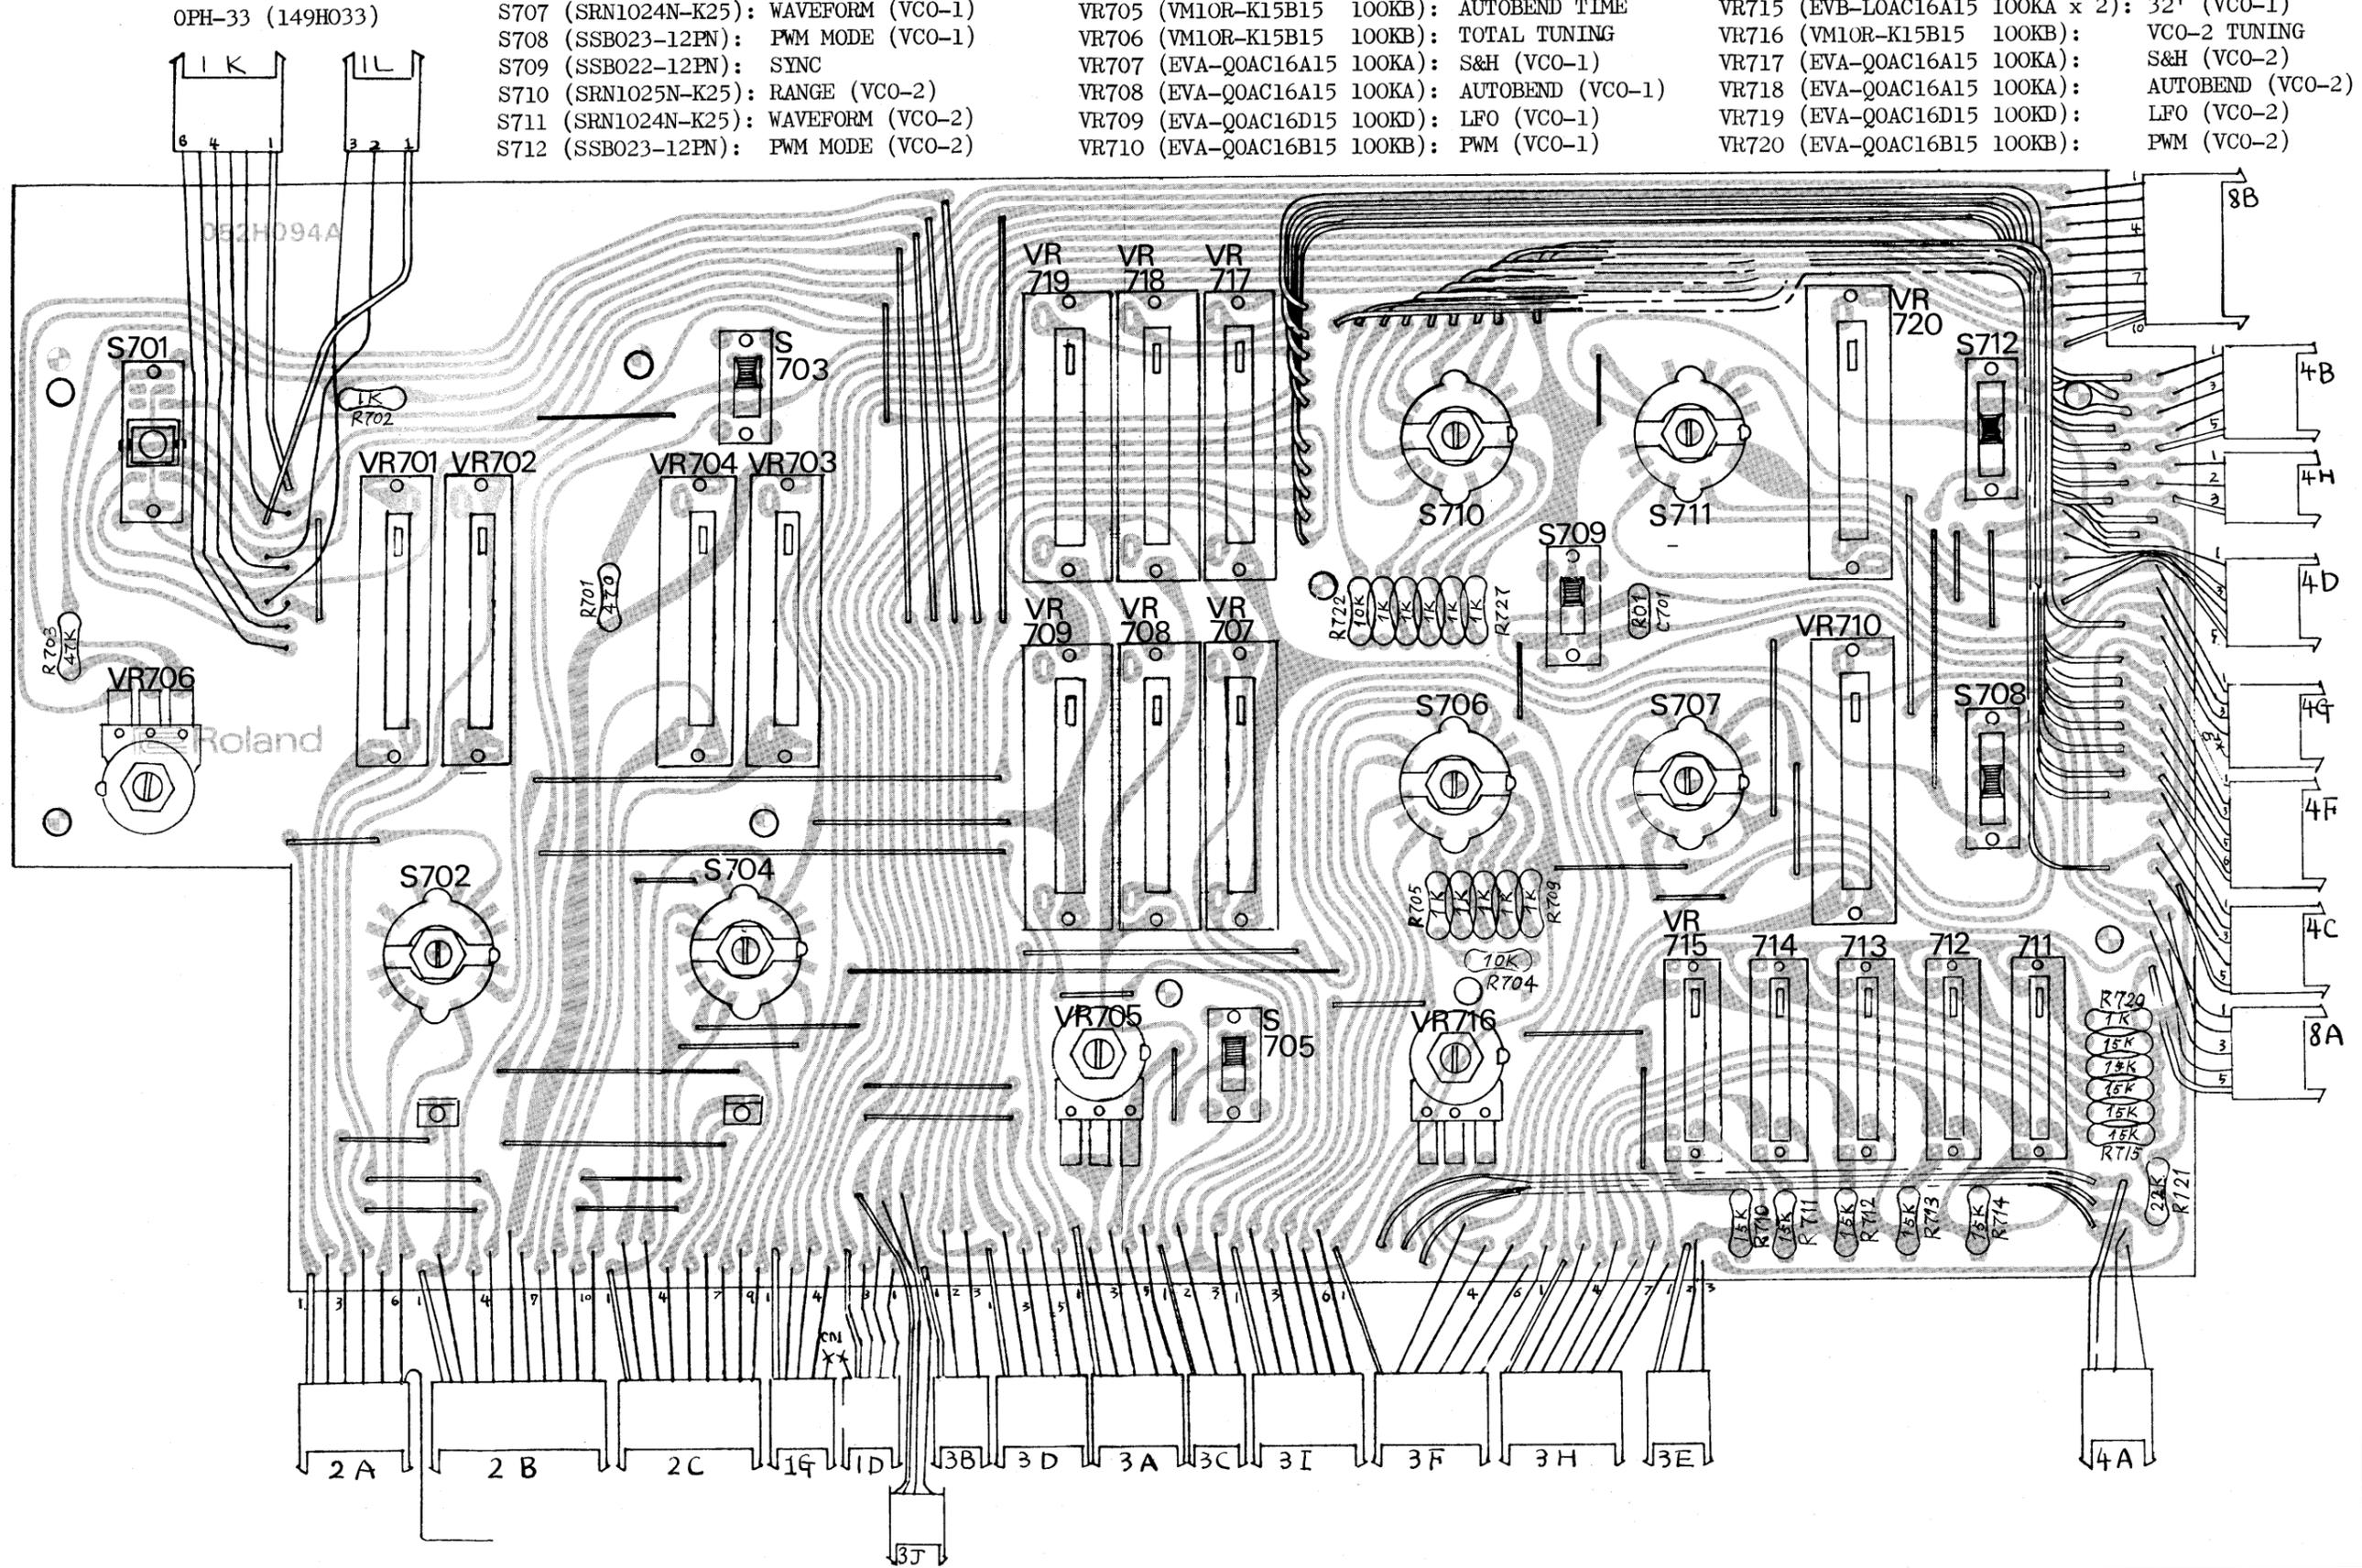

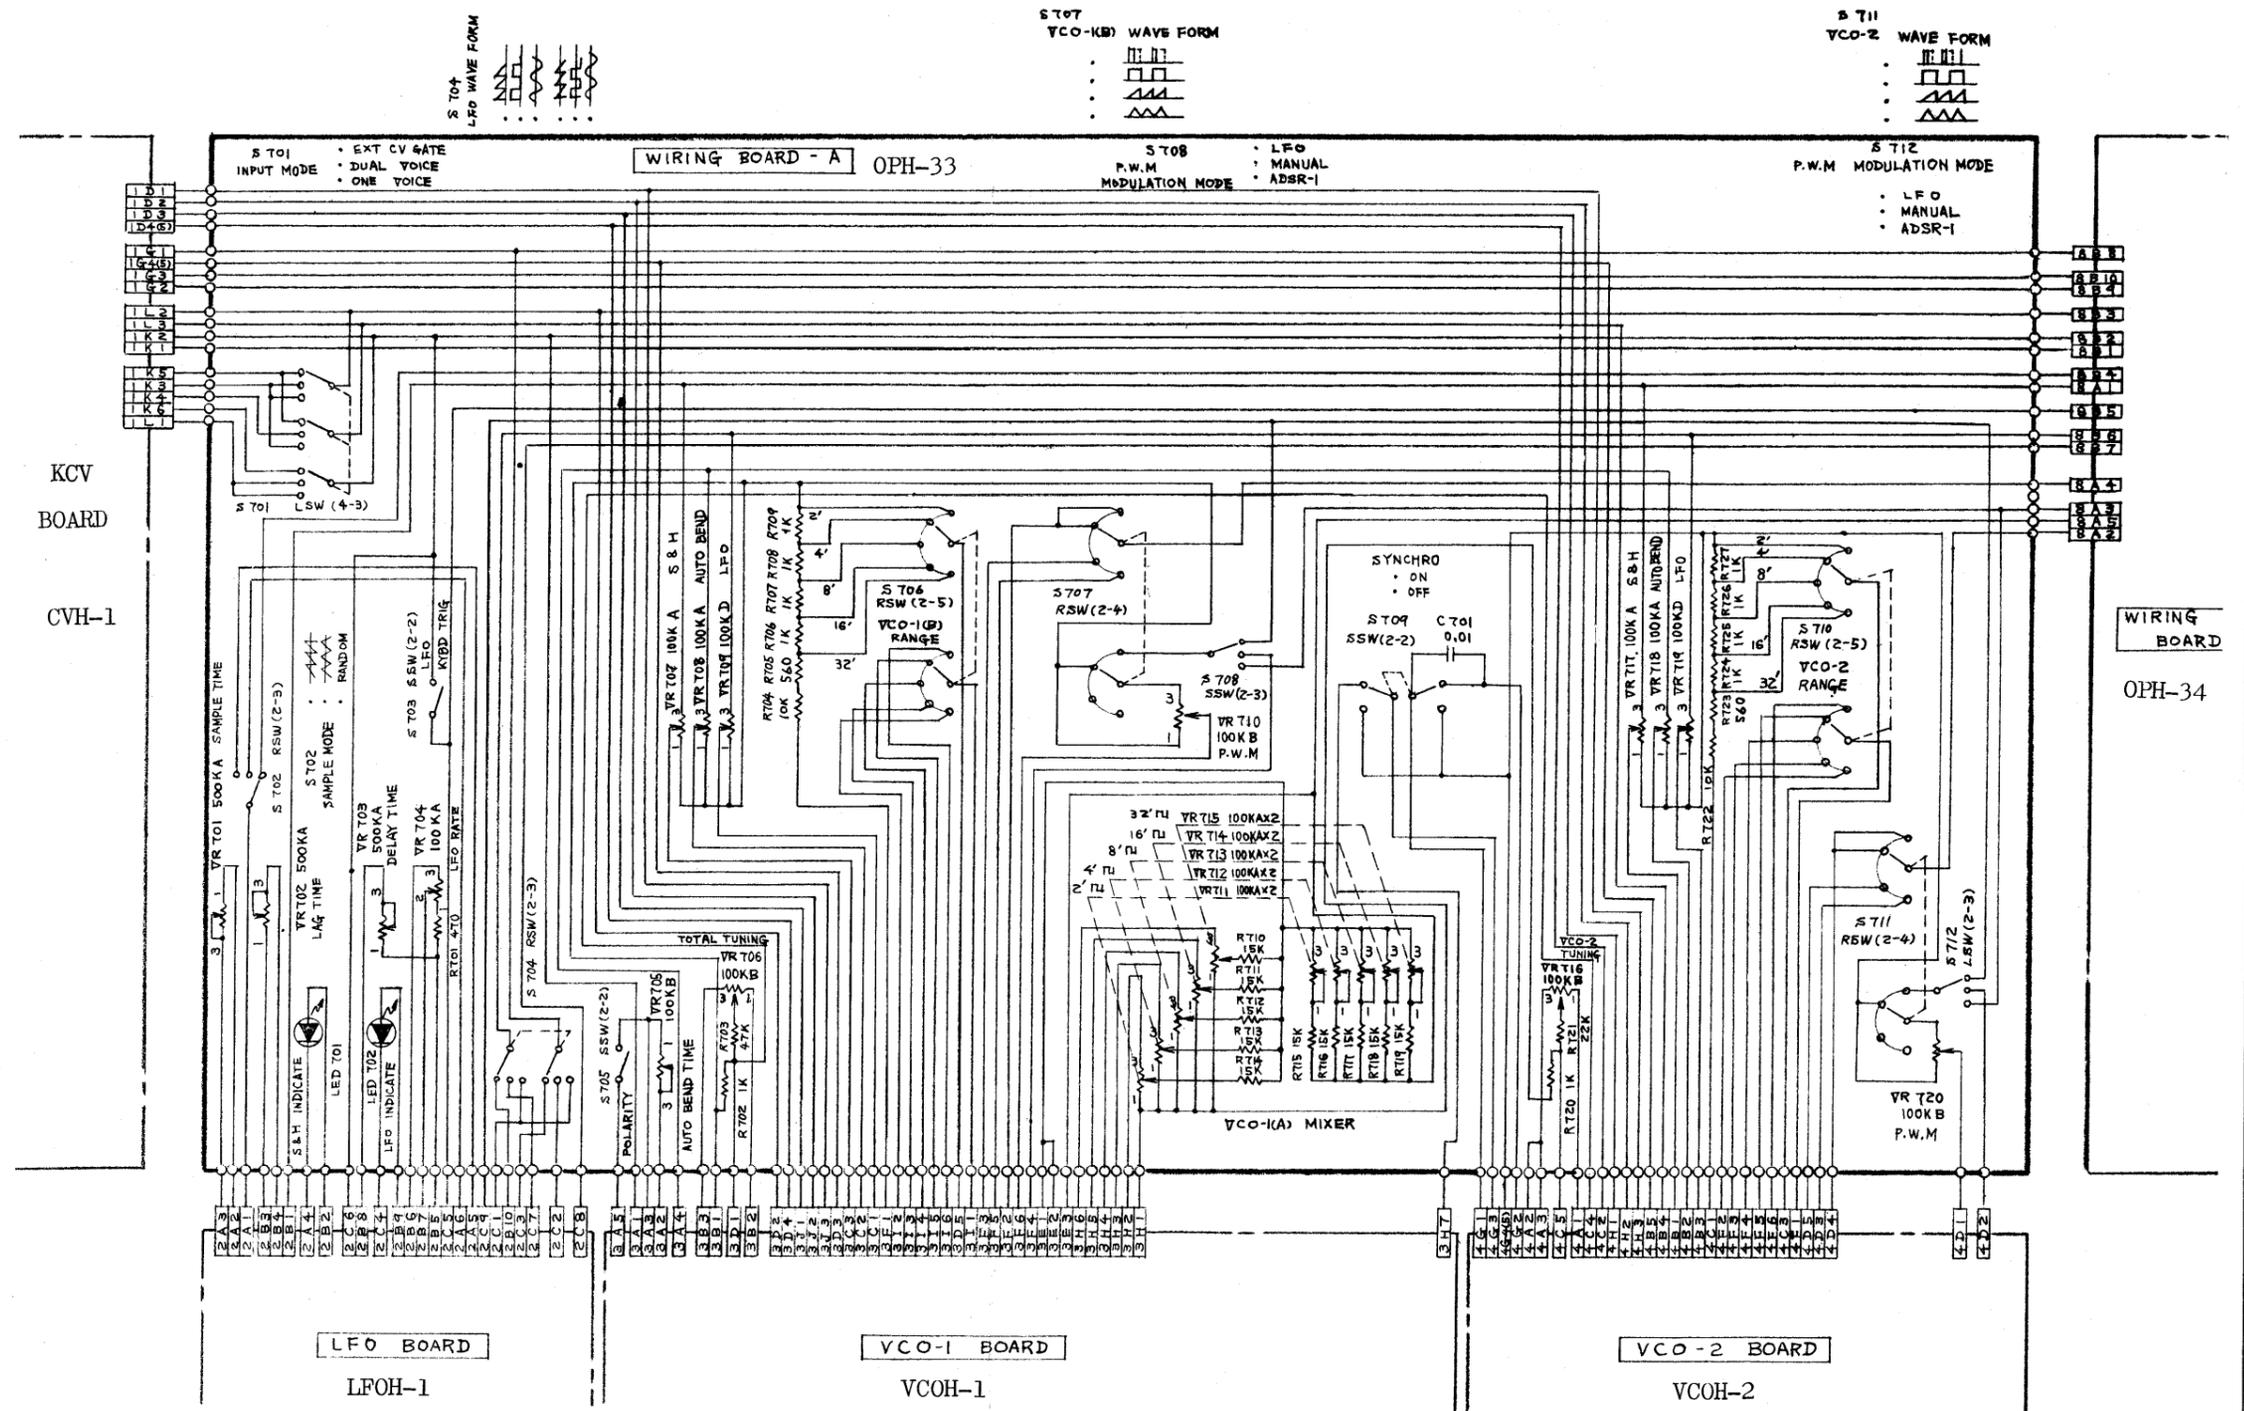

NOTES;  
 VR701, 702, 703, 704, 707, 708, 709, 710, 717, 718, 719, 720.....30mm Slide Type Potentiometer  
 VR705, 706, 716.....16 $\phi$  Rotary Type Potentiometer  
 VR711, 712, 713, 714, 715.....20mm Dual, Slide Type Potentiometer


LSW.....Lever Switch  
 (2-3).....2Poles (Circuits), 3Positions  
 RSW.....Rotary Switch  
 SSW.....Slide Switch  
 LED701, 702.....LR0601R


- S801 (SSBO22-12PN): RING MODULATOR
- S802 (SSBO22-12PN): NOISE GENERATOR
- S803 (SSBO22-12PN): RING/EXT SIG
- S804 (SSBO22-12PN): POLARITY (ENV-1)
- S805 (SSBO22-12PN): LFO
- S806 (SSBO22-12PN): PEDAL/KYBD
- S807 (SSBO22-12PN): NOISE/VCO-2
- S808 (SSBO22-12PN): POLARITY (ENV FOL'R)
- S809 (SSBO23-12PN): GATE+TRIG/GATE/LFO (ENV-1)
- S810 (SSBO23-12PN): GATE+TRIG/GATE/LFO (ENV-2)
- S811 (SSBO22-12PN): ENV-1/ENV-2

- VR801 (EVA-QOAC16B15 100KB): RING/EXT SIG
- VR802 (EVA-QOAC16B15 100KB): NOISE
- VR803 (EVA-QOAC16B15 100KB): VCO-2
- VR804 (EVA-QOAC16B15 100KB): VCO-1(B)
- VR805 (EVA-QOAC16B15 100KB): VCO-1(A)
- VR806 (EVA-QOAC16B15 100KB): ENV-1
- VR807 (EVA-QOAC16B15 100KB): LFO/S&H
- VR808 (EVA-QOAC16B15 100KB): KYBD/PEDAL
- VR809 (EVA-QOAC16B15 100KB): VCO-2/NOISE
- VR810 (EVA-QOAC16B15 100KB): ENV FOL'R
- VR811 (EVA-QOAC16D16 1MD): HPF
- VR812 (EVA-QOAC16A15 100KA): RESONANCE

- VR813 (EVA-QOAC16B15 100KB): CUTOFF FREQ
- VR814 (EVA-QOAC16B15 100KB): SUSTAIN (ENV-1)
- VR815 (EVA-QOAC16A16 1MA): ATTACK (ENV-1)
- VR816 (EVA-QOAC16A26 2MA): DECAY (ENV-1)
- VR817 (EVA-QOAC16A26 2MA): RELEASE (ENV-1)
- VR818 (EVA-QOAC16B15 100KB): SUSTAIN (VCO-2)
- VR819 (EVA-QOAC16A16 1MA): ATTACK (ENV-2)
- VR820 (EVA-QOAC16A26 2MA): DECAY (ENV-2)
- VR821 (EVA-QOAC16A26 2MA): RELEASE (ENV-2)
- VR822 (EVA-QOAC16B15 100KB): HOLD
- VR823 (EVA-QOAC16B15 100KB): LFO


OPH-34 (149H034)

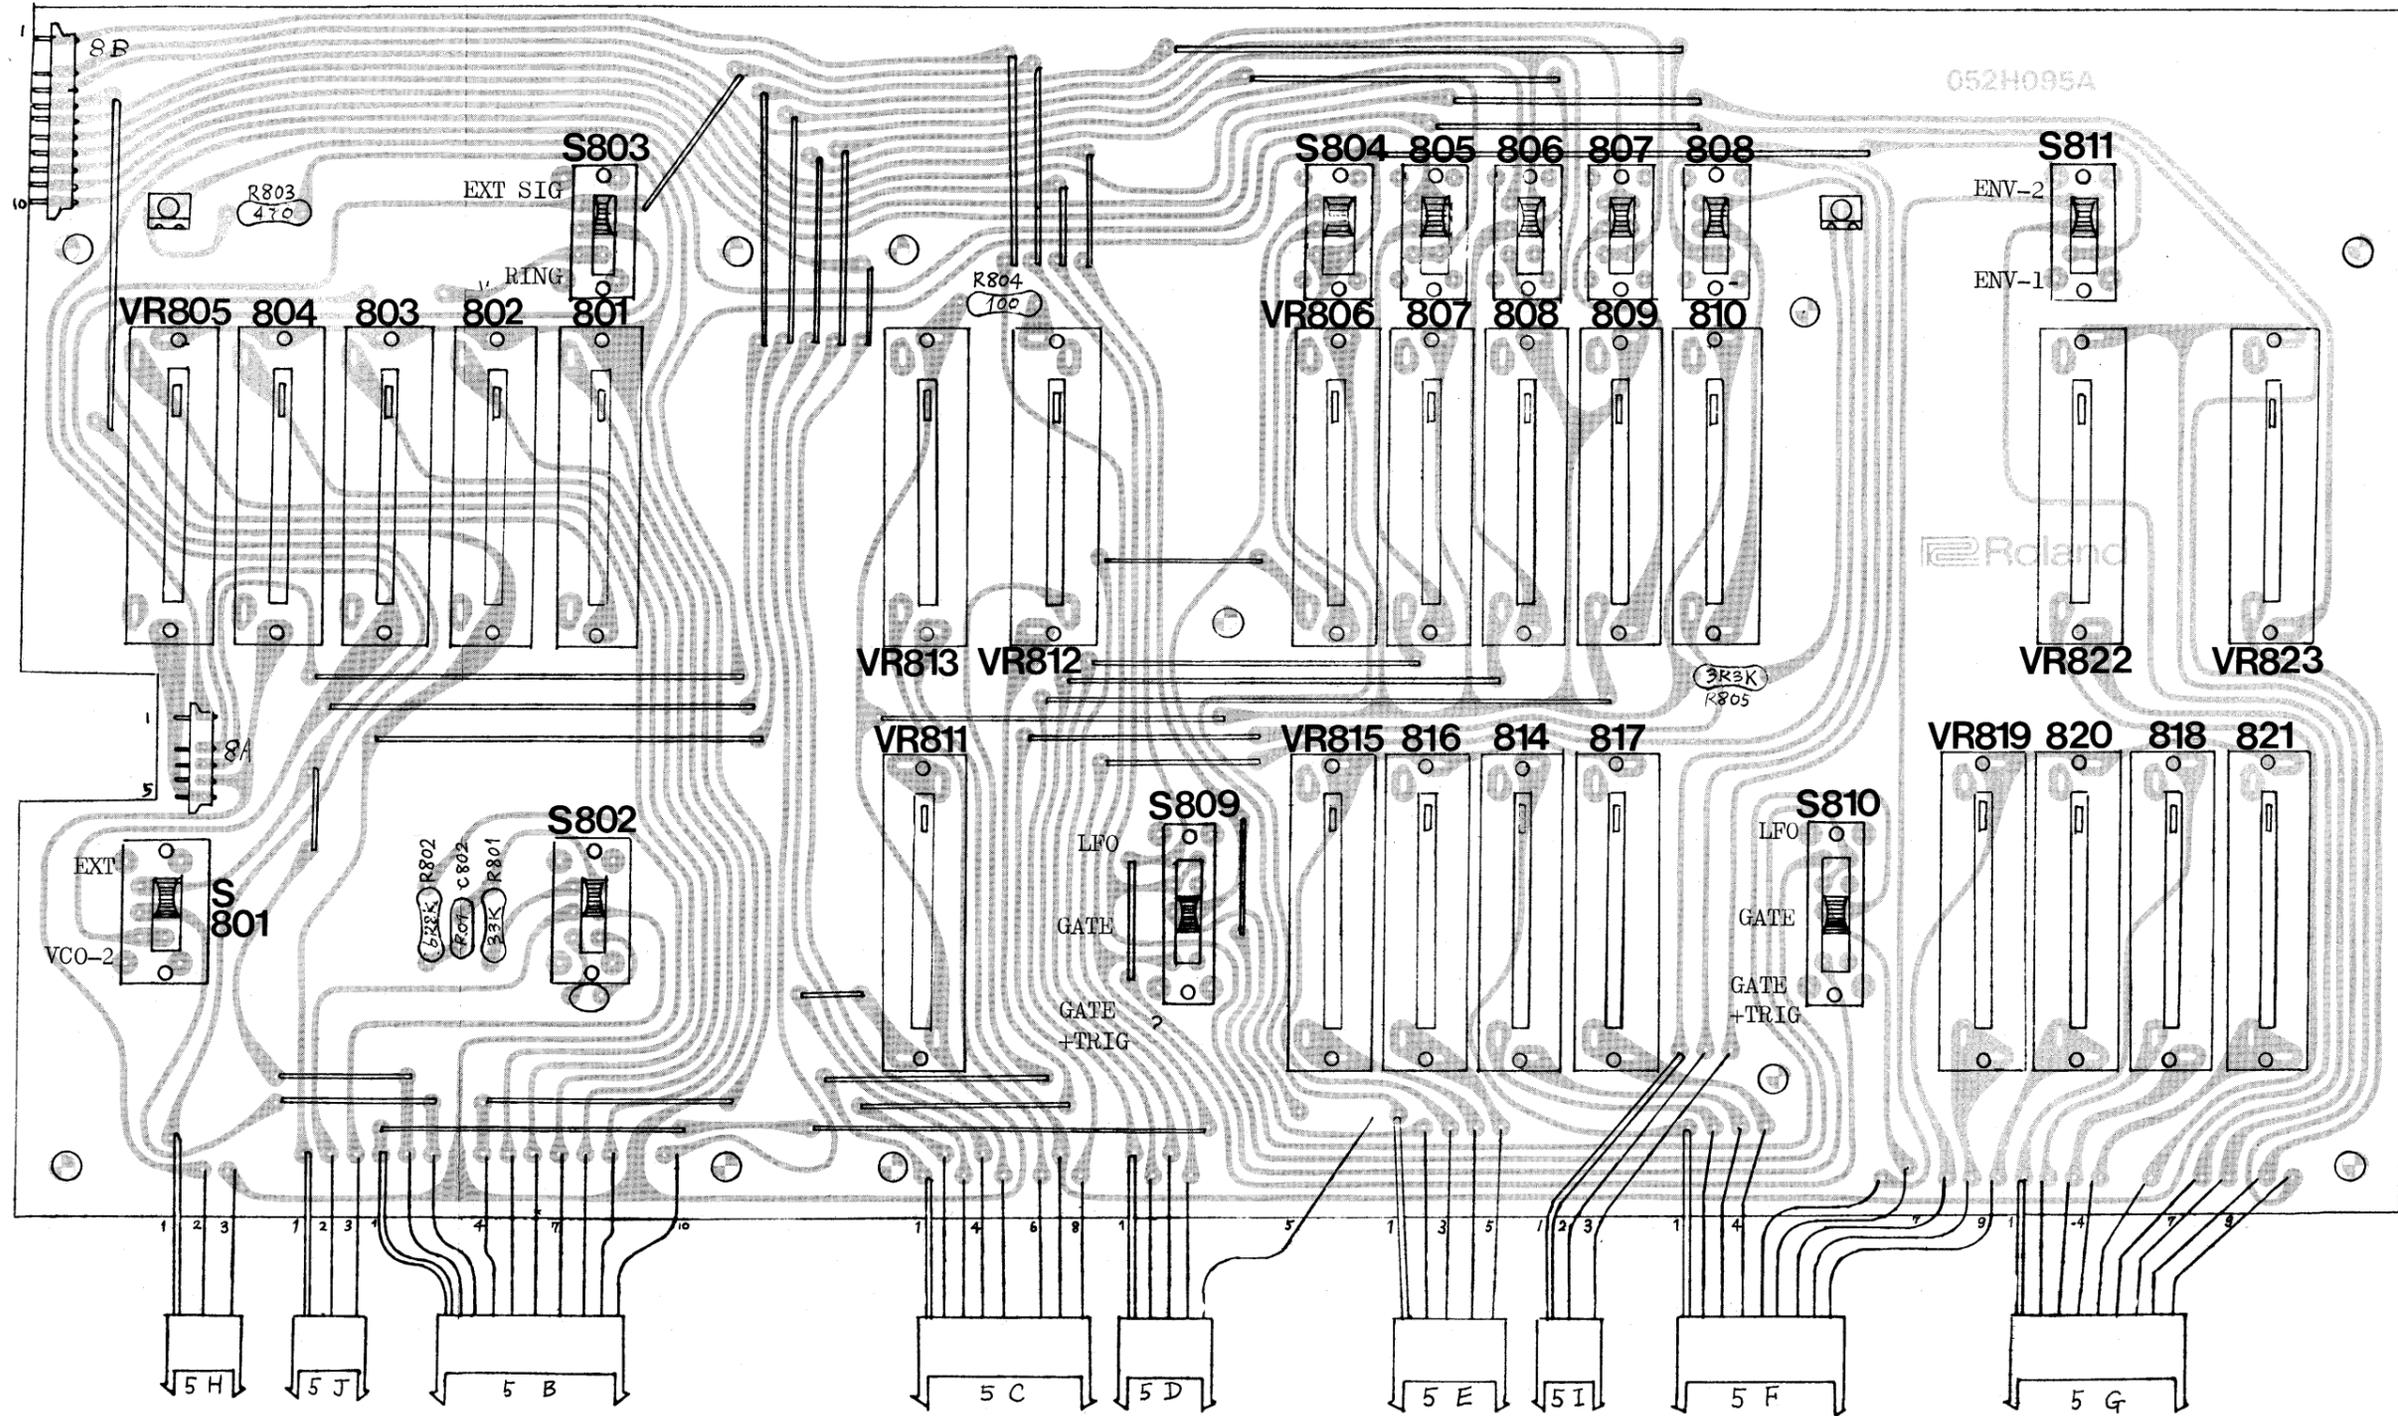

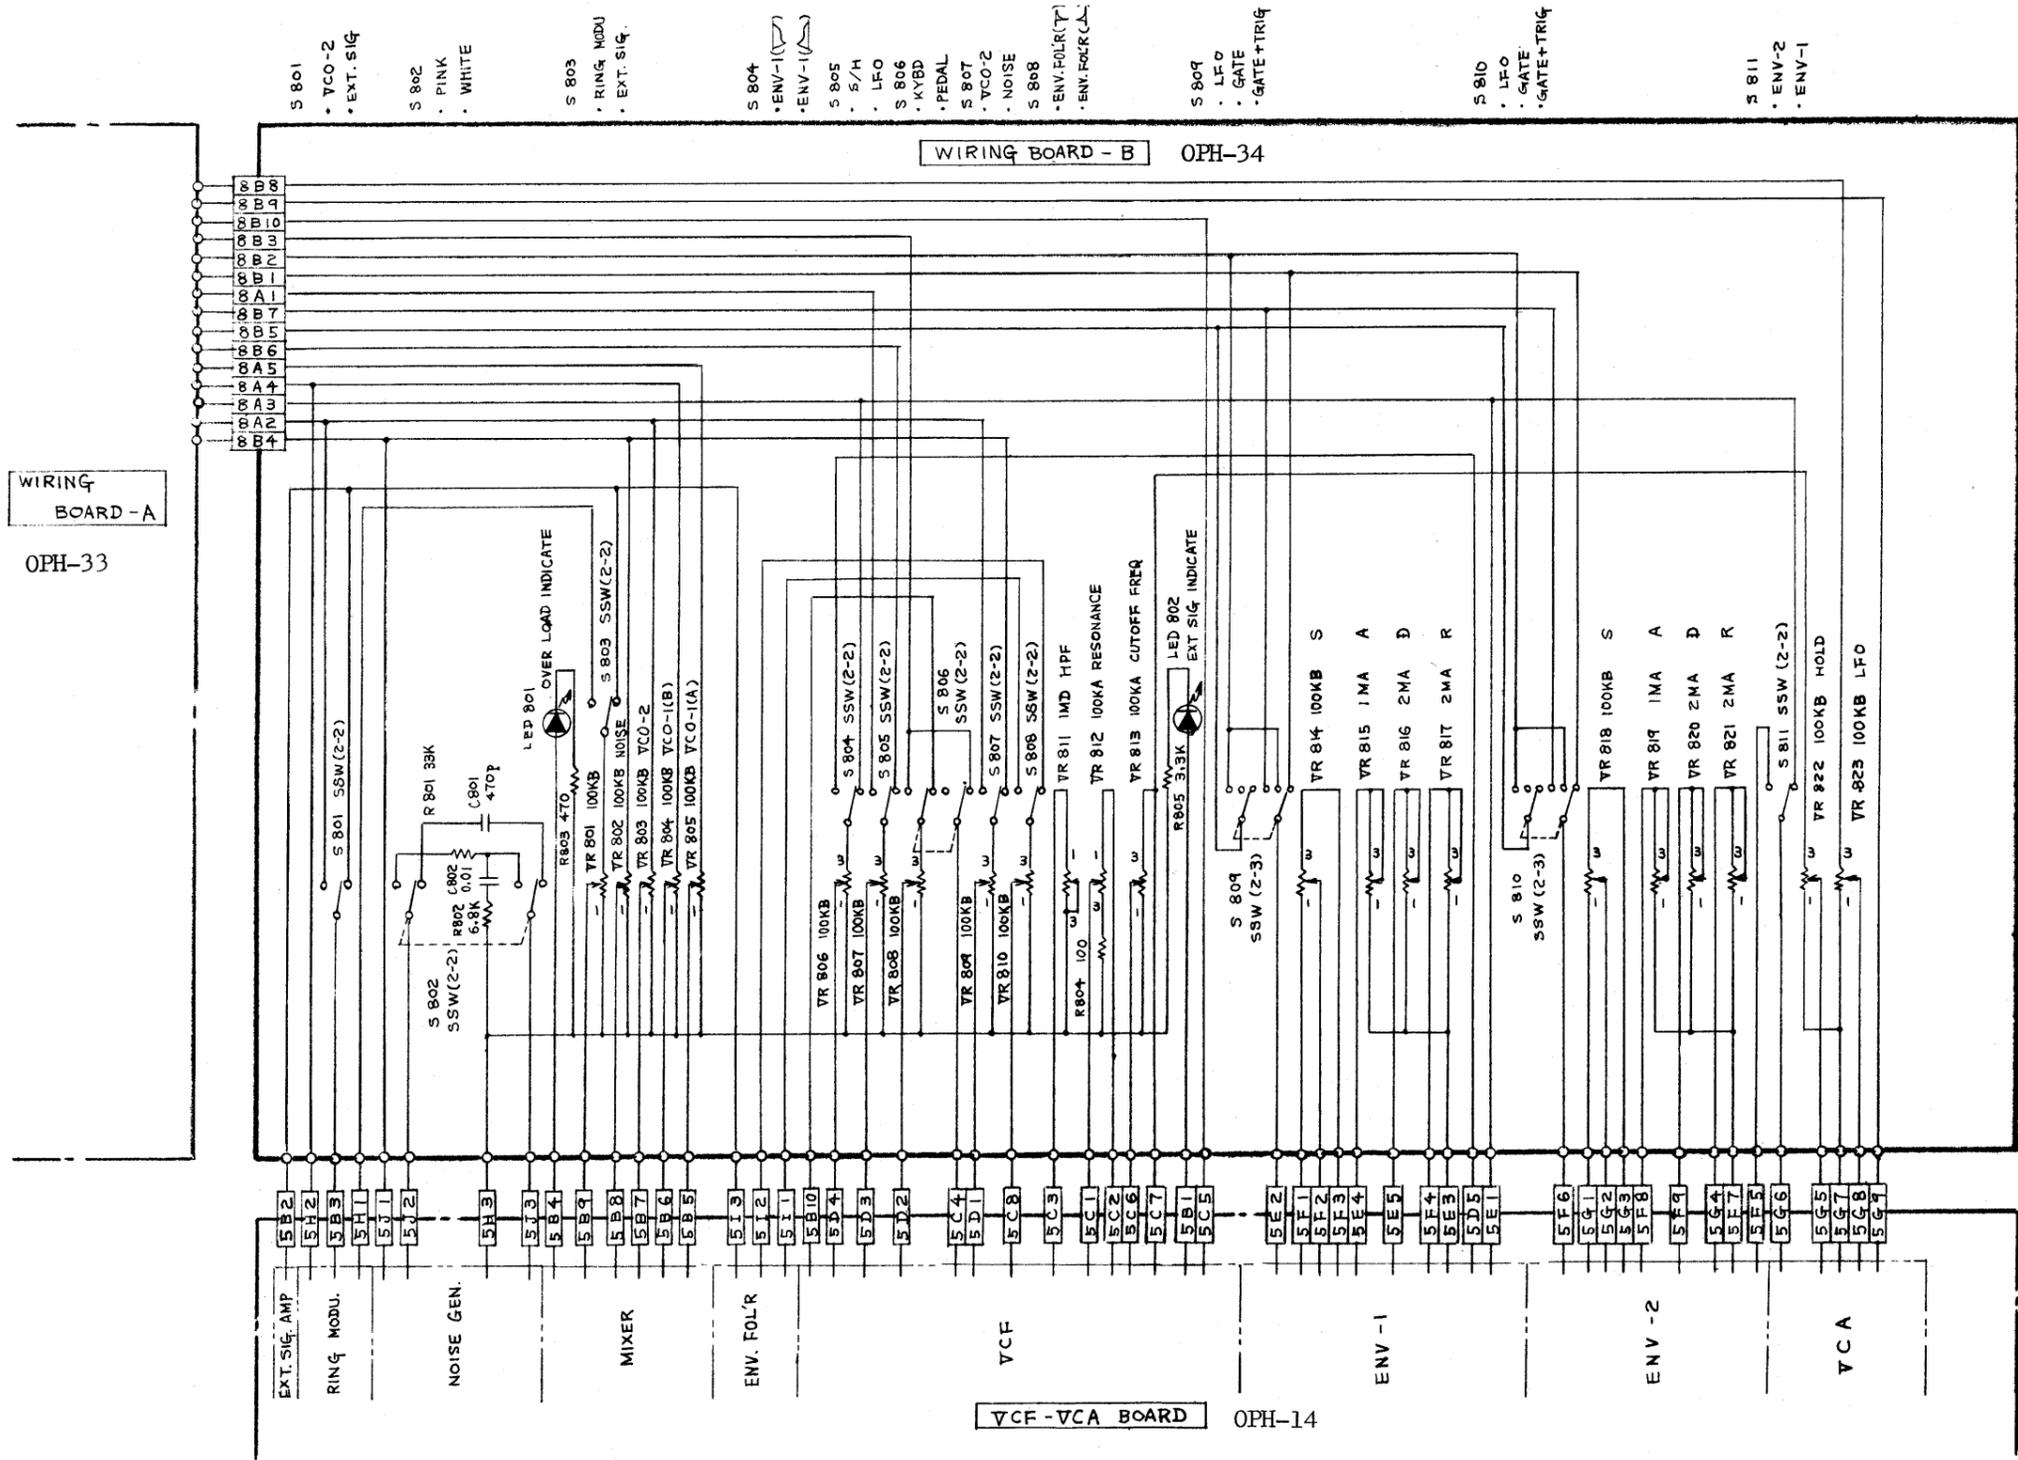


- S 801
  - VCO-2
  - EXT. SIG
- S 802
  - PINK
  - WHITE
- S 803
  - RING MODU
  - EXT. SIG
- S 804
  - ENV-1 (V)
  - ENV-1 (A)
- S 805
  - S/H
  - LFO
- S 806
  - KYBD
  - PEDAL
  - S 807
  - VCO-2
  - NOISE
- S 808
  - ENV.FOL'R (V)
  - ENV.FOL'R (A)
- S 809
  - LFO
  - GATE
  - GATE+TRIG
- S 810
  - LFO
  - GATE
  - GATE+TRIG
- S 811
  - ENV-2
  - ENV-1


NOTES;  
 VR.....30mm Slide Type Potentiometer  
 SSW(2-2).....Slide Switch (2 Poles 2 Positions)  
 SSW(2-3).....Slide Switch (2 Poles 3 Positions)  
 LED.....LR0601R

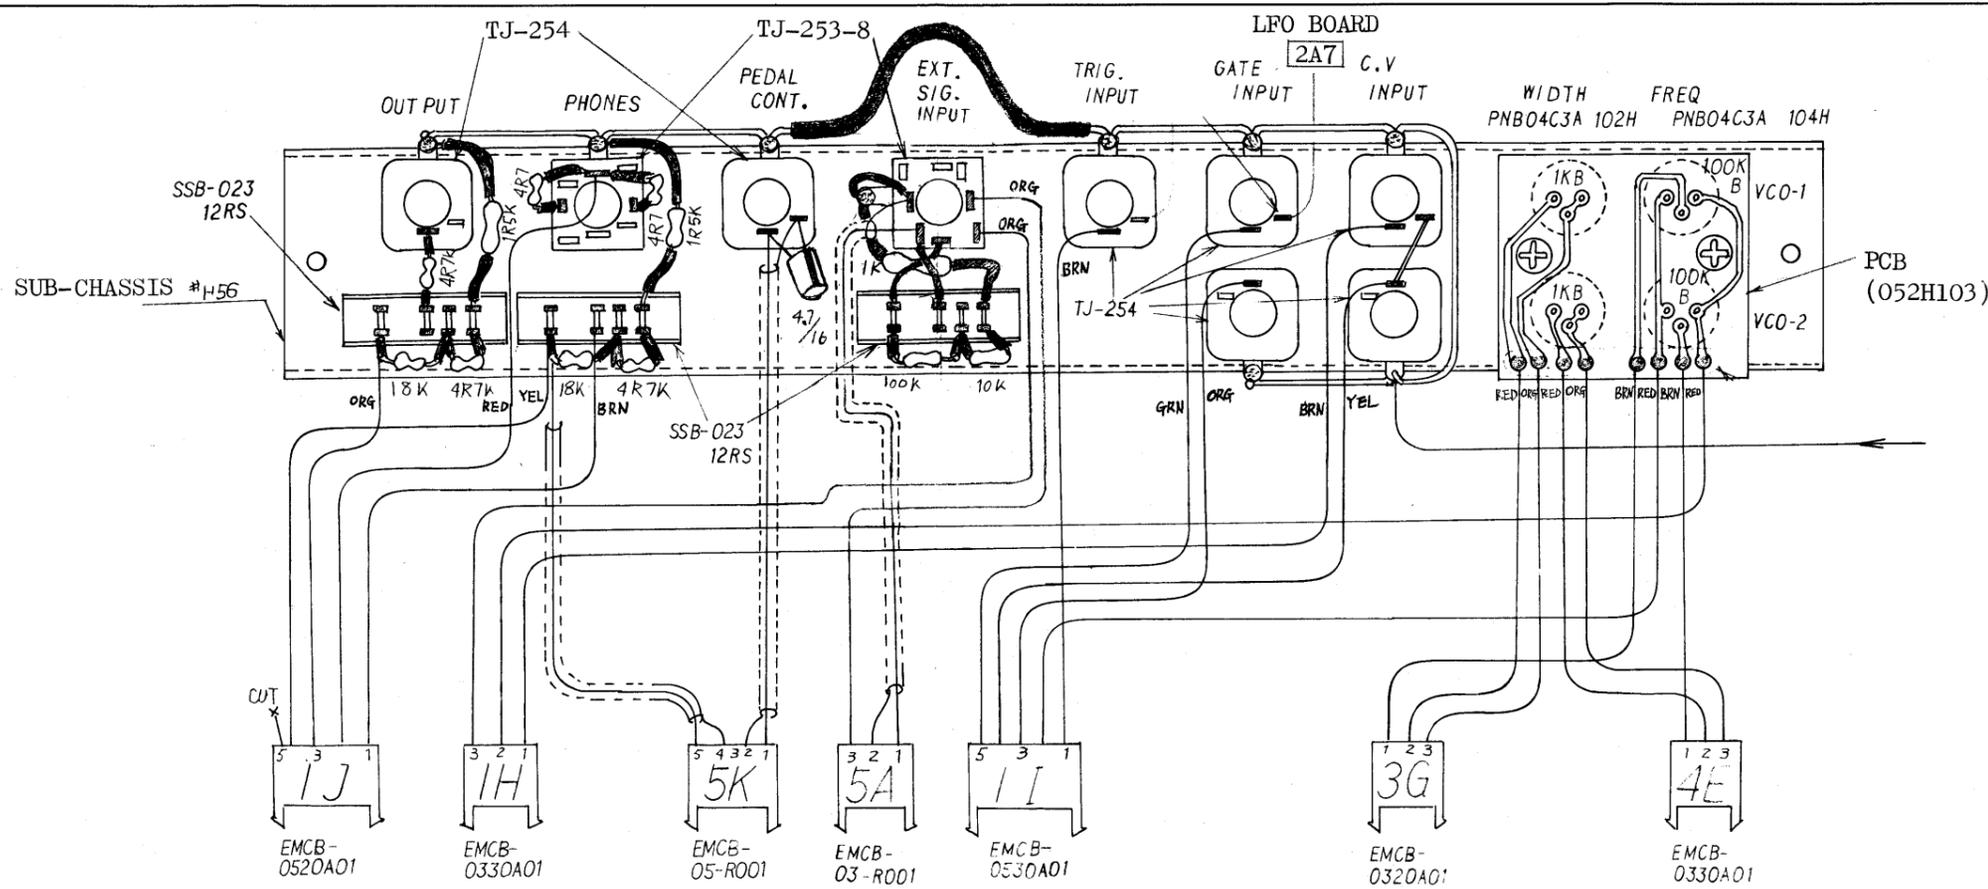


REAR PANEL

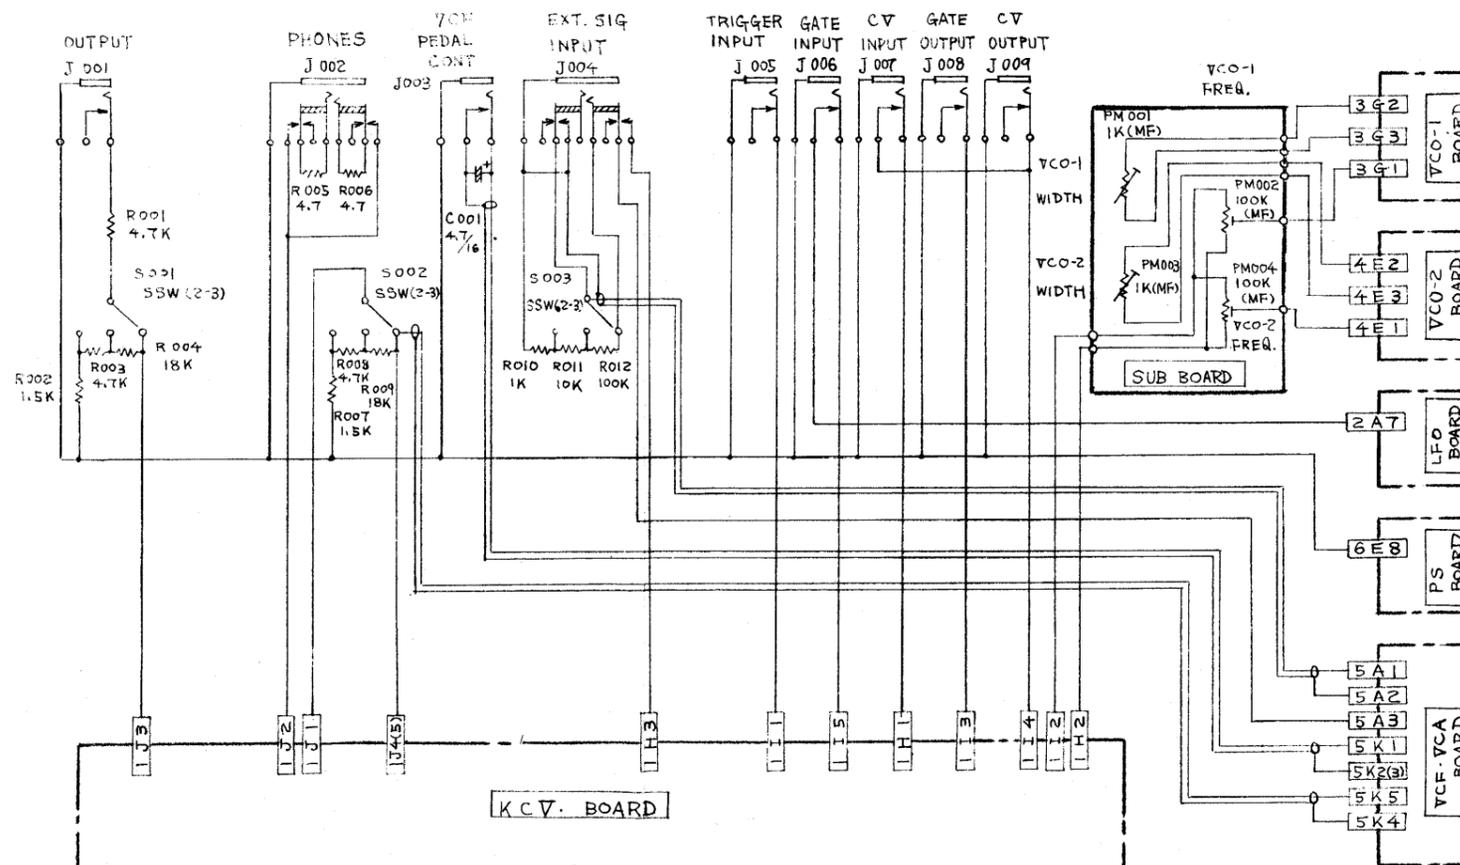


PSH-13A (146H013A) 100/117V  
 PSH-14A (146H014A) 220/240V






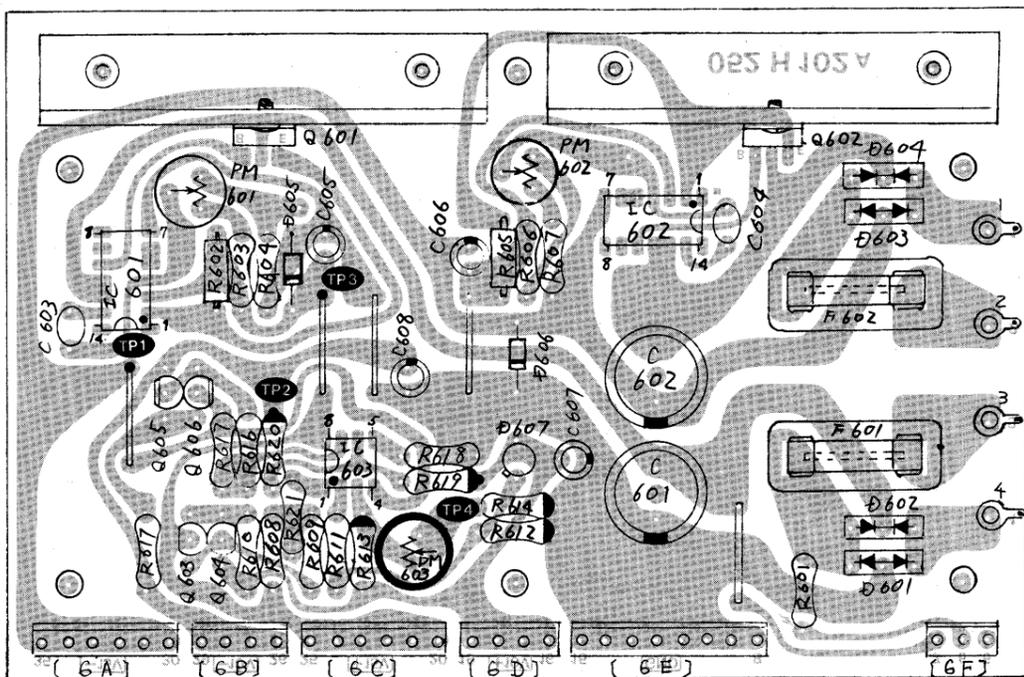


PSH-13/14 - PARTS ON THE FOIL SIDE (SERIAL NO. UP TO 710749)

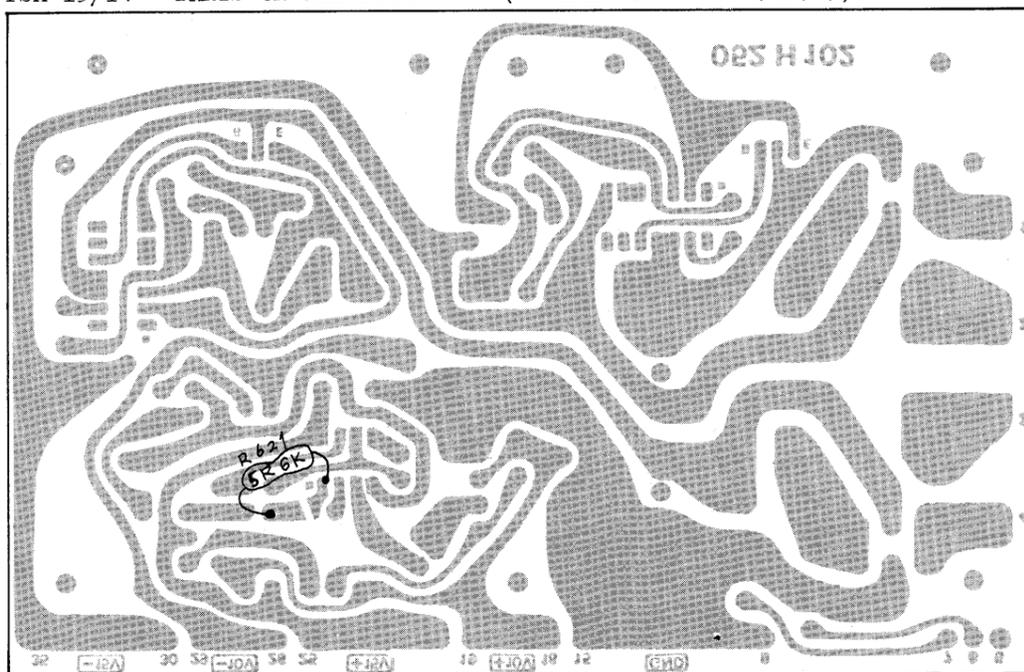


PM601 (1KB): +15V ADJ  
 PM602 (1KB): -15V ADJ  
 PM603 (1KB): +10V ADJ

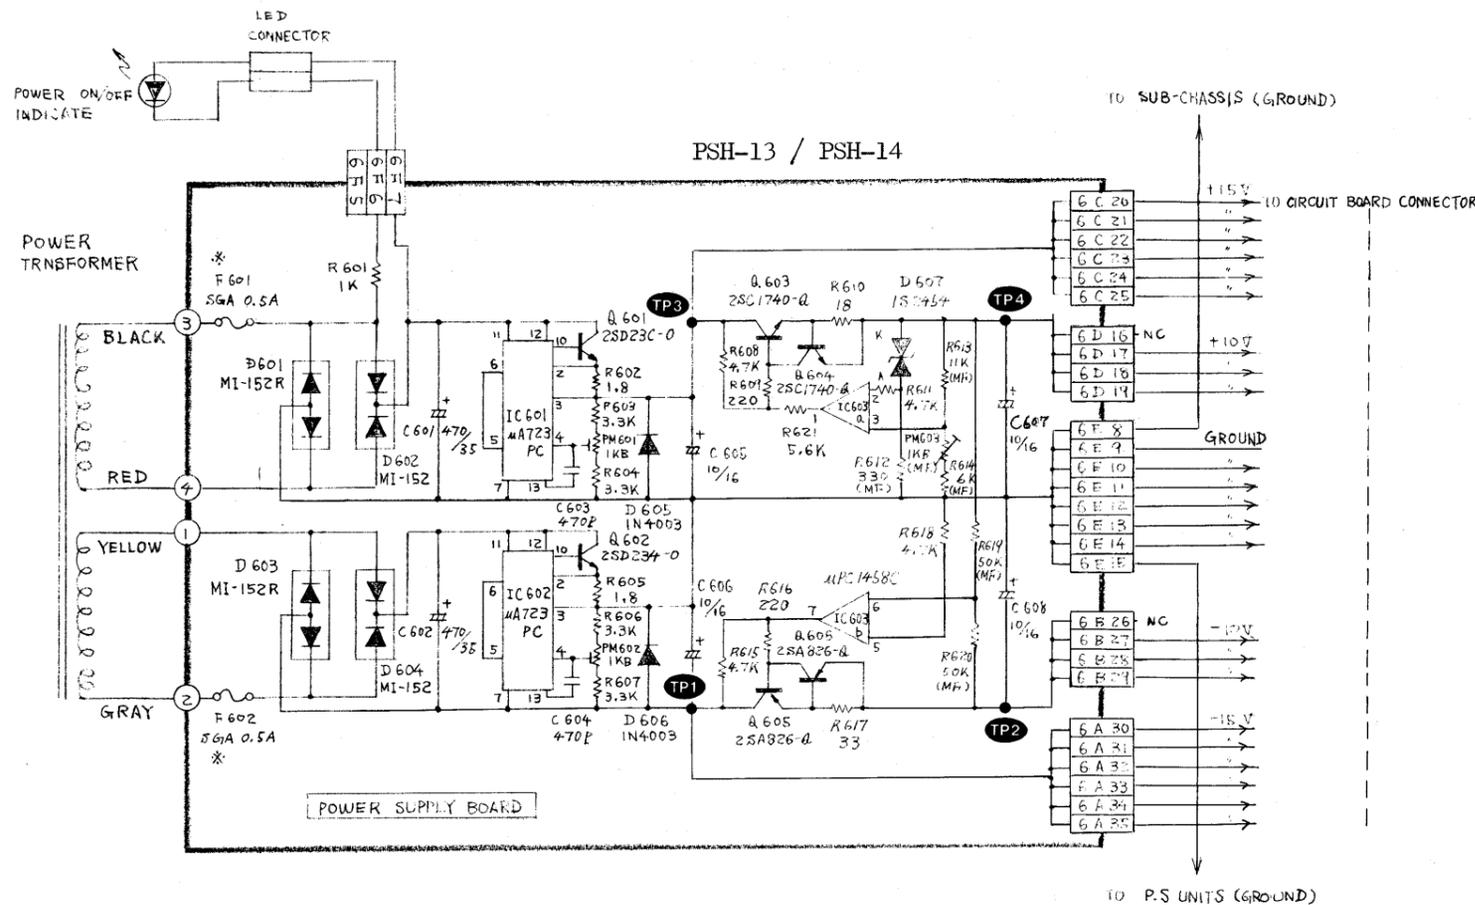

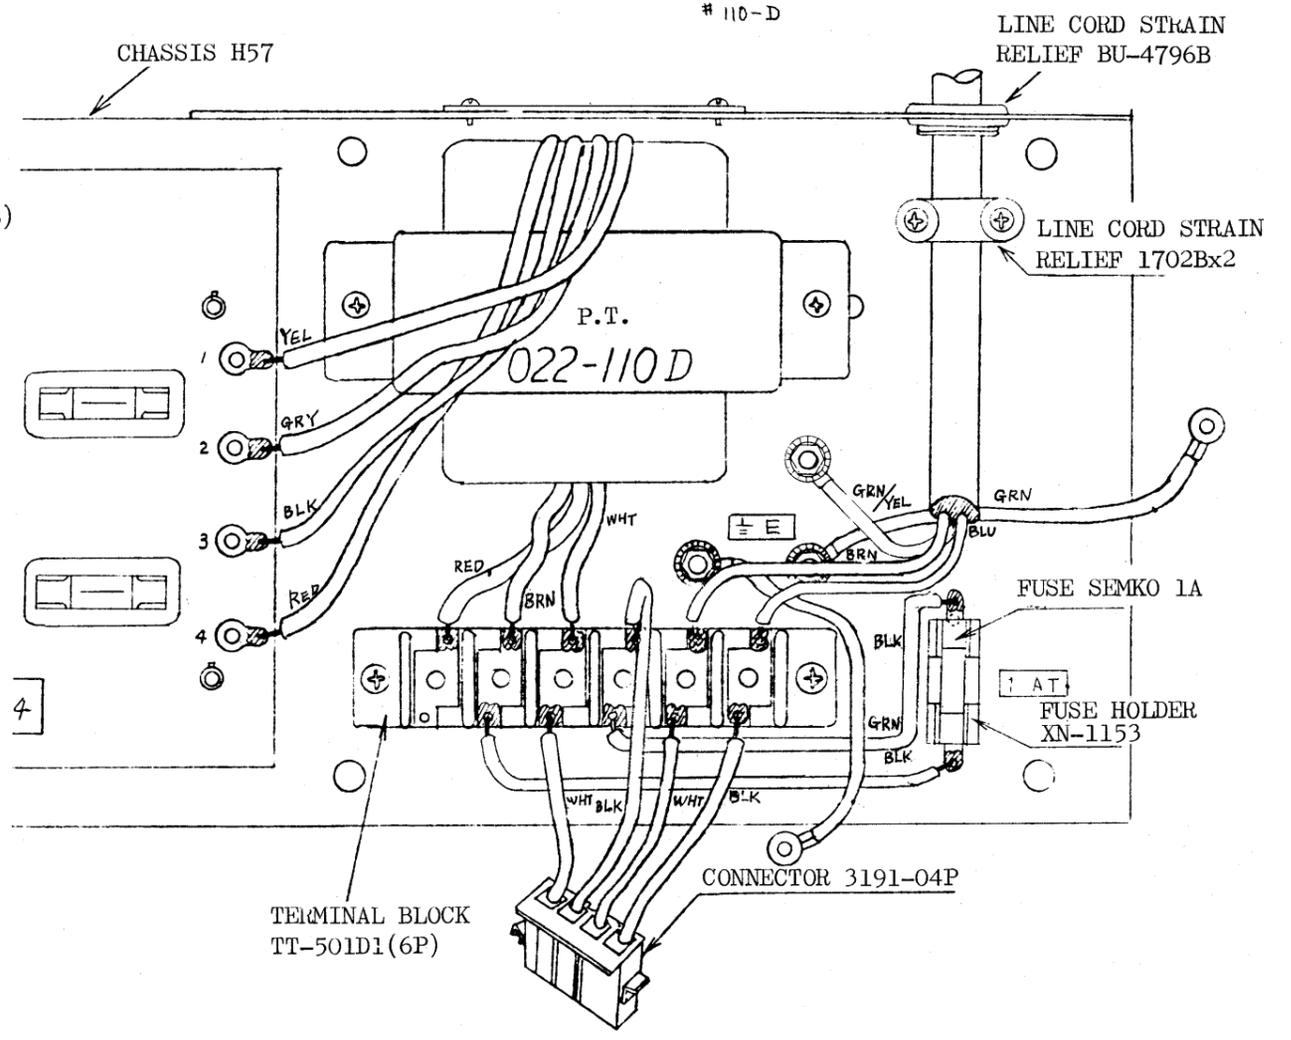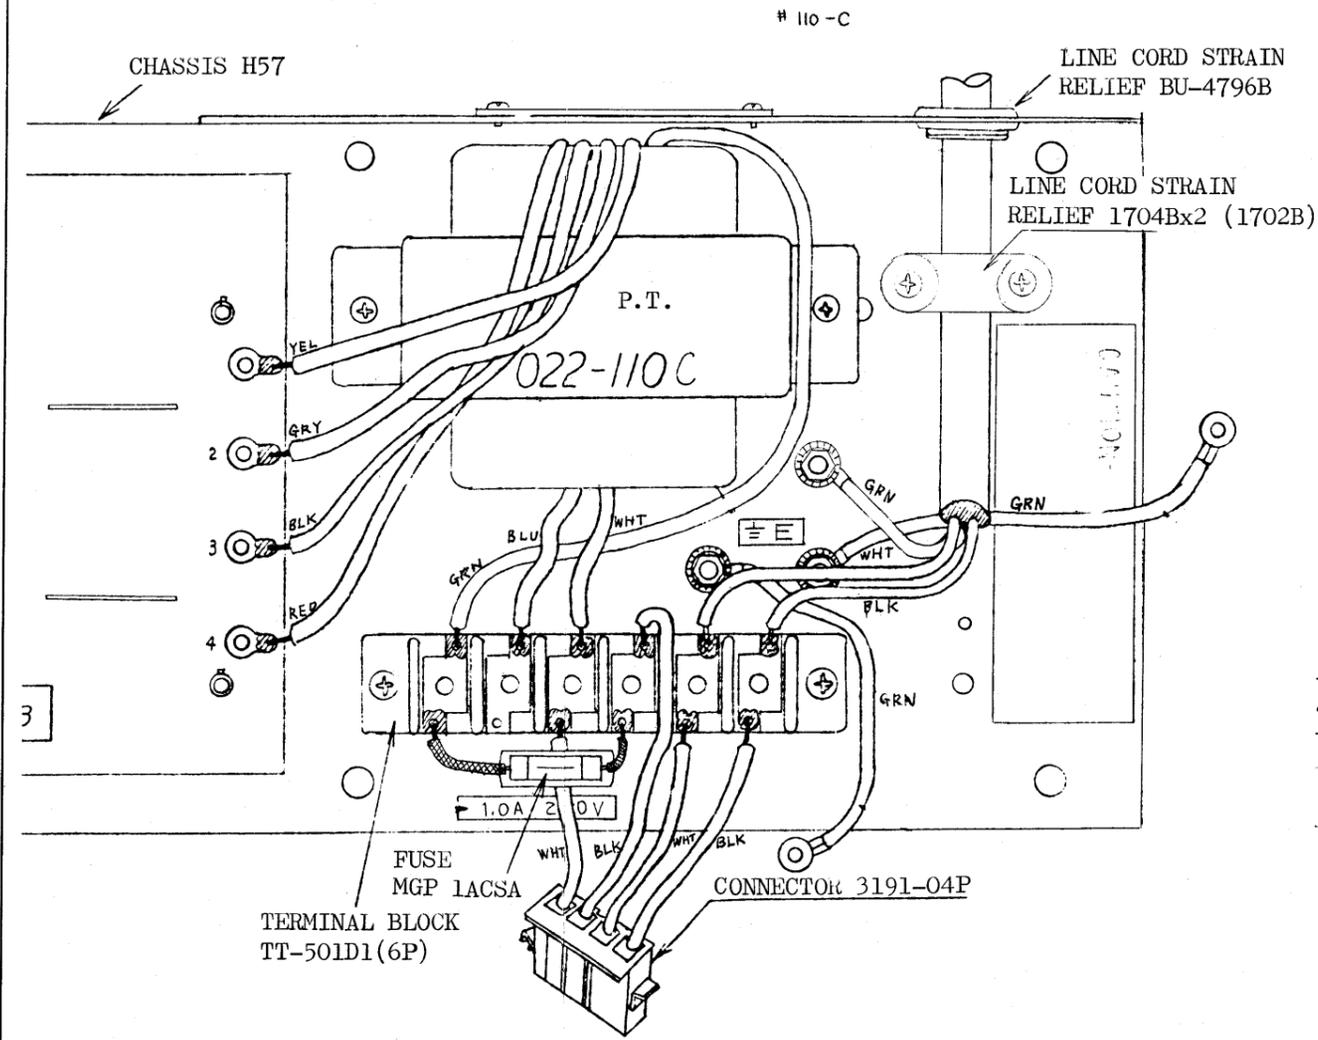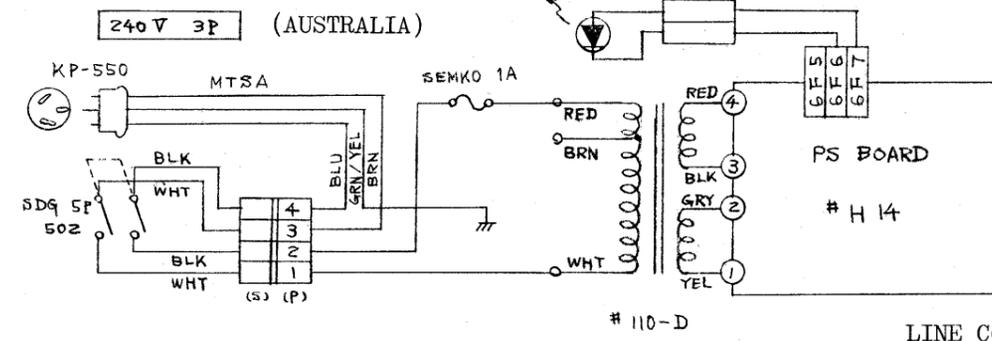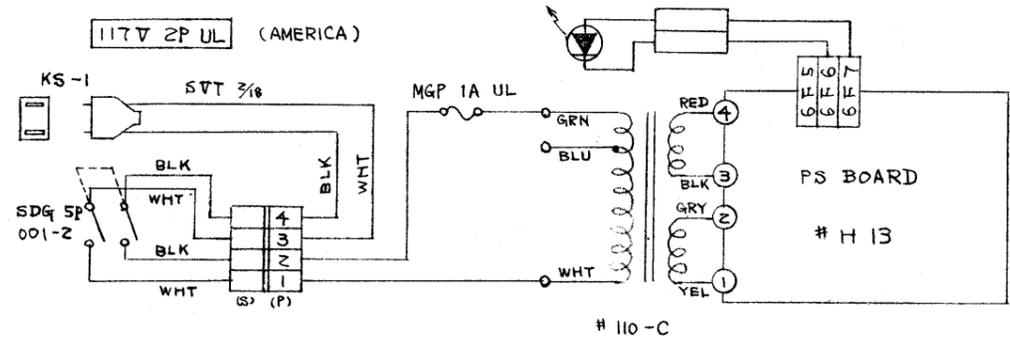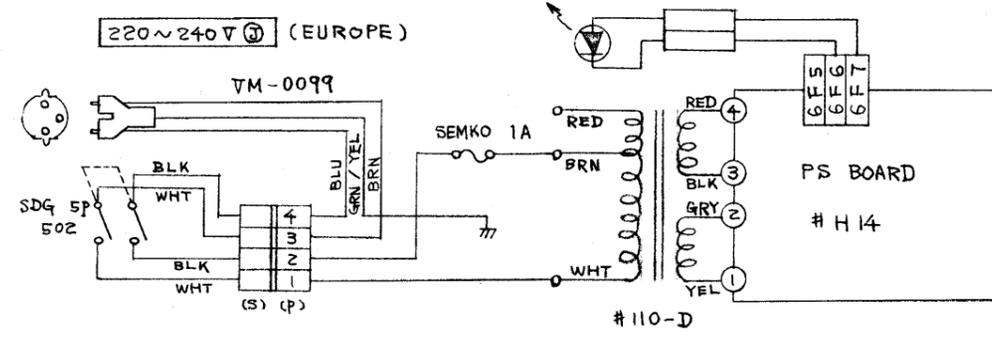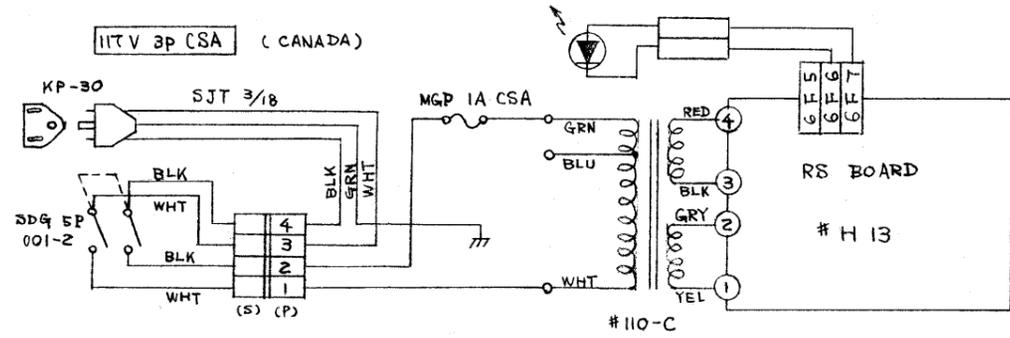


ADJUSTMENT

1. POWER SUPPLY

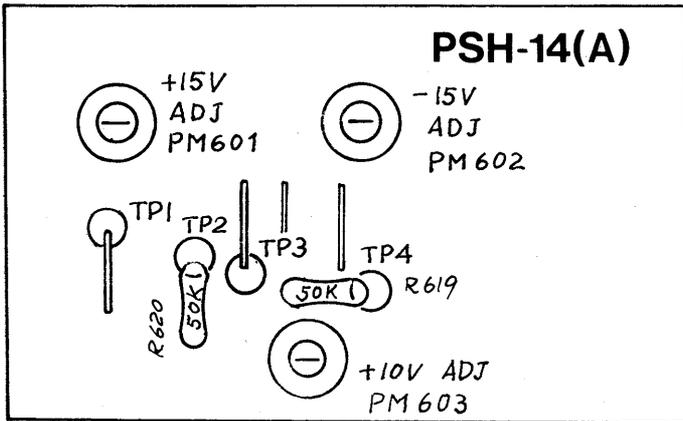

Make adjustment under temperatures where the SH-7 is usually used.

Allow at least 5 minutes as a warm-up period.

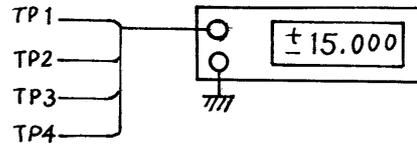

Adjust PM601 to set the TP3 voltage at +15.000V.

Adjust PM602 to set the TP1 voltage at -15.000V.

Adjust PM603 to set the TP4 voltage at +10.000V.

Note: When +10.000V is correctly set, -10.000V is expected to be correct. If -10.000V is not attained, distribute the error as shown below.

$$\begin{array}{l}
 +10.000V \\
 -9.994V
 \end{array}
 \left. \vphantom{\begin{array}{l} +10.000V \\ -9.994V \end{array}} \right\} 6mV \text{ error}
 \left\{ \begin{array}{l} 3mV \\ 3mV \end{array} \right.
 \Rightarrow
 \begin{array}{l}
 +10.003V \\
 -9.997V
 \end{array}$$

2. KCV BOARD

First, depress F1. Set Portamento Time at maximum.

Adjust PM107 ((KCV-H, TP3) and PM108 (KCV-L, TP4) so that the key voltage is constant when Portamento Mode is switched to "UP" and "DOWN".

CAUTION

\*Do not depress any other key.

\*During this adjustment, check to see that no abnormal oscillation is caused (using an oscilloscope, etc.).

Set Portamento Time at minimum and proceed to the following.

CV(H)


Connect a digital voltmeter to TP3.

Adjust PM102 to set the voltage at 4.417V with F4 down. Adjust PM101 to set the voltage at 1.417V with F1 down. Repeat the above steps to obtain correct readings.

CV(L)

Connect a digital voltmeter to TP4.

Adjust PM103 to set the voltage at 4.417V with F4 down. Adjust PM104 to set the voltage at 1.417V with F1 down. Repeat the above steps to obtain correct readings.

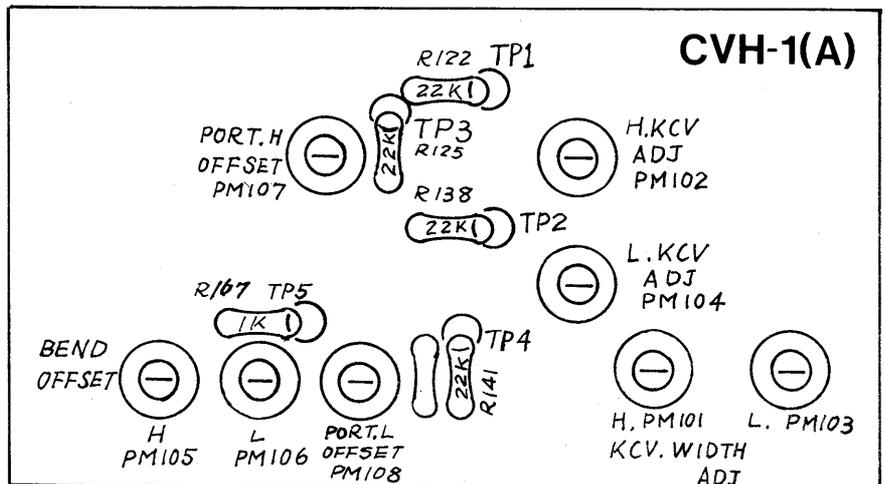

Bender Offset

Connect a digital voltmeter to TP5.


Keep Bender Lever at full + position and adjust PM105 to set the voltage at +3.200V. Then keep Bender Lever at full - position and adjust PM106 to set the voltage at -3.200V. If  $\pm 3.200V$  is not achieved, adjust so that + and - voltages are equal.

3. LFO BOARD

3. a. LFO Waveform

Connect an oscilloscope to TP2.


Adjust PM202 to obtain exact continuation of the sawtooth waveform.

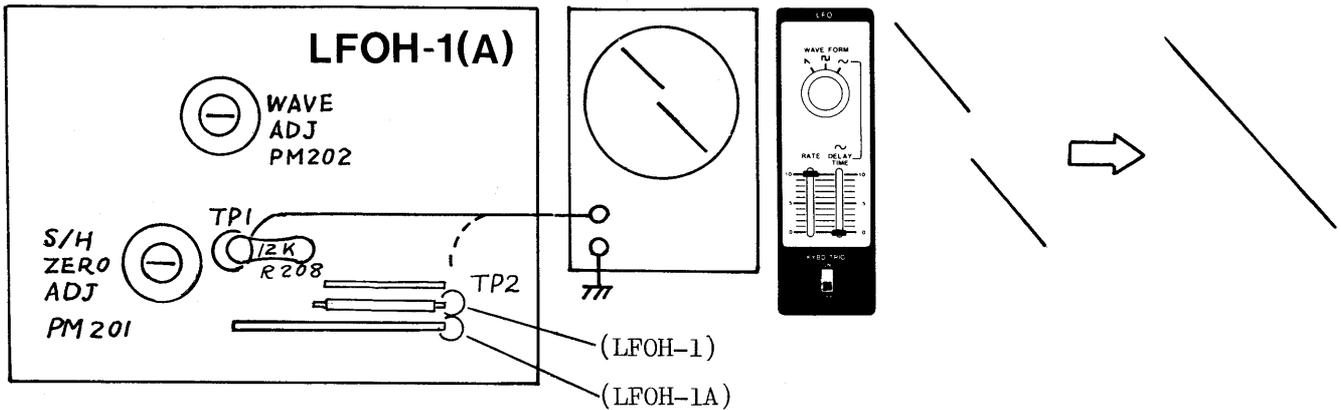

3. b. S & H


Connect an oscilloscope to TP1.

Adjust PM201 so that the waveform deflects equally in + and - directions from the zero level.

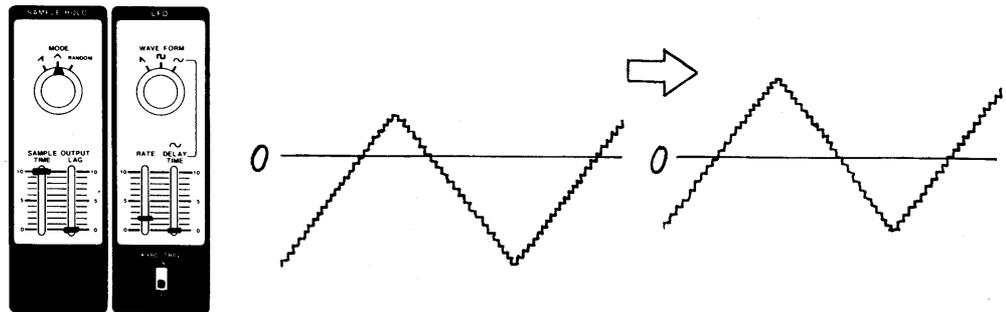


4. VCO-1, VCO-2

Set FREQ and WIDTH controls of VCO-1 and VCO-2 on the rear panel at the middle positions. Set TOTAL TUNING control and VCO-2 TUNING control at the middle positions. Set RANGE control at "8"', both MOD sliders at "0", and SYNC switch at "OFF".

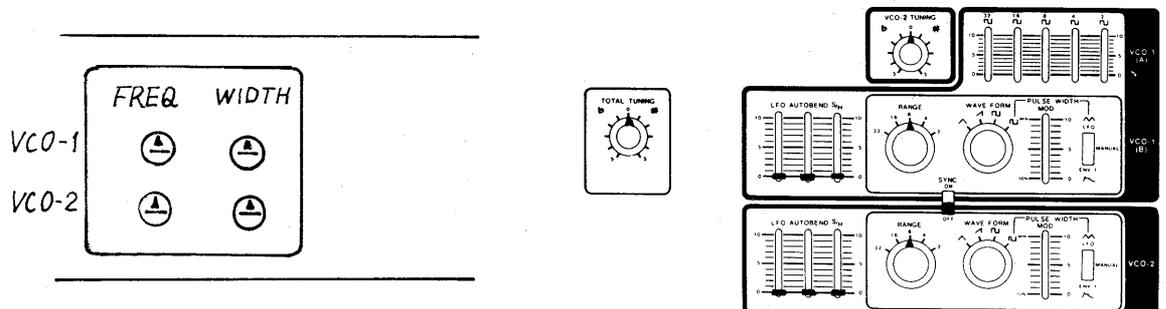


4. a. VCO-1 WIDTH and FREQ

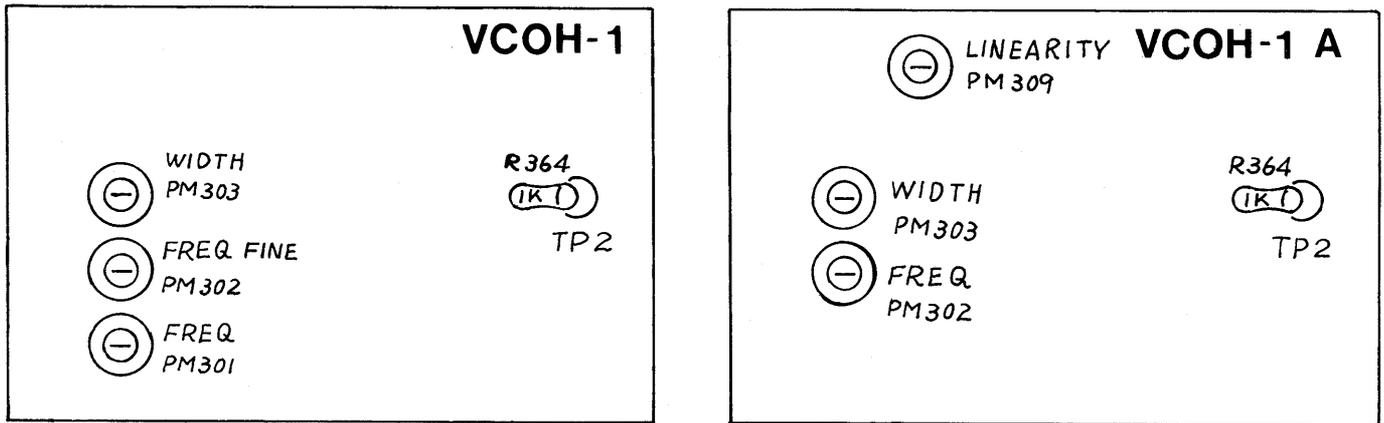

For the adjustment that follows, use a completely tuned electronic instrument or a tuning meter. Adjustment can be made either by checking for the beat sound or by consulting the Lissajous figure on the oscilloscope.

VCO-1	VCO-1A
Adjust PM303 to set F1 at 174.61Hz. *1	Adjust PM303 to set F1 at 174.61Hz. *1
Adjust PM301 to set F2 at 349.22Hz.	Adjust PM302 to set F2 at 349.22Hz.
Repeat above steps until the two are adjusted roughly. *2	
Adjust PM301 to set F3 at 698.44Hz.	Adjust PM302 to set F3 at 698.44Hz.
Adjust PM303 to set F1 at 174.61Hz.	Adjust PM303 to set F1 at 174.61Hz.
Repeat above steps until the two are adjusted roughly.	
Adjust PM301 to set F4 at 1396.88Hz.	Adjust PM302 to set F4 at 1396.88Hz.
Adjust PM303 to set F1 at 174.61Hz.	Adjust PM303 to set F1 at 174.61Hz.
Adjust PM302 to set F4 at 1396.88Hz.	Repeat the above steps.
Repeat the two preceding steps.	Adjust PM309 to set C4 at 2093.0Hz.
*1) If 174.61Hz is not attained by adjusting PM303 only, adjust PM301 also.	*1) If 174.61Hz is not attained by adjusting PM303 only, adjust PM302 also.
*2) The need for repetition arises from close interrelation between PMs' setting.	

4. b. VCO-1 Waveform

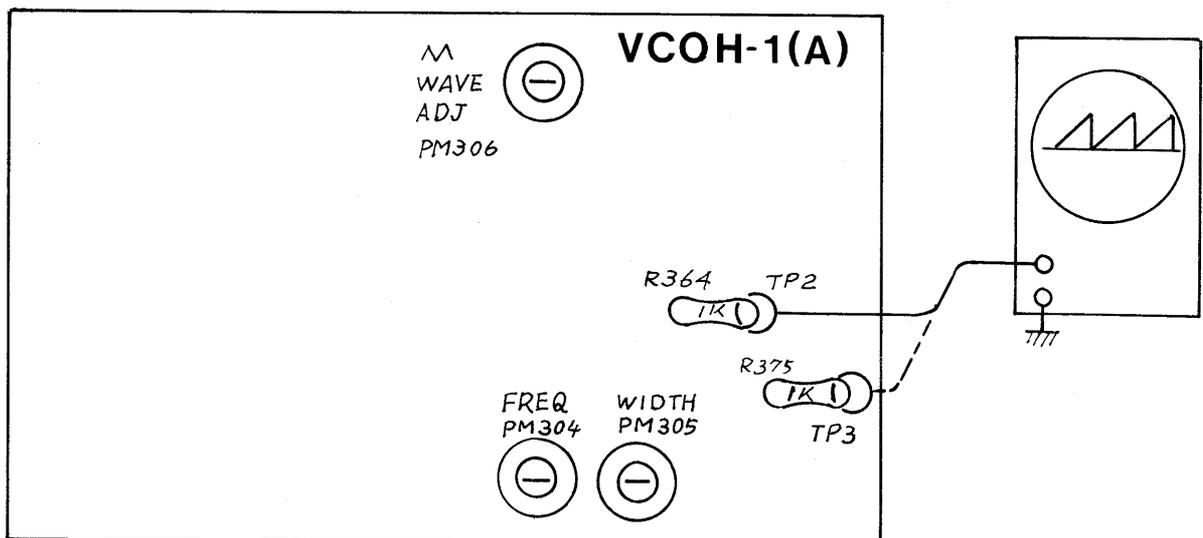

Sawtooth Waveform

Connect an oscilloscope to TP2.


Depress F1 and adjust PM305 to obtain the sawtooth wave of 10Vp-p.

Then depress C4 and adjust PM304 to obtain the sawtooth wave of 10Vp-p.


Repeat the above steps until the specified voltages are obtained.

THE POINT FOR ADJUSTMENT

If F1 voltage is higher than 10Vp-p, set it a little below 10Vp-p with PM305 and if it is lower than 10Vp-p, set it a little above 10Vp-p before adjusting PM304.

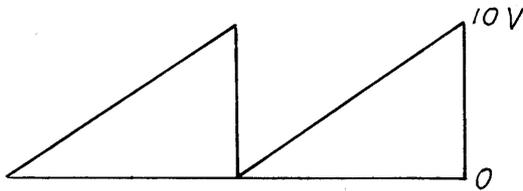

Good

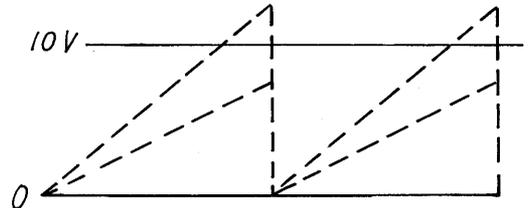


No Good

Triangular Waveform



Connect an oscilloscope to TP3.

Depress F1 and adjust PM306 to obtain correctly matched waveform.

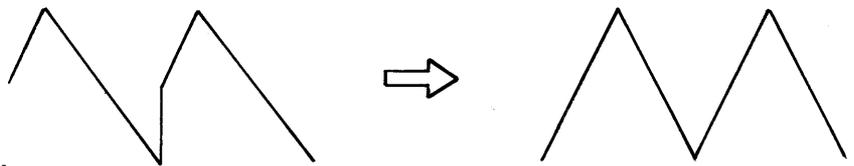



4. c. VCO-1 PWM Pulse Width

With PWM slider at 50% position ("0" position), depress F1 and adjust PM307 to obtain 50% wave. Then with PWM slider at MIN ("10") position, adjust PM308 to obtain 10% wave.

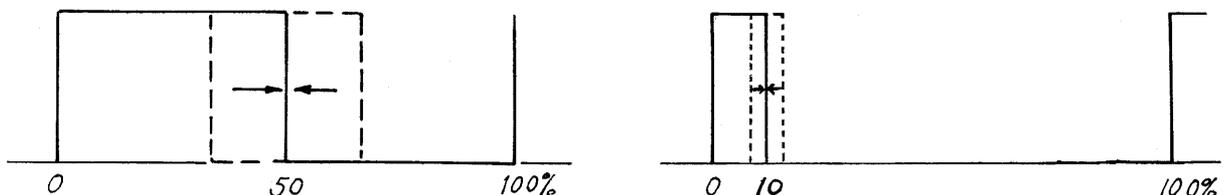
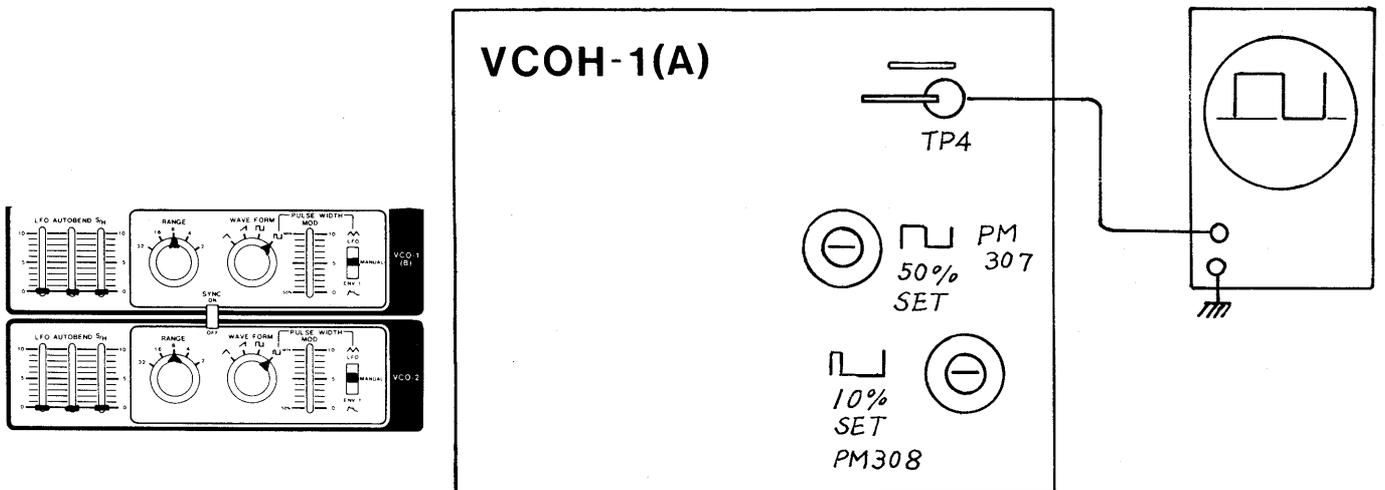


4. d. VCO-2 PWM Pulse Width

Follow the adjustment for VCO-1.

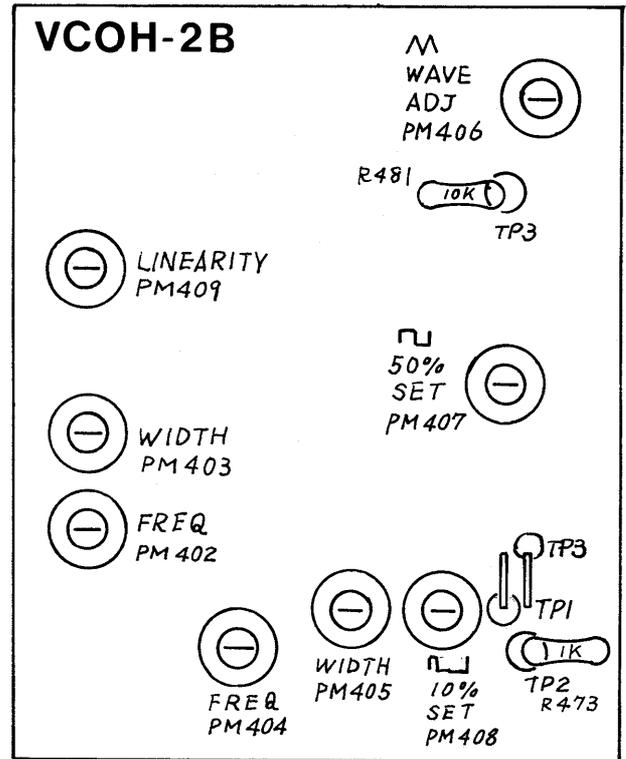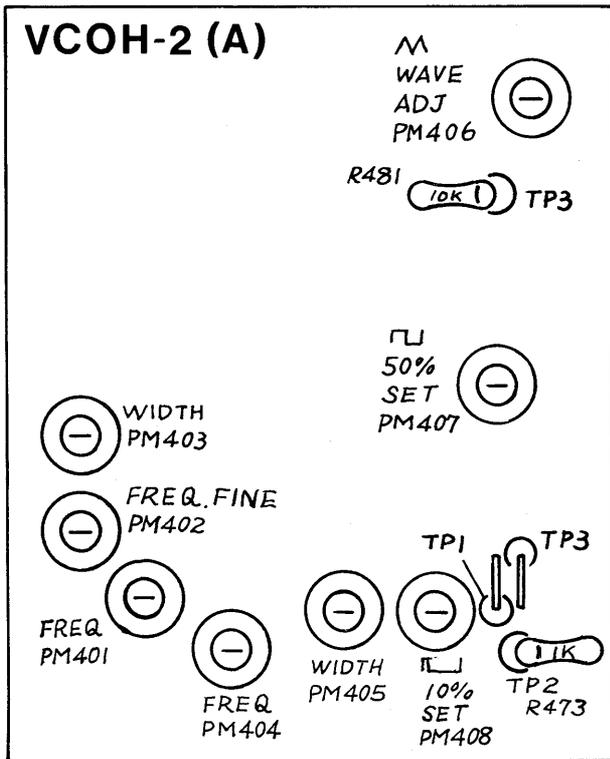


5. VCF and VCA BOARD

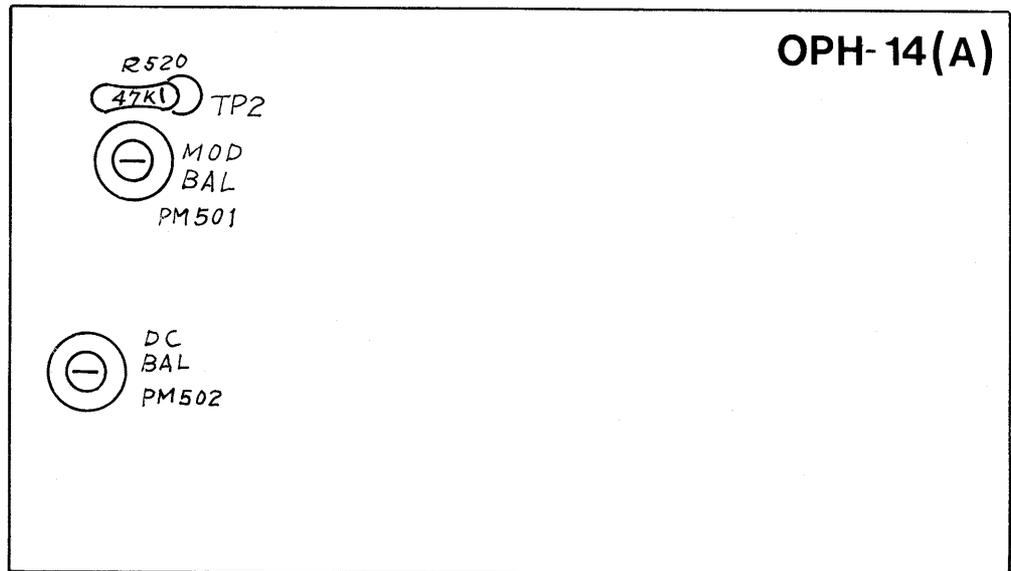

5. a. Ring Modulator



Signal Balance

Connect an oscilloscope to TP2. Set the oscilloscope gain at the maximum in the AC range. Adjust PM502 so that signal is minimized.

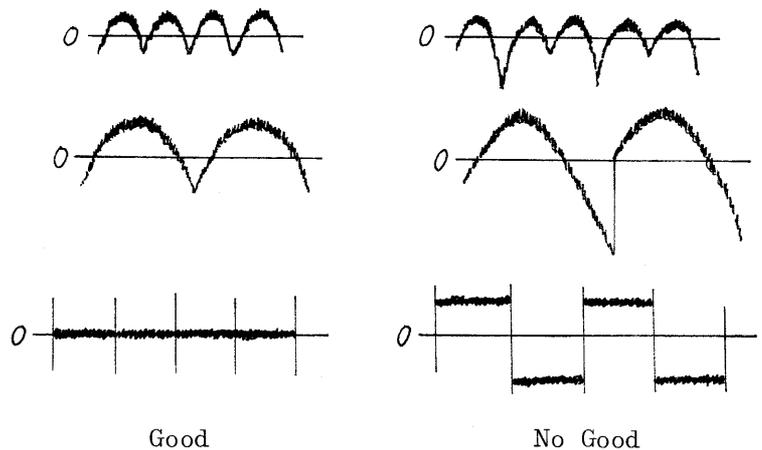


5. b. Modulation Balance

Connect an oscilloscope to TP2.  
Adjust PM501 to level the peak values of Ring Modulator output waveform.

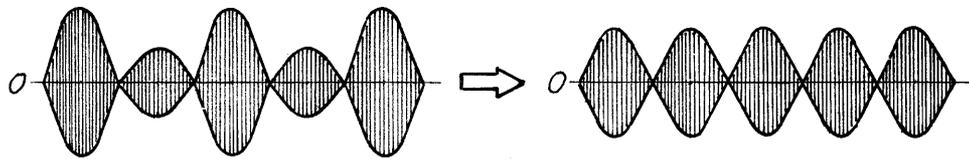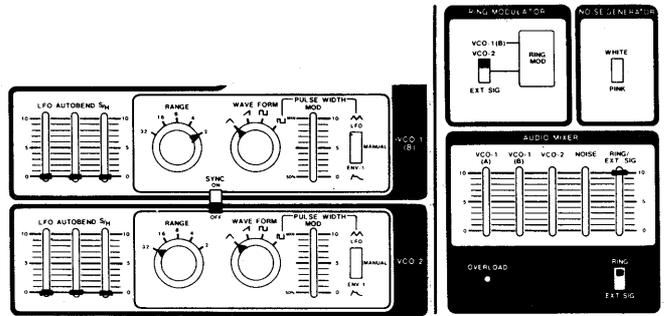


5. c. VCF

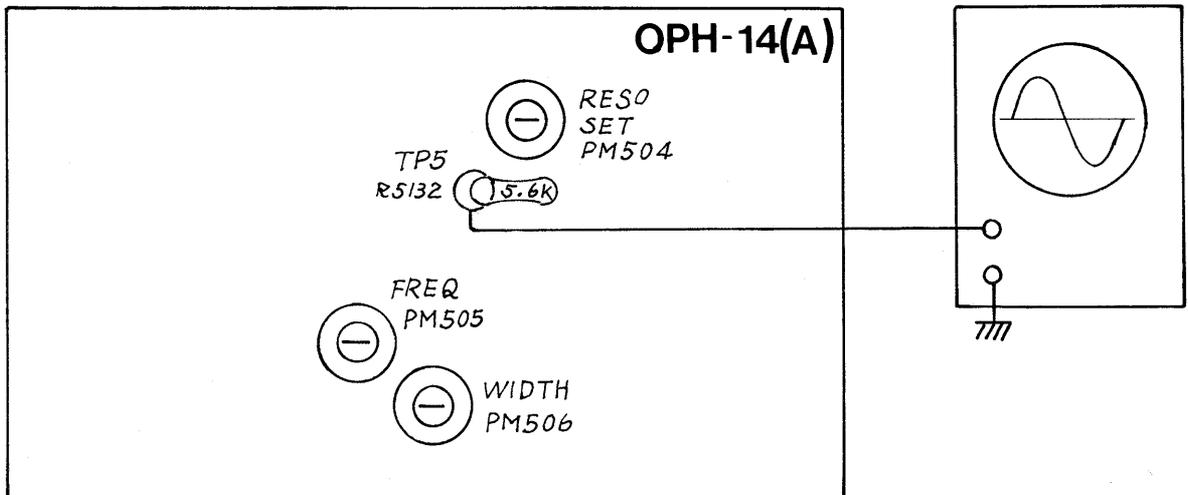



Self-oscillation Point

Connect an oscilloscope to TP5.  
Adjust PM504 so that VCF is at the onset of self-oscillating.  
(See the setting on the right.)

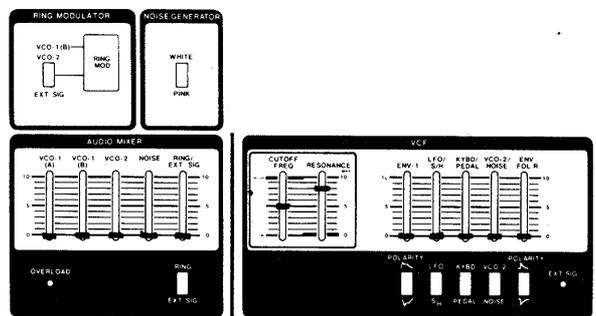



Frequency

Depress F1 and adjust PM505 to set the oscillating frequency at 20KHz(50usec).  
(See the setting on the right.)

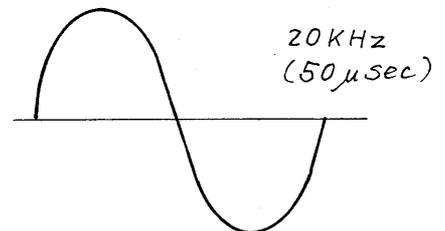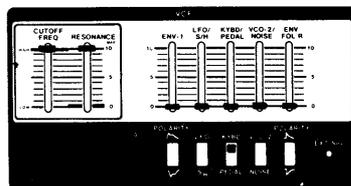


Width

Adjust PM506 to obtain correct octave relationship between F2 and F3.

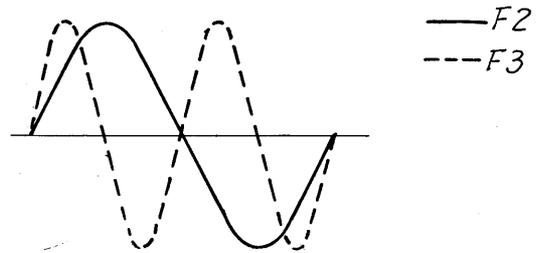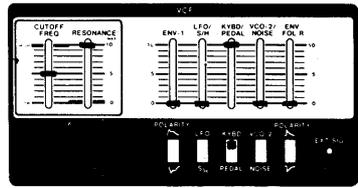

Make sure F1 remains 20KHz.

5. d. Noise Level

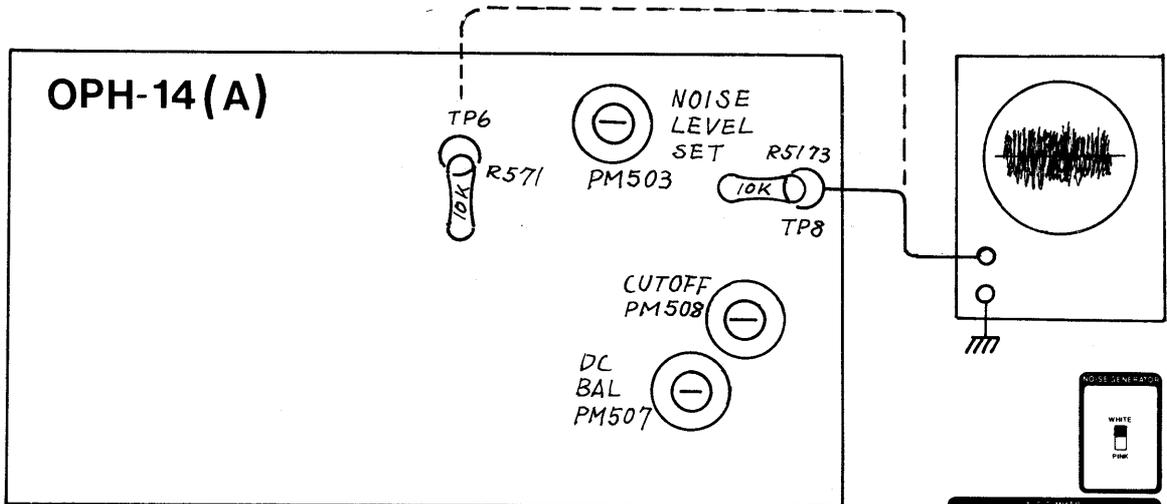

Connect an oscilloscope to TP6.


Adjust PM503 to obtain the noise level of 20Vp-p.

5. e. VCA

VCA DC Balance

Connect an oscilloscope to TP8.



With A, D, S, R sliders at 0 and no input signals, adjust PM507 so that output signal is minimized.

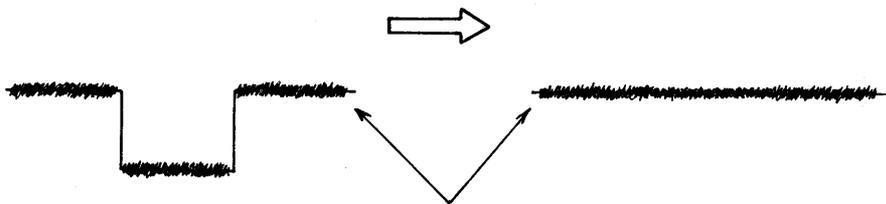


Residual Noise



VCA Cutoff

Feed VCO-1 signal set at maximum and adjust PM508 so that output is about to come out.

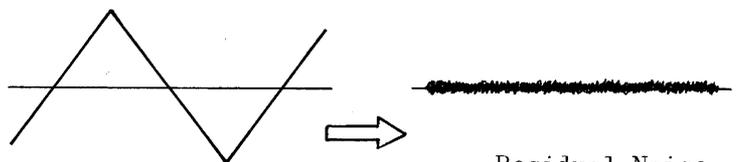


Residual Noise

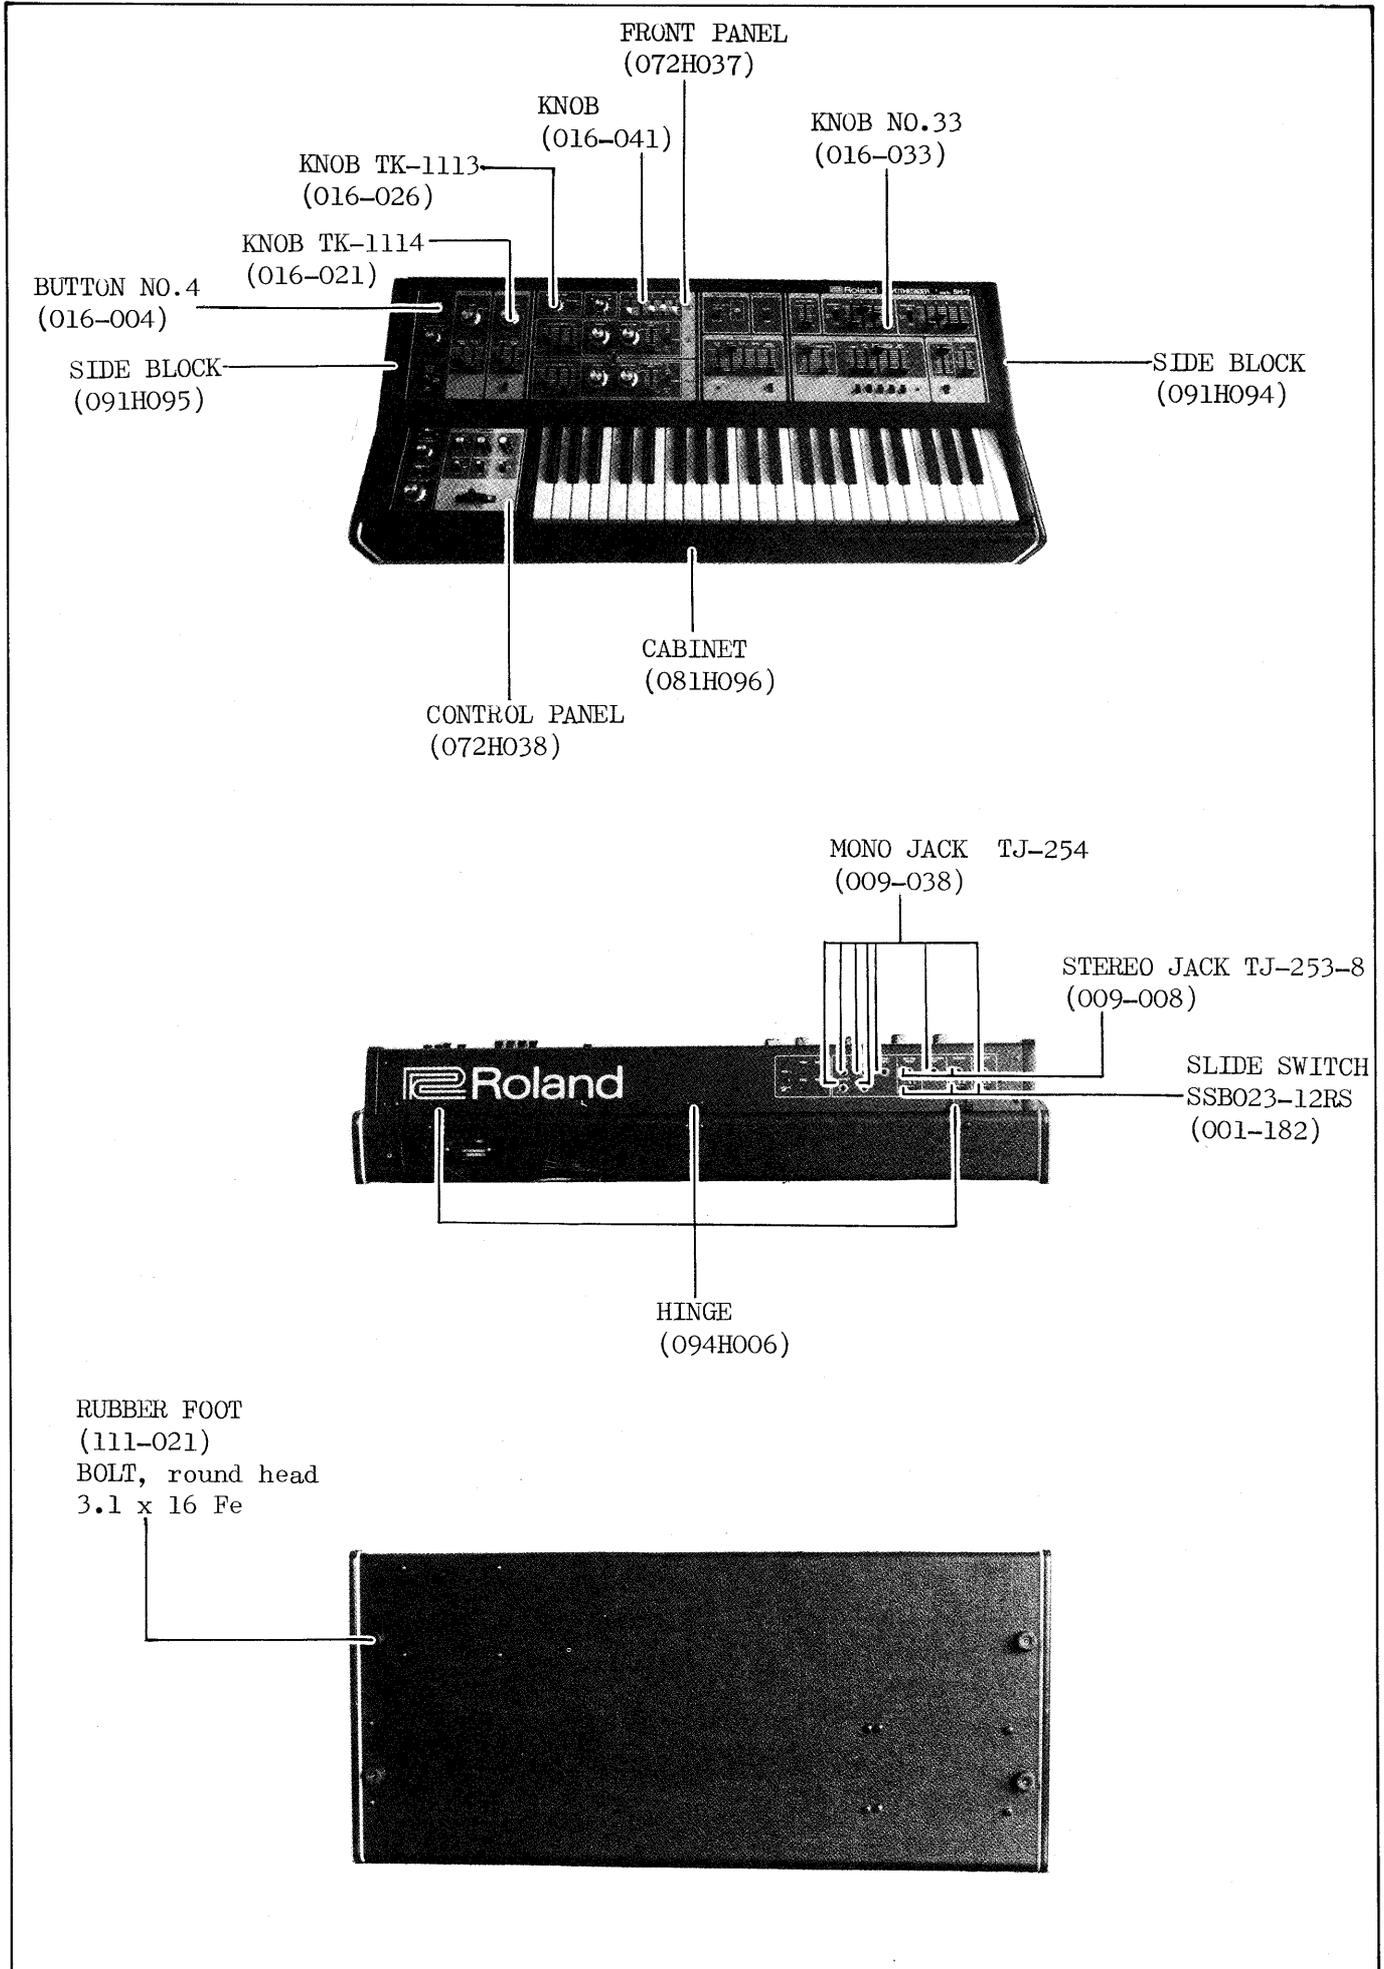


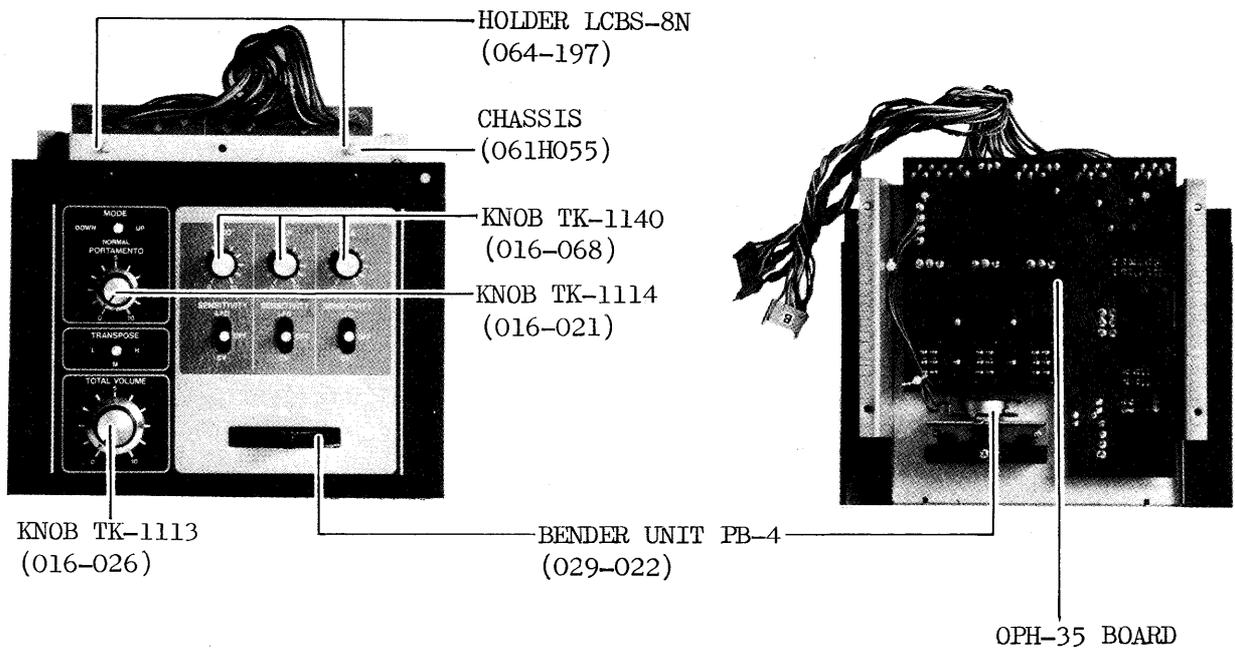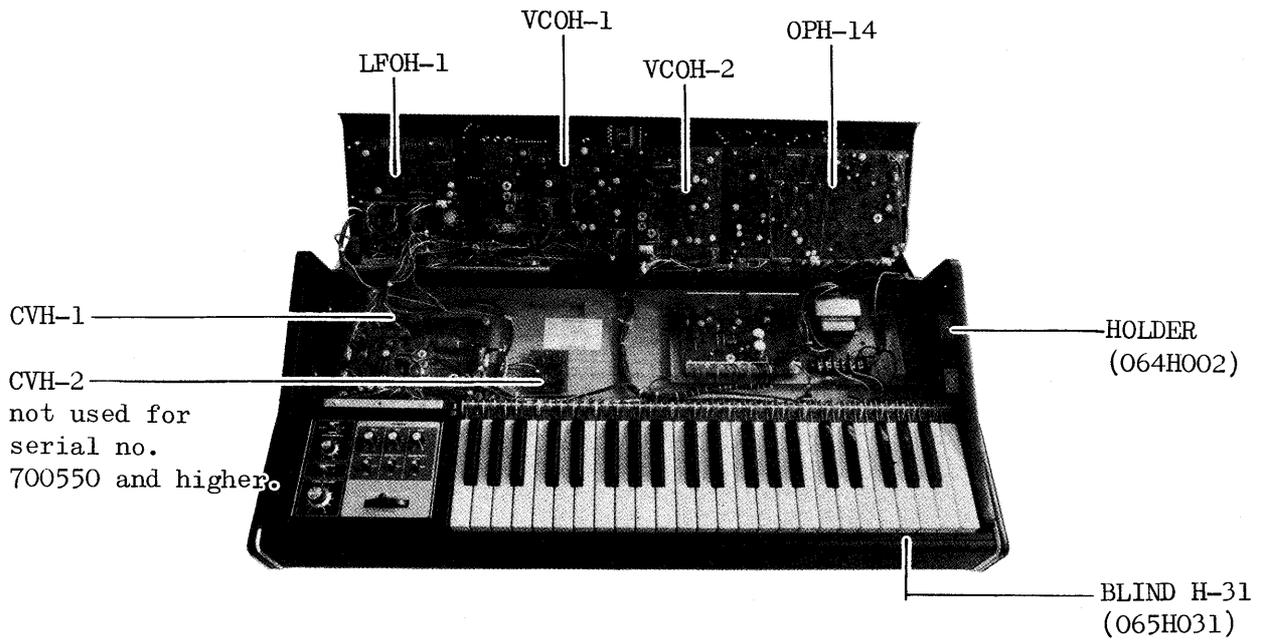

POWER SWITCH

- 100V: SDG5P001-1 (001-215)
- 117V: SDG5P001-2 (001-216)
- 220/240V: SDG5P502 (001-217)

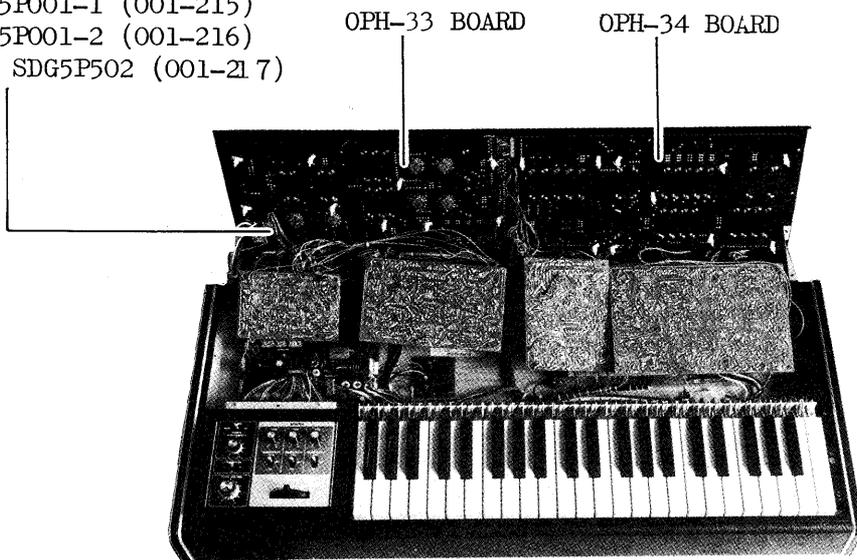

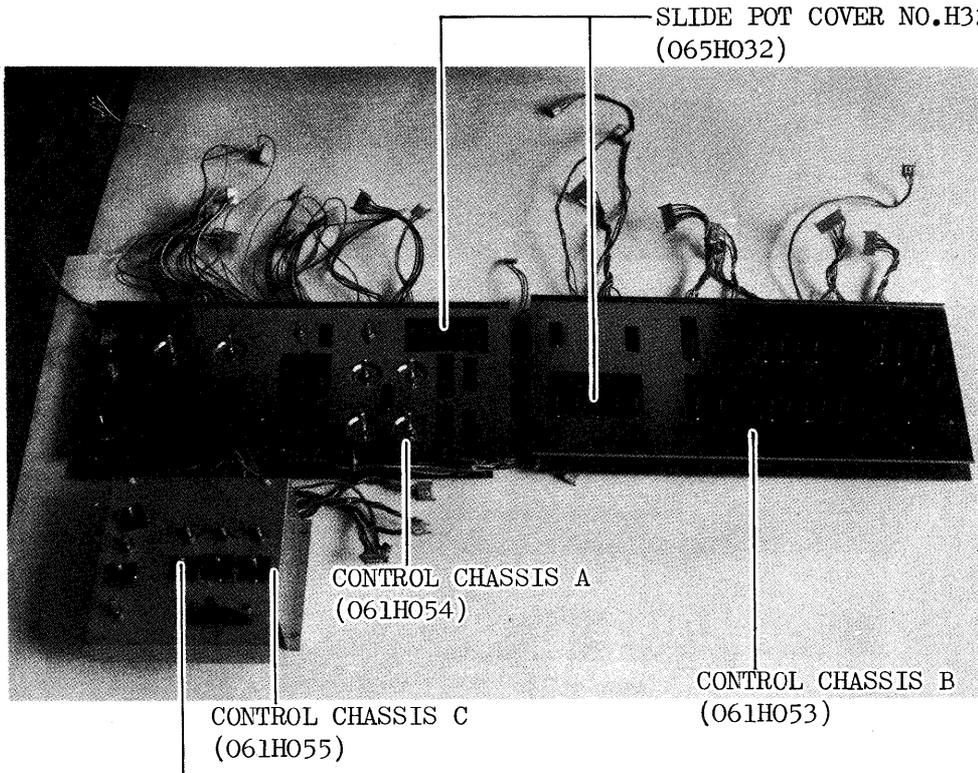

SLIDE POT COVER NO.H32  
(065H032)

CONTROL CHASSIS A  
(061H054)

CONTROL CHASSIS B  
(061H053)

CONTROL CHASSIS C  
(061H055)

SWITCH COVER NO.H33  
(065H033)

POWER TRANSFORMER  
022-110C (100/120V)  
022-110D (220/240V)


HEAT SINK  
(048-052)

LINE CORD STRAIN RELIEF  
BU-4796-B  
(047-036)

PCB HOLDER  
LCBS-4N  
(064-033)

PSH-13 BOARD (100/120V)  
PSH-14 BOARD (220/240V)

LINE CORD STRAIN RELI  
1702B (047-022)  
1704B (047-037)

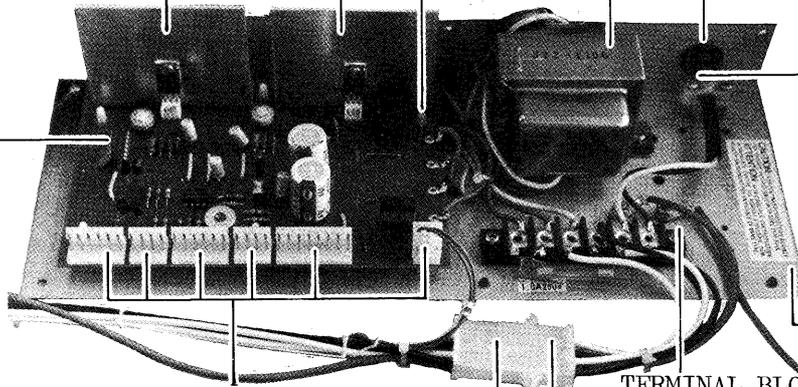

CHASSIS  
(061-057)

WAFER TERMINAL  
3P: 5028-03A (010-106)  
4P: 5028-04A (010-107)  
6P: 5028-06A (010-109)  
8P: 5028-08A (010-111)

TERMINAL BLOCK  
TT-501D1 6P  
(042-044)

CONNECTOR 3191-04P  
(010-167)


CONNECTOR 3191-04R  
(010-168)  
TERMINAL PIN 1381TL  
(042-043)

TERMINAL PIN 1381ATL  
(042-042)

PART NO.	PART AND DESCRIPTION	PART NO.	PART AND DESCRIPTION
081H096	Cabinet		Use the following PCB's,
091H094	Side Block, right		for replacement for the predecessors.
091H095	Side Block, left	159H001A	CVH-1A (700550 and higher)
111H021	Rubber Foot G-5	052H101A	CVH-1A PCB less parts
064H002	Holder, side block	152H001A	VCOH-1A (700600 and higher)
072H037	Front Panel	052H098B	VCOH-1A PCB less parts
072H038	Control Panel	152H002B	VCOH-2B (700650 and higher)
064H046	Holder, front panel	052H099D	VCOH-2B PCB less parts
094H006	Hinge	158H001A	LFOH-1A (700460 and higher)
016-004	Button No.4, power switch	052H097B	LFOH-1A PCB less parts
016-021	Knob TK-1114, small for rotary pot	149H014A	OPH-14A (700650 and higher)
016-026	Knob TK-1113, large for rotary pot	052H100B	OPH-14A PCB less parts
016-068	Knob TK-1140, mini for rotary pot	149H033	OPH-33
016-033	Knob No.33, for slide pot	052H094A	OPH-33 PCB less parts
016-041	Knob No.41, for slide pot (white)	149H034	OPH-34
061H053	Chassis B, control	052H095A	OPH-34 PCB less parts
061H054	Chassis A, control	149H035	OPH-35
061H055	Chassis C, control	052H096A	OPH-35 PCB less parts
061H056	Sub-chassis		(700650 and higher)
061H057	Power Supply Chassis	052H103	Sub-Chassis PCB less parts
068H020	Cover, LED	146-013A	PSH-13A
065H032	Cover, slide pot	146-014A	PSH-14A
065H033	Cover, switch	052H102A	PSH-13/14A PCB less parts
064H045	Holder, power switch		(700650 and higher)
064-033	Holder LCBS-4N, PCB	010-051	Connector 3024-02C, LED
064-147	Holder LCBS-6N, PCB	010-166	Connector 3024-03C, Tr
	(serial no. up to 700599)	010-112	Connector Housing EMCB 0312A01
064-200	Holder DLCBS-6N, PCB	010-114	Connector Housing EMCB 0320A01
	(serial no. 700600 and higher)	010-115	Connector Housing EMCB 0330A01
064-197	Holder LCBS-8N, PCB	010-154	Connector Housing EMCB 03-R001
064-194	Collar Bush, inner NB-300	010-159	Connector Housing EMCB 03-R002
064-194	Collar Bush, outer NA-310	010-161	Connector Housing EMCB 0510A01
012-018	Fuse Holder XN1153 (220/240V)	010-117	Connector Housing EMCB 0512A01
012-003	Fuse Holder TF753 (220/240V)	010-118	Connector Housing EMCB 0516A01
008-041	Fuse MGP 1A (100/117V)	010-119	Connector Housing EMCB 0520A01
008-066	Fuse SEMKO 1A (220/240V)	010-120	Connector Housing EMCB 0530A01
003-024	Fuse SGA 0.5A, midget (220/240V)	010-155	Connector Housing EMCB 05-R001
068-020	Bush No.20	010-123	Connector Housing EMCB 0616A01
068-005	Insulating Bush, jack	010-124	Connector Housing EMCB 0620A01
001-201	Lever Switch SLE-623-18P	010-125	Connector Housing EMCB 0630A01
001-202	Lever Switch SLE-643-18P	010-128	Connector Housing EMCB 0716A01
001-207	Rotary Switch SRN-1025N-K25	010-132	Connector Housing EMCB 0912A01
001-208	Rotary Switch SRN-1024N-K25	010-133	Connector Housing EMCB 0916A01
001-209	Rotary Switch SRN-1023N-K25	010-135	Connector Housing EMCB 0930A01
001-182	Slide Switch SSB022-12PN	010-165	Connector Housing EMCB 1010A01
001-183	Slide Switch SSB023-12PN	010-138	Connector Housing EMCB 1016A01
001-215	Power Switch SDG5P001-1 (100V)	010-139	Connector Housing EMCB 1020A01
001-216	Power Switch SDG5P001-2 (117V)	010-142	I-type PLUG EMC-S0301
001-217	Power Switch SDG5P502 (220/240V)	010-143	I-type PLUG EMC-S0501
009-038	Jack TJ-254 (mono)	010-144	I-type PLUG EMC-S0601
009-008	Jack TJ-253-8 (stereo)	010-145	I-type PLUG EMC-S0701
029-022	Bender Unit PB-4	010-146	I-type PLUG EMC-S0901
		010-147	I-type PLUG EMC-S1001
		010-149	L-type PLUG EMC-S0501L
		010-153	L-type PLUG EMC S1001L
		010-106	Wafer Terminal 5028-03A
		010-107	Wafer Terminal 5028-04A

PART NO.	PART AND DESCRIPTION	PART NO.	PART AND DESCRIPTION
010-108	Wafer Terminal 5028-05A		RESISTOR
010-109	Wafer Terminal 5028-06A		All CRB1/4FX resistors are
010-111	Wafer Terminal 5028-08A		+1% tolerance.
017-003	Tr 2SC1000-GR	044-823	200 CRB1/4FX
017-010	Tr 2SD234-0	044-907	330 CRB1/4FX
017-016	Tr 2SK30A-GR	044-830	1K CRB1/4FX
017-036	Tr E-412 (ITS 30546)	044-831	1.5K CRB1/4FX
017-039	Tr NF510	044-832	2.2K CRB1/4FX
017-046	Tr 2SA828-R, noise generator	044-833	3.3K CRB1/4FX
017-071	Tr 2SK30A-Y FET	044-910	3.6K CRB1/4FX
017-097	Tr 2SA826-Q	044-834	3.9K CRB1/4FX
017-118	Tr 2SC1740-Q	044-911	4.7K CRB1/4FX
018-005	Diode 1S1555	044-864	5K CRB1/4FX
018-015	Diode SDT1000 (thermistor)	044-912	5.6K CRB1/4FX
018-018	Diode 1N4003	044-835	6K CRB1/4FX
018-062	MI152 (rectifier)	044-837	8.2K CRB1/4FX
018-063	MI152R (rectifier)	044-838	10K CRB1/4FX
018-079	Diode 1S2454	044-914	11K CRB1/4FX
019-009	LED LRO601R	044-915	12K CRB1/4FX
020-007	LM3216	044-839	15K CRB1/4FX
020-010	TA7504M	044-887	20K CRB1/4FX
020-015	CA3080-GR (CVH-1)	044-916	27K CRB1/4FX
020-015	CA3080-BL (OPH-14)	044-895	30K CRB1/4FX
020-021	ITS1276	044-841	33K CRB1/4FX
020-024	uA301HC	044-842	47K CRB1/4FX
020-026	LM1496N	044-917	50K CRB1/4FX
020-027	TA7136P	044-843	56K CRB1/4FX
020-032	uA726HC	044-846	100K CRB1/4FX
020-039	DN819	044-848	150K CRB1/4FX
020-054	LM311H	044-852	270K CRB1/4FX
020-062	uPC1458C	044-845	330K CRB1/4FX
020-104	CD4081BE	044-856	470K CRB1/4FX
020-105	CA3140T	044-860	1M CRB1/4FX
	SLIDE POT		CAPACITOR
028-036	EVA-QOAC16A15 100KA	035-156	150p 50V-V-J (styrole)
028-025	EVA-QOAC16B15 100KB	035-168	470p 50V-V-J (styrole)
029-094	EVA-QOAC16D15 100KD	032-191	10u 16V ECEA16N10 (non-polar)
028-038	EVA-QOAC16A55 500KA	035-091	0.33u ECQF2334M (polypropylene)
028-039	EVA-QOAC16A16 1MA	032-099	1u 35V-V-K (tantalum)
029-097	EVA-QOAC16D16 1MD	032-226	2.2u 35V-V-K (tantalum)
028-040	EVA-QOAC16A26 2MA	032-227	3.3u 35V-V-K (tantalum)
029-295	EVB-LOAC16A15 100KA x 2		Carbon resistors, and electrolytic, mylar and ceramic capacitors are omitted.
	ROTARY POT		<b>PARTS ORDERING INFORMATION</b>
028-794	VM10R-S15B14 10KB		Name of part number of some of the parts is changed from those printed on previously issued parts list. When ordering replacement parts, be sure to follow the description on the present issue.
028-76C	VM10R-K20B14 10KB		When ordering parts, be sure to include the following information:
028-727	VM10R-K15B15 100KB		1. Model and Serial Number
028-797	VM10R-S15B15 100KB		2. Part Number
028-857	GM70R-K15A26 2MA x 2		3. A Description of the Part
	TRIMMER POT		This parts list includes all standard stock replacement parts. No attempt has been made to include every nut, bolt and screw. If the necessity for a non-listed part arises, please write describing the parts location and function as well as model and serial number of the unit.
029-103	PNBO4C3A 501H 500B (metal film)		
029-104	PNBO4C3A 102H 1KB (metal film)		
029-106	PNBO4C3A 103H 10KB (metal film)		
029-109	PNBO4C3A 104H 100KB (metal film)		
029-463	SR19R-4.7KB (carbon film)		
029-465	SR19R-10KB (carbon film)		
029-461	SR19R-47KB (carbon film)		
029-471	SR19R-100KB (carbon film)		

# KEYBOARD PARTS

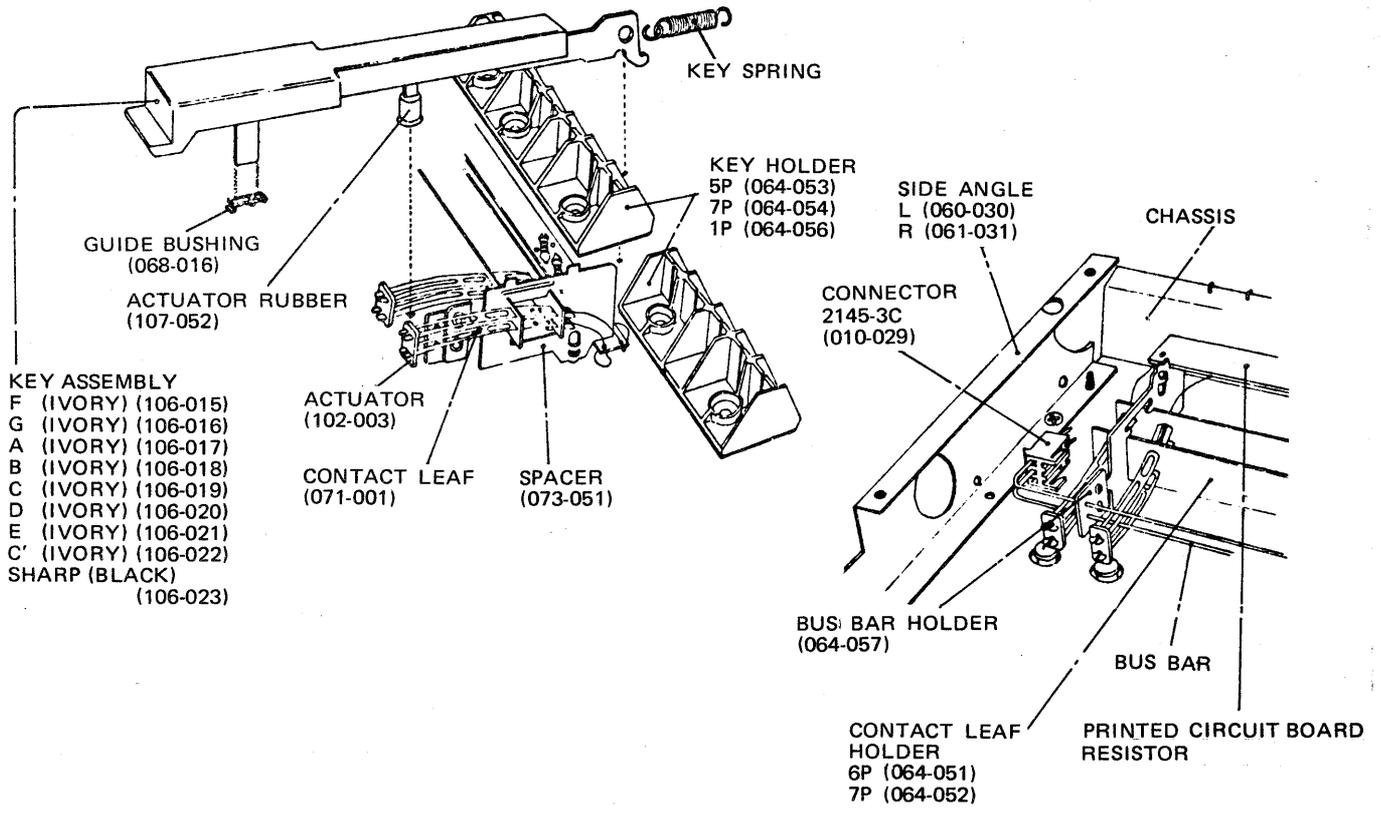

INSTRUMENT MODEL	NO. OF KEYS	KEYBOARD MODEL	KEY SPRING	BUS BAR	PCB		RESISTOR
					6P	7P	
SH-1	32	SK-132-D	070-052	G71H034	052-066	052-067	100 1/4W <u>+1%</u> CRB1/4FX
SH-3A	44	SK-142-A	070-052	071-008	052-066	052-067	100 1/4W <u>+1%</u> CRB1/4FX
SH-5	44	SK-142-B	070-052	071-008	052-066	052-067	100 1/4W <u>+1%</u> CRB1/4FX
SH-7	44	SK-142-C	070-052	071-008	052-066	052-067	100 1/4W <u>+1%</u> CRB1/4FX
SH-1000	37	SK-132-A	070-052	071-006	052-066	052-067	1K 1/4W <u>+2%</u>
SH-2000	37	SK-132-B	070-052	071-006	052-066	052-067	1K 1/4W <u>+2%</u> SELECTED
SYSTEM-100	37	SK-132-C	070-052	071-006	052-066	052-067	100 1/4W <u>+1%</u> CRB1/4FX
SYSTEM-700	61	SK-162-C	070-058	071-007	052-066	052-067	100 1/4W <u>+1%</u> CRA1/4FX
RS-101	61	SK-161-A	070-058	071-007	052-081	052-082	
RS-202	61	SK-161-A	070-058	071-007	052-081	052-082	
EP-10	61	SK-162-A	070-058	071-007			
EP-20	61	SK-162-A	070-058	071-007			
EP-30	61	SK-162B	070-058	071-007	052-081	052-082	