

NOTE HIGHEST REF R114 C125 CR112 FC115 J131 F107 S100 VR100

1

2

3

4

5

6

7

8

D

C

1

2

3

4

5

6

7

C

B

1

2

3

4

5

6

7

B

A

1

2

3

4

5

6


7

A


NOTICE: THIS CIRCUITRY IS PROTECTED BY U.S. PATENT NO. 5,197,102 (WITH PATENT PENDING) OWNED BY PEAVEY ELECTRONICS CORP. USE OR COPYING WITHOUT EXPRESS WRITTEN AUTHORITY FROM PEAVEY IS STRICTLY FORBIDDEN AND VIOLATORS WILL BE PROSECUTED TO THE FULLEST EXTENT ALLOWED UNDER U.S. PATENT LAWS.

| | | | |
|---|--------------------------|-------|--------|
| PEAVEY ELECTRONICS CORP. 711 A STREET MERIDIAN, MISSISSIPPI 39301 | | | |
| TITLE | CLASSIC 400 POWER SUPPLY | REV | A |
| SIZE | CODE NUMBER #81500041 | SHEET | 1 OF 1 |
| PRINT | | | |
| DATE | 7-MAR-96 | | |

POST EQ EFFECTS LOOP

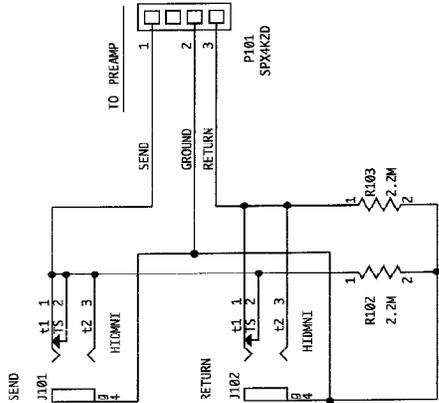


FOOT SWITCH

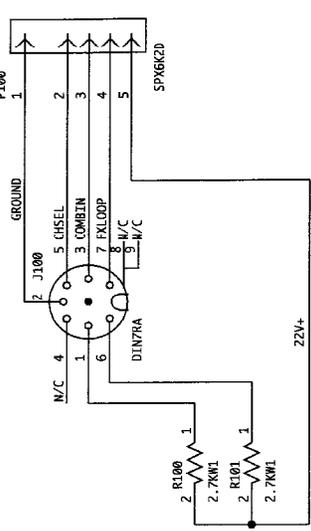

TO PREAMP


PRE/POST EQ

DIRECT OUT - BALANCED

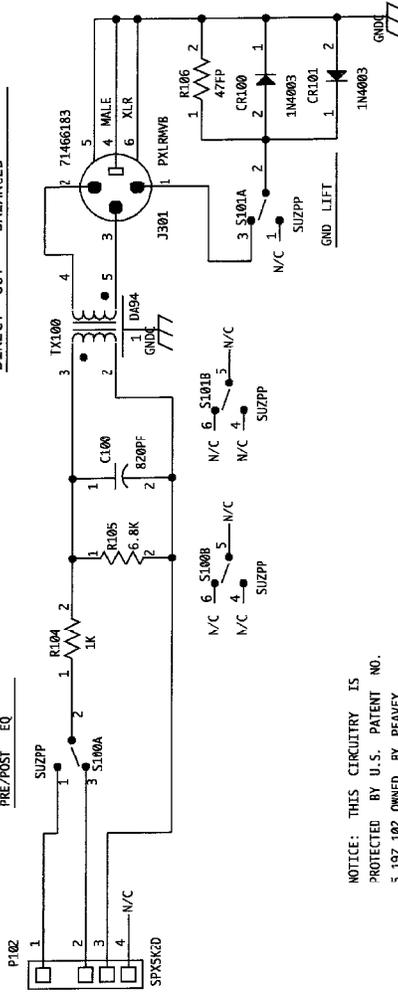


NOTICE: THIS CIRCUITRY IS PROTECTED BY U.S. PATENT NO. 5,197,102 OWNED BY PEAVEY ELECTRONICS CORP. USE OR COPYING WITHOUT EXPRESS WRITTEN AUTHORITY FROM PEAVEY IS STRICTLY FORBIDDEN AND VIOLATORS WILL BE PROSECUTED TO THE FULLEST EXTENT ALLOWED UNDER U.S. PATENT LAWS.

PREAMP/POWER AMP IN

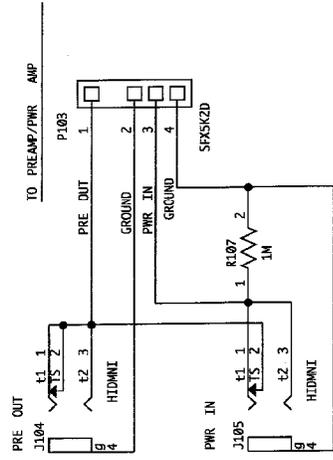

TITLE
 PEAVEY ELECTRONICS CORP.
 711 A STREET
 MERIDIAN, MISSISSIPPI 39301
 CLASSIC 400, PATCH BOARD


| | | | |
|-------|------|-----------|-----|
| SIZE | CODE | NUMBER | REV |
| B | | #81500041 | A |
| PRINT | | | |
| DATE | | 7-MAR-96 | |

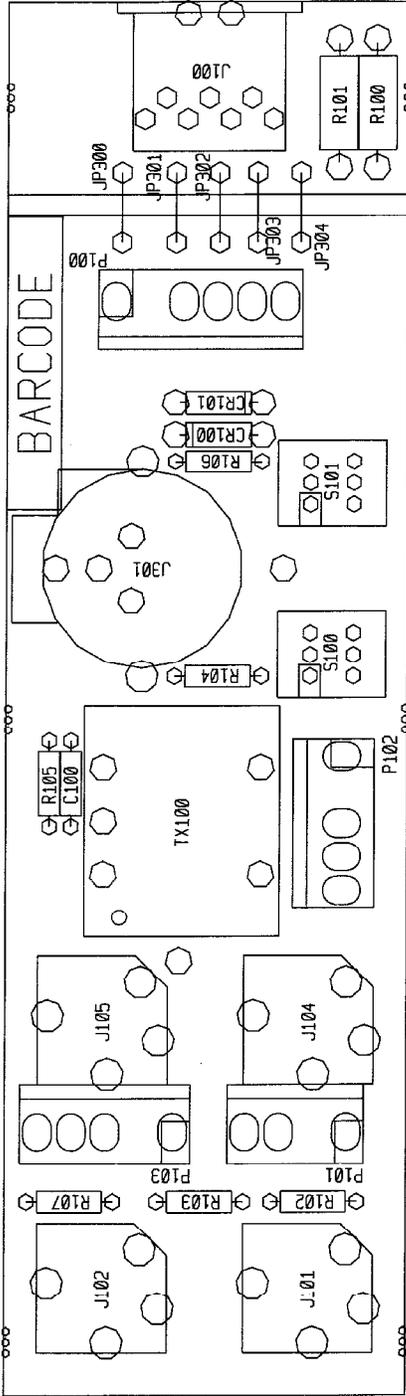

CLASSIC 400 PATCH

BOARD NAME: CLASSIC400 PATCH

| QTY. | NAME | VALUE | PART NUMBER | DESCRIPTION AND DEVICE DESIGNATIONS |
|------|---------|----------|-------------|---|
| 1 | 820PF | 820PF | 70340062 | 820PF--10%--50VDC--T/C--T&R |
| 2 | 1N4003 | 1N4003 | 70464003 | C100 1N4003 200V SILICON DIODE |
| 1 | DIN7RA | 71466226 | 71466226 | CR100, CR101 CONN 7P R/A PCMNT DIN W/ 4 MNT. HOLES |
| 4 | HIDMNI | 71466214 | 71466214 | J100 2 TIP HID JACK MINS W/SPD |
| 1 | PX_RWVB | 71466183 | 71466183 | J101, J102, J104, J105 XLB CONN VERT MALE W/BRKT |
| 1 | SPX6K2D | SPX6E2D | XXXXXXX | J301 5 EACH OF STAKED PINS |
| 1 | SPX4K2D | SPX4K2D | XXXXXXX | P100 3 EACH OF STAKE PINS |
| 2 | SPX5K2D | SPX5K2D | 73717003 | P101 4 EACH OF STAKED PINS |
| 2 | 2.7KW1 | 2.7KW1 | 70210016 | P102, P103 2.7K--1W--5%--MO--T&R |
| 2 | 2.2M | 2.2M | 70240040 | R100, R101 2.2M--1/4W--5%--CF--T&R |
| 1 | 1K | 1K | 70240017 | R102, R103 1K--1/4W--5%--CF--T&R |
| 1 | 6.8K | 6.8K | 70240024 | R104 6.8K--1/4W--5%--CF--T&R |
| 1 | 47FP | 47FP | 70240090 | R105 47FP--1/4W--5%--FP--T&R |
| 1 | 1M | 1M | 70240039 | R106 1M--1/4W--5%--CF--T&R |
| 2 | SUZPP | SUZPP? | 71322251 | R107 SUZ P/P SWITCH FC MOUNT |
| 1 | DA94 | DA94 | 70500094 | S100, S101 OUTPUT TRANSFORMER |
| | | | | TX100 |

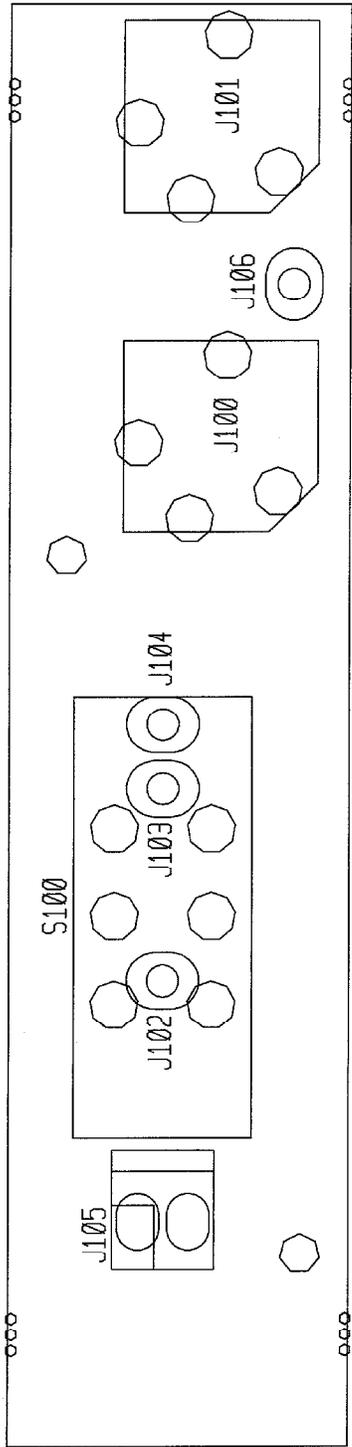


CLASSIC 400 SPEAKER OUTPUT BOARD

BOARD NAME: CL400 OUTPUT

| QTY. | NAME | VALUE | PART NUMBER | DESCRIPTION AND DEVICE DESIGNATIONS |
|------|---------|----------|-------------|--|
| 2 | HIDMNI | 71466214 | 71466214 | 2 TIP HID JACK NINS W/SPD J100, J101 |
| 3 | MMPD | 73711812 | 73711812 | R93-12 PN C.B. MALE MOLEX PIN J102, J103, J104 |
| 1 | SPX2 | SPX2 | XXXXXXX | 2 EACH OF STAKE PINS J105 |
| 1 | MMPD | 73711812 | 73711812 | R93-12 PN C.B. MALE MOLEX PIN J106 |
| 1 | SSW2231 | SSW2231 | 71322231 | DPDT SLIDE SW 1Q LEAD S100 |

! CAUTION !
 REFER ALL SERVICING TO PEAVEY
 AUTHORIZED SERVICE CENTER

DANGEROUS HIGH VOLTAGE EXISTS ON THE
 SECONDARY OF THE POWER TRANSFORMER

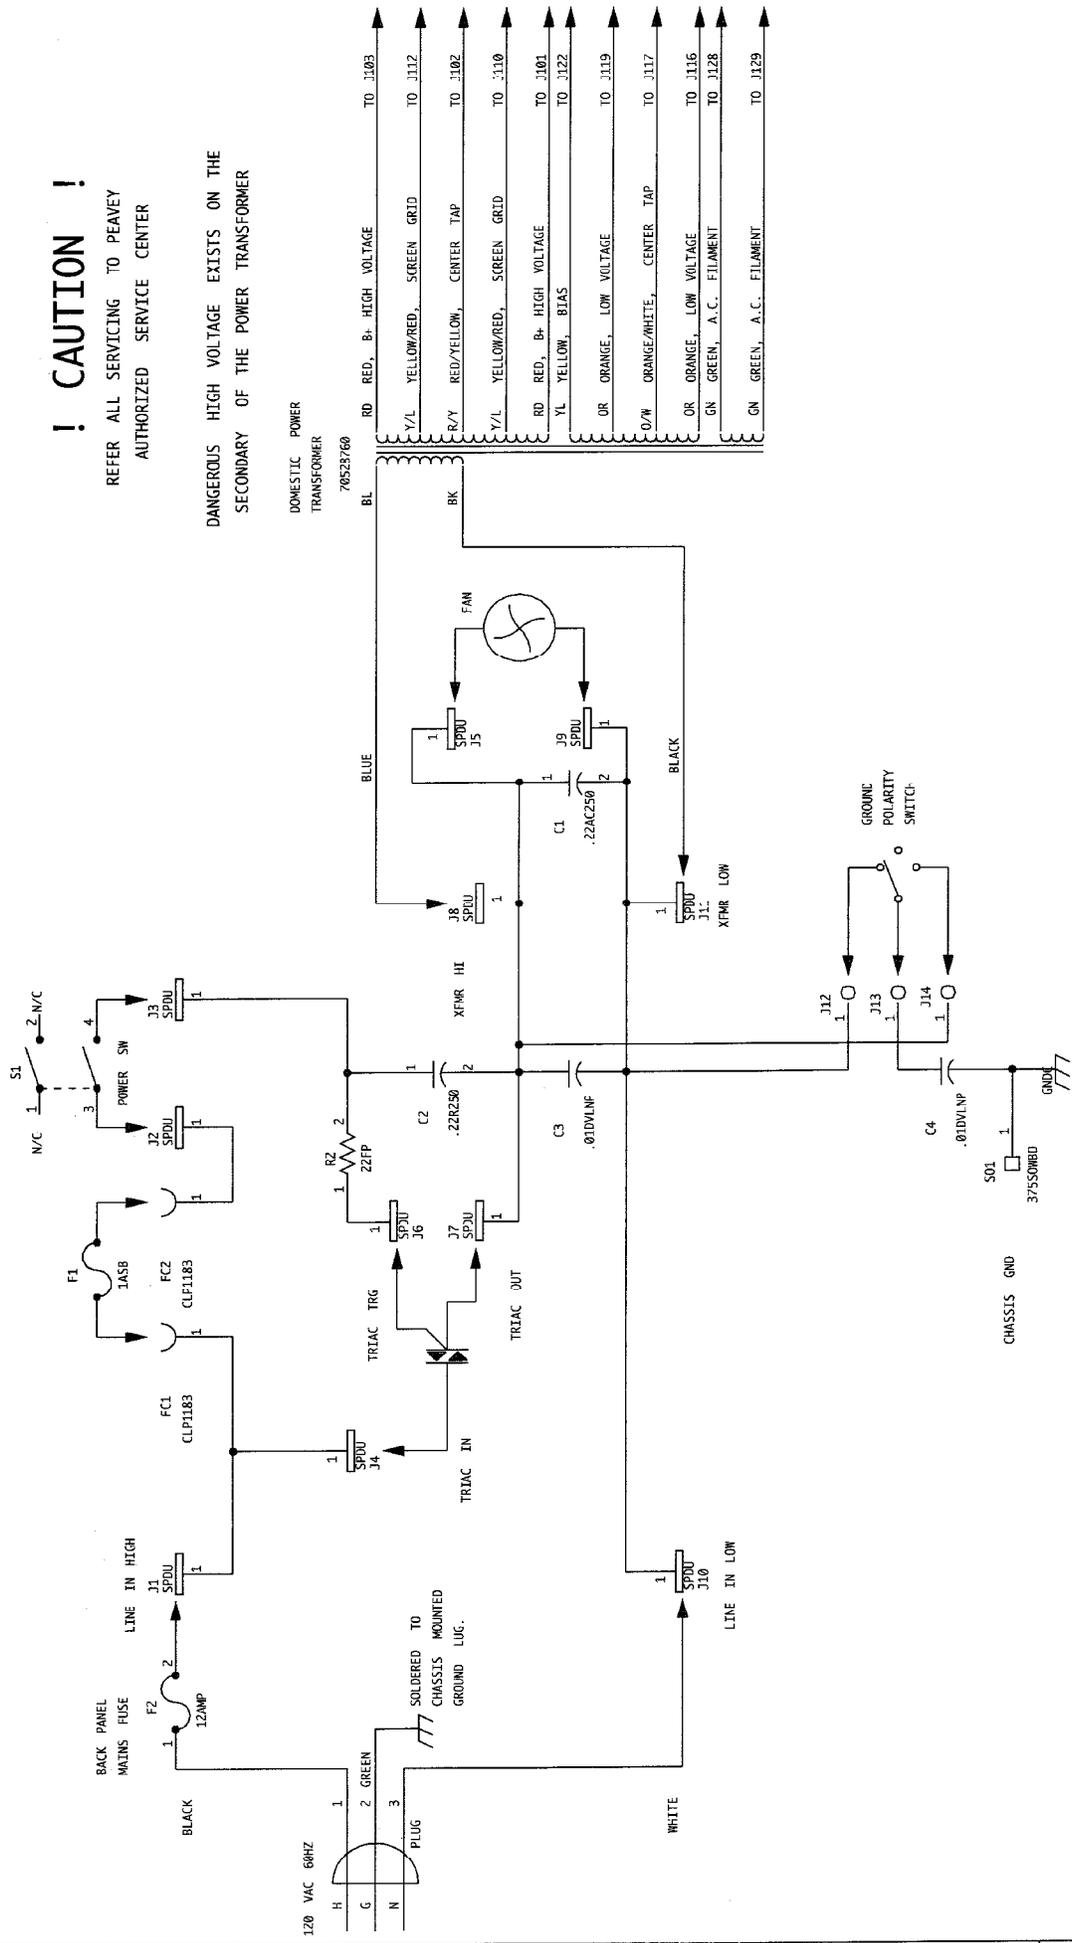


| | | | |
|---|-------------------|--------------------|----------|
| PEAVEY ELECTRONICS CORP. 711 A STREET MERIDIAN, MISSISSIPPI 39361 | | | |
| TITLE CLASSIC 400 DOMESTIC PRIMARY | | | |
| SIZE B | CODE #81508041 | NUMBER REV A | REV A |
| PRINT DATE | 24-APR-56 | SHEET 1 OF 1 | 1 |

! CAUTION !

REFER ALL SERVICING TO PEAVEY
AUTHORIZED SERVICE CENTER

DANGEROUS HIGH VOLTAGE EXISTS ON THE
SECONDARY OF THE POWER TRANSFORMER

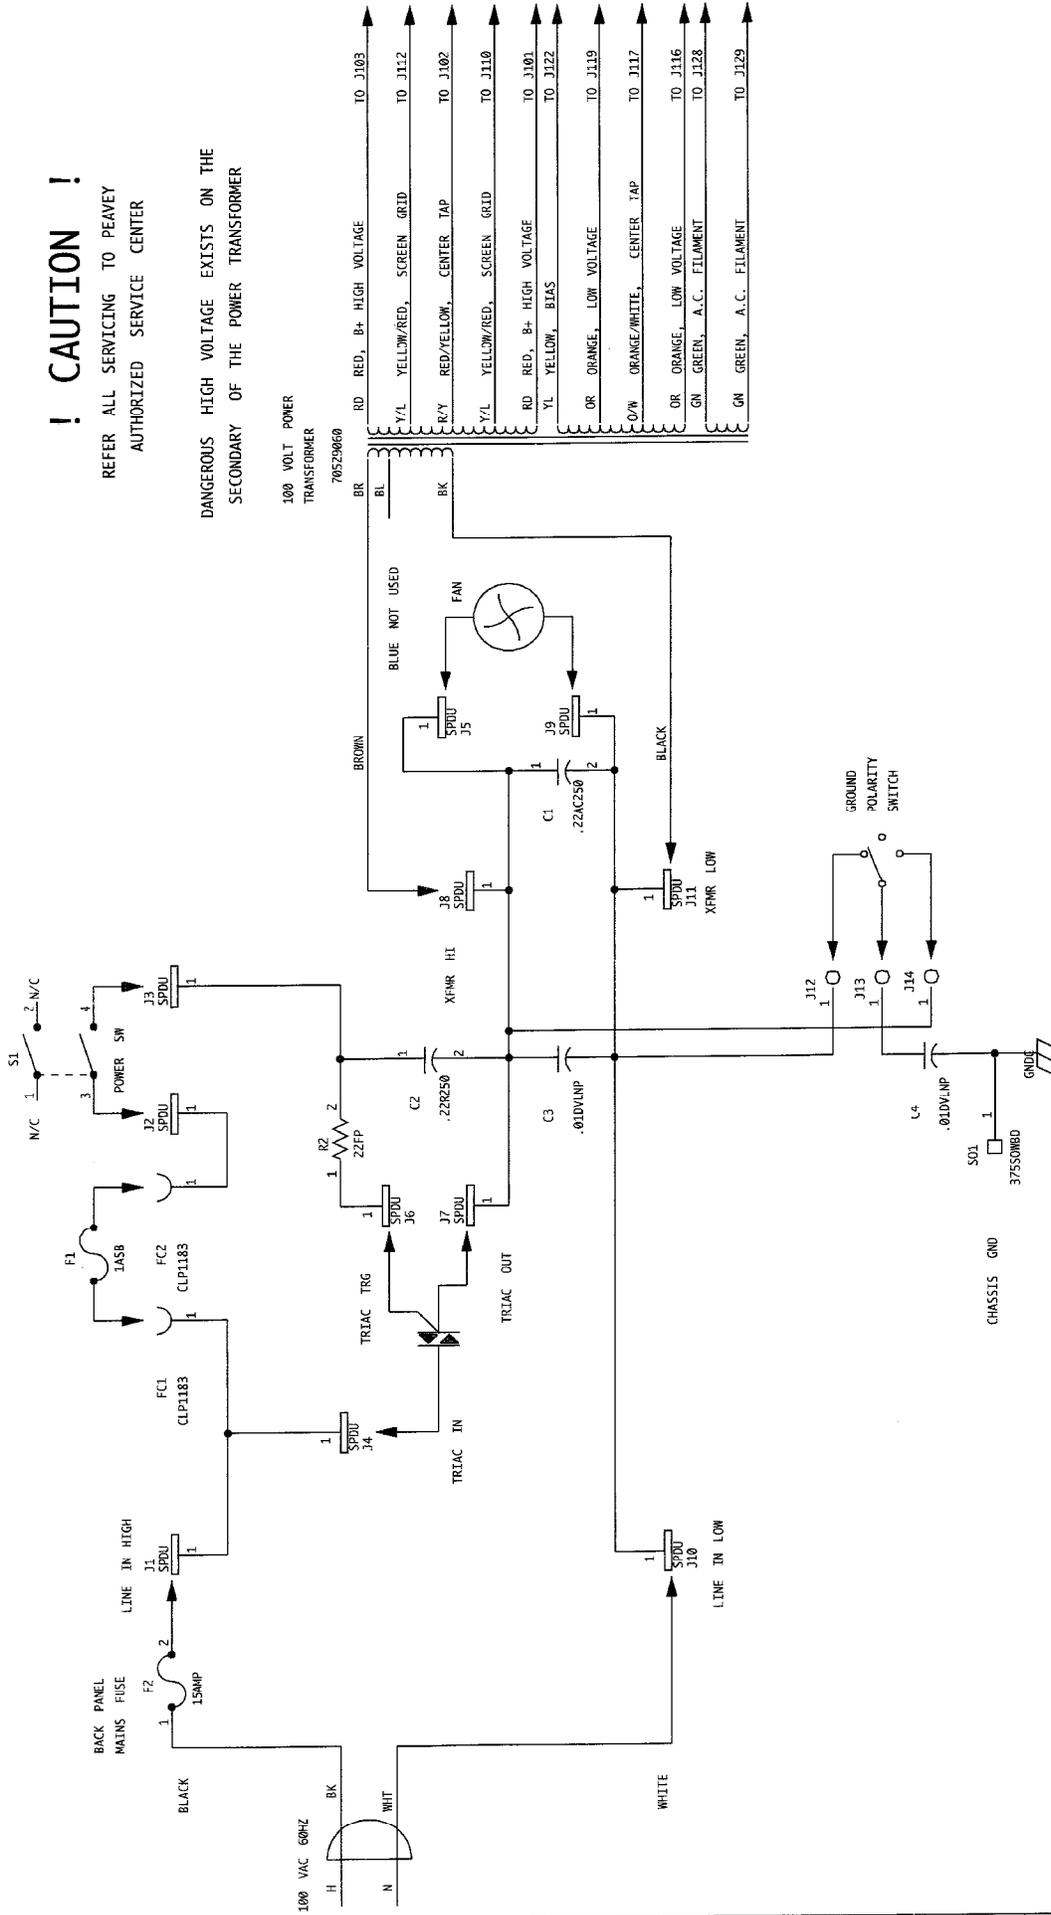

| | |
|---|--------|
| PEAVEY ELECTRONICS CORP. 711 A STREET MERIDIAN, MISSISSIPPI 39001 | |
| TITLE | |
| CLASSIC 400 100 VOLT PRIMARY | |
| SIZE CODE NUMBER | REV |
| B #81500041 | A |
| PRINT DATE | SHEET |
| 24-APR-96 | 1 OF 1 |

BOARD NAME: CLASSIC400AC

PART PART

* QTY. NAME VALUE

1 .22AC250 .22AC250 7032J161

1 .22R250 .22R250 7032J129

2 .01DVLNP .01DVLNP 7032J104

2 CLP1183 CLP1183 7090J183

11 SPDU 73716194 73716194

3 RMPU 73711811 73711811

1 22FP 22FP 7024J100

1 375SOWED 7090J779 7090J779

3 375SOWID 7090J295 7090J295

DESCRIPTION AND

DEVICE DESIGNATIONS *****

.22 mHG 20% 250vac MY R/a

.22MFD 10% 250V MY R/W

.01 MFD 125VDC DVL MYLAR +0-20%

FUSECLIP, PC MT - T&A

PC1, FC2

.250 PC MNT SPADE .093 PCB

J1, J2, J3, J4, J5, J6, J7, J8, J9, J10,

J11

M118-171 C.B. FEMALE MOLEX PIN

J12, J13, J14

22FP-1/4W-5%-FP-


R2

SPACER, 3/8,R(#4),.187 SWAGE BRASS

SO1

SPACER, 3/8,R(#4),.187 SWAGE ALUM.

SO2, SO3, SO4

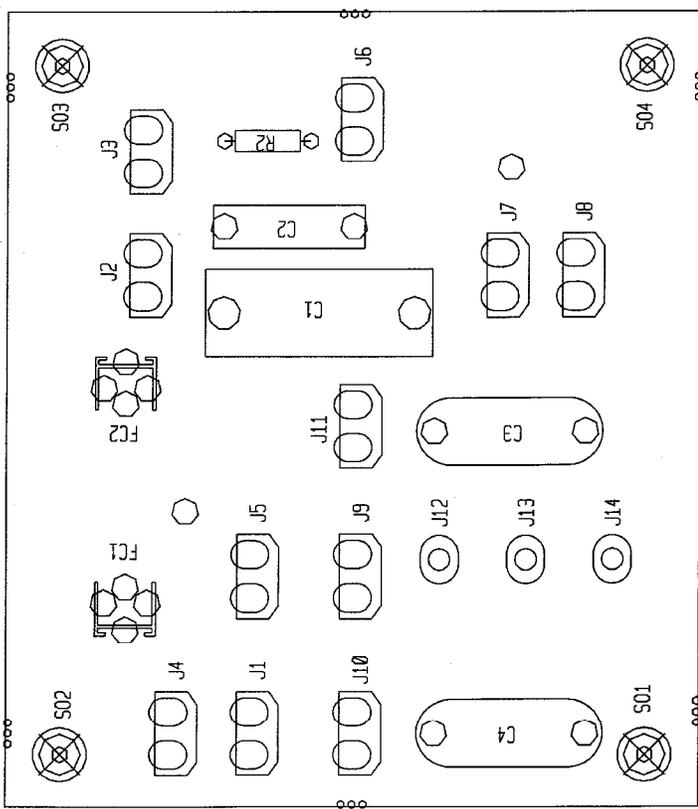


CLASSIC 400
AC PRIMARY (DOMESTIC)

! CAUTION !

REFER ALL SERVICING TO PEAVEY
AUTHORIZED SERVICE CENTER

DANGEROUS HIGH VOLTAGE EXISTS ON THE
SECONDARY OF THE POWER TRANSFORMER


EXPORT (230 VOLT)
POWER TRANSFORMER
70529360

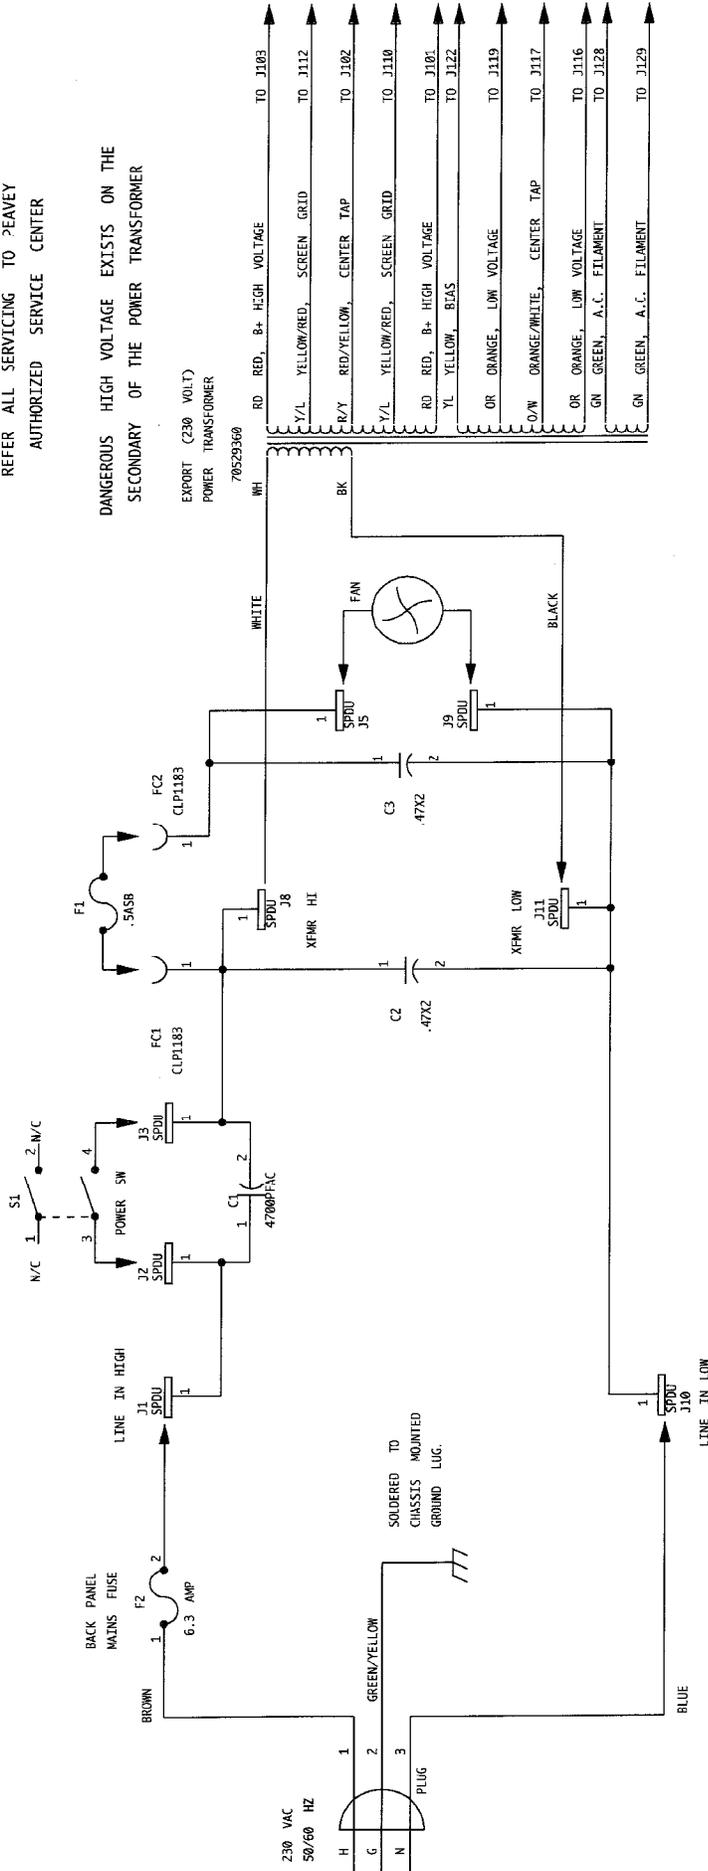

| | |
|--|-----------------------------|
| PEAVEY ELECTRONICS CORP. 711 A STREET MEMPHIS, MISSISSIPPI 39301 | |
| TITLE CLASSIC 400 PRIMARY EXPORT | |
| SIZE B | CODE NUMBER #81300041 |
| PRINT DATE | REV A |
| 24-APR-96 | |
| SHEET 1 OF 1 | |

BOARD NAME: CL400EXP

| QTY. | NAME | VALUE | PART NUMBER | DESCRIPTION AND DEVICE DESIGNATIONS |
|------|----------|----------|-------------|-------------------------------------|
| 1 | 4700PFAC | 4700PFAC | 70320114 | 4700PF 400VAC EXP LINE CAP X |
| 2 | .47X2 | .47X2 | 70320271 | .47MF-20%-275VAC-MP-R/W |
| 2 | CLP1183 | CLP1183 | 70901183 | FUSECLIP, PC MT - T&A |
| 8 | SPDU | 73716194 | 73716194 | FCL, FC2 |
| 2 | MMFU | 73711812 | 73711812 | .250 FC MNT SPADE .093 PCB |
| 2 | FMPU | 73711811 | 73711811 | J1, J2, J3, J5, J8, J9, J10, J11 |
| 1 | CL30 | CL30 | 70240202 | R93-12 FN C.B. MALE MOLEX PIN |
| 1 | 2.8KW15 | 2.8KW15 | 70250082 | J12, J13 |
| 4 | 375SOWD | 70900295 | 70900295 | M116-171 C.B. FEMALE MOLEX PIN |
| | | | | J14, J15 |
| | | | | INRUSH CURRENT LIMITER |
| | | | | R3 |
| | | | | 2800 15W 10% WW AXL |
| | | | | R4 |
| | | | | SPACER 3/8,R(#4),.187 SWAGE ALUM. |
| | | | | S01, S02, S03, S04 |

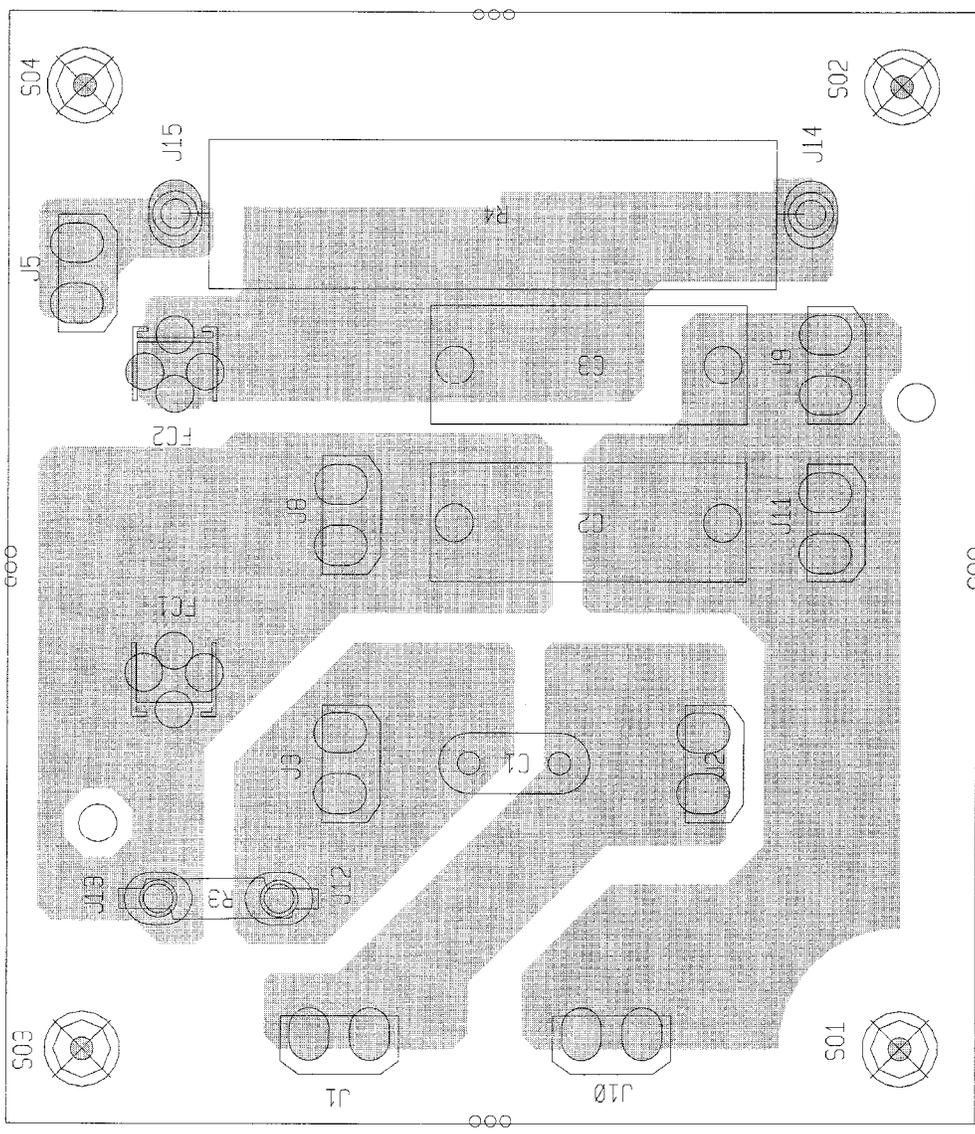

CLASSIC 400 EXPORT AC