

SANYO**LA1851N****DTS Single-chip Tuner IC**

Overview

The LA1851N is a tuner IC designed for home-use stereo equipment which supports the SD system and IF counter system and incorporates AM/FM IF/MPX functions on a single chip.

Features

- AM/FM tuner and multiplex demodulator on a single chip
- No multiplexer adjustments required
- Output (FM/AM) for IF counter buffer compatible with electronic tuning
- Stereo separation control
- Forced monaural and VCO stop functions
- Minimal multiplexer carrier leakage
- Excellent VCO temperature characteristics: $f_o = 0.1\%$ typ. with ± 50 deg. variation

Functions

[FM Block]

- IF amplifier
- Quadrature detector
- IF counter buffer
- S-meter output
- Tuner indicator (variable sensitivity)

[AM Block]

- RF amplifier
- Mixer
- Oscillator
- Oscillator buffer
- IF amplifier
- Detector
- AGC
- IF counter buffer
- Tuner indicator (variable sensitivity)


[MPX Block]

- PLL decoder
- ST indicator
- VCO stop
- Mute
- Separation control
- No VCO adjustment
- Forced monaural (VCO stop)

Package Dimensions

unit : mm

3196-DIP30SD

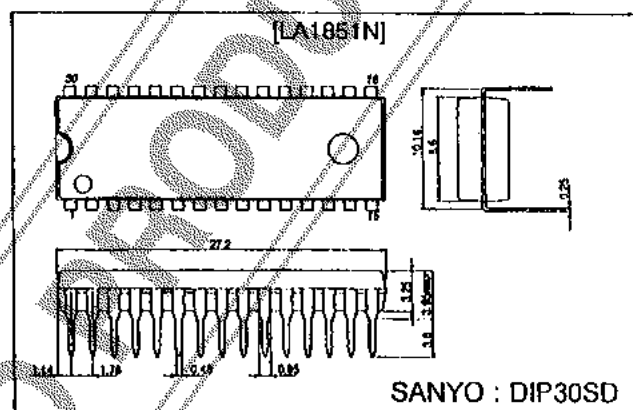

Specifications

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	$V_{CC \text{ max}}$	Pins 3, 7, 10, 21, 22 and 26	14	V
Maximum supply current	$I_{CC \text{ max}}$	Pin 3	40	mA
		Pins 21 and 22	20	mA
Allowable power dissipation	$P_d \text{ max}$	$T_a = 70^\circ\text{C}$	480	mW
Operating temperature	T_{opr}		-20 to +70	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to +125	$^\circ\text{C}$

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co., Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

43096HA(II)/40594HK/N0621'S No. 3231-1/15

LA1851N


Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		8.5	V
Operating supply voltage range	$V_{CC\text{ op}}$		6 to 12	V

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 8.5\text{ V}$


Parameter	Symbol	Conditions	min	typ	max	Unit
[AM: $f_{in} = 1\text{ MHz}$, 1 kHz tone]						
Quiescent current	I_{CCO}	No Input		26	37	mA
Detector output	V_{O1}	$V_{IN} = 23\text{ dB}\mu$, 30% AM	70	140	260	mV
	V_{O2}	$V_{IN} = 80\text{ dB}\mu$, 30% AM	170	280	390	mV
Signal-to-noise ratio	S/N1	$V_{IN} = 23\text{ dB}\mu$, 30% AM	15	19		dB
	S/N2	$V_{IN} = 80\text{ dB}\mu$, 30% AM	45	50		dB
Total harmonic distortion	THD1	$V_{IN} = 80\text{ dB}\mu$, 30% AM		0.5	1.2	%
	THD2	$V_{IN} = 100\text{ dB}\mu$, 30% AM		0.6	1.3	%
IF buffer output	V_{IF}	$V_{IN} = 20\text{ dB}\mu$	110	170	230	mV
Local oscillator buffer output	V_{OSC}	$f_{OSC} = 1.450\text{ MHz}$	290	350	420	mV
Tuner turn-on sensitivity	V_S	Variable sensitivity		(13)		dB μ
[FM mono: $f_{in} = 10.7\text{ MHz}$, 1 kHz tone]						
Quiescent current	I_{CCO}	No Input		27	38	mA
Input limiting sensitivity	LMS	3 dB down, 100% FM		32	38	dB μ
Demodulation output	V_O	$V_{IN} = 100\text{ dB}\mu$, 100% FM	380	560	750	mV
Signal-to-noise ratio	S/N	$V_{IN} = 100\text{ dB}\mu$	71	77		dB
Amplitude modulation rejection ratio	AMR	$V_{IN} = 100\text{ dB}\mu$, 30% AM, 1 kHz tone	48	61		dB
Total harmonic distortion	THD	$V_{IN} = 100\text{ dB}\mu$, 100% FM		0.2	1.0	%
Signal meter output	V_{SM1}	No input	0	0.1	0.3	%
	V_{SM2}	$V_{IN} = 70\text{ dB}\mu$	0.7	1.2	1.8	V
	V_{SM3}	$V_{IN} = 100\text{ dB}\mu$	2.1	2.9	3.3	V
IF buffer output	V_{IF}	$V_{IN} = 50\text{ dB}\mu$	170	260	350	mV
Tuner turn-on sensitivity	V_S	Variable sensitivity		(59)		dB μ
[FM stereo: L + R = 90%, pilot = 10%, $V_{IN} = 100\text{ dB}\mu$, $f_{in} = 1\text{ kHz}$]						
Channel separation	Sep 1K		30	45		dB
Total harmonic distortion	THD main	Stereo, main		0.3	1.0	%
Bandwidth	BW	Stereo, main	160	210	280	kHz
Channel balance	CB	Mono AM	-1.0	0	0.1	dB
Mute attenuation	ATT	Mono	67	82		dB
Lamp turn-on level	Pilot	Stereo, main	1.2	3.1	4.5	%
Lamp hysteresis	Hs	Stereo, main		(2.5)		dB

Note: Figures in parenthesis denote design guarantee values.

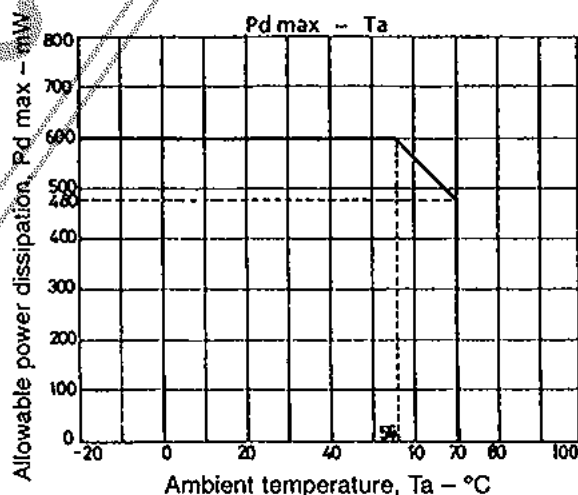


Block Diagram


• Forced monaural (→ VCO STOP) • When ST is ON, and the status changes from open to shorted, the mode is switched to forced monaural (VCO STOP).

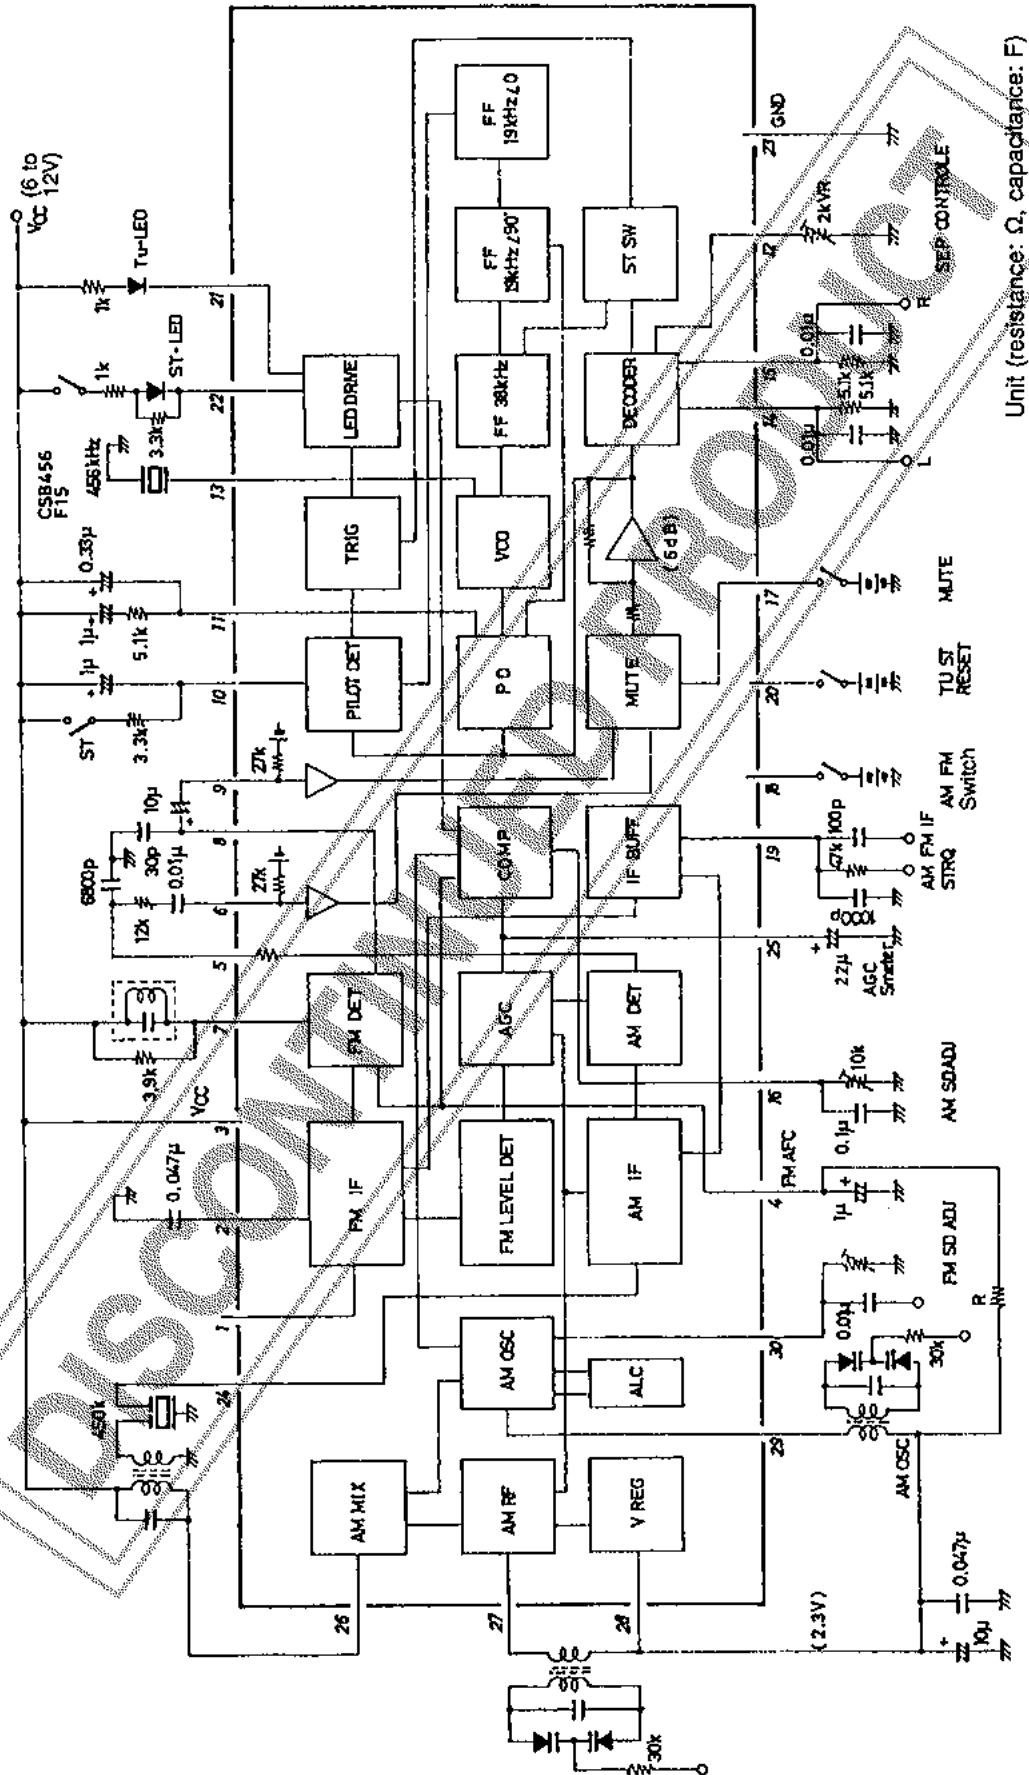









Test Circuit

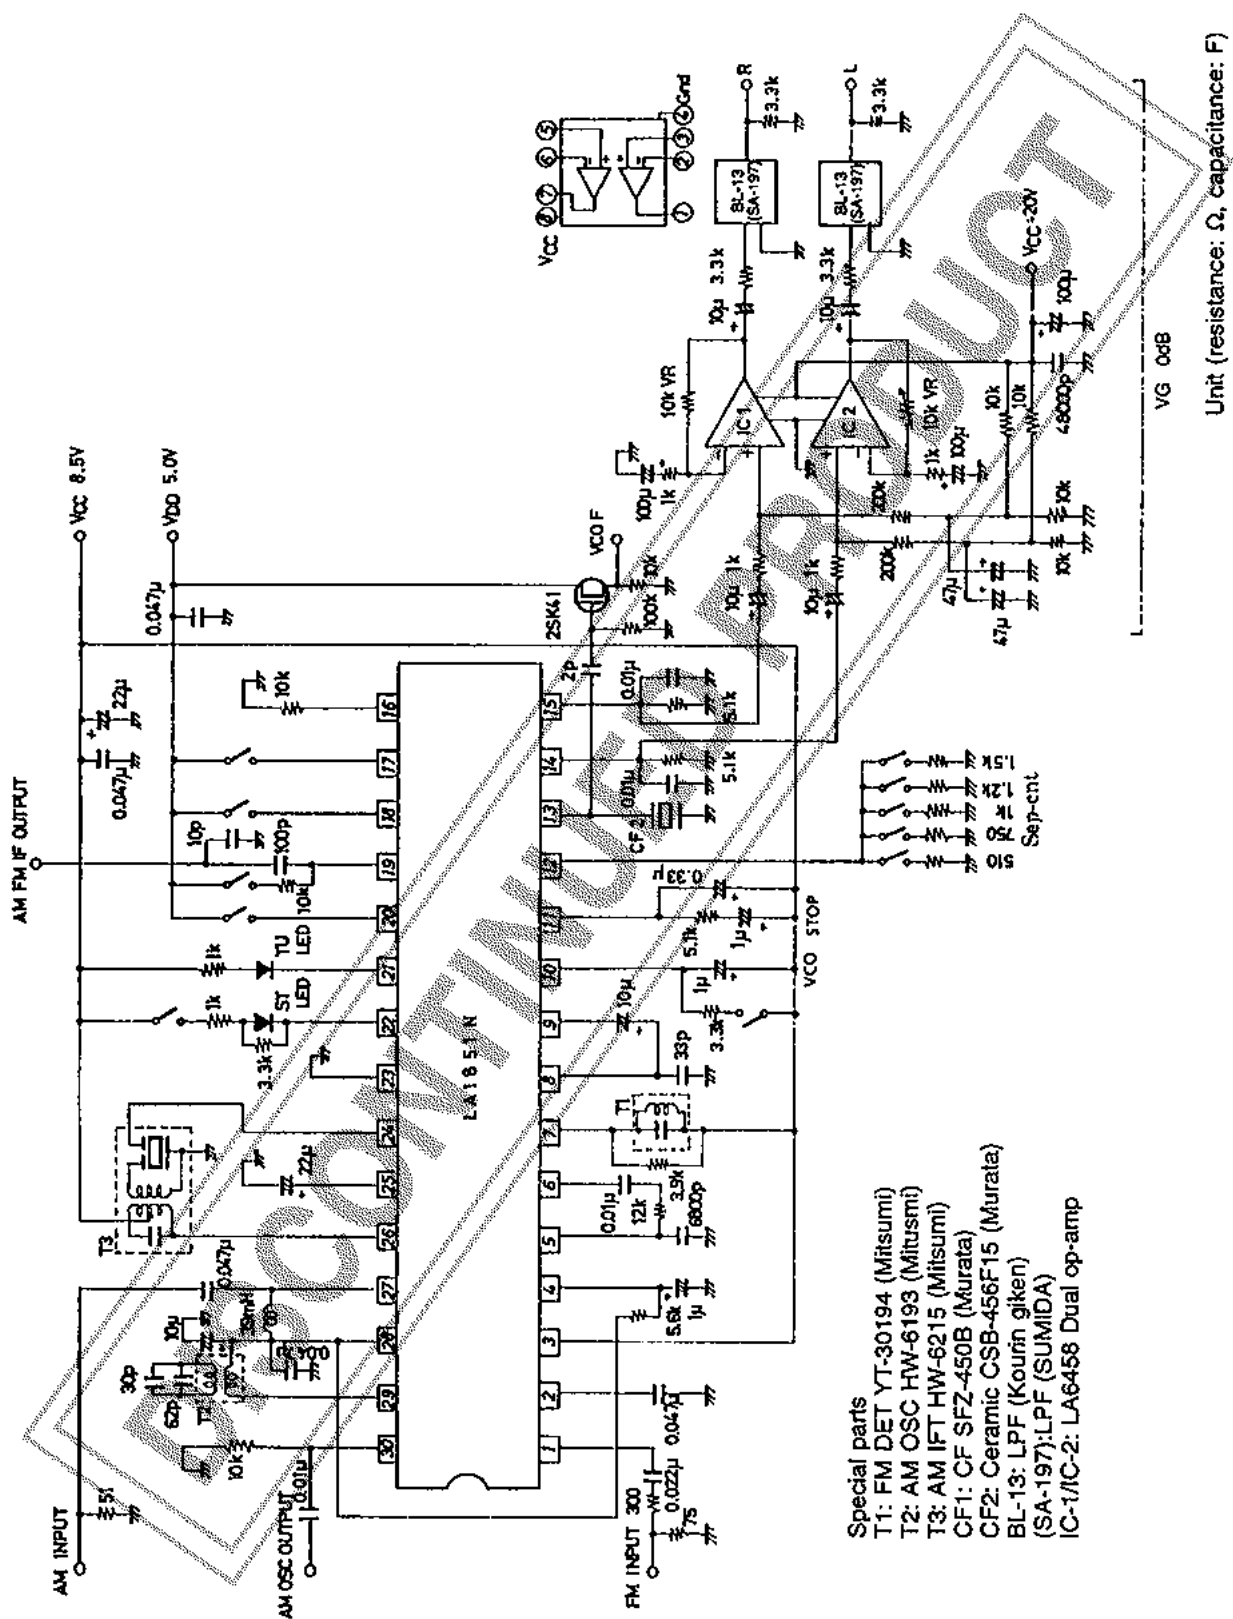

Printed Circuit Board Layout

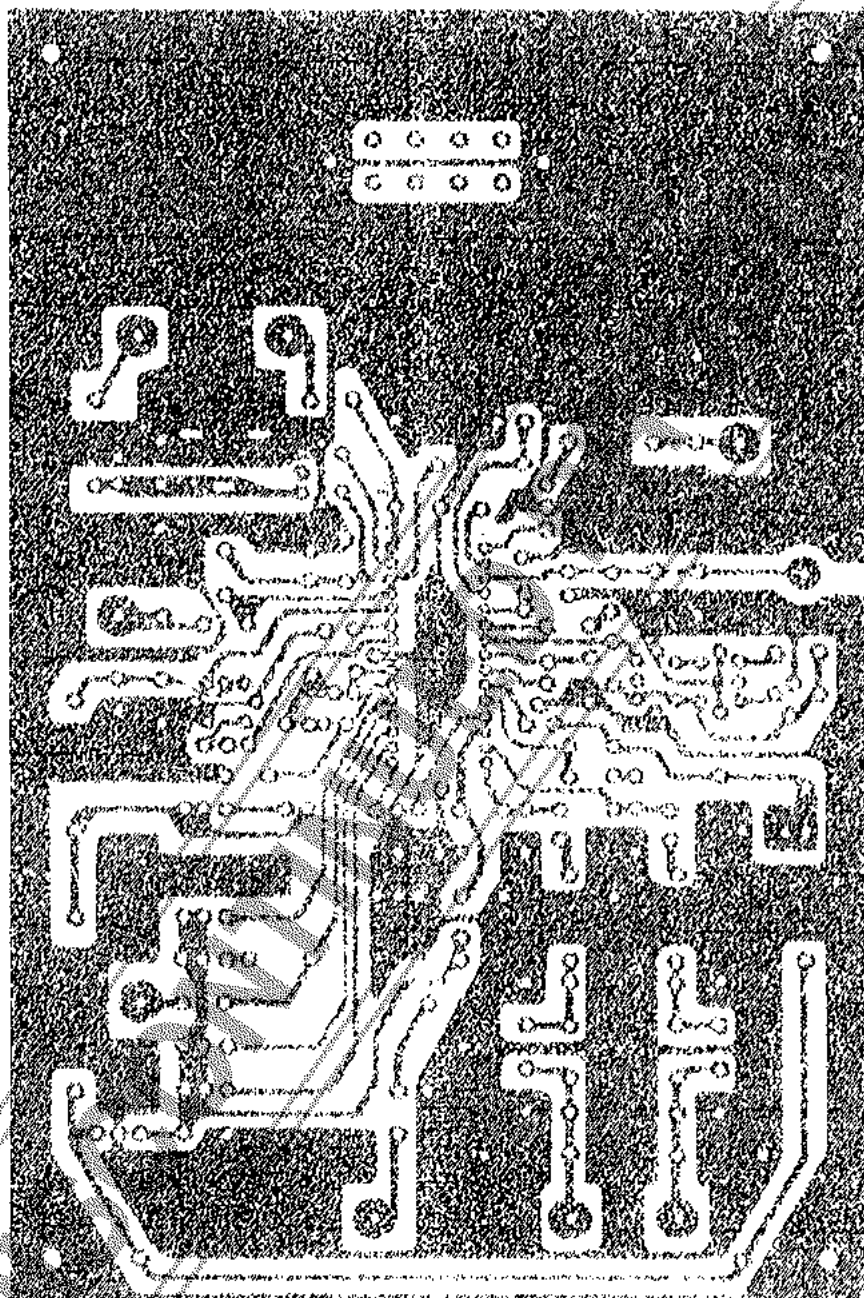

Pin Functions

Pin no.	Function	Internal equivalent circuit	Remarks
1	FM IF input		Input Impedance: 330 Ω
2	FM IF bias		
3	V _{CC}		
4	FM AFC output		Forced monaural mode is established in synchronization with the extinguishing of ST LED during FM AFC detuning.
5	AM demodulation output		
6	MPX AM DET input		MPX block AM demodulation input pin Input impedance: 27 k Ω
7	FM discriminator output		
8	FM demodulation output		Output Impedance: 5 k Ω
9	MPX FM DET output		MPX block FM demodulation input pin Input impedance: 27 k Ω
10	MPX pilot sync detection filter		MPX VCO is stopped by shorting the V10 voltage in the V3 V _{CC} line. However, a 3.3 k Ω current-limiting resistor is required.
11	MPX PLL loop filter		

Continued on next page.






Continued from preceding page.



Pin no.	Function	Internal equivalent circuit	Remarks
12	MPX Separation control		
13	MPX VCO		Ceramic oscillator connection pin. CSB456F15 (Murata) recommended
14	MPX Left channel output		
15	MPX Right channel output		
16	AM SD ADJ		
17	MPX AF muting drive		$V_{HI} (\geq 1.5 \text{ V})$: Mute on $V_{LO} (< 1.5 \text{ V})$: Mute off (μ -COM direct control enabled)
18	AM/FM switch		$V_{HI} (\geq 1.5 \text{ V})$: FM $V_{LO} (< 1.5 \text{ V})$: AM (μ -COM direct control enabled)
19	AM/FM IF counter output/ switch		$V_{HI} (\geq 1.5 \text{ V})$: IF CNT ON $V_{LO} (< 1.5 \text{ V})$: IF CNT OFF (μ -COM direct control enabled)
20	Forced TU/ST LED extinguishing drive pin		$V_{HI} (\geq 1.5 \text{ V})$: LED forced OFF (forced monaural mode) $V_{LO} (< 1.5 \text{ V})$: Normal (μ -COM direct control enabled)
21	AM/FM TU LED		
22	MPX ST LED		

Continued on next page.



LA1851N

Continued from preceding page.


Number	Symbol	Equivalent circuit	Description
23	AM/FM MPX GND		
24	AM IF input		Input impedance: 2 k Ω
25	AM AGC output FM S-meter output		
26	AM MIXER output		
27	AM RF input		
28	V Reg		V _{reg} = 2.3 V
29	AM OSC		
30	AM OSC buffer output/ FM SD ADJ		

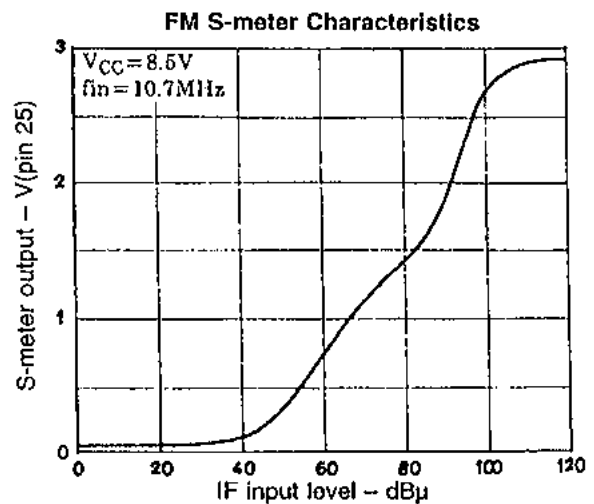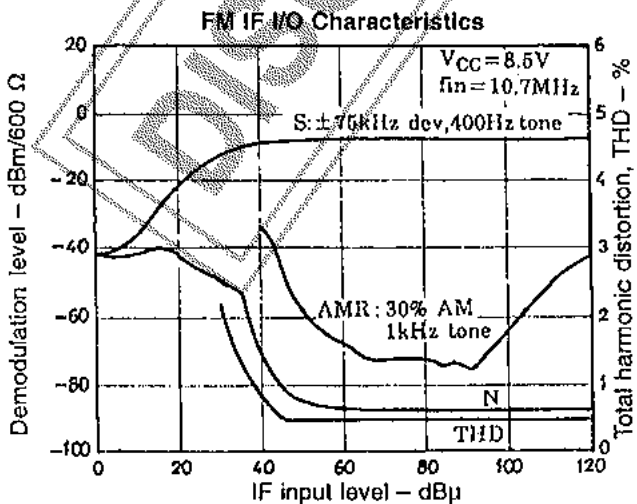


FM IF Counter I/O Characteristics

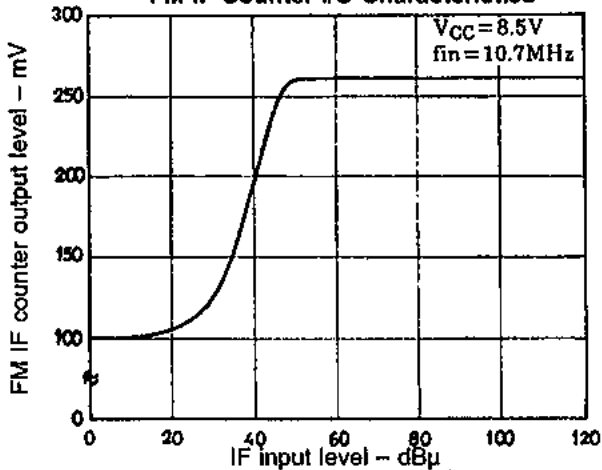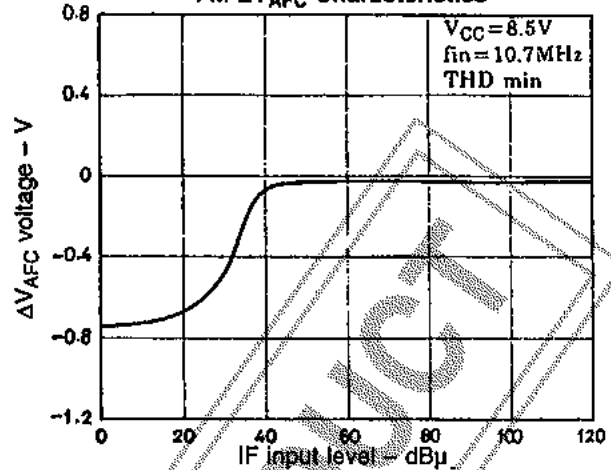FM ΔV_{AFC} Characteristics


FM TU LED Turn-on Sensitivity

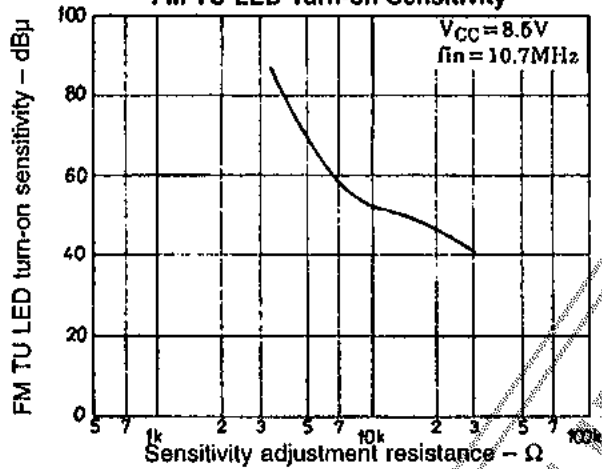


FM Demodulation Frequency Characteristics

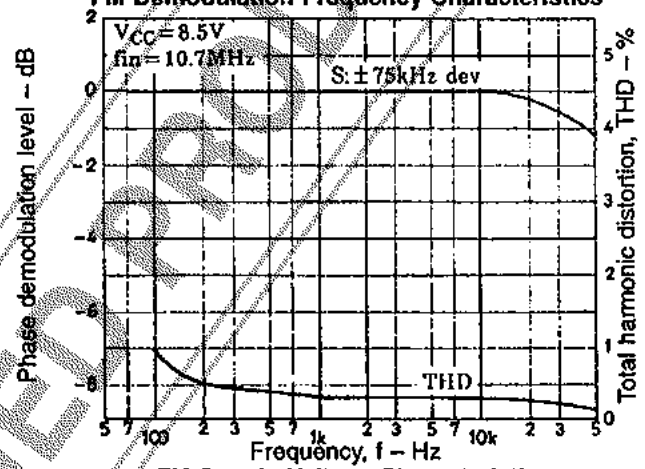


FM Supply Voltage Characteristics

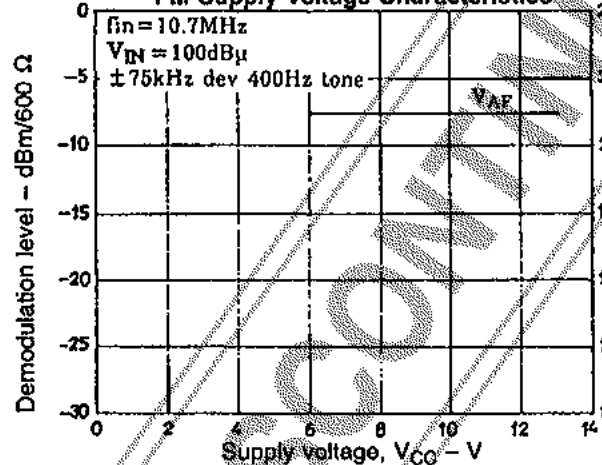


FM Supply Voltage Characteristics








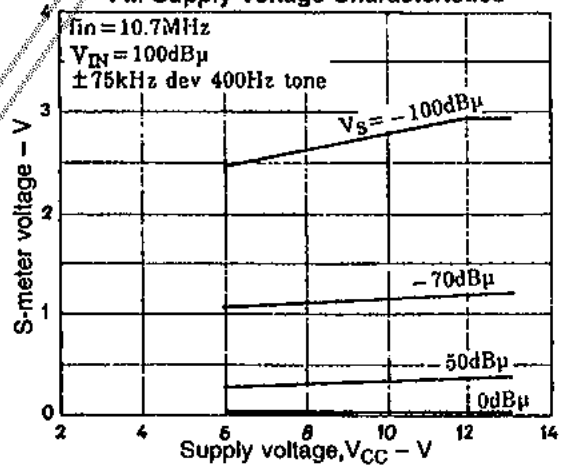


FM Supply Voltage Characteristics

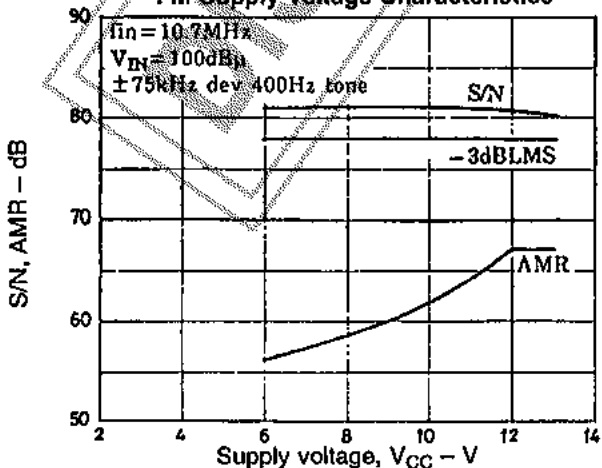


FM Temperature Characteristics

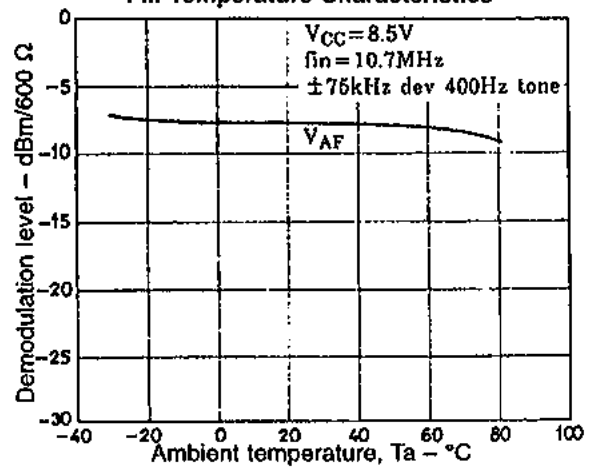


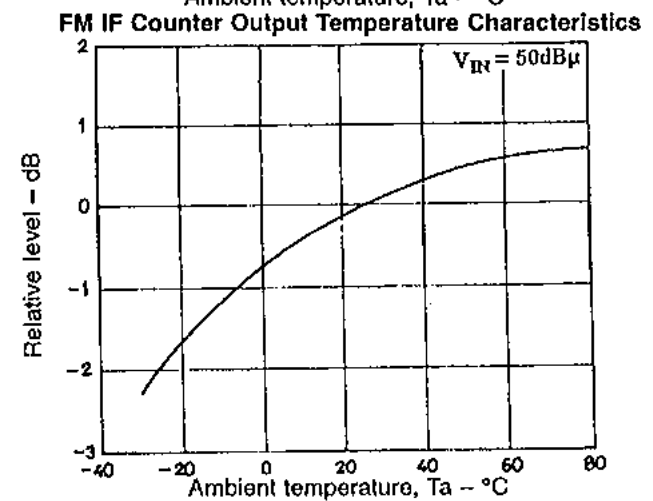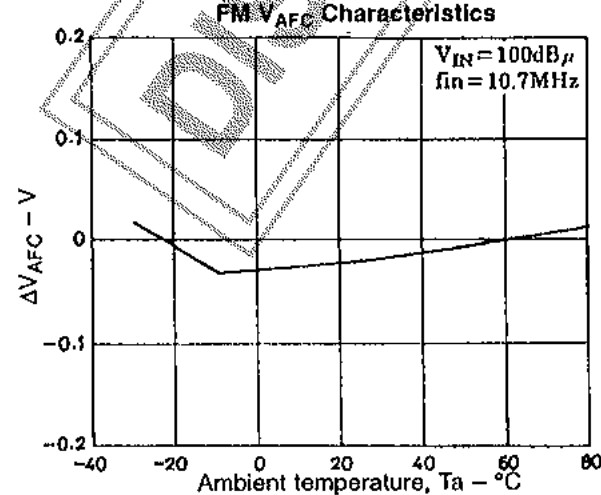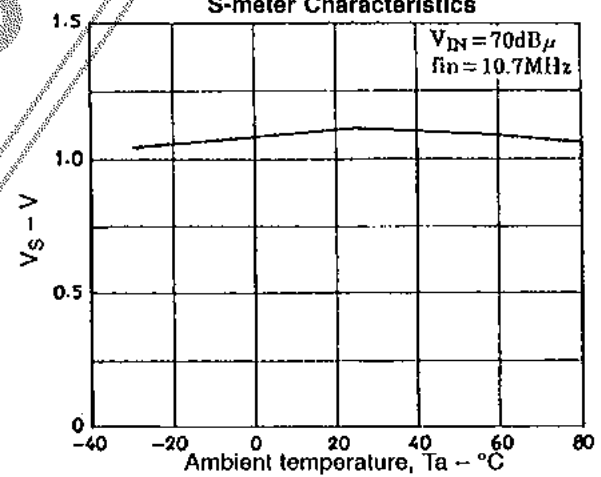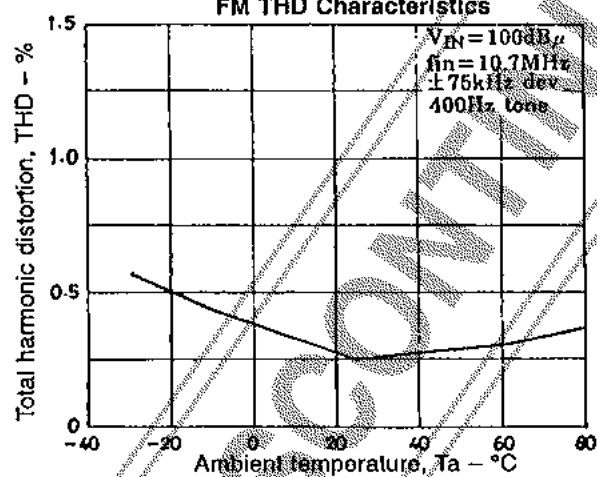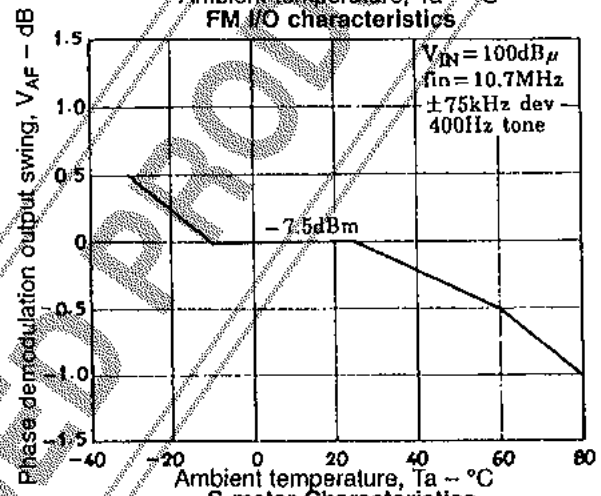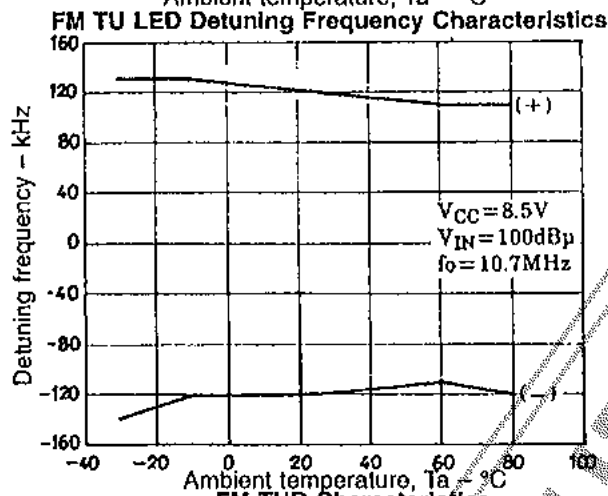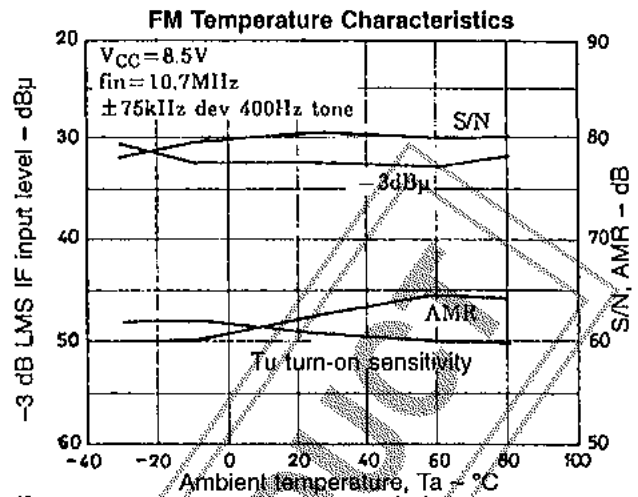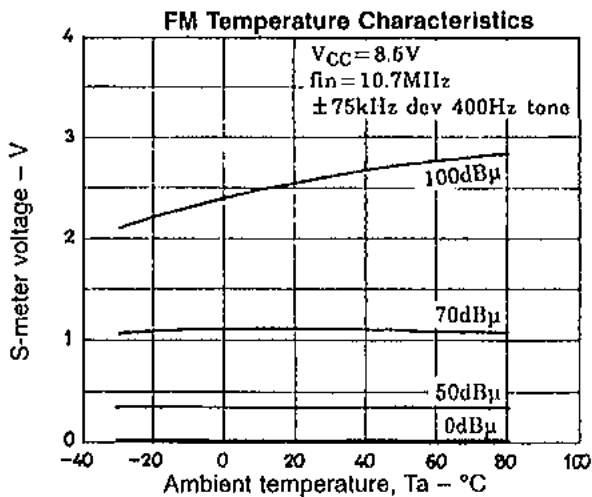


FM IF Counter Output Temperature Characteristics

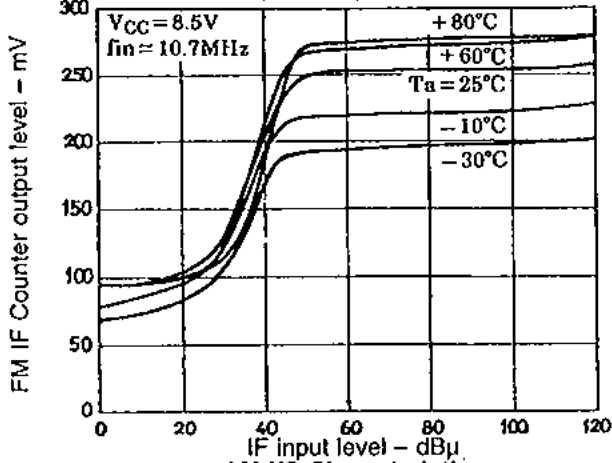


Reference Voltage Temperature Characteristics

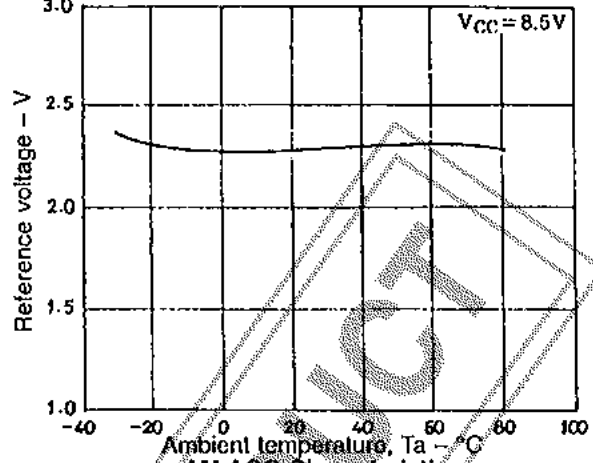


AM I/O Characteristics

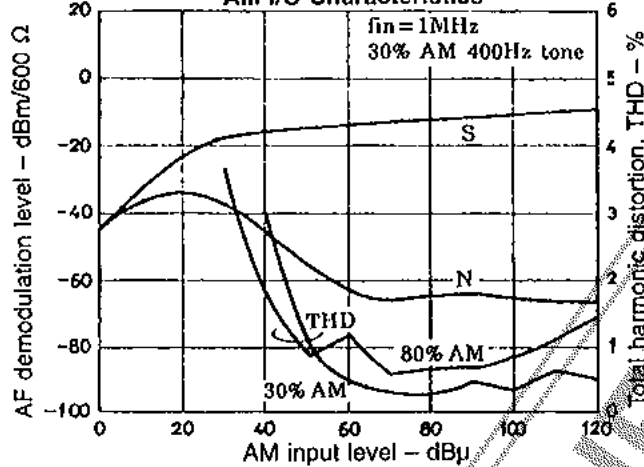


AM AGC Characteristics

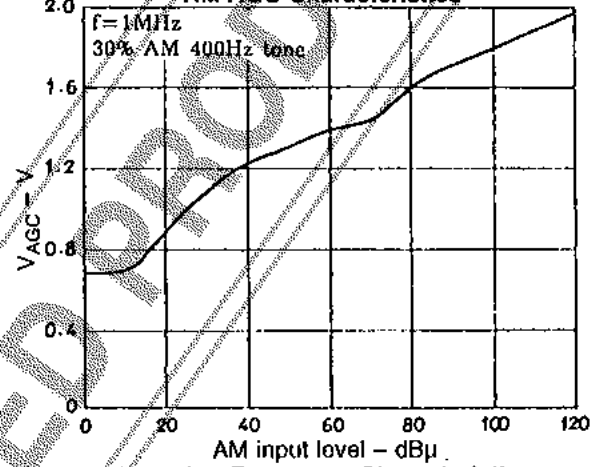


Passband Ripple Characteristics

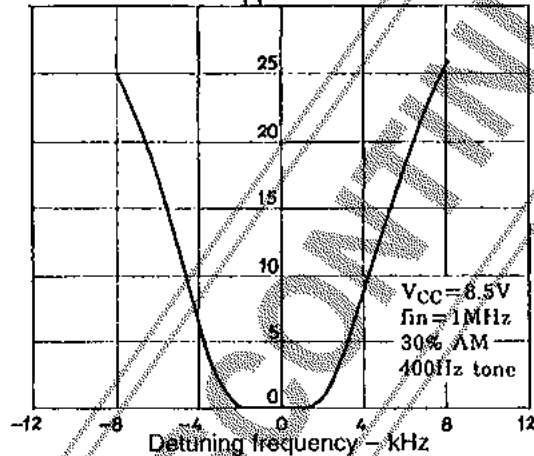


Detuning Frequency Characteristics

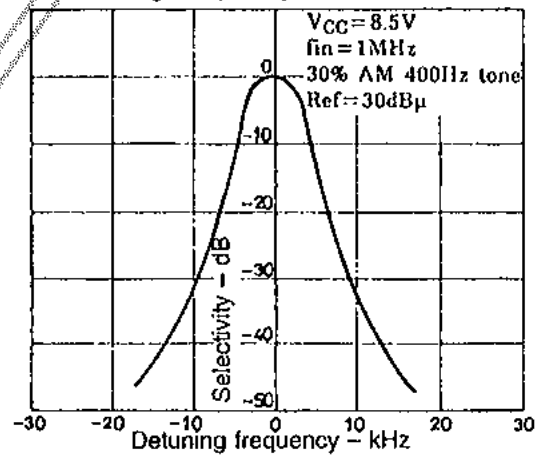


AM TU LED Turn-on Sensitivity

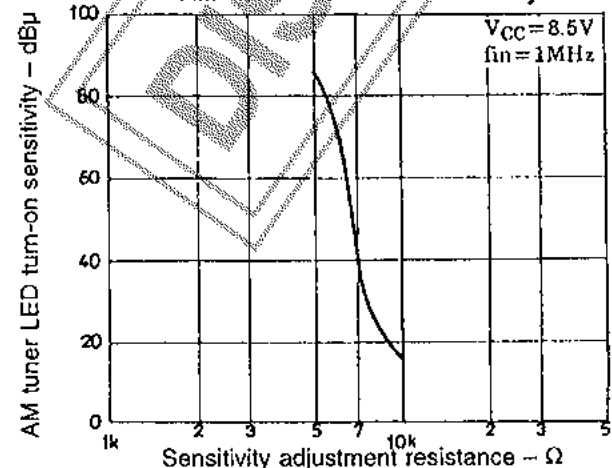


AM Local Oscillator Output Load Dependence

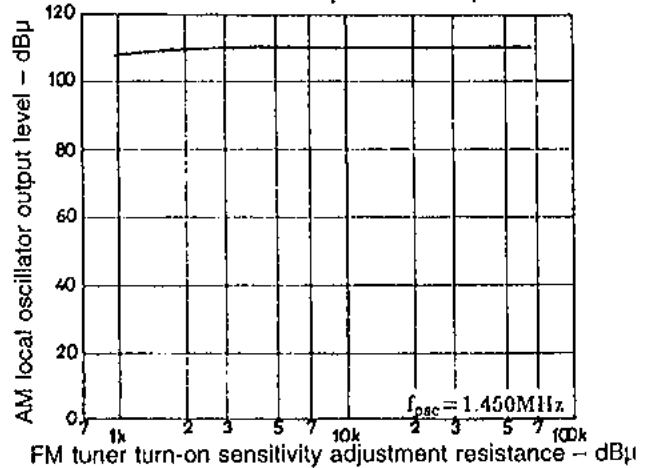


AM Local Oscillator Output Level Characteristics

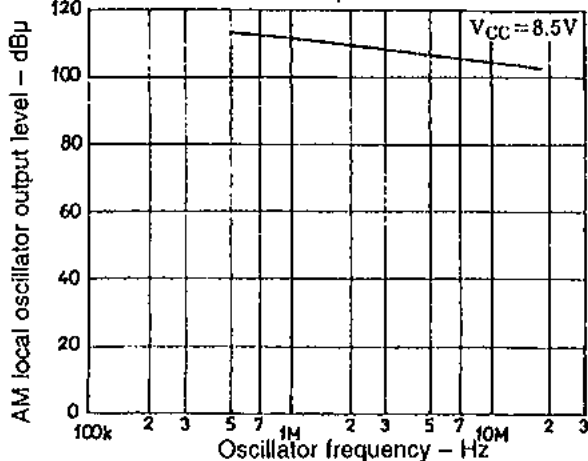


AM Supply Voltage Characteristics

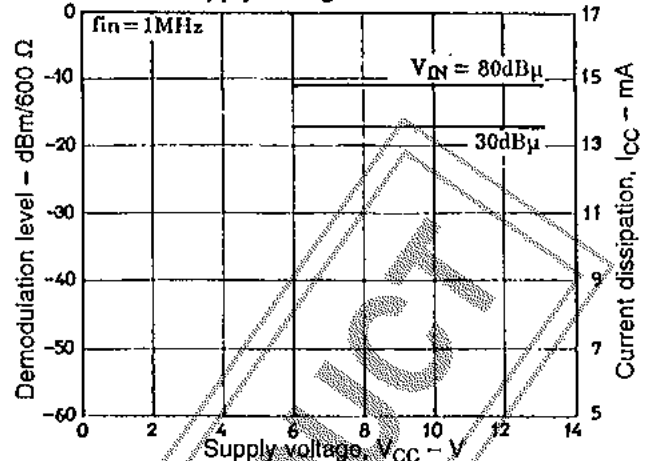


AM Supply Voltage Characteristics

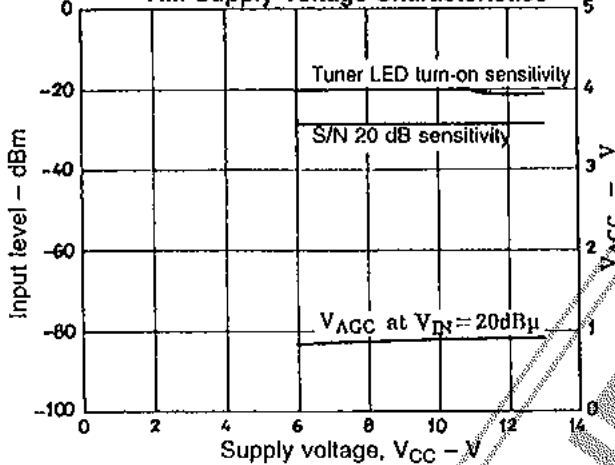


AM IF Counter Output Level

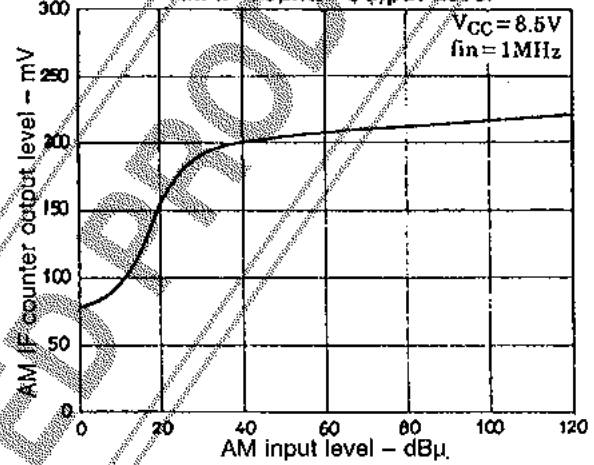


AM fidelity Characteristics

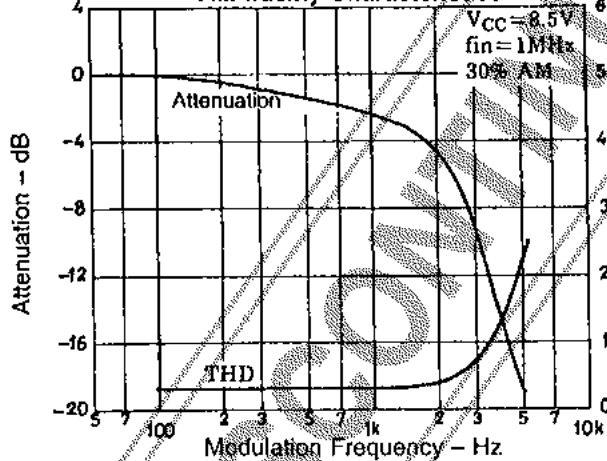


AM Temperature Characteristics








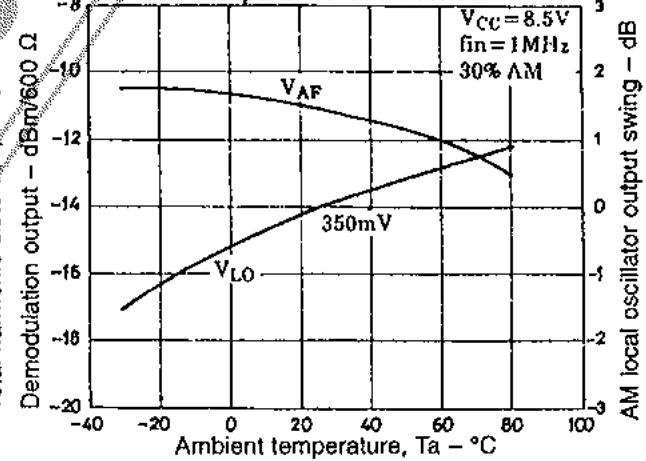










AM Temperature Characteristics

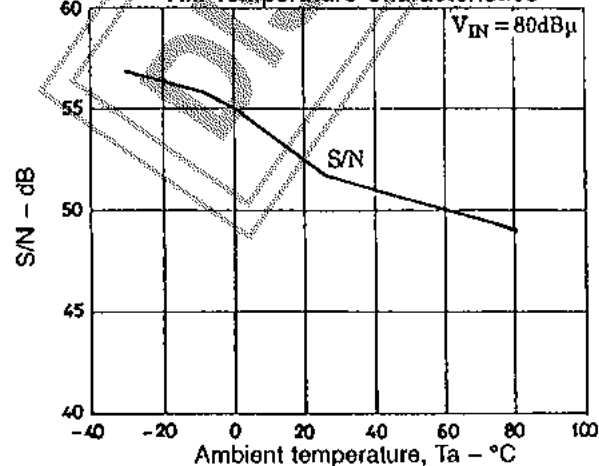


AM Temperature Characteristics

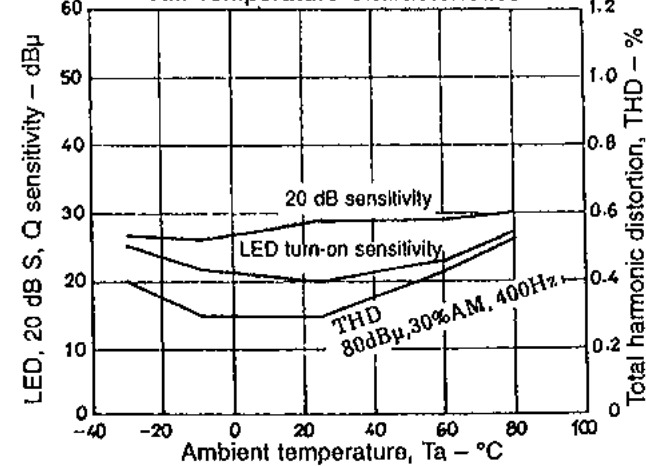

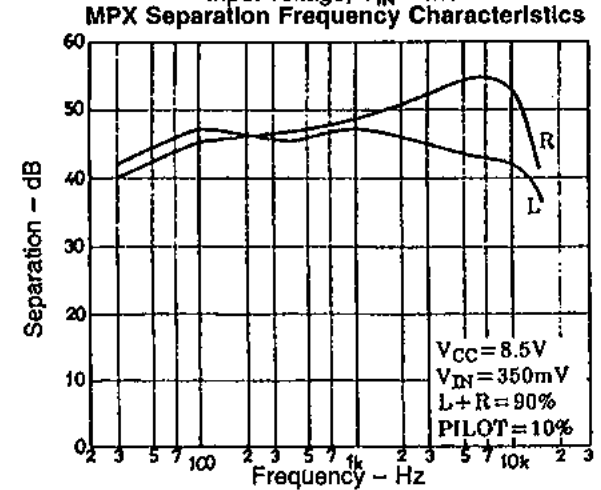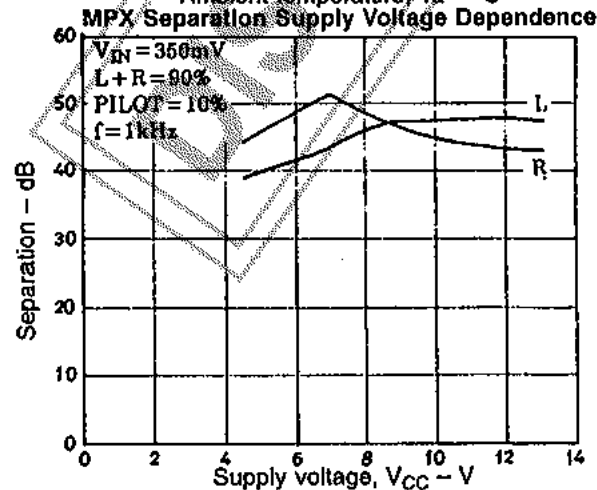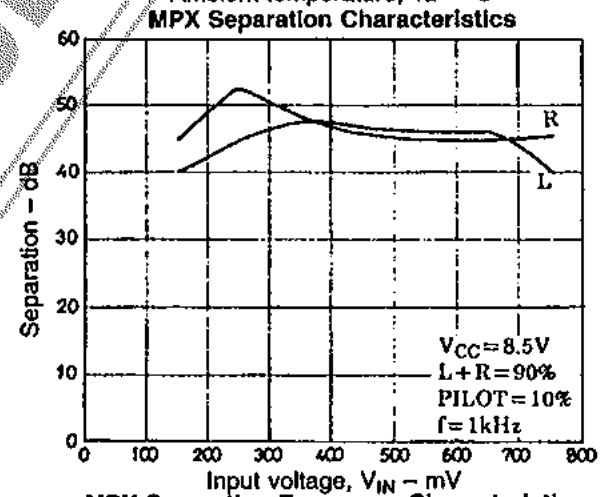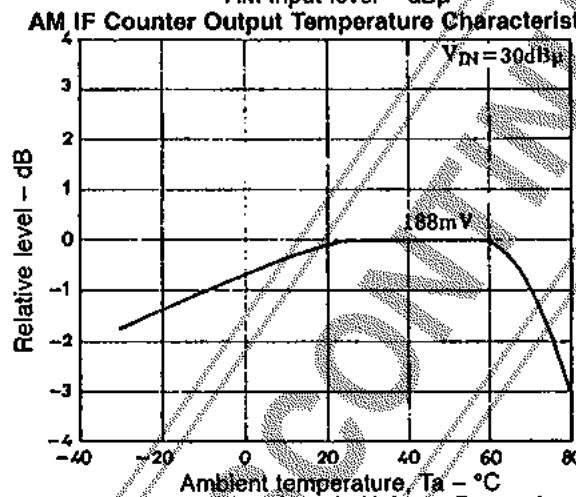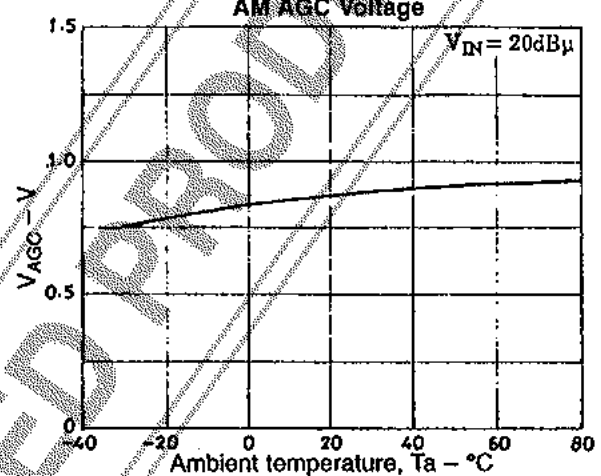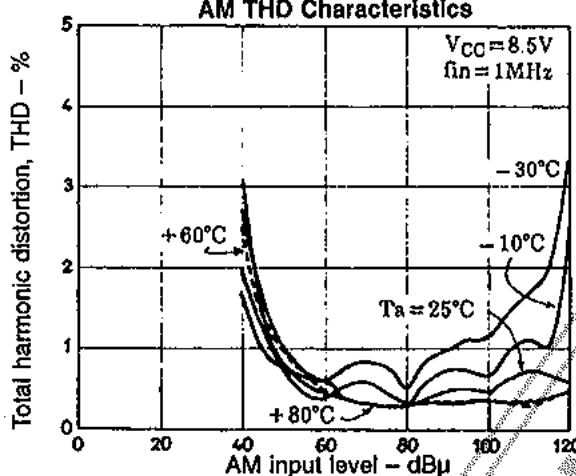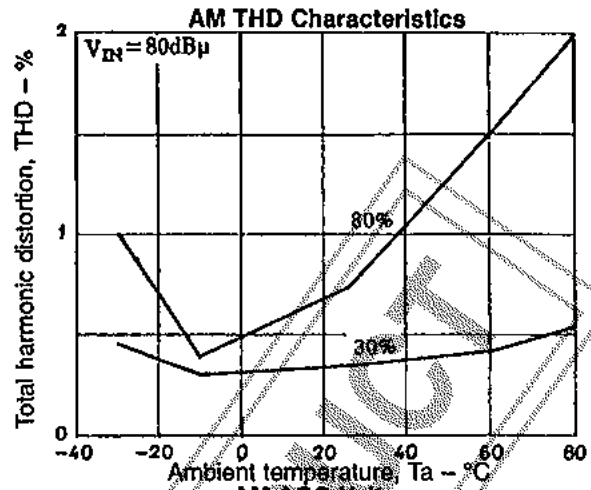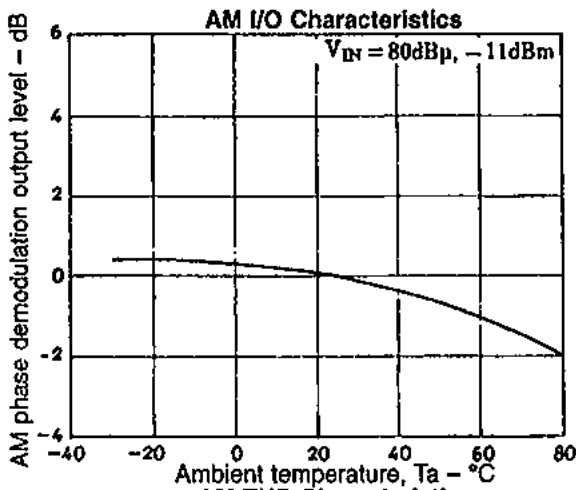


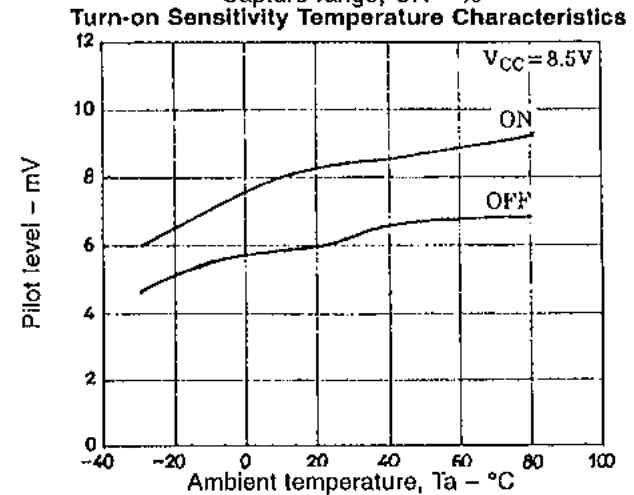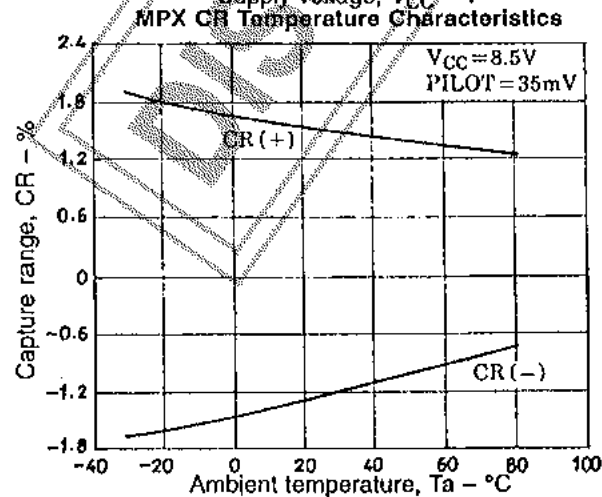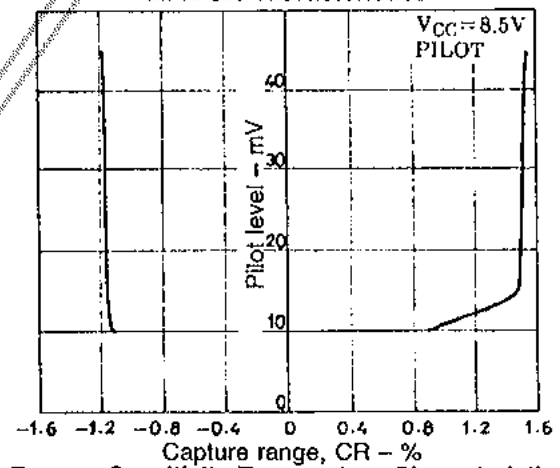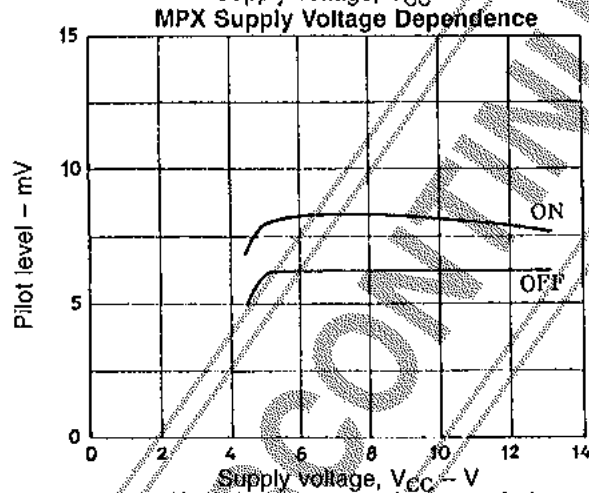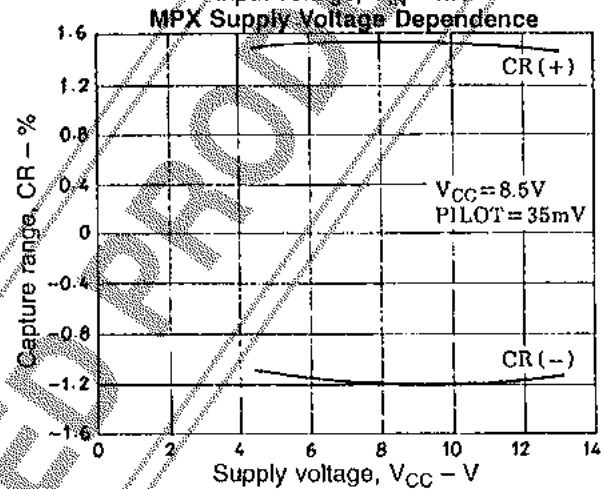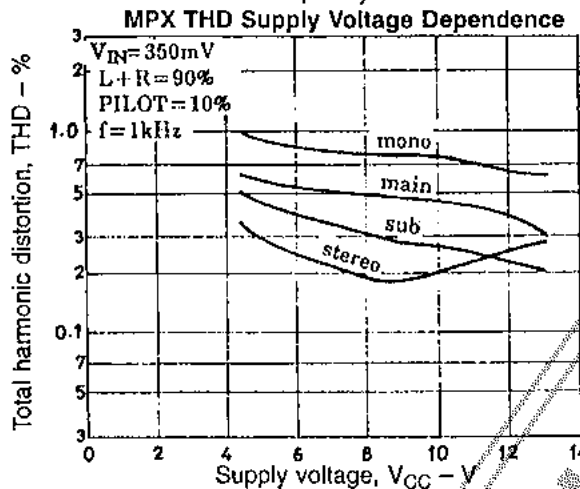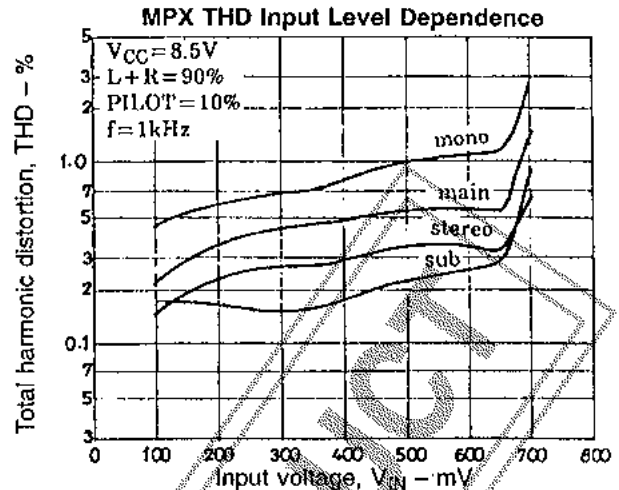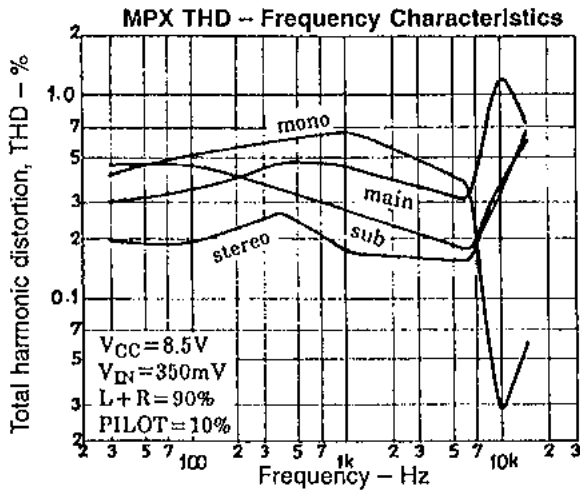


MPX Output Voltage Temperature Characteristics

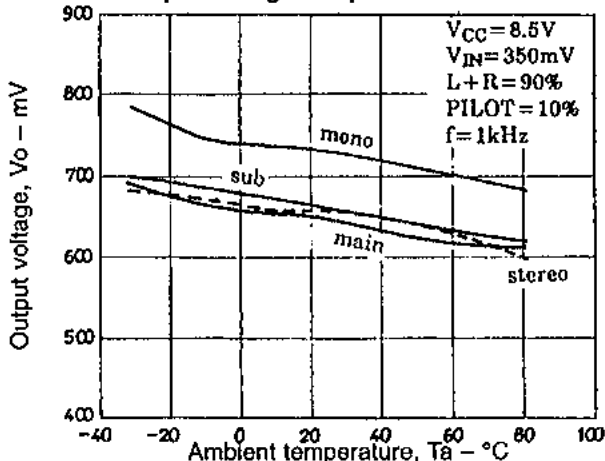

MPX Separation Temperature Characteristics

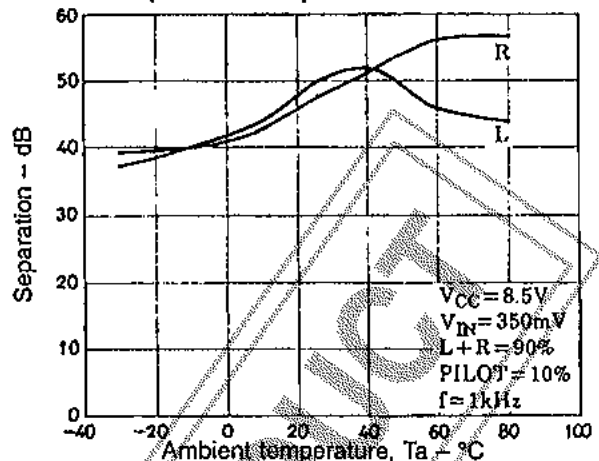

MPX THD Temperature Characteristics

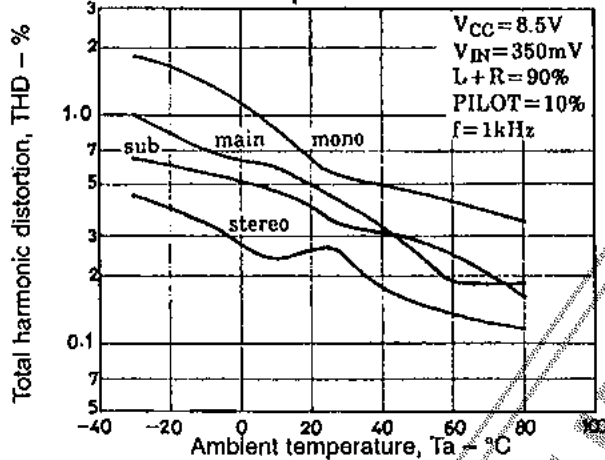

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 1996. Specifications and information herein are subject to change without notice.