

SANYO

No.2064B

LA6462D,6462S,6462M

Monolithic Linear IC

High-Performance

Dual Operational Amplifiers

The LA6462D,S,M consist of two independent, internally phase compensated operational amplifiers. They feature low noise, high speed, wide band. Application areas include audio preamplifiers, active filters, and various electronic circuits.


Features

- On-chip phase compensation circuit (Gain $\geq$ 10dB recommended)
- Low noise: Equivalent input noise voltage
0.70 μ V typ(Rg=2.2kohms RIAA,DIN Audio).
0.50 μ V typ(Rg=300ohms,IHF-A).
- High speed: Slew rate 4.0V/ μ s typ.
- Wide band: Gain-bandwidth product 6MHz typ.


Maximum Ratings at Ta=25°C

Maximum Supply Voltage	V_{CC}/V_{EE}	± 18	V
Differential Input Voltage	V_{ID}	± 30	V
Common-Mode Input Voltage	V_{IN}	± 15	V
Allowable Power Dissipation	P_{Dmax}	500	mW
		300	mW
Operating Temperature	T_{opr}	-20 to +75	°C
Storage Temperature	T_{stg}	-40 to +125	°C


Package Dimensions 3001B-D8IC
(unit: mm)

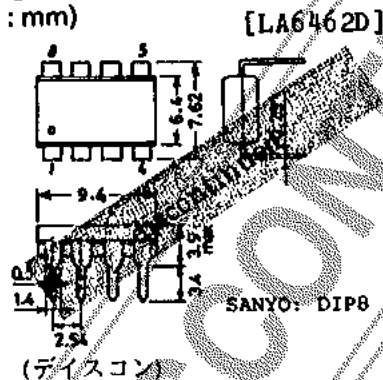

Package Dimensions 3017B-S9IC
(unit: mm)

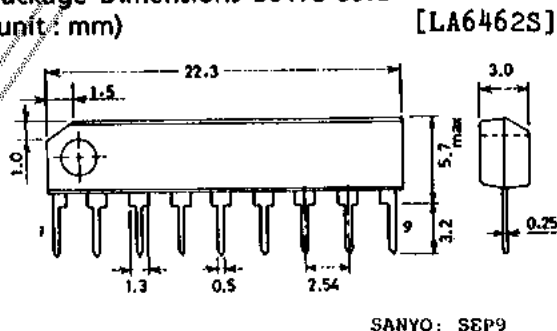

Package Dimensions 3032B-M8IC
(unit: mm)

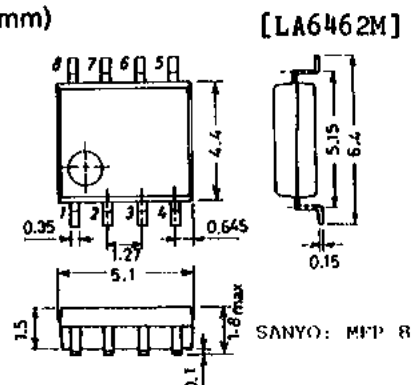

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg. 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN


4050YT / 8077KI / 3277KI, TS No2064-1/5

LA6462D,6462S,6462M

Operating Characteristics at Ta=25°C, V _{CC} =15V, V _{EE} =-15V				min	typ	max	unit
Input Offset Voltage	V _{IO}	R _s ≥10kohms			0.3	6.0	mV
Input Offset Current	I _{IO}				5	200	nA
Input Bias Current	I _B				200	500	nA
Common-Mode Input Voltage	V _{ICM}			±12	±14		V
Common-Mode Rejection Ratio	CMRR			70	90		dB
Voltage Gain	V _{Go}	R _L ≥2kohms, V _o =±10V		96	110		dB
Maximum Output Voltage	V _o (1)	R _L ≥10kohms			±14		V
	V _o (2)	R _L ≥2kohms			±13		V
Slew Rate	SR	V _G =0, R _L ≥2kohms			4.0		V/μs
Equivalent Input Noise Voltage	V _{NI} (1)	R _g =2.2kohms, RIAA			0.70		μV
	V _{NI} (2)	DIN Audio Weight					
		R _g =300ohms, IHF-A Weight			0.50		μV
Current Dissipation	I _{CC}				6.0		mA
Power Dissipation	P _d				180		mW
Gain-Bandwidth Product	f _T				6		MHz


Test Circuits

(1) V_{IO}, SVRR



- V_{IO}: V_{CC}/V_{EE}=±15V
- SVRR: $\begin{cases} V_{CC}=15, 5V \\ V_{EE}=-5, -15V \end{cases}$

(2) V_o

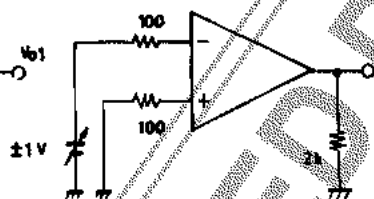


$$V_{IO} = V_{o1} / 100$$

$$SVR(+) = \frac{\Delta V_{o1}}{100 \times 10V}$$


$$SVR(-) = \frac{\Delta V_{o1}}{100 \times 10V}$$

(3) CMRR, V_{ICM}

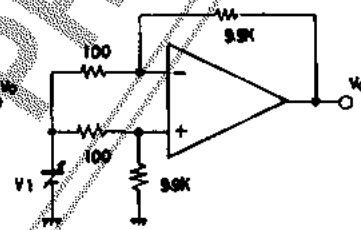


- CMRR V₁=±7.5V
- CMR=20log $\frac{15 \times 100}{|\Delta V_{o1}|}$

(4) I_B(+)




$$I_B(+) = \frac{V_{o2} - V_{o1}}{50k \times 100}$$

(5) I_B(-)




$$I_B(-) = \frac{V_{o3} - V_{o1}}{50k \times 100}$$

(6) I_{IO}




$$I_{IO} = \frac{V_{o4} - V_{o1}}{50k \times 100}$$


(7) I_{CC}



(8) SR




(9) V_{Go}

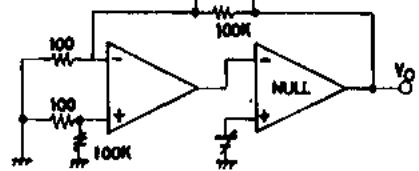




$$V_{Go} = 20 \log \frac{1000 \times 20}{\Delta V_{o1}}$$

(10) V_{NI} RIAA(36dB/1kHz)
Total Gain 80dB/1kHz

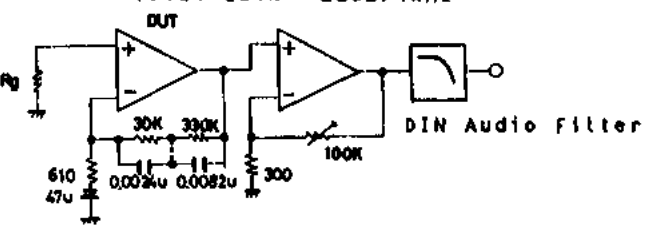


Unit (resistance:Ω capacitance:F)








Pin Assignment

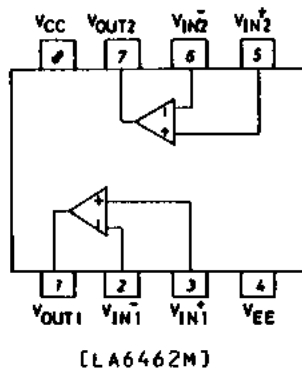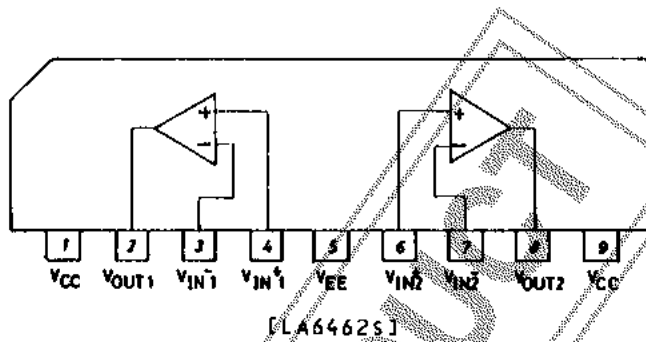
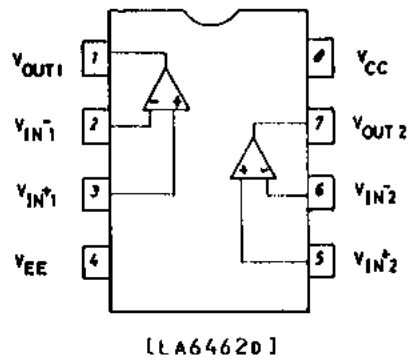


Equivalent Circuit

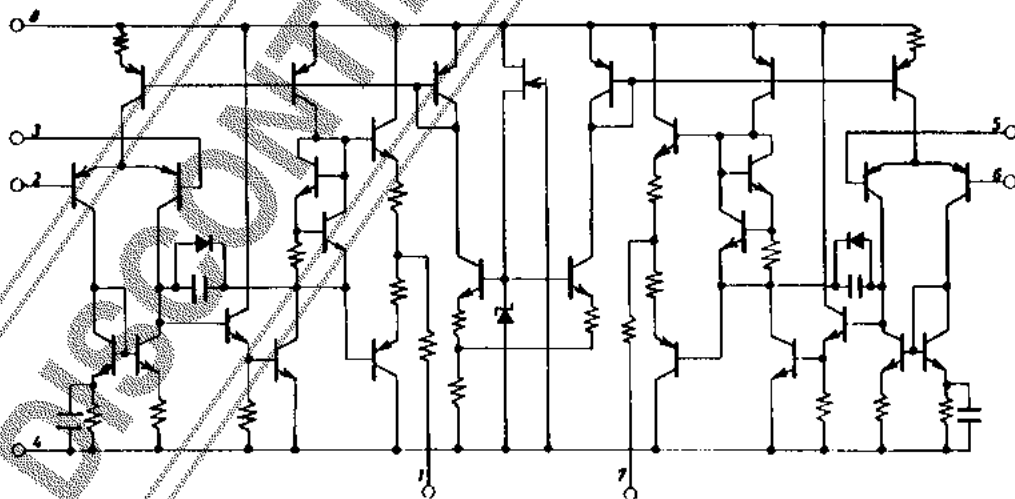

LA6462D, 6462S, 6462M

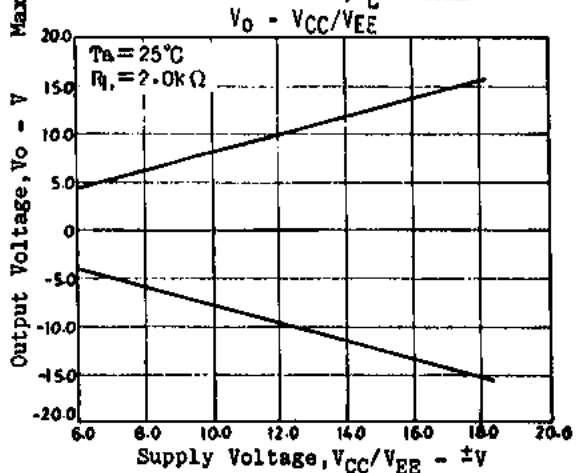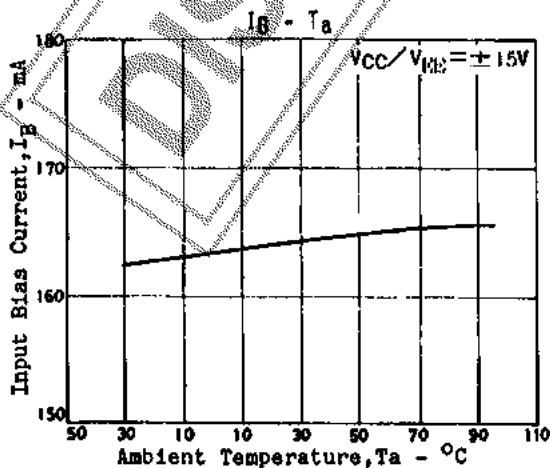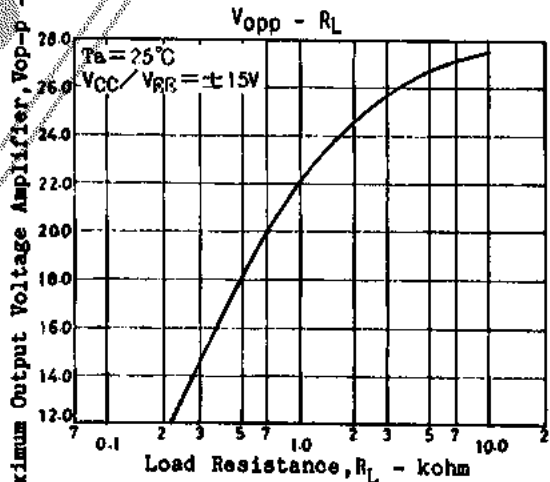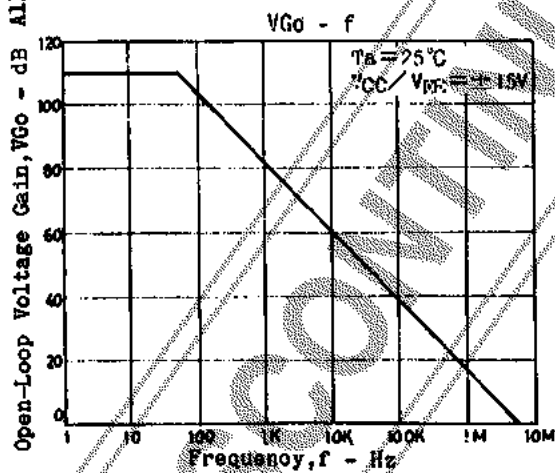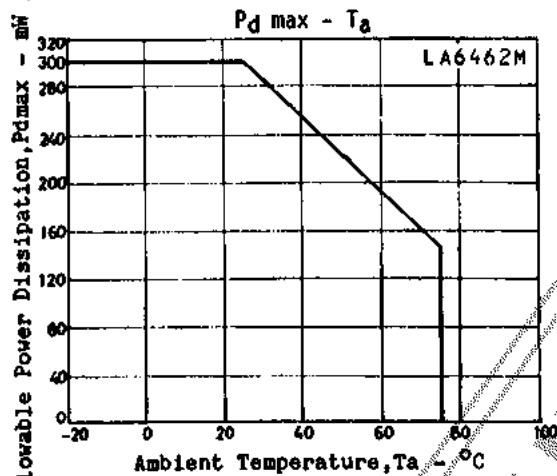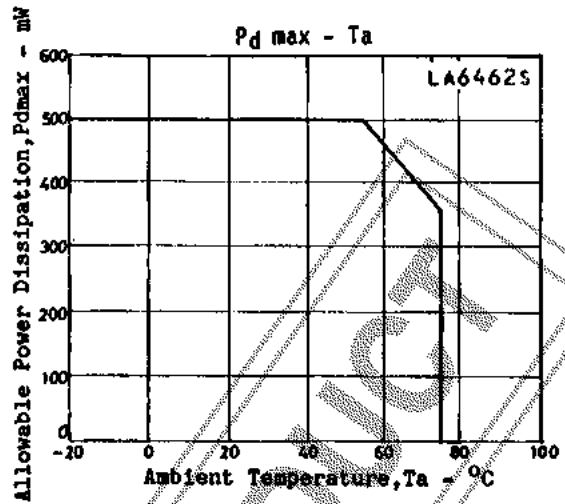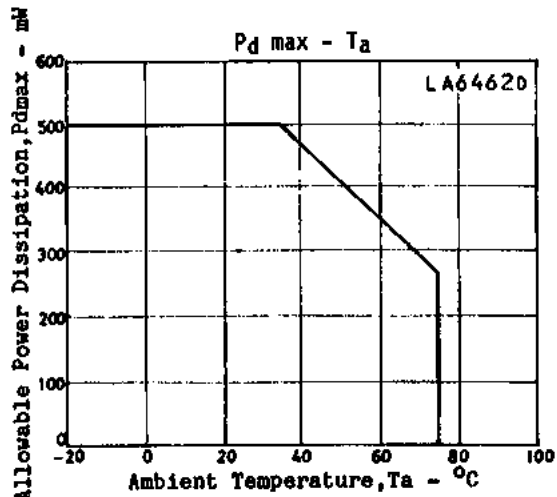

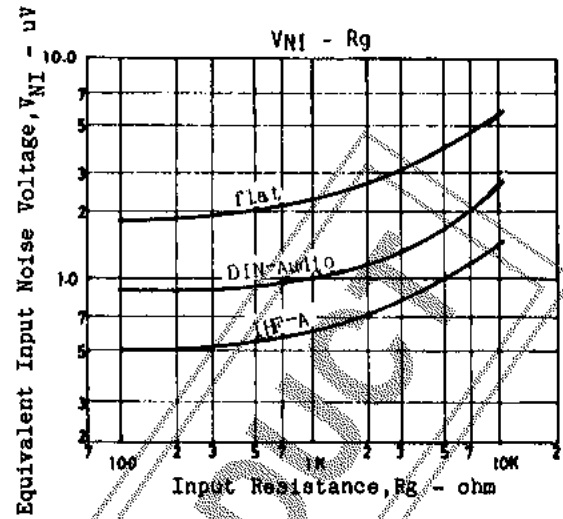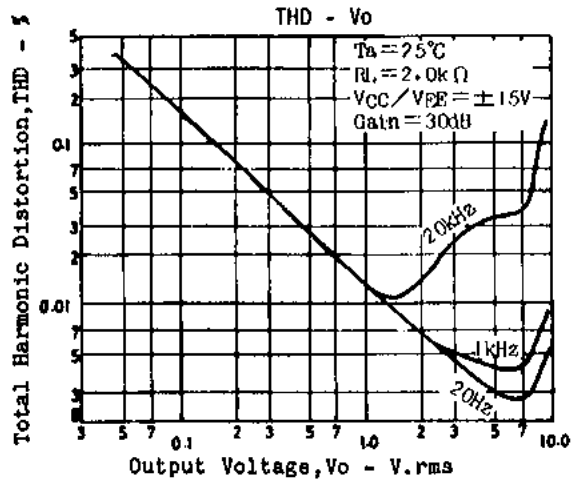

DISCONTINUED PRODUCT