

SANYO

No.2899

LA7321, 7321M

Monolithic Linear IC

VHS VTR Playback Head Amp,
Recording Amp**Functions and Features**

(Functions) • 4-channel playback head amp

- 2-channel recording amp
- 13 head select switches (PB, REC)
- 1 recording amp gain select switch
- Envelope detector for special playback (for GT-4)

(Features) • Designed for 4 heads (for GT-4)

- On-chip head select switches, recording amp gain select switch, envelope detector for GT-4 making it possible to perform signal processing for the head section on a single chip.
- Load variations cause less recording current variations because of recording amp of constant-current type.

(Maximum recording current: 40mA p-p)

Maximum Ratings at Ta = 25°C


| Maximum Supply Voltage | V _{CC} max | (PB) | 7.0 | V |
|-----------------------------|---------------------|--------|---------------|----|
| Allowable Power Dissipation | P _d max | (REC) | 14.0 | V |
| Operating Temperature | T _{opg} | (65°C) | 920 | mW |
| Storage Temperature | T _{stg} | LA7321 | 850 | mW |
| | | | - 10 to + 65 | °C |
| | | | - 40 to + 125 | °C |

Operating Conditions at Ta = 25°C

| Supply Voltage | V _{CC} | (PB) | 5.0 | V |
|-------------------------|---------------------|-------|-------------|---|
| Operating Voltage Range | V _{CC} opg | (REC) | 12.0 | V |
| | | (PB) | 4.75 to 5.5 | V |
| | | (REC) | 10 to 13 | V |

Case Outline 3061-D30SIC


(unit: mm)

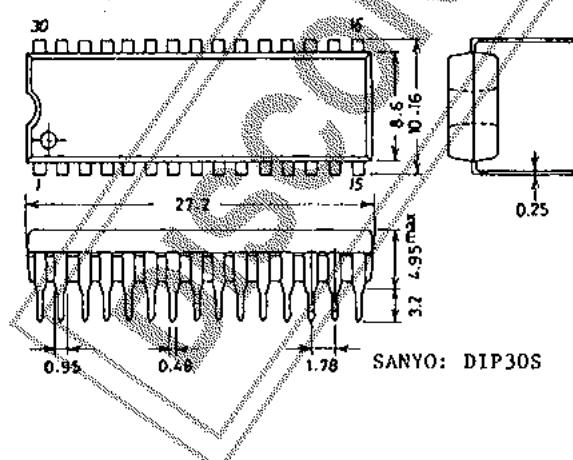

[LA7321]

Case Outline 3073A-M30IC

(unit: mm)

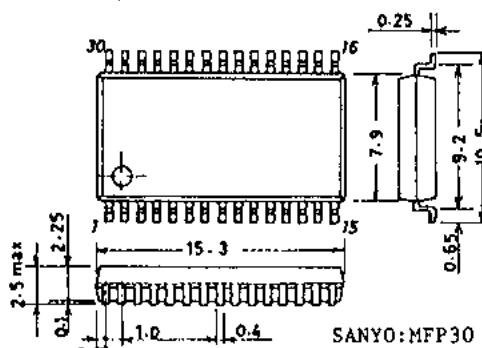

[LA7321M]

The application circuit diagrams and circuit constants herein are included as an example and provide no guarantee for designing equipment to be mass-produced. The information herein is believed to be accurate and reliable. However, no responsibility is assumed by SANYO for its use; nor for any infringements of patents or other rights of third parties which may result from its use.

Specifications and information herein are subject to change without notice.

SANYO Electric Co.,Ltd. Semiconductor Overseas Marketing Div.
Natsume Bldg., 18-6, 2-chome, Yushima, Bunkyo-ku, TOKYO 113 JAPAN


LA7321,7321M

Operating Characteristics at $T_a = 25^\circ C$

| Characteristic | Symbol | | | Test Conditions | | | | SW | | | | min | typ | max | unit |
|--------------------------------|-----------------------|----------------------|--------|---|---|---|---|----------|----|-----------|-----------------|------|------|------|------------------|
| | | Input | Output | 1 | 2 | 3 | 4 | SW 30 | HA | EP /SP | Speci- al MU | | | | |
| PB (Preamplifier Section) | | T1 | | PB + 5V | | | | | | | | | | | |
| Current Dissipation | I _{ceep} | | | Pin 1 flow-in current | 1 | 1 | 1 | 1 | | | | 18 | 24 | 30 | mA |
| Voltage Gain | CH1 | V _G (1) | T28 | T7 | Vi: 38mVpp f: 1MHz | 2 | 2 | 2 | 2 | | | | | | |
| | CH2 | V _G (2) | T27 | T7 | | 1 | 2 | 2 | 2 | | | 56.0 | 59.5 | 62.5 | dB |
| | CH3 | V _G (3) | T23 | T7 | | 2 | 1 | 1 | 2 | | | | | | |
| | CH4 | V _G (4) | T21 | T7 | | 1 | 1 | 1 | 2 | | | | | | |
| Voltage Gain Difference 1 | $\Delta V_G(1)$ | | | V _G (1) - V _G (2) | | | | | | | | -1.0 | 0 | 1.0 | dB |
| Voltage Gain Difference 2 | $\Delta V_G(2)$ | | | V _G (3) - V _G (4) | | | | | | | | -1.0 | 0 | 1.0 | dB |
| Intermode Gain Difference | ΔV_G SP-EP | | | V _G (1) - V _G (3) | | | | | | | | -1.0 | 0 | 1.0 | dB |
| Equivalent Input Noise Voltage | CH1 | V _{NIN} (1) | | T7 | * V _{out} V _{G(1),(2),(3),(4)} after 1.1MHz L.P.F. | 2 | 2 | 2 | 2 | | | | | | |
| | CH2 | V _{NIN} (2) | | T7 | | 1 | 2 | 2 | 2 | | | | | | |
| | CH3 | V _{NIN} (3) | | T7 | | 2 | 1 | 1 | 2 | | | | 1.1 | 1.5 | μV rms |
| | CH4 | V _{NIN} (4) | | T7 | | 1 | 1 | 1 | 2 | | | | | | |
| Frequency Characteristic | CH1 | $\Delta V_{fp}(1)$ | T28 | T7 | Vi: 38mVpp f: 100kHz, 7MHz 7MHz 100kHz output ratio | 2 | 2 | 2 | 2 | | | | | | |
| | CH2 | $\Delta V_{fp}(2)$ | T27 | T7 | | 1 | 2 | 2 | 2 | | | | | | |
| | CH3 | $\Delta V_{fp}(3)$ | T23 | T7 | | 2 | 1 | 1 | 2 | | | | -2.5 | 0 | |
| | CH4 | $\Delta V_{fp}(4)$ | T21 | T7 | | 1 | 1 | 1 | 2 | | | | | | |
| 2nd Harmonic Distortion | CH1 | V _{NIN} (1) | T28 | T7 | Vi: 38mVpp f: 4MHz 8M component 4M component output ratio | 2 | 2 | 2 | 2 | | | | | | |
| | CH2 | V _{NIN} (2) | T27 | T7 | | 1 | 2 | 2 | 2 | | | | | | |
| | CH3 | V _{NIN} (3) | T23 | T7 | | 2 | 1 | 1 | 2 | | | | -40 | -35 | |
| | CH4 | V _{NIN} (4) | T21 | T7 | | 1 | 1 | 1 | 2 | | | | | | |
| Max. Output Level | CH1 | V _{OMP} (1) | T28 | T7 | 1.1MHz Output level when 3rd distortion is -30dB. | 2 | 2 | 2 | 2 | | | | | | |
| | CH2 | V _{OMP} (2) | T27 | T7 | | 1 | 2 | 2 | 2 | | | | | | |
| | CH3 | V _{OMP} (3) | T23 | T7 | | 2 | 1 | 1 | 2 | | | 0.8 | 1.0 | | V _{p-p} |
| | CH4 | V _{OMP} (4) | T21 | T7 | | 1 | 1 | 1 | 2 | | | | | | |

Continued on next page.

* L.P.F.

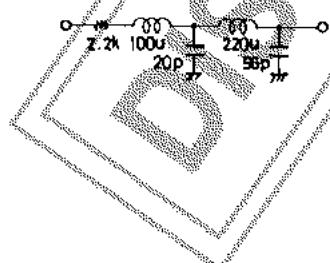

LA7321,7321M

Continued from preceding page.

| Characteristic | | Symbol | Test Conditions | | SW | | | | min | typ | max | unit | |
|--------------------------------------|-------------------|----------------------|-------------------|----|---|----------|-------|-----------|-----------------|------|-----|------|----|
| | | | | | 1 | 2 | 3 | 4 | | | | | |
| PB (Preamp Section) | | | T1 | | PB +5V | SW 30 | HA | EP /SP | Speci- al MU | | | | |
| Cross- talk 1 (SP) | CH1 | V _{CR1} (1) | T27 T23 T21 | T7 | Vi: 38mVpp f: 4MHz Vout VG(1),(2) output ratio | 2 | 2 | 2 | 1 | -40 | -35 | dB | |
| | CH2 | V _{CR1} (2) | T28 T23 T21 | T7 | | 1 | 2 | 2 | 1 | | | | |
| Cross- talk 2 (EP) | CH3 | V _{CR2} (3) | T21 T28 T27 | T7 | Vi: 38mVpp f: 4MHz Vout VG(3),(4) output ratio | 2 | 1 | 1 | 1 | -40 | -35 | dB | |
| | CH4 | V _{CR2} (4) | T23 T28 T27 | T7 | | 1 | 1 | 1 | 1 | | | | |
| Output DC Offset | ΔV_{ODC1} | | Pin 7 | | CH1 - CH2 | 2 → 1 | 2 | | 1 | -100 | 0 | 100 | mV |
| | ΔV_{ODC2} | | Pin 7 | | CH3 - CH4 | 2 → 1 | 1 | | 1 | | | | |
| | ΔV_{ODC3} | | Pin 7 | | CH1 - CH3 | 2 | 2 → 1 | | 1 | | | | |
| | ΔV_{ODC4} | | Pin 7 | | CH2 - CH4 | 1 | 2 → 1 | | 1 | | | | |
| | ΔV_{ODC5} | | Pin 7 | | CH1 - CH4 | 2 → 1 | 2 → 1 | | 1 | | | | |
| | ΔV_{ODC6} | | Pin 7 | | CH2 - CH3 | 1 → 2 | 2 → 1 | | 1 | | | | |
| PB (Envelope Detector) | | | T1 | | PB +5V | | | | | | | | |
| Detection Pin DC Offset | ΔV_{S6} | | T6 T6 | | T6(HC) - T6(DC) | | | | 1 | -50 | 0 | 50 | mV |
| Detection Char- acteristic 1 (SP) | V _{SDC} | T28 | T6 | | After setting T7 output to f: 4MHz, Vi: 200mVpp, measure the difference between T6 output DC and T5 output DC at no input mode. | | 2 | 2 | 1 | 800 | 900 | 1000 | mV |
| Detection Char- acteristic 2 (EP) | V _{SDC} | T23 | T6 | | After setting T7 output to f: 4MHz, Vi: 200mVpp, measure the difference between T5 output DC and T6 output DC at no input mode. | | 2 | 1 | 1 | 800 | 900 | 1000 | mV |
| Comparator Output Waveform 1 | V _{SDC1} | T28 | T9 | | Vi: 38mVpp f: 4MHz, T9 output DC | 2 | 2 | | 1 | 0 | 0.1 | 0.2 | V |
| Comparator Output Waveform 2 | V _{SDC2} | T23 | T9 | | Vi: 38mVpp f: 4MHz, T9 output DC | 2 | 1 | | 1 | 3.8 | 4.0 | 4.2 | V |
| REC | | T14 | | | REC +12V | | | | | | | | |
| Current Dissipation | I _{CCR} | T14 | | | Pin 14 flow-in current | | | | 2 | 38 | 51 | 64 | mA |

Continued on next page.

Continued from preceding page.

| Characteristic | | Symbol | Test Conditions | | | | SW | | | | min | typ | max | unit |
|---------------------------|------|---------------------------|-----------------|--------|---|--|----------|----|-----------|-----------------|------|------|----------|------|
| | | | Input | Output | | | 1 | 2 | 3 | 4 | | | | |
| REC | | T14 | | | REC+12V | | SW 30 | HA | EP /SP | Speci- al MU | | | | |
| Voltage Gain | EPC | VG(EC) | T10 | T18 | Vi:300mVpp f:1MHz | | | | 1 | 2 | | | | |
| | EP Y | VG(EY) | T11 | T18 | Vi:300mVpp f:4MHz | | | | 1 | 2 | -8.0 | -6.0 | -4.0 | dB |
| | SPC | VG(SC) | T10 | T16 | Vi:300mVpp f:1MHz | | | | 2 | 2 | | | | |
| | SP Y | VG(SY) | T11 | T16 | Vi:300mVpp f:4MHz | | | | 2 | 2 | | | | |
| Voltage Gain Difference 1 | | ΔVG (EP) | | | VG(EC) - VG(EY) | | | | | | -1.0 | 0 | 1.0 | dB |
| Voltage Gain Difference 2 | | ΔVG (SP) | | | VG(SC) - VG(SY) | | | | | | -1.0 | 0 | 1.0 | dB |
| Intermodo Gain Difference | | ΔVG EP-SP | | | VG(EC) - VG(SC) | | | | | | -1.0 | 0 | 1.0 | dB |
| Frequency Characteristic | EPC | ΔV _{fR} (EC) | T10 | T18 | Vi:300mVpp f:1MHz,7MHz 7M component 1M component output ratio | | | | 1 | 2 | | | | |
| | EP Y | ΔV _{fR} (EY) | T11 | T18 | | | | | 1 | 2 | | | | |
| | SPC | ΔV _{fR} (SC) | T10 | T16 | | | | | 2 | 2 | -2.0 | -0.5 | -1.0 | dB |
| | SP Y | ΔV _{fR} (SY) | T11 | T16 | | | | | 2 | 2 | | | | |
| 2nd Harmonic Distortion | EPC | ΔV _{HDR} (EC) | T10 | T18 | Vout:30mAopp (160mVpp) 1:4MHz 8M component | | | | 1 | 2 | | | | |
| | EP Y | ΔV _{HDR} (EY) | T11 | T18 | | | | | 1 | 2 | | | | |
| | SPC | ΔV _{HDR} (SC) | T10 | T16 | 4M component output ratio | | | | 2 | 2 | | | | |
| | SP Y | ΔV _{HDR} (SY) | T11 | T16 | | | | | 2 | 2 | | | | |
| Max. Output Level | EPC | V _{OMR} (EC) | T10 | T18 | f: 4MHz Output level when 2nd harmonic distortion is -40dB. | | | | 1 | 2 | | | | |
| | EP Y | V _{OMR} (EY) | T11 | T18 | | | | | 1 | 2 | | | | |
| | SPC | V _{OMR} (SC) | T10 | T16 | | | | | 2 | 2 | 30 | 40 | mV pp | |
| | SP Y | V _{OMR} (SY) | T11 | T16 | | | | | 2 | 2 | | | | |
| Muting Attenuation | EPC | V _{MU} (EC) | T10 | T18 | Vi:300mVpp f:1M(C),4M(Y) Vout VG(EC),(EY) (SC),(SY) output ratio | | | | 1 | 1 | | | | |
| | EP Y | V _{MU} (EY) | T11 | T18 | | | | | 1 | 1 | | | | |
| | SPC | V _{MU} (SC) | T10 | T16 | | | | | 2 | 1 | | | | |
| | SP Y | V _{MU} (SY) | T11 | T16 | | | | | 2 | 1 | | | | |

Continued on next page.

Continued from preceding page.

| Characteristic | | Symbol | Test Conditions | | | | SW | | | | min | typ | max | unit | | |
|--|------|----------------------|-----------------|--------|--|---|----|---|----------|----|-----------|-----------------|-----|------|----|----|
| | | | Input | Output | 1 | 2 | 3 | 4 | SW 30 | HA | EP /SP | Speci- al MU | | | | |
| REC | | | T14 | | REC +12V | | | | | | | | | | | |
| Cross Modulation | SP C | V _{CY} (EP) | T10 T11 | T18 | Input T10, V _{out} = 40mVpp, f = 629kHz Input T11, V _{out} = 160mVpp, f = 4MHz <u>4M ± 629kHz</u> <u>4MHz</u> output ratio | | | | 1 | 2 | | | | | | |
| Relative Level | SP Y | V _{CY} (SP) | T10 T11 | T16 | | | | | | | 2 | 2 | -45 | -40 | dB | |
| Switch Tr ON Resistance | | | | | | | | | | | | | | | | |
| ON Resistance of SW Tr Turned ON at PB | SP | R _{PON} 30 | | T30 | PB mode Difference between DC voltage at 1mA flow-in and DC voltage at 2mA flow-in ※1 | | | | | | | | | | | |
| | EP | R _{PON} 19 | | T19 | | | | | | | | | 5 | 8 | Ω | |
| ON Resistance of Mode Select SW Tr at PB | CH1 | R _{PON} 28 | | T28 | PB mode Difference between DC voltage at 1mA flow-in and DC voltage at 2mA flow-in ※1 | | | | 1 | 2 | | | | | | |
| | CH2 | R _{PON} 27 | | T27 | | | | | 1 | 2 | | | | | | |
| | CH3 | R _{PON} 23 | | T23 | | | | | 2 | 2 | | | 9 | 12 | Ω | |
| | CH4 | R _{PON} 21 | | T21 | | | | | 2 | 2 | | | | | | |
| ON Resistance of SW Tr Turned ON at REC | SP | R _{PON} 30 | | T30 | REC mode Difference between DC voltage at 1mA flow-in and DC voltage at 2mA flow-in | | | | 1 | | | | | | | |
| | EP | R _{PON} 19 | | T19 | | | | | 2 | | | | 6 | 10 | Ω | |
| Leak Current of Mode Select SW Tr at REC | SP | I _L 30 | | T30 | REC mode Flow-current when ±5V is applied | | | | | | | | | | | |
| | EP | I _L 19 | | T19 | | | | | 2 | | | | -4 | 0 | 4 | μA |
| ON Resistance of SW Tr Turned ON at REC | CH1 | R _{PON} 28 | | T28 | REC mode Difference between DC voltage at 1mA flow-in and DC voltage at 2mA flow-in ※1 | | | | | | | | | | | |
| | CH2 | R _{PON} 27 | | T27 | | | | | | | | | | | | |
| | CH3 | R _{PON} 23 | | T23 | | | | | | | | | | 6 | 10 | Ω |
| | CH4 | R _{PON} 21 | | T21 | | | | | | | | | | | | |
| ON Resistance of Gain Select SW Tr at REC (SP) | | R _{SP} | | T9 | REC mode Difference between DC voltage at 1mA flow-in and DC voltage at 2mA flow-in ※1 | | | | | 2 | | | | 7 | 10 | Ω |

Note) ×1 Let the ON resistance to be obtained by x (Ω).2 x (mV) at 2mA flow-in1 x (mV) at 1mA flow-inTherefore, difference $2x - 1x = x$ is the ON resistance.


Continued on next page.

Continued from preceding page.


| Characteristic | Symbol | Test Conditions | | SW | | | | min | typ | max | unit |
|------------------------------------|-------------|-----------------|--------|--|----|--------|--------------|-----|-----|-----|------|
| | | Input | Output | 1 | 2 | 3 | 4 | | | | |
| Control Pin Threshold Level at PB | | | | SW 30 | HA | EP /SP | Speci- al MU | | | | |
| SW 30 Threshold Level | SW 30 (1) | T28 T27 | T2 | CH1 → CH2 changeover voltage | ※ | 2 | 2 | 2 | 2.5 | 5.0 | V |
| | SW 30 (2) | T28 T27 | T2 | CH2 → CH1 changeover voltage | | | | | 0 | 1.5 | |
| HA Threshold Level | HA (1) | T28 T27 | T3 | CH1 → CH2 changeover voltage | 2 | ※ | 1 | 2.5 | 5.0 | V | |
| | HA (2) | T28 T27 | T3 | CH1 → CH3 changeover voltage | | | | | 0 | 1.5 | |
| EP/SP Threshold Level | P MODE (1) | T28 | T4 | T4 DC voltage when T7 output waveform disappears | 2 | 2 | ※ | 2 | 2.5 | 5.0 | V |
| | P MODE (2) | T28 | T4 | T4 DC voltage when T7 output waveform appears | | | | | 0 | 1.5 | |
| Special PB "II" Threshold Level | Special (1) | T28 T27 | T13 | T13 DC voltage when T7 output waveform appears | 2 | 2 | 1 | ※ | 3.0 | 5.0 | V |
| | Special (2) | T28 T27 | T13 | T13 DC voltage when T7 output waveform disappears | | | | | 0 | 1.5 | |
| Control Pin Threshold Level at REC | | | | | | | | | | | |
| EP/SP Threshold Level | P MODE (1) | T10 | T4 | T4 DC voltage when output changes from T16 to T18 | | | ※ | 2 | 2.5 | 5.0 | V |
| | P MODE (2) | T10 | T4 | T4 DC voltage when output changes from T18 to T16 | | | | | 0 | 1.5 | |
| Threshold Level at REC MUTE | MUTE (1) | T10 | T13 | T13 DC voltage when T18 output waveform disappears | | | 1 | ※ | 3.0 | 5.0 | V |
| | MUTE (2) | T10 | T13 | T13 DC voltage when T18 output waveform appears | | | | | 0 | 1.5 | |

LA7321,7321M

LA7321,7321M Block Diagram

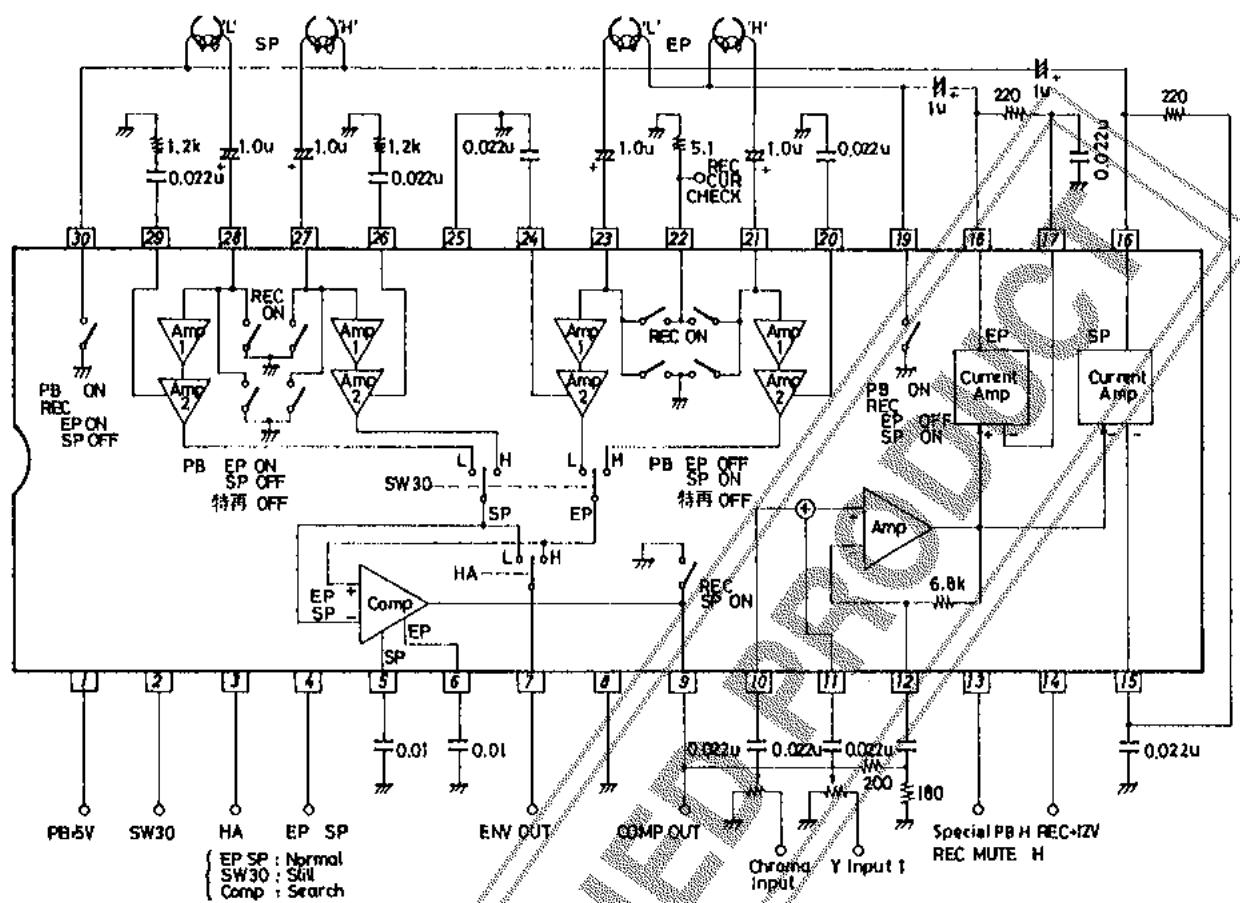

LA7321,7321M Test Circuit

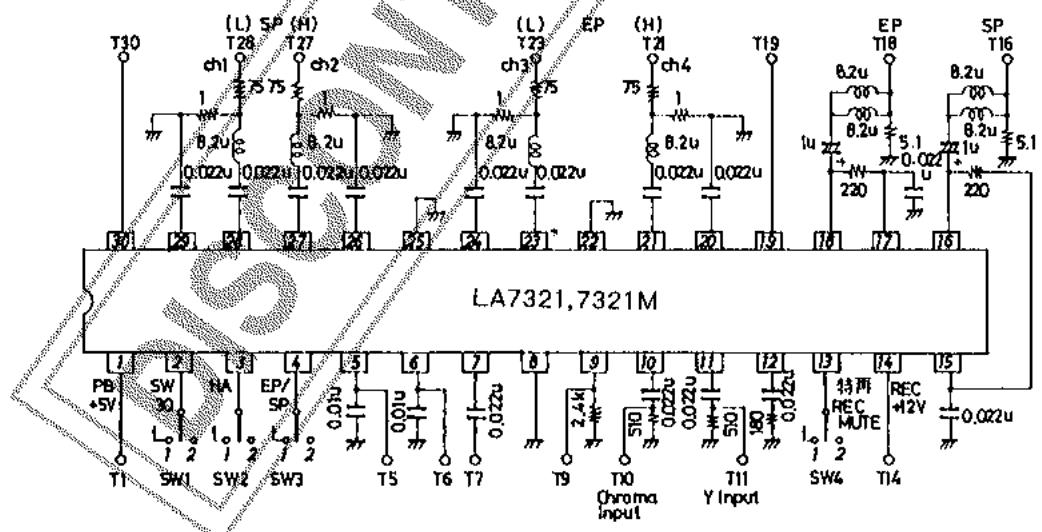




LA7321,7321M

LA7321,7321M Pin Description

| Pin No. | Function | Standard DC Voltage | Input/Output Configuration | Remarks |
|---------------|---|---------------------|----------------------------|--|
| 1 | PB + 5V | | | 24mA typ. |
| 2 | SW30 control pin | | | L : 0 to 1.5V H : 2.5 to 5.0V |
| 3 | H-A control pin | | | L : 0 to 1.5V H : 2.5 to 5.0V |
| 4 | control pin | | | L : 0 to 1.5V H : 2.5 to 5.0V |
| 5 · 6 | Envelope detection pin | 2.4 (V) | | |
| 7 | Preamplifier output | 2.3 (V) | | • Connect R=2kΩ externally when the output line is routed around. |
| 8 | GND | | | |
| 9 | (PB) Comparator output (REC) SW pin for gain change | | | * SW Tr ON resistance 7 to 10Ω * For gain change, refer to pin 12. |
| 10 · 11 | REC amp input chroma. Y | 6.7 (V) | | Rin = 10kΩ |
| 12 | REC Y/CMIX amp feedback pin | 5.9 (V) | | * The gain depends on R1. R1 : 180 = 10.5dB * R2 can be used to change the gain. R2 : 500 = + 2.0 : 200 = + 3.7dB (R : 1.2kΩ) |

Continued on next page.

Continued from preceding page.
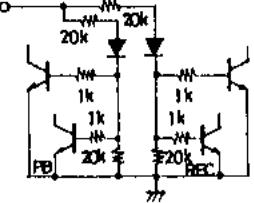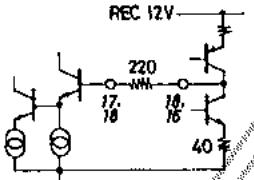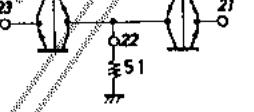
| Pin No. | Function | Standard DC Voltage | Input/Output Configuration | Remarks |
|----------------------|---|---------------------|---|--|
| 13 | (PB) Special PB control pin (REC) REC MUTE control pin | |  | L : 0 to 1.5V II : 3.0 to 5.0V |
| 14 | REC +12V | | | |
| 15 16 17 18 | REC Amp output Amp feedback pin | 5.9 (V) |  | Maximum REC current 40mA _{pp} |
| 19 30 | PB ON SW Tr REC mode select SW Tr | |  | On resistance 6 to 10Ω |
| 20 24 26 29 | Preamp bypass capacitor pin | 1.9 (V) |  | The gain depends on R1. R1 : 0 = 0dB : 820 = -3dB : 1.2k = -4dB |
| 21 23 27 28 | Preamp input | 0.7 (V) |  | R _{in} ≈ 400Ω C _{in} ≈ 40 to 50p |
| 22 | REC circuit check pin | |  | ON resistance 6 to 10Ω |
| 25 | Pre GND | | | |