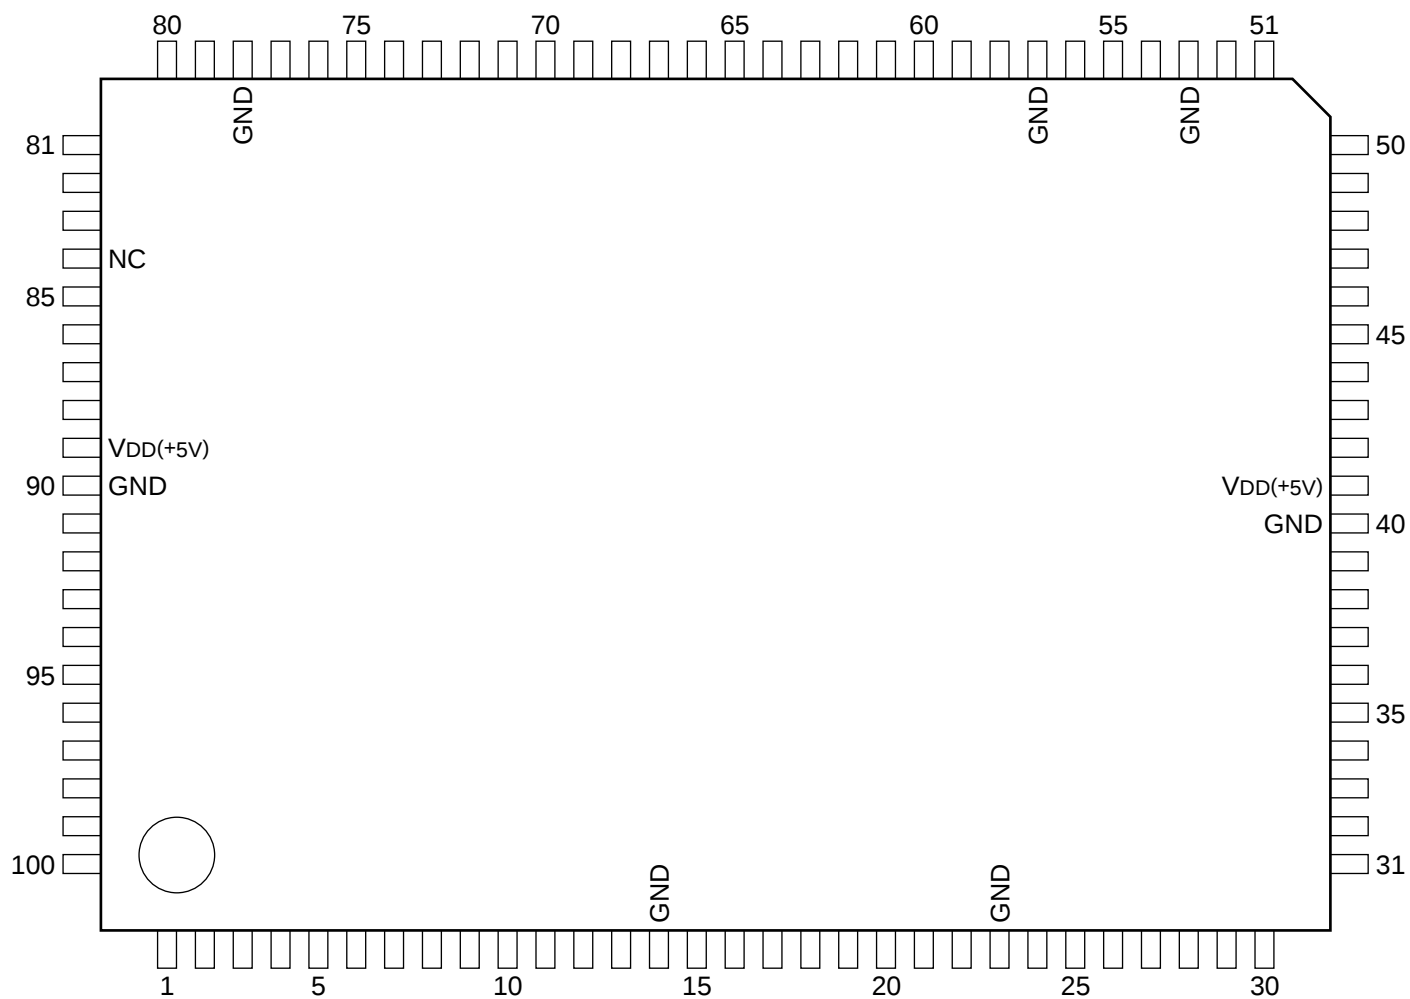

C-MOS ERROR CORRECTION/ADPCM DECODER FOR CD-I/CD-ROM

-TOP VIEW-



(V_{DD}=+5V)

PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	I	SA0	26	O	RA2	51	I/O	IO6	76	I/O	D6
2	I	ZAPCS	27	O	RA3	52	I/O	IO7	77	I/O	D7
3	O	BUSY	28	O	RA4	53	–	GND	78	–	GND
4	O	INTH	29	O	RA5	54	I	EXTAL	79	I	SUA0
5	O	HDE	30	O	RA6	55	O	XTAL	80	I	SUA1
6	I/O	HD7	31	O	RA7	56	I	TEST	81	I	SUA2
7	I/O	HD6	32	O	RA8	57	–	GND	82	I	SUA3
8	I/O	HD5	33	O	RA9	58	O	MCK	83	I	SUA4
9	I/O	HD4	34	O	RA10	59	I	LRCK	84	–	NC
10	I/O	HD3	35	O	RA11	60	I	SDATA	85	O	ZINT
11	I/O	HD2	36	O	RA12	61	I	BCK	86	I	RS(ALE)
12	I/O	HD1	37	O	RA13	62	I	C2P0	87	I	ZRD
13	I/O	HD0	38	O	RA14	63	I	WFCK	88	I	ZWR
14	–	GND	39	O	RA15	64	O	EXCK	89	–	V _{DD}
15	O	ZEOP	40	–	GND	65	I	SBS0	90	–	GND
16	O	MSTEMON	41	–	V _{DD}	66	I	SCOR	91	O	ZCS
17	O	MEMPHAS	42	O	ZRWE	67	O	CEMPHAS	92	I	ZENABLE
18	O	OLRCK	43	O	ZROE	68	I	ZRESET	93	I	SELDRQ
19	O	ODATA	44	I/O	ERA	69	I	SCPUCNT	94	O	ZWAIT/DRQ
20	O	OBLCK	45	I/O	IO0	70	I/O	D0	95	O	ZDTEN
21	O	SOC1	46	I/O	IO1	71	I/O	D1	96	O	ZSTEN
22	O	DACCK	47	I/O	IO2	72	I/O	D2	97	I	ZHWR
23	–	GND	48	I/O	IO3	73	I/O	D3	98	I	ZHRD
24	O	RA0	49	I/O	IO4	74	I/O	D4	99	I	ZCMD
25	O	RA1	50	I/O	IO5	75	I/O	D5	100	I	SA1

