SIEMENS

2-GHz-Mixer PMB 2330


Preliminary Data Bipolar IC

Features

- Few external components
- Low noise
- Low spurious signal content
- High conversion transconductance
- Very highly isolated RF, IF and LO ports
- Good suppression of input signals at output
- Wide range of supply voltage

Applications

- Cellular radio mixer
- Cordless telephone mixer
- UHF transceivers
- RF data links
- HF/VHF/UHF frequency conversion



| Туре | Version | Ordering Code | Package |
|-----------|---------|---------------|-----------------|
| PMB 2330 | V1.1 | Q67000-A6045 | P-DSO-8-1 (SMD) |
| PMB 2330T | V1.2 | Q67000-A6103 | P-DSO-8-1 (SMD) |

The PMB 2330 is a low power, monolithic, double balanced mixer similar to S 042 P and TBB 042 G for frequencies up to 2 GHz.

Circuit Description

The pins RF (7) and \overline{RF} (8) are low resistance inputs of the base coupled difference stage.


The resistor of at least 200 Ω may be connected between pins 7 and 6 (ground) and between 8 and 6 to increase the currents (max. 4 mA per pin) and thus the conversion transductance.

The pins \overline{LO} (4) and LO (5) are the local oscillator inputs of the mixer.

The connections to the mixer inputs may be symmetrical or asymmetrical coupled, capacitive or inductive coupled.


The mixer outputs MO (1) and $\overline{\text{MO}}$ (2) are high impedance open-collector outputs for frequencies up to 2 GHz.

Pin Configuration

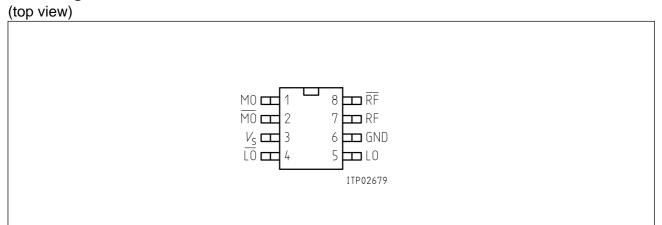

Pin Definitions and Functions

| Pin No. | Symbol | Function |
|---------|------------------|------------------|
| 1 | МО | Mixer output |
| 2 | MO | Mixer output |
| 3 | $V_{\mathtt{S}}$ | Supply voltage |
| 4 | LO | Oscillator input |
| 5 | LO | Oscillator input |
| 6 | GND | Ground |
| 7 | RF | Mixer input |
| 8 | RF | Mixer input |

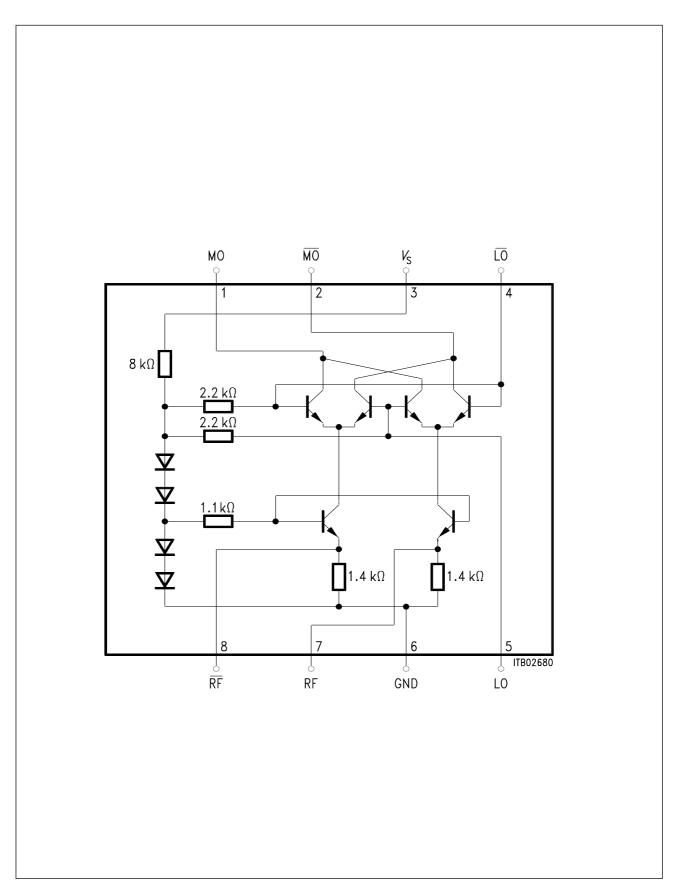

Block Diagram

Electrical Characteristics

Absolute Maximum Ratings

 $T_{\rm A}$ = - 40 to 85 $^{\circ}$ C

| Parameter | Symbol | Lim | it Values | Unit | Remarks |
|----------------------|------------------|------|-----------|------|----------------|
| | | min. | typ. | | |
| Supply voltage | $V_{\mathtt{S}}$ | 0 | 8 | V | |
| Mixer output | V _{1,2} | 1 | 8 | V | open collector |
| Oscillator input | $V_{4,5}$ | 0 | 2.5 | V | |
| Mixer input | V _{7,8} | 0.8 | 3.5 | V | |
| Junction temperature | T_{j} | | 150 | °C | |
| Storage temperature | $T_{ m stg}$ | - 40 | 125 | °C | |
| Thermal resistance | $R_{th\;SA}$ | | 185 | K/W | |

All pins have no additional internal ESD protection circuitry

Operational Range

Within the operational range the IC operates as described in the circuit description.

| Supply voltage | $V_{\mathtt{S}}$ | 3 | 7 | V | |
|----------------------------------|------------------|------|------|-----|--|
| Input frequency range | f_{I} | 10 | 2000 | MHz | |
| Ambient temperature in operation | T_{A} | - 40 | 85 | °C | |

Characteristics

 $V_{\rm S}$ = 5 V \pm 10 %; $T_{\rm A}$ = 25 °C

| Parameter | Symbol | Limit Values | | Unit | Test Condition | |
|---------------------------|---|--------------|------|------|----------------|--|
| | | min. | typ. | max. | | |
| Current consumption | I_{MO} + $I_{\overline{MO}}$ + I_{VS} | | 1.6 | | mA | |
| Output current | $I_{MO} = I_{\overline{MO}}$ | | 0.54 | | mA | |
| Output current difference | $ I_{MO} - I_{\overline{MO}} $ | | | 60 | μΑ | |
| Break down voltage | $V_{MO,\overline{MO}}$ | | 13 | | V | $I_{MO, \overline{MO}} = 8 \text{ mA}$ |

Signal Input RF/RF


| Input resistance | R_{RF} | | 100 | | Ω | |
|--|-----------|---|------------|-----|----------|---------------------------|
| Input inductance | L_{RF} | | 10 | | nΗ | in series to R_{RF} |
| Input level | P_{RF} | | | 0 | dBm | |
| Input Intercept point | P_{IPI} | | - 5 | | dBm | referred to input |
| Input frequency | f_{RF} | 0 | | 2.0 | GHz | |
| Noise figure $f_{\rm RF}$ = 100 MHz, $f_{\rm LO}$ = 145 MHz $f_{\rm RF}$ = 1 GHz, $f_{\rm LO}$ = 1.045 GHz | N N | | 6 8 | | dB dB | according to test circuit |

Local Oscillator Input LO/LO


| Input resistance | $R_{	ext{LO diff}} \ R_{	ext{LO diff}}$ | | 3.8 0.6 | | kΩ kΩ | f_{LO} = 100 MHz f_{LO} = 1 GHz |
|-------------------|---|-------------|------------|----------|------------|--|
| Input capacitance | $C_{LO\;diff}$ | | 1.5 | | pF | parallel to R_{LOdiff} |
| Input level | P _{LO} P _{LO} | - 10 - 5 | | 10 10 | dBm dBm | f_{LO} = 100 MHz f_{LO} = 1 GHz |
| Input frequency | f_{LO} | | | 2.0 | GHz | |

Mixer Output MO/\overline{MO}

| Output resistance | R_{MOdiff} | 7.0 | | l . | $f_{\rm MO}$ = 100 MHz |
|--|----------------|-----|-----|-----|------------------------------|
| | $R_{MO\;diff}$ | 0.6 | | kΩ | f_{MO} = 1 GHz |
| Output capacitance | C_{MOdiff} | 1.5 | | pF | parallel to $R_{ m MO~diff}$ |
| Power gain | | | | | |
| $f_{\rm RF}$ = 100 MHz, $f_{\rm LO}$ = 145 MHz | V_{P} | 10 | | dB | |
| $f_{\rm RF}$ = 1 GHz, $f_{\rm LO}$ = 1.045 GHz | V_{P} | 10 | | dB | |
| Intermediate frequency | f_{IF} | | 2.0 | GHz | |

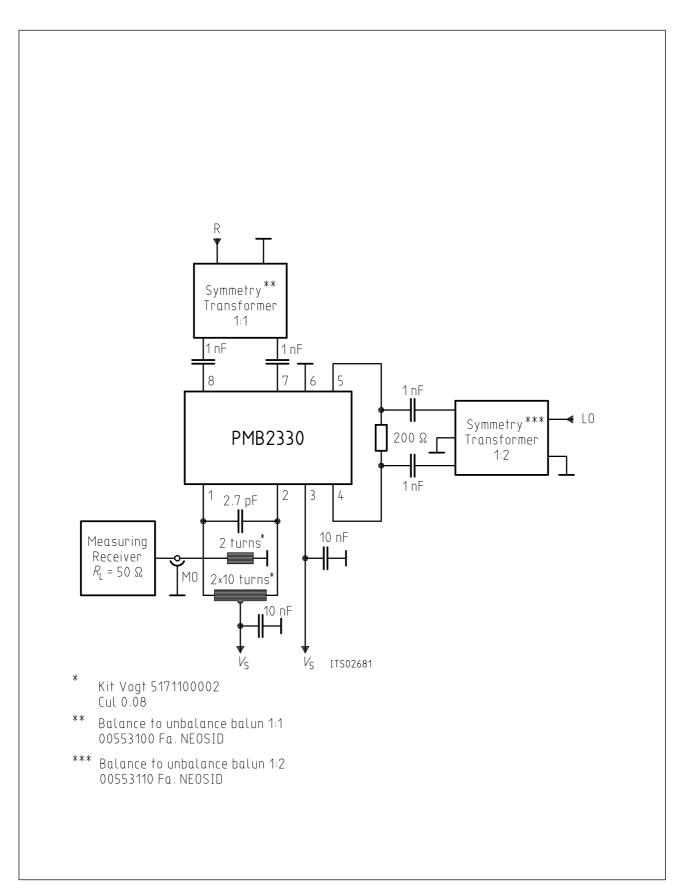

Test Circuit

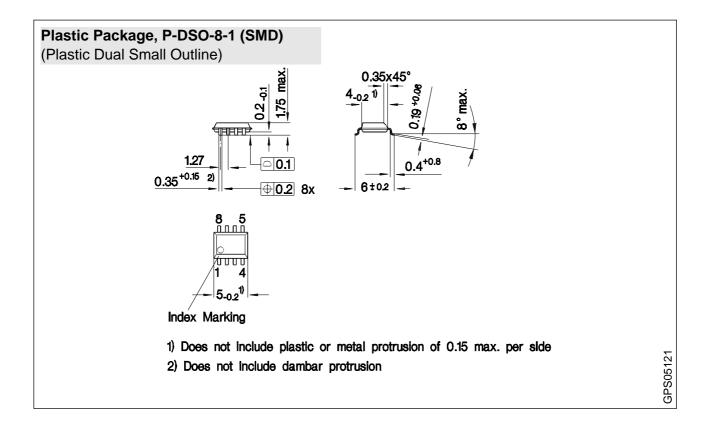

Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information"

SMD = Surface Mounted Device

Dimensions in mm