


54AC11881, 74AC11881 ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

SCAS390 – MARCH 1990


- Full Look-Ahead for High-Speed Operations on Long Words
- Arithmetic Operating Modes: Addition, Subtraction, Shift Operand A One Position, Magnitude Comparison, Plus Twelve Other Arithmetic Operations
- Logic Function Modes Exclusive-OR, Comparator, AND, NAND, OR, NOR, Plus Ten Other Logic Operations
- Provides Status Register Checks
- Flow-Through Architecture to Optimize PCB Layout
- Center-Pin V_{CC} and GND Configurations to Minimize High-Speed Switching Noise
- EPIC™ (Enhanced-Performance Implanted CMOS) 1- μ m Process
- 500-mA Typical Latch-Up Immunity at 125°C
- Package Options Include Plastic “Small Outline” Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs

11881 . . . JT PACKAGE
11881 . . . DW OR NT PACKAGE


(TOP VIEW)

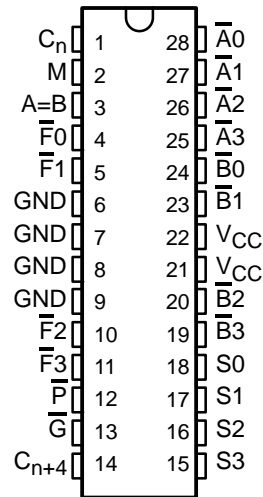

54AC11881 . . . FK PACKAGE
(TOP VIEW)

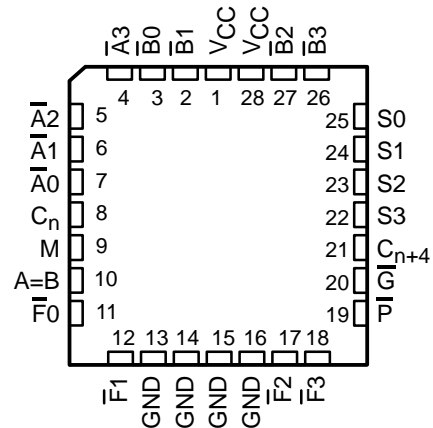

logic symbol†

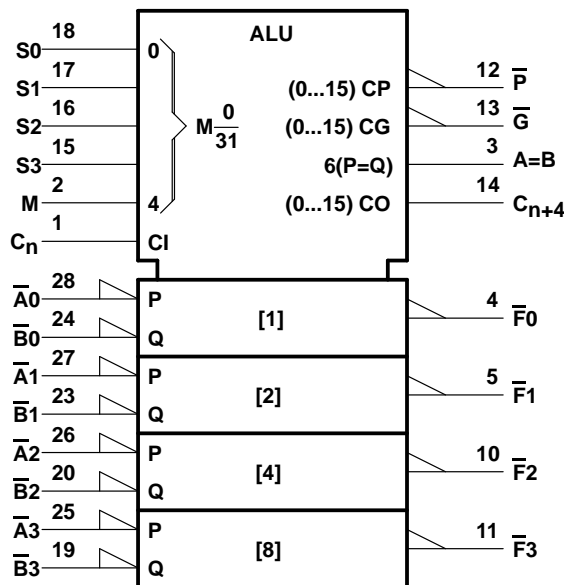

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for DW, JT, and NT packages.

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.

**TEXAS
INSTRUMENTS**
POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1990, Texas Instruments Incorporated

PRODUCT PREVIEW

signal designations

In both Figures 1 and 2, the polarity indicators (\triangle) indicate that the associated input or output is active-low with respect to the function shown inside the symbol and the symbols are the same in both figures. The signal designations in Figure 1 agree with the indicated internal functions based on active-low data and are for use with the logic functions and arithmetic operations shown in Table 1. The signal designations have been changed in Figure 2 to accommodate the logic functions and arithmetic operations for the active-high data given in Table 2.

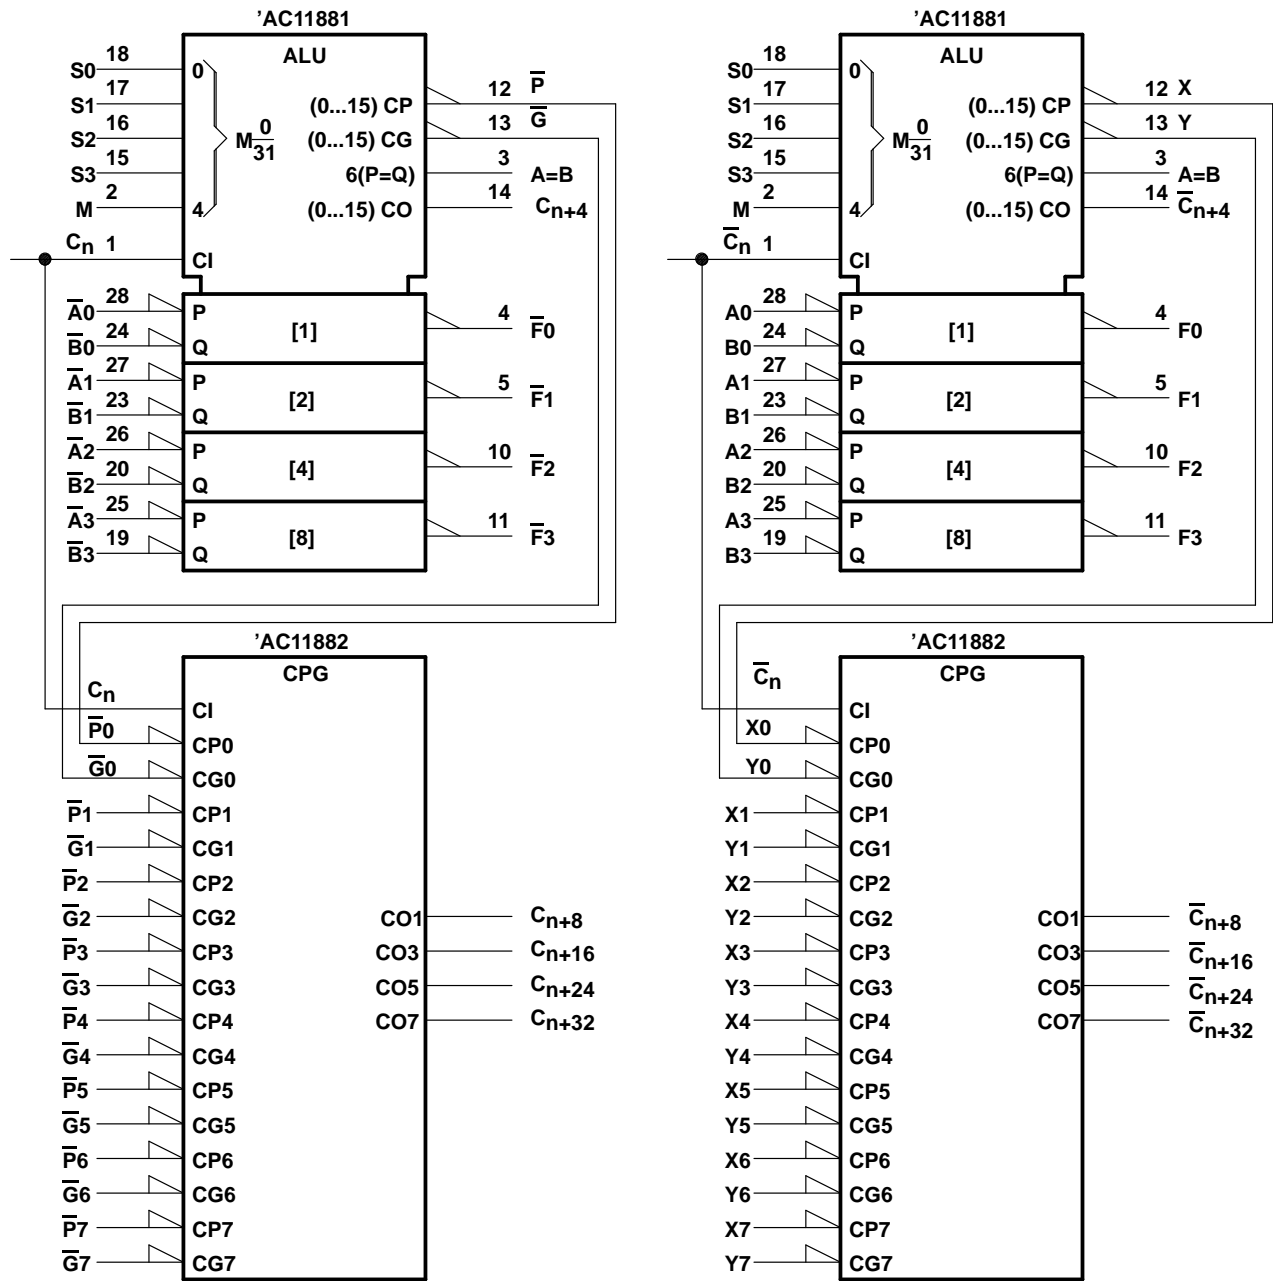


FIGURE 1
(USE WITH TABLE 1)

FIGURE 2
(USE WITH TABLE 2)

Pin numbers shown are for DW, JT, and NT packages.

PRODUCT PREVIEW

description

The 'AC11881 arithmetic logic units (ALU)/function generators have a complexity of 77 equivalent gates on a monolithic chip. These circuits perform 16 binary arithmetic operations on two 4-bit words as shown in Tables 1 and 2. These operations are selected by the four function-select lines (S0, S1, S2, S3) and include addition, subtraction, decrement, and straight transfer. When performing arithmetic manipulations, the internal carries must be enabled by applying a low-level voltage to the mode control input (M). A full carry look-ahead scheme is made available in these devices for fast, simultaneous carry generation by means of two cascade-outputs, \overline{G} and \overline{P} , for the four bits in the package. When used in conjunction with the 54AC11882 or 74AC11882 full carry look-ahead circuits, high-speed arithmetic operations can be performed. The typical addition times shown previously illustrate the little additional time required for addition of longer words when full carry look-ahead is employed. The method of cascading 'AC11882 circuits with these ALUs to provide multilevel full carry look-ahead is illustrated under signal designations.

If high speed is not of importance, a ripple-carry input (C_n) and a ripple-carry output (C_{n+4}) are available. However, the ripple-carry delay has also been minimized so that arithmetic manipulations for small word lengths can be performed without external circuitry.

The 'AC11881 will accommodate active-high or active-low data if the pin designations are interpreted as follows:

PIN NUMBER	28	24	27	23	26	20	25	19	4	5	10	11	1	14	12	13
Active-low data (Table 1)	A0	B0	A1	B1	A2	B2	A3	B3	F0	F1	F2	F3	C_n	C_{n+4}	\overline{P}	\overline{G}
Active-high data (Table 2)	A0	B0	A1	B1	A2	B2	A3	B3	F0	F1	F2	F3	C_n	C_{n+4}	X	Y

Subtraction is accomplished by 1's complement addition, where the 1's complement of the subtrahend is generated internally. The resultant output is A-B-1, which requires an end-around or forced carry to provide A-B.

The 'AC11881 can also be utilized as a comparator. The A=B output is internally decoded from the function outputs (F0, F1, F2, F3) so that when two words of equal magnitude are applied at the A and B inputs, it will assume a high level to indicate equality (A=B). The ALU must be in the subtract mode with $C_n=H$ when performing this comparison. The A=B output is open-collector so that it can be wire-AND connected to give a comparison for more than four bits. The carry output (C_{n+4}) can also be used to supply relative magnitude information. Again, the ALU must be placed in the subtract mode by placing the function select input S3, S2, S1, S0 at L, H, H, L, respectively.

INPUT C_n	OUTPUT C_{n+4}	ACTIVE-LOW DATA (FIGURE 1)	ACTIVE-HIGH DATA (FIGURE 2)
H	H	$A \geq B$	$A \leq B$
H	L	$A < B$	$A > B$
L	H	$A > B$	$A < B$
L	L	$A \leq B$	$A \geq B$

These circuits have been designed to not only incorporate all of the designer's requirements for arithmetic operations, but also to provide 16 possible functions of two Boolean variables without the use of external circuitry. These logic functions are selected by use of the four function-select inputs (S0, S1, S2, S3) with the mode-control input (M) at a high level to disable the internal carry. The 16 logic functions are detailed in Tables 1 and 2 and include exclusive-OR, NAND, AND, NOR, and OR functions.

The 'AC11881 has the same pinout and same functionality as the 'AC1181 except for the \overline{P} , \overline{G} , and C_{n+4} outputs when the device is in the logic mode (M = H).

description (continued)

In the logic mode, the 'ACT11881 provides the user with a status check on the input words A and B and the output word F. While in the logic mode, the \bar{P} , \bar{G} , and C_{n+4} outputs supply status information based upon the following logical combinations:

$$\bar{P} = F_0 + F_1 + F_2 + F_3$$

$$\bar{G} = H$$

$$C_{n+4} = PC_n.$$

Function Tables for Input Bits Equal/Not Equal

$S_0 = S_3 = H$, $S_1 = S_2 = L$, AND $M = H$

C_n	DATA INPUTS				OUTPUTS		
					G	P	C_{n+4}
H	$A_0 = B_0$	$A_1 = B_1$	$A_2 = B_2$	$A_3 = B_3$	H	L	H
L	$A_0 = B_0$	$A_1 = B_1$	$A_2 = B_2$	$A_3 = B_3$	H	L	L
X	$A_0 \neq B_0$	X	X	X	H	H	L
X	X	$A_1 \neq B_1$	X	X	H	H	L
X	X	X	$A_2 \neq B_2$	X	H	H	L
X	X	X	X	$A_3 \neq B_3$	H	H	L

$S_0 = S_1 = S_3 = L$, $S_2 = H$, AND $M = H$

C_n	DATA INPUTS				OUTPUTS		
					G	P	C_{n+4}
H	$A_0 \text{ or } B_0 = L$	$A_1 \text{ or } B_1 = L$	$A_2 \text{ or } B_2 = L$	$A_3 \text{ or } B_3 = L$	H	L	H
L	$A_0 \text{ or } B_0 = L$	$A_1 \text{ or } B_1 = L$	$A_2 \text{ or } B_2 = L$	$A_3 \text{ or } B_3 = L$	H	L	L
X	$A_0 = B_0 = H$	X	X	X	H	H	L
X	X	$A_1 = B_1 = H$	X	X	H	H	L
X	X	X	$A_2 = B_2 = H$	X	H	H	L
X	X	X	X	$A_3 = B_3 = H$	H	H	L

The combination of signals on the S_3 through S_0 control lines determine the operation performed on the data words to generate the output bits \bar{F}_i . By monitoring the \bar{P} and C_{n+4} outputs, the user can determine if all pairs of input bits are equal (see table above) or if any pair of inputs are both high (see table above). The 'ACT11881 has the unique feature of providing an $A = B$ status while the exclusive-OR (\oplus) function is being utilized. When the control inputs (S_3, S_2, S_1, S_0) equal H, L, L, H; a status check is generated to determine whether all pairs (\bar{A}_i, \bar{B}_i) are equal in the following manner: $\bar{P} = (A_0 \oplus B_0) + (A_1 \oplus B_1) + (A_2 \oplus B_2) + (A_3 \oplus B_3)$. This unique bit-by-bit comparison of the data words, which is available on the totem-pole \bar{P} output, is particularly useful when cascading 'ACT11881s. As the $A = B$ condition is sensed in the first stage, the signal is propagated through the same ports used for carry generation in the arithmetic mode (\bar{P} and \bar{G}). Thus, the $A = B$ status is transmitted to the second stage more quickly without the need for external multiplexing logic. The $A = B$ open-drain output allows the user to check the validity of the bit-by-bit result by comparing the two signals for parity.

If the user wishes to check for any pair of data inputs (\bar{A}_i, \bar{B}_i) being high, it is necessary to set the control lines (S_3, S_2, S_1, S_0) to L, H, L, L. The data pairs will then be ANDed together and the results ORed in the following manner: $\bar{P} = \bar{A}_0\bar{B}_0 + \bar{A}_1\bar{B}_1 + \bar{A}_2\bar{B}_2 + \bar{A}_3\bar{B}_3$.

S_3	S_2	S_1	S_0	M	$\bar{P} = F_0 + F_1 + F_2 + F_3$
L	H	L	L	H	$A_0B_0 + A_1B_1 + A_2B_2 + A_3B_3$
H	L	L	H	H	$(A_0 \oplus B_0) + (A_1 \oplus B_1) + (A_2 \oplus B_2) + (A_3 \oplus B_3)$

Table 1. Logic Functions and Arithmetic Operations (Active-Low)

SELECTION				ACTIVE-LOW DATA		
S3	S2	S1	S0	M = H LOGIC FUNCTIONS	M = L; ARITHMETIC OPERATIONS	
					C _n = L (no carry)	C _n = H (with carry)
L	L	L	L	$F = \bar{A}$	$F = A \text{ MINUS } 1$	$F = A$
L	L	L	H	$F = \bar{A}\bar{B}$	$F = AB \text{ MINUS } 1$	$F = AB$
L	L	H	L	$F = \bar{A} + B$	$F = \bar{A}\bar{B} \text{ MINUS } 1$	$F = \bar{A}\bar{B}$
L	L	H	H	$F = 1$	$F = \text{MINUS } 1 \text{ (2's COMP)}$	$F = \text{ZERO}$
L	H	L	L	$F = \overline{A + B}$	$F = A \text{ PLUS } (A + \bar{B})$	$F = A \text{ PLUS } (A + \bar{B}) \text{ PLUS } 1$
L	H	L	H	$F = \bar{B}$	$F = AB \text{ PLUS } (A + \bar{B})$	$F = AB \text{ PLUS } (A + \bar{B}) \text{ PLUS } 1$
L	H	H	L	$F = A \oplus \bar{B}$	$F = A \text{ MINUS } B \text{ MINUS } 1$	$F = A \text{ MINUS } B$
L	H	H	H	$F = A + \bar{B}$	$F = A + \bar{B}$	$F = (A + \bar{B}) \text{ PLUS } 1$
H	L	L	L	$F = \bar{A}B$	$F = A \text{ PLUS } (A + B)$	$F = A \text{ PLUS } (A + B) \text{ PLUS } 1$
H	L	L	H	$F = A \oplus B$	$F = A \text{ PLUS } B$	$F = A \text{ PLUS } B \text{ PLUS } 1$
H	L	H	L	$F = B$	$F = \bar{A}\bar{B} \text{ PLUS } (A + B)$	$F = \bar{A}\bar{B} \text{ PLUS } (A + B) \text{ PLUS } 1$
H	L	H	H	$F = A + B$	$F = (A + B)$	$F = (A + B) \text{ PLUS } 1$
H	H	L	L	$F = 0$	$F = A \text{ PLUS } A^\dagger$	$F = A \text{ PLUS } A \text{ PLUS } 1$
H	H	L	H	$F = \bar{A}\bar{B}$	$F = AB \text{ PLUS } A$	$F = AB \text{ PLUS } A \text{ PLUS } 1$
H	H	H	L	$F = AB$	$F = \bar{A}\bar{B} \text{ PLUS } A$	$F = \bar{A}\bar{B} \text{ PLUS } A \text{ PLUS } 1$
H	H	H	H	$F = A$	$F = A$	$F = A \text{ PLUS } 1$


Table 2. Logic Functions and Arithmetic Operations (Active-High)

SELECTION				ACTIVE-HIGH DATA		
S3	S2	S1	S0	M = H LOGIC FUNCTIONS	M = L; ARITHMETIC OPERATIONS	
					C _n = H (no carry)	C _n = L (with carry)
L	L	L	L	$F = \bar{A}$	$F = A$	$F = A \text{ PLUS } 1$
L	L	L	H	$F = \bar{A} + \bar{B}$	$F = A + B$	$F = (A + B) \text{ PLUS } 1$
L	L	H	L	$F = \bar{A}B$	$F = A + \bar{B}$	$F = (A + \bar{B}) \text{ PLUS } 1$
L	L	H	H	$F = 0$	$F = \text{MINUS } 1 \text{ (2's COMP)}$	$F = \text{ZERO}$
L	H	L	L	$F = \bar{A}\bar{B}$	$F = A \text{ PLUS } \bar{A}\bar{B}$	$F = A \text{ PLUS } \bar{A}\bar{B} \text{ PLUS } 1$
L	H	L	H	$F = \bar{B}$	$F = (A + B) \text{ PLUS } \bar{A}\bar{B}$	$F = A \text{ PLUS } \bar{A}\bar{B} \text{ PLUS } 1$
L	H	H	L	$F = A \oplus B$	$F = A \text{ MINUS } B \text{ MINUS } 1$	$F = A \text{ MINUS } B$
L	H	H	H	$F = \bar{A}\bar{B}$	$F = \bar{A}\bar{B} \text{ MINUS } 1$	$F = \bar{A}\bar{B}$
H	L	L	L	$F = \bar{A} + B$	$F = A \text{ PLUS } AB$	$F = A \text{ PLUS } AB \text{ PLUS } 1$
H	L	L	H	$F = \bar{A} \oplus \bar{B}$	$F = A \text{ PLUS } B$	$F = A \text{ PLUS } B \text{ PLUS } 1$
H	L	H	L	$F = B$	$F = (A + \bar{B}) \text{ PLUS } AB$	$F = (A + \bar{B}) \text{ PLUS } AB \text{ PLUS } 1$
H	L	H	H	$F = AB$	$F = AB \text{ MINUS } 1$	$F = AB$
H	H	L	L	$F = 1$	$F = A \text{ PLUS } A^\dagger$	$F = A \text{ PLUS } A \text{ PLUS } 1$
H	H	L	H	$F = A + \bar{B}$	$F = (A + B) \text{ PLUS } A$	$F = (A + B) \text{ PLUS } A \text{ PLUS } 1$
H	H	H	L	$F = A + B$	$F = (A + \bar{B}) \text{ PLUS } A$	$F = (A + \bar{B}) \text{ PLUS } A \text{ PLUS } 1$
H	H	H	H	$F = A$	$F = A \text{ MINUS } 1$	$F = A$

[†] Each bit is shifted to the next more significant position.

54AC11881, 74AC11881
ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

logic diagram (positive logic)

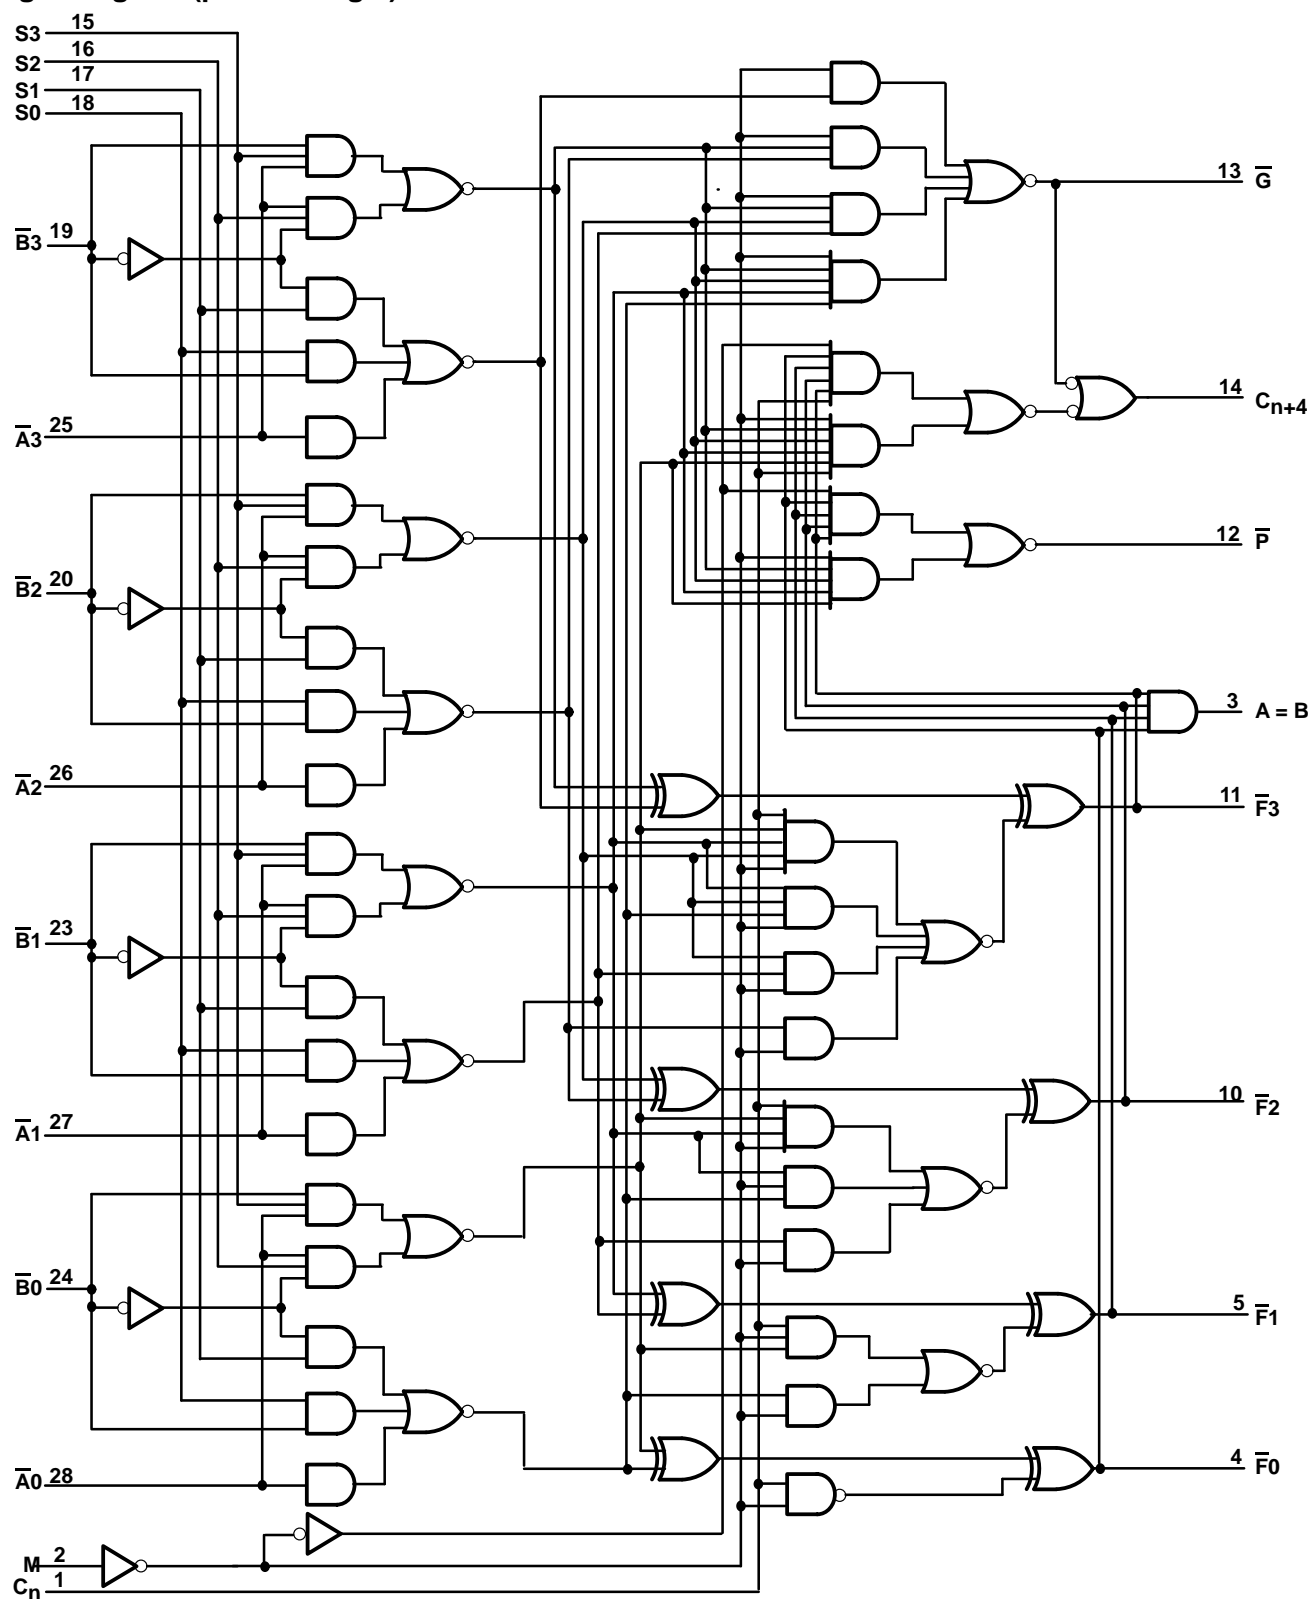

Pin numbers shown are for DW, JT, and NT packages.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V_{CC}	−0.5 V to 7 V
Input voltage range, V_I (see Note 1)	−0.5 V to $V_{CC} + 0.5$ V
Output voltage range, V_O (see Note 1)	−0.5 V to $V_{CC} + 0.5$ V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$)	±20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$)	±50 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	±50 mA
Continuous current through V_{CC} or GND pins	±200 mA
Storage temperature range	−65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

recommended operating conditions

Recommended operating conditions								UNIT
		54AC11881			74AC11881			
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	3	5	5.5	3	5	5.5	V
V _{IH}	High-level input voltage	V _{CC} = 3 V	2.1		2.1		V	
		V _{CC} = 4.5 V	3.15		3.15			
		V _{CC} = 5.5 V	3.85		3.85			
V _{IL}	Low-level input voltage	V _{CC} = 3 V	0.9		0.9		V	
		V _{CC} = 4.5 V	1.35		1.35			
		V _{CC} = 5.5 V	1.65		1.65			
V _I	Input voltage	0	V _{CC}		0	V _{CC}		V
V _O	Output voltage	0	V _{CC}		0	V _{CC}		V
I _{OH}	High-level output current, All outputs except A=B	V _{CC} = 3 V	−4		−4		mA	
		V _{CC} = 4.5 V	−24		−24			
		V _{CC} = 5.5 V	−24		−24			
I _{OL}	Low-level output current	V _{CC} = 3 V	12		12		mA	
		V _{CC} = 4.5 V	24		24			
		V _{CC} = 5.5 V	24		24			
Δt/Δv	Input transition rise or fall rate	0	10		0	10		ns/V
T _A	Operating free-air temperature	−55	125		−40	85		°C

PRODUCT PREVIEW

PRODUCT PREVIEW

54AC11881, 74AC11881

ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	V _{CC}	T _A = 25°C			54AC11881		74AC11881		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
I _{OH}	A = B	V _O = V _{CC}	5.5 V			0.5		10		5	μA
V _{OH}	I _{OH} = -50 μA	3 V		2.9			2.9		2.9		V
		4.5 V		4.4			4.4		4.4		
		5.5 V		5.4			5.4		5.4		
	I _{OH} = -4 mA	3 V		2.58			2.4		2.48		
		4.5 V		3.94			3.7		3.8		
	I _{OH} = -24 mA	5.5 V		4.94			4.7		4.8		
		I _{OH} = -50 mA†	5.5 V				3.85				
V _{OL}	I _{OL} = 50 μA	3 V			0.1		0.1		0.1		V
		4.5 V			0.1		0.1		0.1		
		5.5 V			0.1		0.1		0.1		
	I _{OL} = 12 mA	3 V			0.36		0.5		0.44		
		4.5 V			0.36		0.5		0.44		
	I _{OL} = 24 mA	5.5 V			0.36		0.5		0.44		
		I _{OL} = 50 mA†	5.5 V				1.65				
I _I	V _I = V _{CC} or GND	I _{OL} = 75 mA†	5.5 V						1.65		μA
			5.5 V			±0.1	±1		±1		
I _{CC}	V _I = V _{CC} or GND, I _O = 0		5.5 V			8	160		80		μA
C _i	V _I = V _{CC} or GND		5 V		4.5						pF
C _o	A = B	V _O = V _{CC} or GND	5 V		11						pF

† Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$ (unless otherwise noted) (see Note 2)

SUM MODE; $M = S1 = S2 = 0 \text{ V}$, $S0 = S3 = 4.5 \text{ V}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54AC11881		74AC11881		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	C_n	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any $\overline{A_i}$	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any $\overline{B_i}$	C_{n+4}								ns
t_{PHL}										
t_{PLH}	C_n	Any \overline{F}								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	\overline{G}								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	\overline{G}								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	\overline{P}								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	\overline{P}								ns
t_{PHL}										
t_{PLH}	$\overline{A_i}$	$\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	$\overline{B_i}$	$\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	Any $\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any $\overline{B_i}$	Any $\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	M	Any \overline{F}								ns
t_{PHL}										
t_{PLH}	M	$A = B$								ns
t_{PHL}										

NOTE 2: Load circuits and voltage waveforms are shown in Section 1 of *Advanced CMOS Logic Data Book, 1990*.

PRODUCT PREVIEW

54AC11881, 74AC11881

ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$ (unless otherwise noted) (see Note 2)

DIFF MODE; $M = S0 = S3 = 0 \text{ V}$, $S1 = S2 = 4.5 \text{ V}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54AC11881		74AC11881		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	C_n	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any $\overline{A_i}$	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any $\overline{B_i}$	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	\overline{G}								ns
t_{PHL}										
t_{PLH}	C_n	Any \overline{F}								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	\overline{G}								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	\overline{P}								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	\overline{P}								ns
t_{PHL}										
t_{PLH}	$\overline{A_i}$	$\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	$\overline{B_i}$	$\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	Any $\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any $\overline{B_i}$	Any $\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	$A = B$								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	$A = B$								ns
t_{PHL}										

NOTE 2: Load circuits and voltage waveforms are shown in Section 1 of *Advanced CMOS Logic Data Book, 1990*.

PRODUCT PREVIEW

switching characteristics over recommended operating free-air temperature range,
V_{CC} = 3.3 V ± 0.3 V (unless otherwise noted) (see Note 2)

LOGIC and ARITH MODES

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	T _A = 25°C			54AC11881		74AC11881		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t _{PLH}	Any $\overline{A_i}$	Any $\overline{F_i}$	M = 4.5 V (LOGIC mode)								ns
t _{PHL}											
t _{PLH}	$\overline{B_i}$	$\overline{F_i}$	M = 4.5 V (LOGIC mode)								ns
t _{PHL}											
t _{PLH}	Any S	Any \overline{F}	M = 0 V, (ARITH mode)								ns
t _{PHL}											
t _{PLH}	Any S	A = B	M = 0 V, (ARITH mode)								ns
t _{PHL}											
t _{PLH}	Any S	C _{n+4}	M = 4.5 V (LOGIC mode)								ns
t _{PHL}											
t _{PLH}	Any S	\overline{G}	M = 0 V, (ARITH mode)								ns
t _{PHL}											
t _{PLH}	Any S	\overline{P}	M = 4.5 V (LOGIC mode)								ns
t _{PHL}											

PRODUCT PREVIEW

54AC11881, 74AC11881

ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Note 2)

SUM MODE; $M = S1 = S2 = 0\text{ V}$, $S0 = S3 = 4.5\text{ V}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54AC11881		74AC11881		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	C_n	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any $\overline{A_i}$	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any $\overline{B_i}$	C_{n+4}								ns
t_{PHL}										
t_{PLH}	C_n	Any \overline{F}								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	\overline{G}								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	\overline{G}								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	\overline{P}								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	\overline{P}								ns
t_{PHL}										
t_{PLH}	$\overline{A_i}$	$\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	$\overline{B_i}$	$\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	Any $\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any $\overline{B_i}$	Any $\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	M	Any \overline{F}								ns
t_{PHL}										
t_{PLH}	M	$A = B$								ns
t_{PHL}										

NOTE 2: Load circuits and voltage waveforms are shown in Section 1 of *Advanced CMOS Logic Data Book, 1990*.

PRODUCT PREVIEW

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Note 2)

DIFF MODE; $M = S0 = S3 = 0\text{ V}$, $S1 = S2 = 4.5\text{ V}$

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54AC11881		74AC11881		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	C_n	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any $\overline{A_i}$	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any $\overline{B_i}$	C_{n+4}								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	\overline{G}								ns
t_{PHL}										
t_{PLH}	C_n	Any \overline{F}								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	\overline{G}								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	\overline{P}								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	\overline{P}								ns
t_{PHL}										
t_{PLH}	$\overline{A_i}$	$\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	$\overline{B_i}$	$\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	Any $\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any $\overline{B_i}$	Any $\overline{F_i}$								ns
t_{PHL}										
t_{PLH}	Any \overline{A}	$A = B$								ns
t_{PHL}										
t_{PLH}	Any \overline{B}	$A = B$								ns
t_{PHL}										

NOTE 2: Load circuits and voltage waveforms are shown in Section 1 of *Advanced CMOS Logic Data Book, 1990*.

PRODUCT PREVIEW

54AC11881, 74AC11881

ARITHMETIC LOGIC UNITS/FUNCTION GENERATORS

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Note 2)

LOGIC and ARITH MODES

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	$T_A = 25^\circ\text{C}$			54AC11881		74AC11881		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	Any $\overline{A_i}$	Any $\overline{F_i}$	$M = 4.5\text{ V}$ (LOGIC mode)								ns
t_{PHL}											
t_{PLH}	$\overline{B_i}$	$\overline{F_i}$	$M = 4.5\text{ V}$ (LOGIC mode)								ns
t_{PHL}											
t_{PLH}	Any S	Any \overline{F}	$M = 0\text{ V}$, (ARITH mode)								ns
t_{PHL}											
t_{PLH}	Any S	$A = B$	$M = 0\text{ V}$, (ARITH mode)								ns
t_{PHL}											
t_{PLH}	Any S	C_{n+4}	$M = 4.5\text{ V}$ (LOGIC mode)								ns
t_{PHL}											
t_{PLH}	Any S	\overline{G}	$M = 0\text{ V}$, (ARITH mode)								ns
t_{PHL}											
t_{PLH}	Any S	\overline{P}	$M = 4.5\text{ V}$ (LOGIC mode)								ns
t_{PHL}											

PRODUCT PREVIEW

switching characteristics involving status checks, $V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$, $C_n = 4.5 \text{ V}$, $M = 4.5 \text{ V}$ (unless otherwise noted) (see Note 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	$T_A = 25^\circ\text{C}$			54AC11251		74AC11251		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{pd}	Any \bar{A} or \bar{B}	\bar{P}	$S0=S3=4.5 \text{ V}$, $S1=S2=0 \text{ V}$, $\bar{A}_i=\bar{B}_i$ or $\bar{A}_i\neq\bar{B}_i$								ns
t_{pd}	Any \bar{A} or \bar{B}	C_{n+4}	$S0=S3=4.5 \text{ V}$, $S1=S2=0 \text{ V}$, $\bar{A}_i=\bar{B}_i$ or $\bar{A}_i\neq\bar{B}_i$								ns
t_{pd}	Any \bar{A} or \bar{B}	\bar{P}	$S2=4.5 \text{ V}$, $S0=S1=S3=0 \text{ V}$, $\bar{A}_i=\bar{B}_i=H$ or L								ns
t_{pd}	Any \bar{A} or \bar{B}	C_{n+4}	$S2=4.5 \text{ V}$, $S0=S1=S3=0 \text{ V}$, $\bar{A}_i=\bar{B}_i=H$ or L								ns

switching characteristics involving status checks, $V_{CC} = 5 \text{ V} \pm 0.5 \text{ V}$, $C_n = 4.5 \text{ V}$, $M = 4.5 \text{ V}$ (unless otherwise noted) (see Note 2)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST CONDITIONS	$T_A = 25^\circ\text{C}$			54AC11251		74AC11251		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{pd}	Any \bar{A} or \bar{B}	\bar{P}	$S0=S3=4.5 \text{ V}$, $S1=S2=0 \text{ V}$, $\bar{A}_i=\bar{B}_i$ or $\bar{A}_i\neq\bar{B}_i$								ns
t_{pd}	Any \bar{A} or \bar{B}	C_{n+4}	$S0=S3=4.5 \text{ V}$, $S1=S2=0 \text{ V}$, $\bar{A}_i=\bar{B}_i$ or $\bar{A}_i\neq\bar{B}_i$								ns
t_{pd}	Any \bar{A} or \bar{B}	\bar{P}	$S2=4.5 \text{ V}$, $S0=S1=S3=0 \text{ V}$, $\bar{A}_i=\bar{B}_i=H$ or L								ns
t_{pd}	Any \bar{A} or \bar{B}	C_{n+4}	$S2=4.5 \text{ V}$, $S0=S1=S3=0 \text{ V}$, $\bar{A}_i=\bar{B}_i=H$ or L								ns

NOTE 2: Load circuits and voltage waveforms are shown in Section 1 of *Advanced CMOS Logic Data Book, 1990*.

operating characteristics, $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER	TEST CONDITIONS	TYP	UNIT
C_{pd} Power dissipation capacitance	$C_L = 50 \text{ pF}$, $f = 1 \text{ MHz}$	161	pF

PRODUCT PREVIEW

PARAMETER MEASUREMENT INFORMATION

DIFF Mode Test Table

FUNCTION INPUTS: $S_0 = S_3 = 4.5\text{ V}$, $S_1 = S_2 = M = 0\text{ V}$

PARAMETER	INPUT UNDER TEST	OTHER INPUT SAME BIT		OTHER DATA INPUTS		OUTPUT UNDER TEST	OUTPUT WAVEFORM (SEE NOTE 2)
		APPLY 4.5 V	APPLY GND	APPLY 4.5 V	APPLY GND		
t_{PLH}	\bar{A}_i	\bar{B}_i	None	Remaining A and \bar{B}	C_n	\bar{F}_i	In-Phase
t_{PHL}	\bar{A}_i	\bar{B}_i	None	Remaining A and \bar{B}	C_n	\bar{F}_i	In-Phase
t_{PLH}	\bar{B}_i	\bar{A}_i	None	Remaining A and \bar{B}	C_n	\bar{F}_i	In-Phase
t_{PHL}	\bar{B}_i	\bar{A}_i	None	Remaining A and \bar{B}	C_n	\bar{F}_i	In-Phase
t_{PLH}	\bar{A}_i	\bar{B}_i	None	None	Remaining A and \bar{B} , C_n	\bar{P}	In-Phase
t_{PHL}	\bar{A}_i	\bar{B}_i	None	None	Remaining A and \bar{B} , C_n	\bar{P}	In-Phase
t_{PLH}	\bar{B}_i	\bar{A}_i	None	None	Remaining A and \bar{B} , C_n	\bar{P}	In-Phase
t_{PHL}	\bar{B}_i	\bar{A}_i	None	None	Remaining A and \bar{B} , C_n	\bar{P}	In-Phase
t_{PLH}	\bar{A}_i	None	\bar{B}_i	Remaining \bar{B}	Remaining A, C_n	\bar{G}	In-Phase
t_{PHL}	\bar{A}_i	None	\bar{B}_i	Remaining \bar{B}	Remaining A, C_n	\bar{G}	In-Phase
t_{PLH}	\bar{B}_i	None	\bar{A}_i	Remaining \bar{B}	Remaining A, C_n	\bar{G}	In-Phase
t_{PHL}	\bar{B}_i	None	\bar{A}_i	Remaining \bar{B}	Remaining A, C_n	\bar{G}	In-Phase
t_{PLH}	C_n	None	None	All \bar{A}	All \bar{B}	Any \bar{F} or C_{n+4}	In-Phase
t_{PHL}	C_n	None	None	All \bar{A}	All \bar{B}	Any \bar{F} or C_{n+4}	In-Phase
t_{PLH}	\bar{A}_i	None	\bar{B}_i	Remaining \bar{B}	Remaining A, C_n	C_{n+4}	Out-of-Phase
t_{PHL}	\bar{A}_i	None	\bar{B}_i	Remaining \bar{B}	Remaining A, C_n	C_{n+4}	Out-of-Phase
t_{PLH}	\bar{B}_i	None	\bar{A}_i	Remaining \bar{B}	Remaining A, C_n	C_{n+4}	Out-of-Phase
t_{PHL}	\bar{B}_i	None	\bar{A}_i	Remaining \bar{B}	Remaining A, C_n	C_{n+4}	Out-of-Phase

NOTE 2: Load circuits and voltage waveforms are shown in Section 1 of *Advanced CMOS Logic Data Book, 1990*.

PARAMETER MEASUREMENT INFORMATION

DIFF Mode Test Table

FUNCTION INPUTS: S1 = S2 = 4.5 V, S0 = S3 = M = 0 V

PARAMETER	INPUT UNDER TEST	OTHER INPUT SAME BIT		OTHER DATA INPUTS		OUTPUT UNDER TEST	OUTPUT WAVEFORM (SEE NOTE 2)
		APPLY 4.5 V	APPLY GND	APPLY 4.5 V	APPLY GND		
t _{PLH}	\bar{A}_i	None	\bar{B}_i	Remaining \bar{A}	Remaining B, C _n	\bar{F}_i	In-Phase
t _{PHL}	\bar{A}_i	None	\bar{B}_i	Remaining \bar{A}	Remaining B, C _n	\bar{F}_i	In-Phase
t _{PLH}	\bar{B}_i	\bar{A}_i	None	Remaining \bar{A}	Remaining B, C _n	\bar{F}_i	Out-of-Phase
t _{PHL}	\bar{B}_i	\bar{A}_i	None	Remaining \bar{A}	Remaining B, C _n	\bar{F}_i	Out-of-Phase
t _{PLH}	\bar{A}_i	None	\bar{B}_i	None	Remaining A and \bar{B} , C _n	\bar{P}	In-Phase
t _{PHL}	\bar{A}_i	None	\bar{B}_i	None	Remaining A and \bar{B} , C _n	\bar{P}	In-Phase
t _{PLH}	\bar{B}_i	\bar{A}_i	None	None	Remaining A and \bar{B} , C _n	\bar{P}	Out-of-Phase
t _{PHL}	\bar{B}_i	\bar{A}_i	None	None	Remaining A and \bar{B} , C _n	\bar{P}	Out-of-Phase
t _{PLH}	\bar{A}_i	\bar{B}_i	None	None	Remaining A and \bar{B} , C _n	\bar{G}	In-Phase
t _{PHL}	\bar{A}_i	\bar{B}_i	None	None	Remaining A and \bar{B} , C _n	\bar{G}	In-Phase
t _{PLH}	\bar{B}_i	None	\bar{A}_i	None	Remaining A and \bar{B} , C _n	\bar{G}	Out-of-Phase
t _{PHL}	\bar{B}_i	None	\bar{A}_i	None	Remaining A and \bar{B} , C _n	\bar{G}	Out-of-Phase
t _{PLH}	\bar{A}_i	None	\bar{B}_i	Remaining \bar{A}	Remaining B, C _n	A = B	In-Phase
t _{PHL}	\bar{A}_i	None	\bar{B}_i	Remaining \bar{A}	Remaining B, C _n	A = B	In-Phase
t _{PLH}	\bar{B}_i	\bar{A}_i	None	Remaining \bar{A}	Remaining B, C _n	A = B	Out-of-Phase
t _{PHL}	\bar{B}_i	\bar{A}_i	None	Remaining \bar{A}	Remaining B, C _n	A = B	Out-of-Phase

NOTE 2: Load circuits and voltage waveforms are shown in Section 1 of *Advanced CMOS Logic Data Book, 1990*.

PRODUCT PREVIEW

PARAMETER MEASUREMENT INFORMATION

DIFF Mode Test Table (Continued)

FUNCTION INPUTS: $S1 = S2 = 4.5\text{ V}$, $S0 = S3 = M = 0\text{ V}$

PARAMETER	INPUT UNDER TEST	OTHER INPUT SAME BIT		OTHER DATA INPUTS		OUTPUT UNDER TEST	OUTPUT WAVEFORM (SEE NOTE 2)
		APPLY 4.5 V	APPLY GND	APPLY 4.5 V	APPLY GND		
t_{PLH}	C_n	None	None	All \bar{A} and \bar{B}	None	C_{n+4} or Any \bar{F}	In-Phase
t_{PHL}	C_n	None	None	All \bar{A} and \bar{B}	None	C_{n+4} or Any \bar{F}	In-Phase
t_{PLH}	\bar{A}_i	\bar{B}_i	None	None	Remaining A , \bar{B} , C_n	C_{n+4}	Out-of-Phase
t_{PHL}	\bar{A}_i	\bar{B}_i	None	None	Remaining A , \bar{B} , C_n	C_{n+4}	Out-of-Phase
t_{PLH}	\bar{B}_i	None	\bar{A}_i	None	Remaining A , \bar{B} , C_n	C_{n+4}	In-Phase
t_{PHL}	\bar{B}_i	None	\bar{A}_i	None	Remaining A , \bar{B} , C_n	C_{n+4}	In-Phase

Logic Mode Test Table

FUNCTION INPUTS: $S1 = S2 = M = 4.5\text{ V}$, $S0 = S3 = 0\text{ V}$

PARAMETER	INPUT UNDER TEST	OTHER INPUT SAME BIT		OTHER DATA INPUTS		OUTPUT UNDER TEST	OUTPUT WAVEFORM (SEE NOTE 2)
		APPLY 4.5 V	APPLY GND	APPLY 4.5 V	APPLY GND		
t_{PLH}	\bar{A}_i	\bar{B}_i	None	None	Remaining A and \bar{B} , C_n	\bar{F}_i	Out-of-Phase
t_{PHL}	\bar{A}_i	\bar{B}_i	None	None	Remaining A , and \bar{B} , C_n	\bar{F}_i	Out-of-Phase
t_{PLH}	\bar{B}_i	\bar{A}_i	None	None	Remaining A , and \bar{B} , C_n	\bar{F}_i	Out-of-Phase
t_{PHL}	\bar{B}_i	\bar{A}_i	None	None	Remaining A , and \bar{B} , C_n	\bar{F}_i	Out-of-Phase

NOTE 2: Load circuits and voltage waveforms are shown in Section 1 of *Advanced CMOS Logic Data Book, 1990*.

IMPORTANT NOTICE

Texas Instruments (TI) reserves the right to make changes to its products or to discontinue any semiconductor product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

TI warrants performance of its semiconductor products and related software to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS.

Inclusion of TI products in such applications is understood to be fully at the risk of the customer. Use of TI products in such applications requires the written approval of an appropriate TI officer. Questions concerning potential risk applications should be directed to TI through a local SC sales office.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards should be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does TI warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used.