

DATA SHEET



VES9600 Single Chip DVB-T Channel Receiver

Product specification
File under Integrated Circuits, IC02

1999 Sep 01

Single Chip DVB-T Channel Receiver

VES9600

FEATURES

- 2K and 8K COFDM demodulator (Fully DVB-T compliant : ETS 300-744).
- All modes supported including hierarchical modes.
- On chip 9-bit ADC.
- Digital down conversion.
- Fully automatic transmission parameters detection.
- Crystal or VCXO clock generation.
- Frequency offset estimator to speed up the scan.
- RF Tuner input power measurement
- On chip FEC decoder, full DVB-T compliant.
- Parallel or serial transport stream interface.
- DSP based synchronization.
- BER measurement
- SNR estimation
- Channel frequency response output.
- Channel impulse response output.
- Controllable dedicated I2C tuner bus.
- 2 low frequency spare DAC. ($\Delta\Sigma$)
- Spare I/O.
- I2C bus interface, for easy control.
- CMOS 0.35 μ m technology.

APPLICATIONS

- DVB-T fully compatible.
- Digital data transmission using COFDM modulations.

DESCRIPTION

The VES9600 is a single chip channel receiver for 2K and 8K COFDM modulated signals based on the ETSI specification (ETSI 300 744). The device interfaces directly to an IF signal, which is sampled by a 9-bit AD converter.

The VES9600 performs all the COFDM demodulation tasks from IF signal to the MPEG2 transport stream. An internal DSP core manages the synchronization and the control of the demodulation process.

After base band conversion and FFT, the channel frequency response is estimated based on the scattered pilots, and filtered in both time and frequency domains. This estimation is used as a correction on the signal, carrier by carrier. A common phase error and estimator is used to deal with the tuner phase noise.

The FEC decoder is automatically synchronized thanks to the frame synchronization algorithm that uses the TPS information included in the modulation. Finally descrambling according to DVB-T standard, is achieved at the Reed Solomon output.


This device is controlled via an I2C bus. The chip provides a switchable tuner I2C bus to be disconnected from the I2C master when not necessary. The DSP software code can be fed to the chip via the master I2C bus or via a dedicated I2C bus (Eeprom).

Designed in 0.35 μ m CMOS technology and housed in a 208-pin MQFP package, the VES9600 operates over the commercial temperature range.

Single Chip DVB-T Channel Receiver

VES9600

FIGURE 1 : FUNCTIONAL BLOCK DIAGRAM

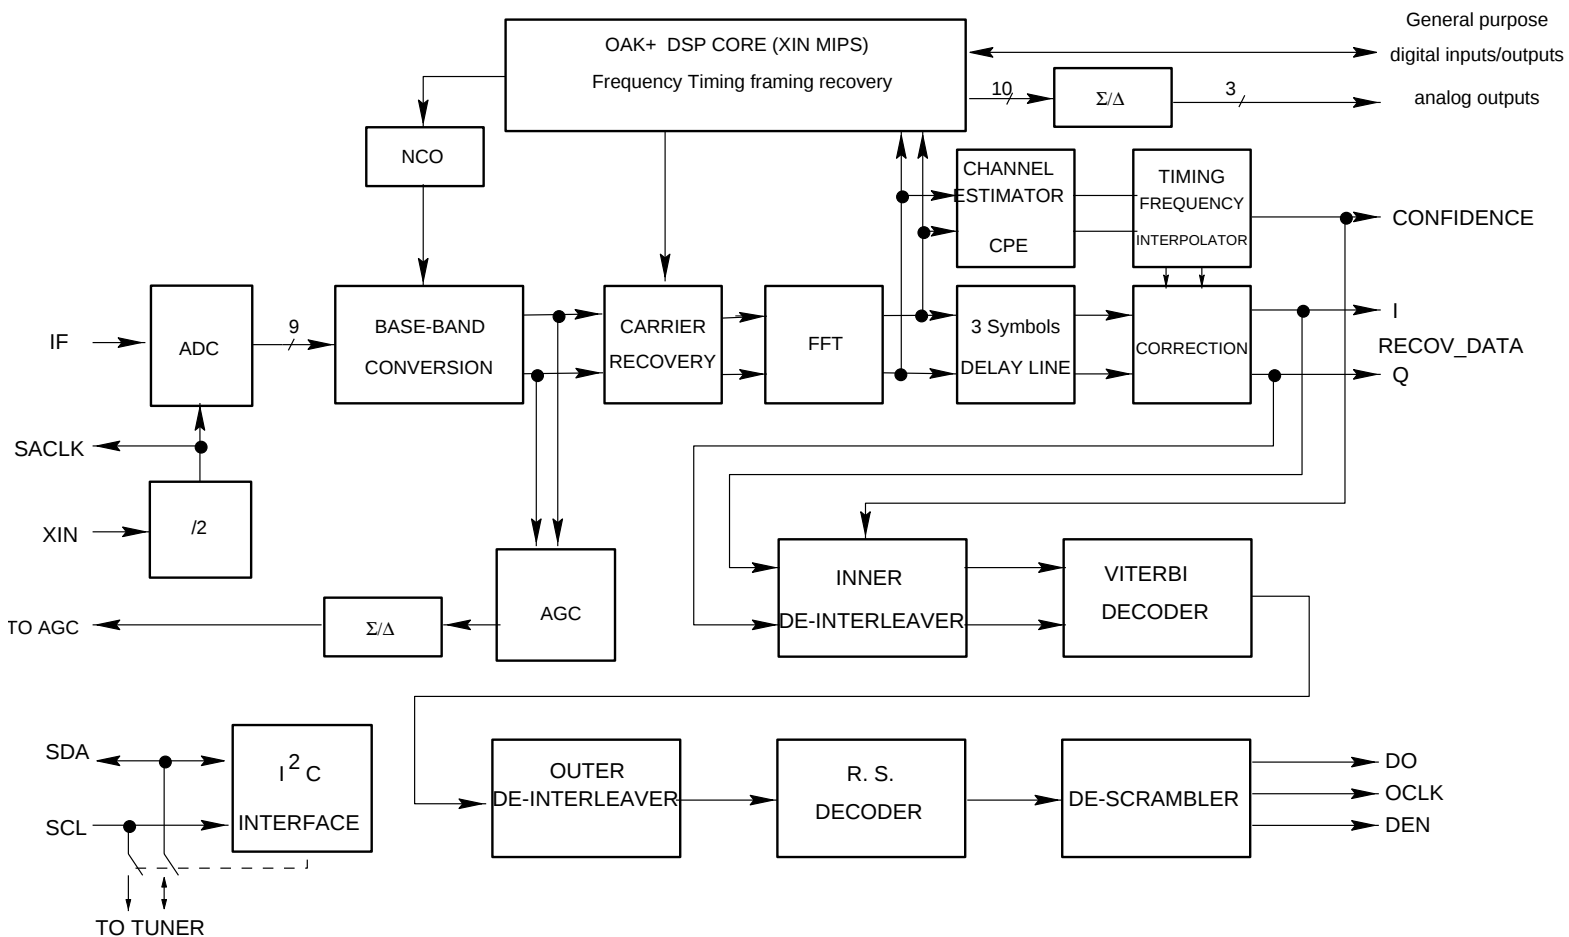

Single Chip DVB-T Channel Receiver

VES9600

INPUT - OUTPUT SIGNAL DESCRIPTION

SYMBOL	PIN NUMBER	TYPE	DESCRIPTION
CLOCK AND RESET SIGNALS			
CLR#	32	I	reset signal, active low
XIN	8	I	Crystal oscillator input pin. When USE_NCO pin is high a third overtone XTAL should be connected between the XIN and XOUT pins. When USE_NCO pin is low a VCXO should be connected between XIN and via a RC filter to the CTRL_VCXO output.
XOUT	9	O	Crystal oscillator output pin.
SACLK	25	O (5V)	Sampling frequency output. This output clock can be fed to an external (10-bit) ADC as sampling clock. SACLK= XIN/2
USE_NCO	33	I	When low the chip is in VCXO mode else in NCO mode
CTRL_VCXO	26	O (5V)	If not in NCO mode, control of an external sampling VCXO (after low-pass filtering)
CLK_X1	181	O (5V)	Internal SACLK equivalent monitoring output.
CLK_X2	180	O (5V)	Internal SACLK* 2 equivalent monitoring output.

DEMODULATOR SIGNALS			
FI[9:0]	12-13-14-15-16-19-20-21-22-23	I	Input data from an external ADC, FI must be tied to ground when not used, positive notation (from 0 to 1023) or two's complement notation (from -512 to 511).
FFT_WIN_IN	81	I	to be connected to FFT_WIN_OUT in default mode.
FFT_WIN_OUT	82	O (3.3)	Output signal, indicating the start of the active data; equals 1 during complex sample 0 of the active FFT block
VAGC	27	O (5V)	output value from the Delta-Sigma Modulator, used to control a log-scaled amplifier (after analog filtering)
RECOV_DATA [7:0]	168-169-170-171-172-173-174-175	O (3.3)	Demodulator output signal (after channel correction), synchronous with the falling edge of CLK_X1, provided in a multiplexed way, I first. Normal order.
CFND[3 :0]	151-152-153-154	O (3.3)	Multiplexed output bearing the confidence factor during I and channel response square amplitude during Q (4 MSB bits), respectively to RECOV_DATA. (For the channel square amplitude see C2_H2)
H2[3:0]	160-161-162-163	O (3.3)	4 LSB bits of the channel response square amplitude according to CFND.
EN_CLK	150	O (3.3)	enable clk18 to synchronize and phase the RECOV_DATA H2 et CFND outputs. EN_CLK is set to 1 during I and 0 during Q.
D_START	145	O (3.3)	Output signal, indicating the start of the active data out of the equalizer; equals 1 during sample Kmin of the RECOV_DATA current output block, for 2 18MHz clock cycles. CAUTION : sample Kmin does not convey regular data, since it happens to be a continual carrier; it is the first active (non zero) sample of the current OFDM block, but D_VAL and TPS_VAL (see below) will be low.
D_VAL	144	O (3.3)	active when RECOV_DATA corresponds to regular data .
FRAME	147	O (3.3)	Indicate the active data out of the first block in a frame at the demodulation part output. (RECOV_DATA)
SUPER_FRAME	146	O (3.3)	Same as FRAME in 8K; in 2K, active only on the first block of each superframe. Indicates the beginning of a new SUPER-FRAME.
TPS_VAL	143	O (3.3)	active when RECOV_DATA corresponds to TPS demodulated data .
FEL	77	O (5V)	front end lock. FEL is an output drain output and therefore requires an external pull up resistor.

Single Chip DVB-T Channel Receiver

VES9600

IT	76	O (5V)	Interrupt line. This output interrupt line can be configured by the I2C interface. See registers Itsel and Itstat. IT is an open drain output and therefore requires an external pull up resistor.
----	----	-----------	--

FEC OUTPUTS			
DO[7:0]	118-119-120-121-124-125-126-127	O (3.3)	output data carrying the current sample of the current MPEG2 packet (188 bytes), delivered on the rising edge of OCLK by default. When the serial mode is selected, the output data is delivered by DO[0].
OCLK	113	O (3.3)	Output CLock. OCLK is the output clock for the parallel DO[7:0] outputs. OCLK is internally generated depending on which interface is selected.
DEN	115	O (3.3)	output data validation signal active high during the valid and regular data bytes (may be inverted, see serial bus description).
PSYNC	112	O (3.3)	Pulse SYNChro. This output signal goes high on a rising edge of OCLK when a synchro byte is provided, then goes low until the next synchro byte (may be inverted).
UNCOR	114	O (3.3)	RS error flag, active high on one RS packet if the RS decoder fails in correcting the errors (may be inverted).
FSTART	109	O (3.3)	Frame start active high for one OCLK output clock cycle at the beginning of a new superframe made of 272 OFDM symbols for the 2k mode and made of 68 OFDM symbols for the 8k mode (may be inverted as C3_psync).
DVIT	108	O (3.3)	viterbi output data stream, delivered on the rising hedge of HVIT. You can also find the viterbi output on DO[0] after by-passing the RS and the descrambling.
HVIT	107	O (3.3)	viterbi output data stream clock, according to DVIT.

ON-CHIP ADC SIGNALS			
VIM	48	I	Negative input to the A/D converter. This pin is DC biased to half supply through an internal resistor divider (2x10K resistors). In order to remain in the range of the ADC, the voltage difference between pins VIP and VIM should be between -0.5 and 0.5 volts.
VIP	49	I	Positive input to the A/D converter. This pin is DC biased to half supply through an internal resistor divider (2x10K resistors). In order to remain in the range of the ADC, the voltage difference between pins VIP and VIM should be between -0.5 and 0.5 volts.
CMCAP	42	I	This pin is connected to a tap point on an internal resistor divider used to create CMO and CMI. An external capacitor of value 0.1µf should be connected between this point and ground to provide good power supply rejection from the positive supply at higher frequencies.
RBIAS	39	I	An external resistor of value 3.3kΩ should be connected between this pin and ground to provide good accurate bias currents for the analog circuits on the ADC.
CMI	40	O	This pin provides the common-mode in voltage for the analog circuits on the ADC. It is the buffered version of a voltage derived from an on-chip resistor divider, and has a nominal value of 0.75 x VD3.
CMO	41	O	This pin provides the common-mode out voltage for the analog circuits on the ADC. It is the buffered version of a voltage derived from an on-chip resistor divider, and has a nominal value of 0.5 x VD3.
VREF	45	O	This is the output of an on-chip resistor divider. An external capacitor of value 0.1µf should be connected between this point and ground to provide good power supply rejection from the positive supply at higher frequencies. Reference voltages VREFP and VREFM are derived from the voltage on VREF.
VREFP	44	O	This is a positive voltage reference for the A/D converter. It is derived

Single Chip DVB-T Channel Receiver

VES9600

			from the voltage on pin VREF through an on-chip fully-differential amplifier. The voltage on this pin is nominally equal to CMO + 0.25 volts.
VREFM	43	O	This is the negative voltage reference for the A/D converter. It is derived from the voltage on pin VREF through an on-chip fully-differential amplifier. The voltage on this pin is nominally equal to CMO- 0.25 volts.
VD1	38	I	Power supply input for the digital switching circuitry (3.3 typ).
VS1	37	I	Ground return for the digital switching circuitry.
VD2	51	I	Power supply input for the analog clock drivers (3.3V typ).
VS2	50	I	Ground return for the analog clock drivers.
VD3	46	I	Power supply input for the analog circuits (3.3V typ).
VS3	47	I	Ground return for analog circuits.
VD4	52	I	Power supply input that connects to an n-well guard ring that surrounds the ADC (3.3V typ).
VS4	36	I	Ground return for the well guard ring that surrounds the ADC.

I2C INTERFACES			
SCL	62	I	I2C serial clock. Up to 700 kbit/s, in this functional mode, I2C slave device
SDA	63	I/O	I2C serial data inout, open drain I/O pad Up to 700 kbit/s, in this functional mode, I2C slave device
SADDR[1:0]	206-207	I	SADDR[1:0] are the 2 LSBs of the I2C address of the VES9600. The MSBs are internally set to 00010. Therefore the complete I2C address of the VES9600 is (MSB to LSB): 0,0,0,1,0,SADDR[1], SADDR[0]
SCL_TUN	64	O	tuner I2C serial clock signal. Can be connected or not to the master I2C bus. (open drain)
SDA_TUN	65	I/O	Tuner I2C data bus. Can be connected or not to the master I2C bus. (open drain)
SCL_EEP	66	O	Extra I2C clock line to download DSP code from an external EEPROM. Optional mode. Can be connected to the master I2C Bus , (open drain)
SDA_EEP	67	I/O	Extra I2C data bus to download DSP code from an external EEPROM. Optional mode. Can be connected to the master I2C Bus. (open drain)
EEPADDR[1:0]	204-205	I	EEPADDR[1:0] are the 2 LSBs of the I2C address of the EEPROM in mode boot alone. The MSBs are internally set to 00010. Therefore the complete I2C address of the EEPROM is (MSB to LSB): 1,0,1,0,0,EEPADDR[1], EEPADDR[0]
EEPSP[1:0]	202-203	I	I2C EEPROM bus speed (SCL_EEP) : 0 : 800Khz; 1 : 400Khz; 2 : 200Khz; 3 : 100Khz.

DSP SIGNALS			
DOWNLOAD_M ODE	4	I	processor control, Boot Mode If 0 the DSP download its software from an external eeprom on the dedicated I2C BUS SDA_EEP and SCL_EEP. If 1 the software is downloaded via a host in the I2C register CODE_IN. In this case no need of an external eeprom.
DSP_BIST	3	I	Boot on the bist mode to test the DSP RAM bank. If good SP_OUT[0] = 1 In normal mode of operation, DSP_BIST must be grounded.
SDI_TCK	194	I	Oak+ DSP smart debug interface, SDI+ external JTAG clock
SDI_TDI	195	I	Oak+ DSP smart debug interface, SDI+ JTAG serial output
SDI_TMS	196	I	Oak+ DSP smart debug interface, SDI+ JTAG test mode select
SDI_TDO	197	O	Oak+ DSP smart debug interface, SDI+ JTAG serial output

Single Chip DVB-T Channel Receiver


VES9600

		(3.3)	
SP_IN[3:0]	72-73-74-75	I	Spare inputs
SP_OUT[7:0]	88-89-90-91-92-93-94-95	O (3.3)	Spare outputs
CTRL[1:0]	84-85	O (3.3)	control detection signal, flag monitoring outputs.
DS_SPARE_1	28	O (5V)	Spare delta-sigma output. Managed by the DSP to handle a low frequency DAC. (automatic first stage tuner AGC measurement for example).
DS_SPARE_2	29	O (5V)	Spare delta-sigma output. Managed by the DSP or by an I2C register to generate an analog level. (after a RC low-pass filter)
TESTADC	55	I	Must be set to "1"

BOUNDARY SCAN			
TCK	187	I	clock signal for boundary-scan. Wired to GND (if not used)
TDI	188	I	Input port for boundary-scan. Wired to GND (if not used)
TMS	190	I	Mode programming signal for boundary-scan. Wired to GND (if not used)
TRST	189	I	Asynchronous reset signal for boundary-scan. Wired to GND (if not used)
TDO	191	O (5V)	Output port for boundary-scan. NC (if not used)

POWER SUPPLIES			
GND	2-10-18-31-69-71-80-87-97-117-123-134-142-149-165-177-183-193-201	GN	Ground level 0 V
VCC	1-30-68-79-192	VCC 5V	Positive Power Supply 5 V typical
VDD	7-17-70-86-96-116-122-133-141-148-164-176-182-200	VDD 3.3V	Positive Power Supply 3.3 V typical


FIGURE 2 : BLOCK DIAGRAM

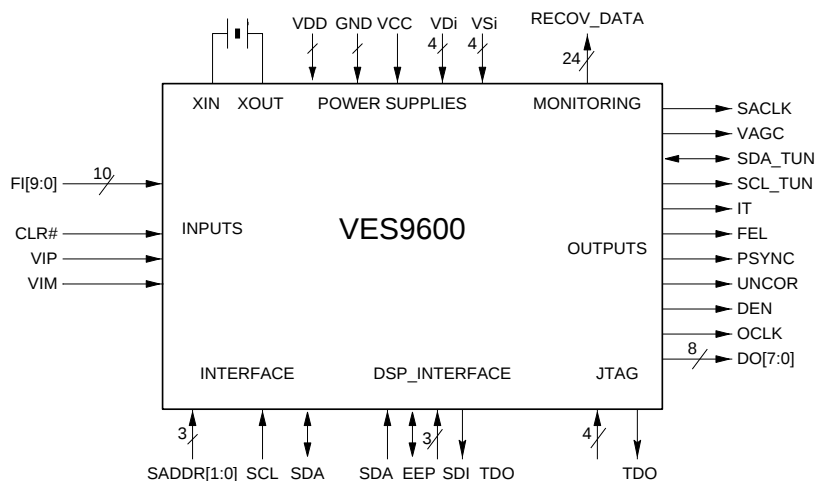

Single Chip DVB-T Channel Receiver

VES9600

FIGURE 3 : PIN DIAGRAM

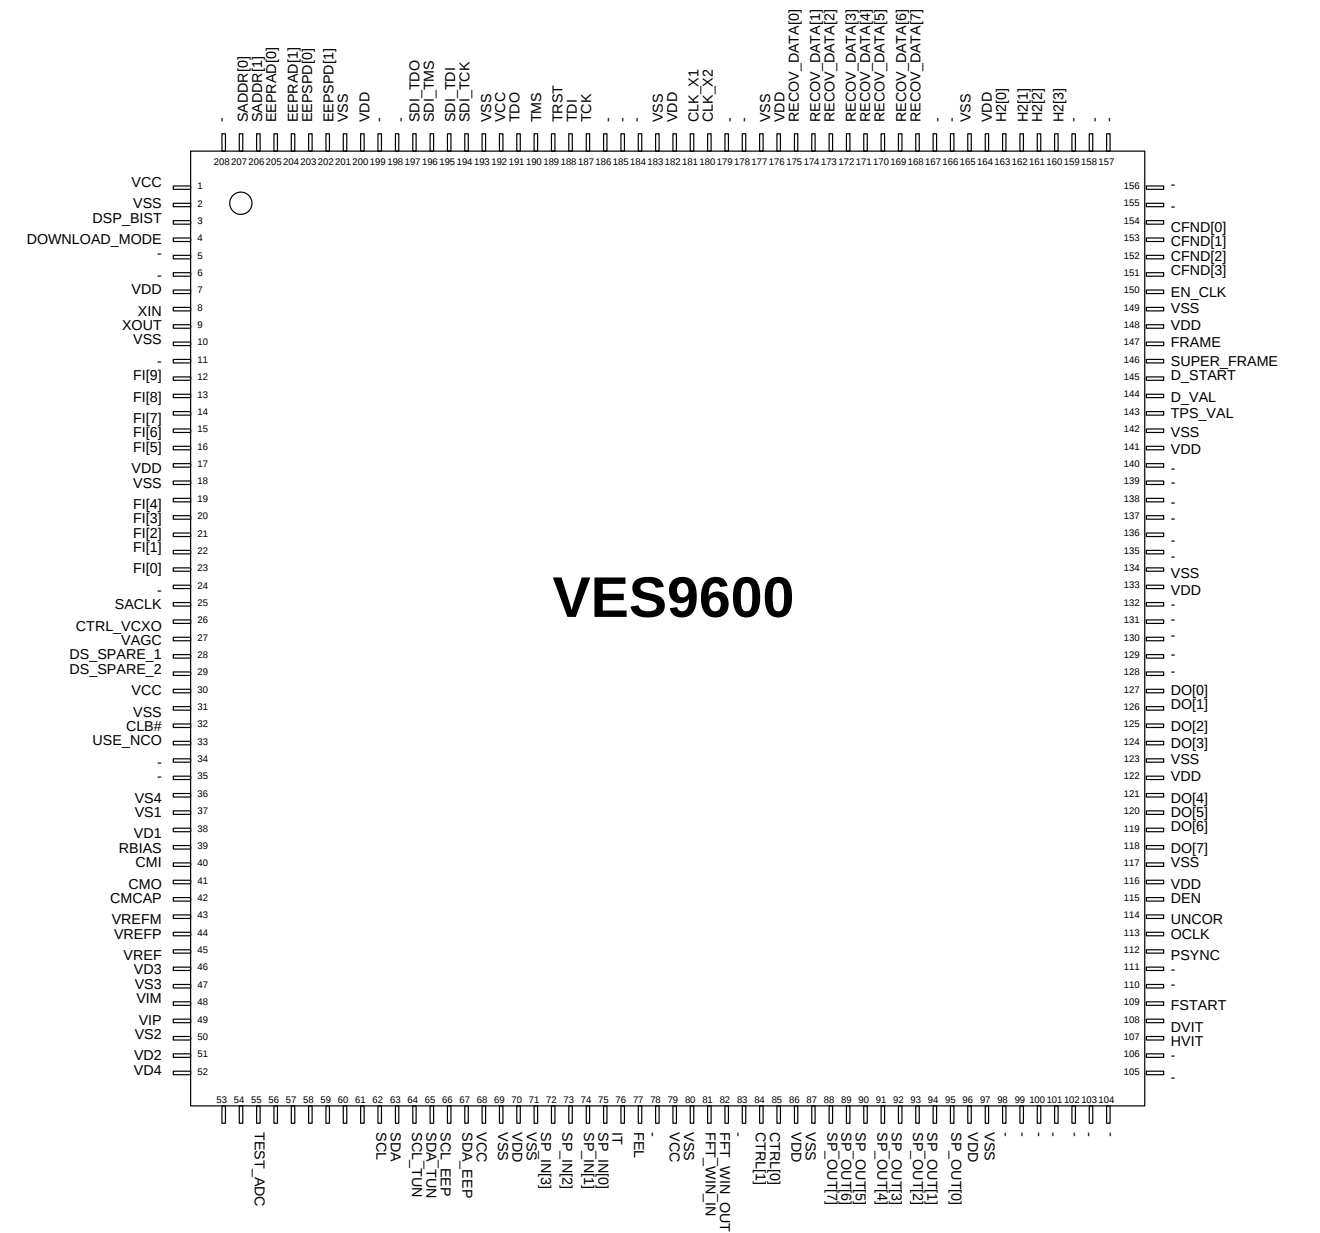

Single Chip DVB-T Channel Receiver

VES9600

TABLE 1 : PIN DESCRIPTION

Pin	Pin Name	Direction
1	VCC	-
2	VSS	-
3	DSP_BIST	I
4	DWNLD_MODE	I
5	-	I ³
6	-	I ³
7	VCC	-
8	XIN	I
9	XOUT	O
10	VSS	-
11	-	I ³
12	FI[9]	I
13	FI[8]	I
14	FI[7]	I
15	FI[6]	I
16	FI[5]	I
17	VCC	-
18	VSS	-
19	FI[4]	I
20	FI[3]	I
21	FI[2]	I
22	FI[1]	I
23	FI[0]	I
24	-	I ³
25	SACLK	O
26	CTRL_VCXO	O
27	VAGC	O
28	DS_SPARE_1	O
29	DS_SPARE_2	O
30	VCC	-
31	VSS	-
32	CLR#	I
33	USE_NCO	I
34	-	I ³
35	-	I ³
36	VS4	-
37	VS1	-
38	VD1	-
39	RBIAS	I
40	CMI	O
41	CMO	O
42	CMCAP	I
43	VREFM	O
44	VREFP	O
45	VREF	O
46	VD3	-
47	VS3	-
48	VIM	I
49	VIP	I
50	VS2	-
51	VD2	-
52	VD4	-
53	-	-

54	-	-
55	TEST_ADC	I
56	-	I ³
57	-	O ³
58	-	O ³
59	-	O ³
60	-	O ³
61	-	O ³
62	SCL	I
63	SDA	I/O
64	SCL_TUN	OD
65	SDA_TUN	I/O
66	SCL_EEP	OD
67	SDA_EEP	I/O
68	VCC	-
69	VSS	-
70	VCC	-
71	VSS	-
72	SP_IN[3]	I
73	SP_IN[2]	I
74	SP_IN[1]	I
75	SP_IN[0]	I
76	IT	OD
77	FEL	OD
78	-	I ³
79	VCC	-
80	VSS	-
81	FFT_WIN_IN	I ¹
82	FFT_WIN_OUT	O
83	-	I ³
84	CTRL[1]	O
85	CTRL[0]	O
86	VDD	-
87	VSS	-
88	SP_OUT[7]	O
89	SP_OUT[6]	O
90	SP_OUT[5]	O
91	SP_OUT[4]	O
92	SP_OUT[3]	O
93	SP_OUT[2]	O
94	SP_OUT[1]	O
95	SP_OUT[0]	O
96	VDD	-
97	VSS	-
98	-	I ³
99	-	I ³
100	-	I ³
101	-	I ³
102	-	I ³
103	-	I ³
104	-	I ³
105	-	I ³
106	-	I ³
107	HCORE	O
108	DCORE	O

109	FSTART	O
110	-	O ³
111	-	I ³
112	PSYNC	O
113	OCLK	O
114	UNCOR	O
115	DEN	O
116	VDD	-
117	VSS	-
118	DO[7]	O
119	DO[6]	O
120	DO[7]	O
121	DO[4]	O
122	VDD	-
123	VSS	-
124	DO[3]	O
125	DO[2]	O
126	DO[1]	O
127	DO[0]	O
128	-	I ³
129	-	I ³
130	-	I ³
131	-	I ³
132	-	O ³
133	VDD	-
134	VSS	-
135	-	O ³
136	-	O ³
137	-	I ³
138	-	I ³
139	-	I ³
140	-	I ³
141	VDD	-
142	VSS	-
143	TPS_VAL	O
144	D_VAL	O
145	D_START	O
146	SUPER_FRAME	O
147	FRAME	O
148	VDD	-
149	VSS	-
150	EN_CLK	O
151	CFND[3]	O
152	CFND[2]	O
153	CFND[1]	O
154	CFND[0]	O
155	-	I ³
156	-	-
157	-	I ³
158	-	I ³
159	-	I ³
160	H2[3]	O
161	H2[2]	O
162	H2[1]	O
163	H2[0]	O

Single Chip DVB-T Channel Receiver

VES9600

164	VDD	-
165	VSS	-
166	-	O ³
167	-	I ³
168	RECOV_DATA[7]	O
169	RECOV_DATA[6]	O
170	RECOV_DATA[5]	O
171	RECOV_DATA[4]	O
172	RECOV_DATA[3]	O
173	RECOV_DATA[2]	O
174	RECOV_DATA[1]	O
175	RECOV_DATA[0]	O
176	VDD	-
177	VSS	-
178	-	O ³
179	-	I ³
180	CLK_X2	O

181	CLK_X1	O
182	VDD	-
183	VSS	-
184	-	-
185	-	O ³
186	-	O ³
187	TCK	I
188	TDI	I
189	TRST	I
190	TMS	I
191	TDO	OD
192	VCC	-
193	VSS	-
194	SDI_TCK	I
195	SDI_TDI	I
196	SDI_TMS	I
197	SDI_TDO	OD

198	-	O ³
199	-	O ³
200	VCC	-
201	VSS	-
202	EEPSPD[1]	I
203	EEPSPD[0]	I
204	EEPRAD[1]	I
205	EEPRAD[0]	I
206	SADDR[1]	I
207	SADDR[0]	I
208	-	I ³

Notes :


1.All inputs (I) are TTL, 5V tolerant inputs (excepted FFT_WIN_IN which is 3.3V only)

2.OD are Open Drain 5V outputs, so they must be connected to a pull-up resistor to either VDD or VCC

3. Test IO, inputs must be connected to GND.

VES9600

Technical drawing of a square component. The overall dimensions are 30.60 ±0.25 mm on both the horizontal and vertical axes. The inner square area is 28.00 mm on both axes. The thickness of the component is 1.25 TYP. The drawing includes callouts for dimensions A, B, C, and D. A circular feature is located in the top-left corner of the inner square. A side view on the right shows the profile of the component, with a maximum height of 4.10 mm.

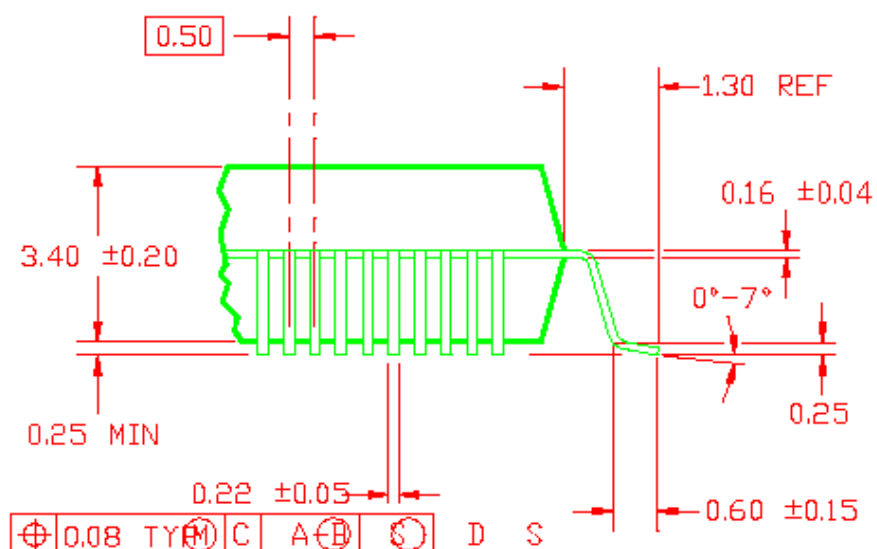

NOTE : Dimensions are in millimeters

Single Chip DVB-T Channel Receiver

VES9600

DATA SHEET STATUS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS ⁽¹⁾
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

Note

1. Please consult the most recently issued data sheet before initiating or completing a design.

DEFINITIONS

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 60134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

DISCLAIMERS

Life support applications — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no licence or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

PURCHASE OF PHILIPS I²C COMPONENTS

Purchase of Philips I²C components conveys a license under the Philips' I²C patent to use the components in the I²C system provided the system conforms to the I²C specification defined by Philips. This specification can be ordered using the code 9398 393 40011.

Single Chip DVB-T Channel Receiver

VES9600

NOTES

Single Chip DVB-T Channel Receiver

VES9600

NOTES

Single Chip DVB-T Channel Receiver

VES9600

NOTES

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 3 Figtree Drive, HOMEBUSH, NSW 2140,
Tel. +61 2 9704 8141, Fax. +61 2 9704 8139

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213,
Tel. +43 1 60 101 1248, Fax. +43 1 60 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6,
220050 MINSK, Tel. +375 172 20 0733, Fax. +375 172 20 0773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor,
51 James Bourchier Blvd., 1407 SOFIA,
Tel. +359 2 68 9211, Fax. +359 2 68 9102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS,
Tel. +1 800 234 7381, Fax. +1 800 943 0087

China/Hong Kong: 501 Hong Kong Industrial Technology Centre,
72 Tat Chee Avenue, Kowloon Tong, HONG KONG,
Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Sydhavnsgade 23, 1780 COPENHAGEN V,
Tel. +45 33 29 3333, Fax. +45 33 29 3905

Finland: Sinikalliontie 3, FIN-02630 ESPOO,
Tel. +358 9 615 800, Fax. +358 9 6158 0920

France: 51 Rue Carnot, BP317, 92156 SURESNES Cedex,
Tel. +33 1 4099 6161, Fax. +33 1 4099 6427

Germany: Hammerbrookstraße 69, D-20097 HAMBURG,
Tel. +49 40 2353 60, Fax. +49 40 2353 6300

Hungary: see Austria

India: Philips INDIA Ltd, Band Box Building, 2nd floor,
254-D, Dr. Annie Besant Road, Worli, MUMBAI 400 025,
Tel. +91 22 493 8541, Fax. +91 22 493 0966

Indonesia: PT Philips Development Corporation, Semiconductors Division,
Gedung Philips, Jl. Buncit Raya Kav.99-100, JAKARTA 12510,
Tel. +62 21 794 0040 ext. 2501, Fax. +62 21 794 0080

Ireland: Newstead, Clonskeagh, DUBLIN 14,
Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, PO Box 18053,
TEL AVIV 61180, Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Via Casati, 23 - 20052 MONZA (MI),
Tel. +39 039 203 6838, Fax +39 039 203 6800

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku,
TOKYO 108-8507, Tel. +81 3 3740 5130, Fax. +81 3 3740 5057

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL,
Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR,
Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905,
Tel. +9-5 800 234 7381, Fax +9-5 800 943 0087

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB,
Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND,
Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO,
Tel. +47 22 74 8000, Fax. +47 22 74 8341

Pakistan: see Singapore

Philippines: Philips Semiconductors Philippines Inc.,
106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI,
Metro MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Al.Jerozolimskie 195 B, 02-222 WARSAW,
Tel. +48 22 5710 000, Fax. +48 22 5710 001

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW,
Tel. +7 095 755 6918, Fax. +7 095 755 6919

Singapore: Lorong 1, Toa Payoh, SINGAPORE 319762,
Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale,
2092 JOHANNESBURG, P.O. Box 58088 Newville 2114,
Tel. +27 11 471 5401, Fax. +27 11 471 5398

South America: Al. Vicente Pinzon, 173, 6th floor,
04547-130 SÃO PAULO, SP, Brazil,
Tel. +55 11 821 2333, Fax. +55 11 821 2382

Spain: Balmes 22, 08007 BARCELONA,
Tel. +34 93 301 6312, Fax. +34 93 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM,
Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH,
Tel. +41 1 488 2741 Fax. +41 1 488 3263

Taiwan: Philips Semiconductors, 5F, No. 96, Chien Kuo N. Rd., Sec. 1,
TAIPEI, Taiwan Tel. +886 2 2134 2451, Fax. +886 2 2134 2874

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd.,
60/14 MOO 11, Bangna Trad Road KM. 3, Bagna, BANGKOK 10260,
Tel. +66 2 361 7910, Fax. +66 2 398 3447

Turkey: Yukari Dudullu, Org. San. Blg., 2.Cad. Nr. 28 81260 Umraniye,
ISTANBUL, Tel. +90 216 522 1500, Fax. +90 216 522 1813

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7,
252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes,
MIDDLESEX UB3 5BX, Tel. +44 208 730 5000, Fax. +44 208 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409,
Tel. +1 800 234 7381, Fax. +1 800 943 0087

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD,
Tel. +381 11 3341 299, Fax. +381 11 3342 553

For all other countries apply to: Philips Semiconductors,
Marketing Communications, Building BE-p, P.O. Box 218, 5600 MD EINDHOVEN,
The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 2000

SCA 70

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

753504/02/pp16

Date of release: 1999 Sep 01

Document order number: 9397 750 07147

Let's make things better.

Philips
Semiconductors



PHILIPS