

SANYO

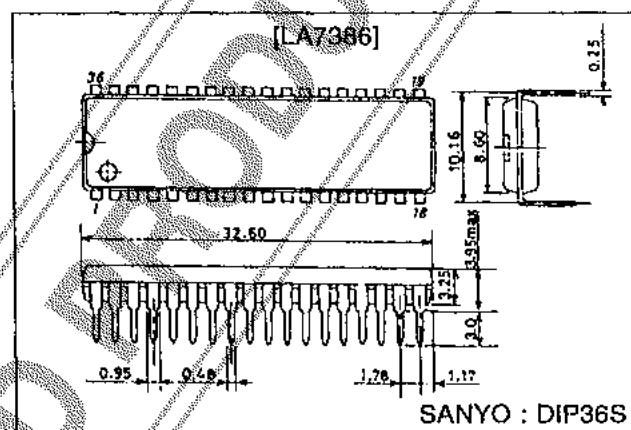
No. 5472

LA7386**NTSC Video Signal Processing LSI for VCRs****Overview**

The LA7386 combines luminance signal processing functions and color signal processing functions for NTSC VCRs on a single chip. Developed as a new-generation LSI for use in VCRs which offer increasingly higher image quality, the LA7386 offers all of the functions needed in order to realize improved picture quality in a dramatically compact 36-pin package, making this device suitable for a wide range of VCRs, from popularly priced models to high-end models.

Package Dimensions

unit : mm

3170-DIP36S**Features**

- Includes all functions required for video signal processing in an NTSC VCR.
- Supports full HQ functions.
 - YNR on chip (standard).
 - CNR on chip (external components can be removed for passthrough operation).
 - Detail enhancer on chip.
 - Higher white clipping level (190%).
- In addition to the above, also provides the following functions for excellent image quality:
 - Edge compensation.
 - Double high-pass noise canceller → permits wide-band noise reduction.
 - Linear phase-type image quality adjustment → ideal image quality adjustment method, with no waveform distortion.
- By adopting the 1CCD method, one comb filter (glass) has become unnecessary.
- Has a single H-delay CCD and a comb Y/C separation/YNR chroma crosstalk canceller function on chip.
- Automatic adjustment filter on chip.
 - Y: LPF
 - C: 3.58 MHz BPF, 4.21 MHz BPF, LPF (REC)
- No adjustment required for white and dark clipping levels.
- Extremely few peripheral components (about 60 components, excluding peripheral components for the CCD).
- fsc output can be used as clock for OSD IC.
- Crystal oscillator for the on-screen display circuit is not required.
- DCC circuit on chip.
 - Suppresses flicker at top of screen and reduces AM noise.
- High-speed AFC circuit.
 - Prevents color alteration and loss at top of screen when dubbing.
- Head switching noise reduction circuit on chip.
- Smallest package in the industry.
- Few components needed.

Maximum Ratings at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CCmax}		7.0	V
Allowable power dissipation	P_{dmax}	$T_a \leq 65^\circ\text{C}$	1070	mW
Operating temperature	T_{opr}		-10 to $+65$	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to $+150$	$^\circ\text{C}$

Operating Conditions at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V_{CC}		5.0	V
Operating supply voltage range	V_{CCop}		4.8 to 5.2	V

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC} = 5\text{ V}$

Parameter	Symbol	Conditions	min	typ	max	Unit
[REC Mode Y]						
Current consumption REC	I_{CCR}	When $V_{CC} = 5\text{ V}$ (when there is no signal), measure sum of incoming currents at pins 29 and 24	95	120	145	mA
AGC adjustment	CAGC	$V_{IN} = 1.0\text{ Vp-p}$ video signal, use VR33 to adjust T3 output to 0.5 Vp-p				
VCA control characteristics 1	VCA 1	Measure T3 output level when S9 is set to 2	0.48	0.5	0.52	Vp-p
VCA control characteristics 2	VCA 2	Measure T3 output level when S9 is set to 4	0.48	0.5	0.52	Vp-p
AGC adjustment voltage	V_{AGC}	Measure T33 DC voltage in above state	3.2	3.4	3.6	V
AGC detection voltage	V_{AD}	Measure T32 DC voltage in same manner	1.2	1.4	1.6	V
EE output level	V_{EE}	Measure T28A output level in same manner	0.95	1.0	1.05	Vp-p
AGC output 1	AGC 1	$V_{IN} = 2.0\text{ Vp-p}$ video signal Measure T3 output level	500	520	540	mVp-p
AGC output 2	AGC 2	$V_{IN} = 0.5\text{ Vp-p}$ video signal Measure T3 output level	460	480	500	mVp-p
AGC output 3	AGC 3	$V_{IN} = 714\text{ mVp-p LUMI}$, 572 mVp-p SYNC , measure T3 SYNC level	135	150	165	mVp-p
AGC output 4	AGC 4	$V_{IN} = 714\text{ mVp-p LUMI}$, 143 mVp-p SYNC , measure T3 SYNC level	90	100	110	mVp-p
Sync separation output level	V_{SYR}	$V_{IN} = 1.0\text{ Vp-p}$ video signal, T26 output pulse peak value	4.0	4.2	4.4	Vp-p
Sync separation output pulse width	PW_{SYR}	$V_{IN} = 1.0\text{ Vp-p}$ video signal, T26 output pulse width	4.0	4.3	4.6	μs
Sync separation output leading edge delay time	ΔT_{SYR}	$V_{IN} = 1.0\text{ Vp-p}$ video signal, measure delay time of output SYNC versus input SYNC	0.8	1.0	1.2	μs
Sync separation threshold level	TH_{SYR}	Gradually attenuate the input level, measure input level at point when output pulse width widens $1\text{ }\mu\text{s}$ or more beyond PW_{SYR}		-18	-14	dB
Sync tip level, pedestal level, white level measurement (REC)	LvOR	Measure electric potential for each of the T28 video output sync tip, pedestal, and white peak, and assign the measured values to L_{SYN} , L_{PED} , and L_{WHI} , respectively				
VCA detection voltage	V_{VCA}	Measure T8 DC voltage	2.80	2.95	3.10	V
Comb filter adjustment		$V_{IN} =$ standard multiburst signal 1 Vp-p and S30 = off, adjust so that the 3.58 MHz component at T21 is at a minimum				
Y-comb characteristics	GY-Comb	Measure the chroma level at T2 with a spectrum analyzer, $V_{IN} =$ standard chroma noise test signal 1 Vp-p and S30 = off			-25	dB
C-comb characteristics	GC-Comb	$V_{IN} =$ white $50\% + \text{CW } 3.0\text{ MHz}$			-25	dB

Continued on next page.

Continued from preceding page.

Parameter	Symbol	Conditions	min	typ	max	Unit
REC YNR operation EP/LP (1)	VR-YNR1	Measure the YNR addition level at T2 with V_{IN} = standard color bar signal 1 Vp-p and S30 = off	10	12	14	mV
REC YNR operation EP/LP (2)	VR-YNR2	Measure the YNR addition level at edit mode T2 with V_{IN} = standard color bar signal 1 Vp-p and S30 = off	2	3	4	mV
Pre-CCD LPF frequency characteristics (1)	GPFIL1	Input a standard multiburst signal (1 Vp-p) and measure the 4 MHz response for 500 kHz at T11	-0.5	0	+0.5	dB
Pre-CCD LPF frequency characteristics (2)	GPFIL2	10 MHz response for 500 kHz at T11 when V_{IN} = standard multiburst signal 1 Vp-p and S30 = off	-10	-8	-6	dB
3MLPF frequency characteristics (1)	G3MLP1	1 MHz response for 500 kHz at T2 when V_{IN} = standard multiburst signal 1 Vp-p and S30 = off	-0.5	0	+0.5	dB
3MLPF frequency characteristics (2)	G3MLP2	2 MHz response for 500 kHz at T2 when V_{IN} = standard multiburst signal 1 Vp-p and S30 = off	-1	0	+1	dB
3MLPF frequency characteristics (3)	G3MLP3	3 MHz response for 500 kHz at T2 when V_{IN} = standard multiburst signal 1 Vp-p and S30 = off	-10	-8	-6	dB
3MLPF frequency characteristics (4)	G3MLP4	3.58 MHz response for 500 kHz at T2 when V_{IN} = standard multiburst signal 1 Vp-p and S30 = off			-30	dB
3MLPF frequency characteristics (5)	G3MLP5	4.2 MHz response for 500 kHz at T2 when V_{IN} = standard multiburst signal 1 Vp-p and S30 = off			-15	dB
FM modulator output level	V_{FM}	No input, use VR36 to adjust output frequency to 4 MHz, measure output level	0.89	1.0	1.12	Vp-p
FM modulator secondary distortion	H_{MOD}	Ratio of 8 MHz component to 4 MHz in the above state		-40	-35	dB
FM modulator modulation sensitivity	S_{MOD}	Measure amplitude of change in output frequency when 2.6 V DC or 3.1 V DC is applied to T3, $2 \times (f_{3.1} - f_{2.6})$	1.6	2.0	2.4	MHz/V
FM modulator linearity	L_{MOD}	Measure output frequency when 2.85 V DC applied to T3, $f_{2.85}$ $L_{MOD} = \frac{f_{2.85} - (f_{3.1} + f_{2.6})/2}{f_{3.1} - f_{2.6}} \times 100$	-3	0	+2	%
1/2 f_H carrier shift 1	CS1	Measure amplitude of change in output frequency when SW35B is from on to off and SW35A is off	6.8	7.8	9.5	kHz
1/2 f_H carrier shift 2	CS2	Measure amplitude of change in output frequency when SW35A is on and SW35B is switch from on to off	6.8	7.8	9.5	kHz
Emphasis gain	G_{EMP}	V_{IN} = 0.5 mVp-p 10 kHz sine wave Measure ratio of levels of input and output amplitude at T4	-0.5	0	+0.5	dB
Detail enhancer characteristics (1)	G_{ENH1}	V_{IN} = 158 mVp-p 2 MHz sine wave Measure ratio of levels of T4 and T3, difference with G_{EMP}	1.6	1.9	2.6	dB
Detail enhancer characteristics (2)	G_{ENH2}	V_{IN} = 50 mVp-p 2 MHz sine wave Measure ratio of levels of T4 and T3, difference with G_{EMP}	3.1	4.1	5.1	dB
Detail enhancer characteristics (3)	G_{ENH3}	V_{IN} = 15.8 mVp-p 2 MHz sin wave Measure ratio of levels of T4 and T3, difference with G_{EMP}	5.3	6.3	7.3	dB
Detail enhancer characteristics (4)	G_{ENH4}	V_{IN} = 15.8 mVp-p 2 MHz sine wave Measure output amplitude at T4 in edit mode, difference with G_{EMP}	2.9	3.9	4.9	dB
Nonlinear emphasis characteristics (1)	G_{NLEMP1}	V_{IN} = 500 mVp-p 2 MHz Measure ratio of levels of T4 and T3, difference with G_{EMP}	0.5	1.4	2.3	dB
Nonlinear emphasis characteristics (2)	G_{NLEMP2}	V_{IN} = 158 mVp-p 2 MHz Measure ratio of levels of T4 and T3, difference with G_{EMP}	2.6	3.8	5.2	dB

Continued on next page.

Continued from preceding page.

Parameter	Symbol	Conditions	min	typ	max	Unit
Nonlinear emphasis characteristics (3)	GNLEMP3	$V_{IN} = 50 \text{ mVp-p } 2 \text{ MHz}$ Measure ratio of levels of T3 and T4, difference with GEMP	4.9	6.4	7.9	dB
Main linear emphasis characteristics (1)	GME1	$V_{IN} = 50 \text{ mVp-p } 500 \text{ kHz sine wave}$ Measure ratio of levels of T4 and T3, difference with GEMP	4.9	5.2	5.5	dB
Main linear emphasis characteristics (2)	GME2	$V_{IN} = 50 \text{ mVp-p } 2 \text{ MHz}$ Measure ratio of levels of T4 and T3, difference with GEMP	13.1	13.8	14.1	dB
Detail enhancer US mode characteristics (1)	GENHS1	Measure the amplitude at T4 when $V_{IN} = 15.8 \text{ mVp-p } 2 \text{ MHz sine wave}$; compare level with GEMP	2.9	3.9	4.9	dB
Detail enhancer US mode characteristics (2)	GENHS2	Measure the amplitude at T4 when $V_{IN} = 15.8 \text{ mVp-p } 2 \text{ MHz sine wave}$ in edit mode; compare level with GEMP	0.7	1.7	2.7	dB
White clipping level	LWC	$V_{IN} = 500 \text{ mVp-p white } 100\% \text{ video}$ Measure white clipping level at T4	186	193	200	%
Dark clipping level	LDC	$V_{IN} = 500 \text{ mVp-p white } 100\% \text{ video}$ Measure dark clipping level at T4	-50	-45	-40	%
[PB Mode Y]						
Current consumption PB	I_{CCP}	Incoming currents at pins 29 and 24 when $V_{CC} = 5.0 \text{ V}$	125	155	185	mA
Dropout compensation period	T_{DOC}	T33A: 4 MHz, 300 mVp-p sine wave T3A: 0.5 Vp-p video signal T33A: time from when input went to 0 until T28A output returned	0.6		1.0	ms
FM demodulation voltage	V_{DEM4}	$V_{IN} = 300 \text{ mVp-p, } f = 4 \text{ MHz}$, output voltage	0.9	1.05	1.15	V
FM demodulation sensitivity	S_{DEM}	$V_{IN} = 300 \text{ mVp-p, } f = 2 \text{ MHz}$, V_{DEM2} $V_{IN} = 300 \text{ mVp-p, } f = 6 \text{ MHz}$, V_{DEM6} Calculate $S_{DEM} = (V_{DEM2} - V_{DEM6})/4$	0.11	0.14	0.17	V/MHz
FM demodulation linearity	L_{DEM}	$L_{DEM} = \frac{V_{DEM4} - (V_{DEM2} + V_{DEM6})/2}{V_{DEM2} - V_{DEM6}} \times 100$	-3.5	0	+3.5	%
Carrier leakage	CL	$V_{IN} = 300 \text{ mVp-p, } f = 4 \text{ MHz}$ Ratio between 4 MHz component of T1 and S_{DEM}		-40	-35	dB
Noncorrelation detection level	V_{CORR}	$V_{IN} = 500 \text{ mVp-p video signal (ramp waveform)}$		22		IRE
PB YNR characteristics LP/EP (1)	GP-YNR1	$V_{IN} = 500 \text{ mVp-p noise test signal } -30 \text{ dB}$ S/N difference with S6 on/off	2.5			dB
PB YNR characteristics LP/EP (2)	GP-YNR2	$V_{IN} = 500 \text{ mVp-p noise test signal } -30 \text{ dB}$ S/N difference with EDIT on/off; pin 36 low	1.5			dB
PB YNR characteristics SP (3)	GP-YNR3	$V_{IN} = 500 \text{ mVp-p noise test signal, } -30 \text{ dB}$ S6 edit on/off S/N ratio Pin36 low	1.5			dB
Playback through gain	G_{PB}	Apply $V_{IN} = 0.5 \text{ Vp-p video signal}$ to pin 3, and determine ratio between pin 28 output level and input level	4.5	6.0	7.5	dB
Dropout detection (feedback) level	L_{DOC}	T33A: 4 MHz, 300 mVp-p sine wave T3A: 0.5 Vp-p video signal Measure input signal level when T33A signal drops momentarily and T28A output goes to 0	30	40	50	mVp-p
Nonlinear de-emphasis characteristics (1)	GNLDEEM1	$N_{IN} = \text{white } 50\% \text{ video} + \text{sine wave}$ $f = 2 \text{ MHz, } 158 \text{ mVp-p}$ Measure I/O response, and assign output level described above as 0 dB	-6.0	-5.0	-4.0	dB
Nonlinear de-emphasis characteristics (2)	GNLDEEM2	$f = 2 \text{ MHz, } 50 \text{ mVp-p}$	-9.0	-8.0	-7.0	dB
Double noise canceller characteristics (1)	GWNC1	$f = 2 \text{ MHz, } 158 \text{ mVp-p}$	-2.3	-1.8	-1.3	dB
Double noise canceller characteristics (2)	GWNC2	$f = 2 \text{ MHz, } 50 \text{ mVp-p}$	-6.0	-5.0	-4.0	dB

Continued on next page.

Continued from preceding page.

Parameter	Symbol	Conditions	min	typ	max	Unit
Double noise canceller characteristics (3)	GWNC3	$f = 2 \text{ MHz}$, 15.8 mVp-p	-10.5	-9.0	-7.5	dB
Double noise canceller characteristics (4)	GWNC4	$f = 3.58 \text{ MHz}$, 158 mVp-p	-2.0	-1.5	-1.0	dB
Double noise canceller characteristics (5)	GWNC5	$f = 3.58 \text{ MHz}$, 50 mVp-p	-5.1	-4.1	-3.1	dB
Double noise canceller characteristics (6)	GWNC6	$f = 3.58 \text{ MHz}$, 15.8 mVp-p	-10.5	-8.5	-7.0	dB
PIC-CTL hard response characteristics (1)	GPH1	$f = 1 \text{ MHz}$, 158 mVp-p	3.5	4.5	5.5	dB
PIC-CTL hard response characteristics (2)	GPH2	$f = 2 \text{ MHz}$, 158 mVp-p	7	8	9	dB
PIC-CTL soft response characteristics (1)	GPS1	$f = 1 \text{ MHz}$, 158 mVp-p	-5.5	-4.5	-3.5	dB
PIC-CTL soft response characteristics (2)	GPS2	$f = 2 \text{ MHz}$, 158 mVp-p	-9	-8	-7	dB
PIC-CTL center response characteristics	GPC	$f = 2 \text{ MHz}$, 158 mVp-p	1.0	1.5	2.0	dB
DOC loop gain Y	GDOC	T33A: 4 MHz, 300 mVp-p sine wave T3A: 0.5 Vp-p video signal I/O response 5H after instant when input at T33A went to 0	-1.0	0	+1.0	dB
Sync tip level, pedestal level, white level measurement (PB)	LVOR	With $V_{IN} = \text{white } 100\% \text{ } 0.5 \text{ Vp-p}$ Measure electric potential for each of the pin 28 video output sync tip, pedestal, and white peak, and assign the measured values to L_{SYN} , L_{PED} , and L_{WHI} , respectively				
Pseudo V insertion level (PB)	ΔV_{DP}	Measure pin 28 DC voltage when 5 V is applied to pin 26, and assign the measured value to L_{VDP} , and calculate the difference with L_{SYN} $\Delta V_{DP} = L_{SYN} - L_{VDP}$	-80	0	+80	mV
Pseudo H insertion level (PB)	ΔH_{DP}	Measure pin 28 DC voltage when 2.5 V is applied to pin 26, and assign the measured value to L_{HDP} , and calculate the difference with L_{PED} $\Delta H_{DP} = L_{PED} - L_{HDP}$	-200	-100	0	mV
White insertion level (PB)	ΔW_{HP}	Measure pin 28 DC voltage when 1.3 V is applied to pin 26, and assign the measured value to L_{WHP} , and calculate the difference with L_{WHI} $\Delta W_{HP} = L_{WHI} - L_{WHP}$	40	140	240	mV
Sync separation output level	V_{SYP}	$V_{IN} = 0.5 \text{ Vp-p}$ video signal Pin 26 output pulse peak value	4.0	4.2	4.4	Vp-p
Sync separation output pulse width	PW_{SYP}	$V_{IN} = 0.5 \text{ Vp-p}$ video signal Pin 26 output pulse width	4.0	4.3	4.6	μs
Sync separation output leading edge delay time	ΔT_{SYP}	$V_{IN} = 0.5 \text{ Vp-p}$ video signal, measure delay time of output SYNC versus input SYNC	1.4	1.6	1.8	μs
[REC Mode Chroma]						
REC chroma Y/C separation output level	V_{OR-21}	$V_{IN} = \text{standard color bar signal (1 Vp-p)}$ Measure burst level at T21	170	220	270	mVp-p
REC chroma low-band conversion output level	V_{OR-14}	$V_{IN} = \text{standard color bar signal (1 Vp-p)}$ Measure burst level at T14A	230	330	430	mVp-p
Burst emphasis amount	G_{BE}	$V_{IN} = \text{standard color bar signal (1 Vp-p)}$ Ratio of burst level at T14A when S35A is off (SP/EP) and on (LP)	5.5	6.0	6.5	dB
VXO oscillation level	V_{VXO-R}	$V_{IN} = \text{standard color bar signal (1 Vp-p)}$, measure T18 output amplitude (with an FET probe)	360	450	540	mVp-p
REC ACC characteristics 1	ACC_{R1}	$V_{IN} = \text{standard color bar signal (1 Vp-p)}$, input +6 dB chroma signal level only, measure T14A burst level, and calculate ratio with V_{OR-14}		+0.2	+0.5	dB

Continued on next page.

Continued from preceding page.

Parameter	Symbol	Conditions	min	typ	max	Unit
REC ACC characteristics 2	ACC _{R2}	V _{IN} = standard color bar signal (1 Vp-p), input -6 dB chroma signal level only, measure T14A burst level, and calculate ratio with V _{OR-14}	-0.5	-0.1		dB
REC ACC killer input level	V _{ACCK-ON}	V _{IN} = standard color bar signal (1 Vp-p), lower the chroma signal, and measure the input burst level at the point where output at T14A ceases, and calculate the ratio with the standard input level	-30	-27	-24	dB
REC ACC killer output level	V _{OACCK}	Use a spectrum analyzer to measure the output level at T14A in the killer state described previously; ratio with V _{OR-14}		-60	-50	dB
Input level for REC ACC killer return	V _{ACCK-OFF}	Starting from the killer state described previously, gradually raise the input chroma level and measure the input burst level when output is generated at T14A and calculate the ratio with the standard input level	-24	-21	-16	dB
VXO control sensitivity	S _{VXO}	Measure the pin 16 DC voltage when a standard color bar signal (1 Vp-p) is input ... V _O Measure the frequency at T18A when V _O is applied to pin 16 from the external power supply...f ₁ Measure the frequency at T18A when V _O + 10 mV is applied to pin 16 ...f ₂ $S_{VXO} = \frac{f_2 - f_1}{10} \text{ Hz/mV}$	3.3	4.9	7.5	Hz/mV
REC APC pull-in range 1	Δf _{APC1}	Input a 50% white signal overlapping with a 3.5795 MHz, 300 mVp-p continuous wave. After confirming that there is output at T14A, increase the frequency of the CW until the output at T14A stops, and then gradually reduce the frequency until output appears again at T14A; that CW frequency is f ₁ . Δf _{APC1} = f ₁ - 3579545 (Hz)	350	440		Hz
REC APC pull-in range 2	Δf _{APC2}	In the same manner, reduce the frequency of the CW until the output at T14A stops, and then gradually increase the frequency until output appears again at T14A; that CW frequency is f ₂ . Δf _{APC2} = f ₂ - 3579545 (Hz)		-900	-350	Hz
BGP delay time for APC ACC	t _{D(N)}	Input a standard color bar signal overlapping with a 3.98 MHz, 300 mVp-p continuous wave, and measure waveforms at T26 and T16.		4.8		μs
BGP pulse width for APC ACC	t _{w(N)}	 A00340		2.5		μs
REC AFC pull-in range 1	Δf _{AFC1}	Input a string of pulses (negative polarity) at 286 mV, 15.7 kHz with a width of 5 μs. After increasing the frequency of the pulse string until the waveform at pin 20 is disrupted, then reduce the frequency until the waveform at pin 20 is normal again; that pulse string frequency is f ₁ . A00341 $\Delta f_{AFC1} = f_1 - 15.734 \text{ (kHz)}$	+1.0	+7.0		kHz

Continued on next page.

Continued from preceding page.

Parameter	Symbol	Conditions	min	typ	max	Unit
REC AFC pull-in range 2	Δf_{AFC2}	In the same manner, after reducing the frequency of the pulse string until the waveform at pin 20 is disrupted, then increase the frequency until the waveform at pin 20 is normal again; that pulse string frequency is f_2 $\Delta f_{AFC2} = f_2 - 15.734$ (kHz)		-6.3	-1.0	kHz
[PB Mode Chroma]						
PB chroma video output level	Vop-28	In PB, SP mode, input a continuous wave from T14A a chroma signal (SP mode, burst 50 mVp-p) that underwent low-band conversion from a chroma noise test signal. Input a 50% white signal from T3A and measure the T28A burst level	210	260	310	mVp-p
PB chroma pin 21 output level	Vop-21	Measure the T21 burst level under the same conditions as for Vop-28	170	200	230	mVp-p
PB ACC characteristics 1	ACC _{P1}	Input the input chroma level at +6 dB under the same conditions as for Vop-28 and measure the T21 burst level, and calculate the ratio with Vop-21		+0.5	+0.8	dB
PB ACC characteristics 2	ACC _{P2}	Input the input chroma level at -6 dB under the same conditions as for Vop-28 and measure the T21 burst level, and calculate the ratio with Vop-21	-0.5	-0.2		dB
PB killer input level	VACK-P	Lower the input chroma level under the same conditions as for Vop-28 and measure the input burst level at the point where T21 chroma output ceases. (Calculate ratio with standard input of 50 mVp-p)	-55		-40	dB
PB killer chroma output level	VOACK-P	Use a spectrum analyzer to measure the T28 chroma output level in the killer state described previously. Calculate ratio with Vop-28.		-44	-40	dB
PB main converter carrier leak	CLP	Monitor T28A with a spectrum analyzer under the same conditions as for Vop-28 and calculate the ratio between the 3.58 MHz component and the 4.21 MHz carrier leak component.		-40	-33	dB
Burst de-emphasis amount	G _{BD}	From T14A, input a 629 kHz 50 mVp-p continuous wave; from T3A, input a 50% white signal, and calculate the ratio between the output level during the T21 burst interval and the output level during other intervals	-4.35	-4.6	-4.85	dB
PB XO output level	V _{XO-P}	In PB mode, measure the T18 output level with an FET probe	480	610	750	mVp-p
PB XO oscillation frequency variation	Δf_{XO}	In PB mode, measure the frequency at T18...f $\Delta f_{XO} = f - 3579545$ (Hz)	-7	0	+7	Hz
SLD detection current 1	I _{SLD1}	In PB mode, with S20: 3 and S19: off, input a 4 MHz 300 mVp-p continuous wave from T33A, input a 50% white signal from T3A, and measure the wave peak at T19A  A00347 $I_{SLD1} = VOS1/1 \text{ k}\Omega$	110	160	210	μA

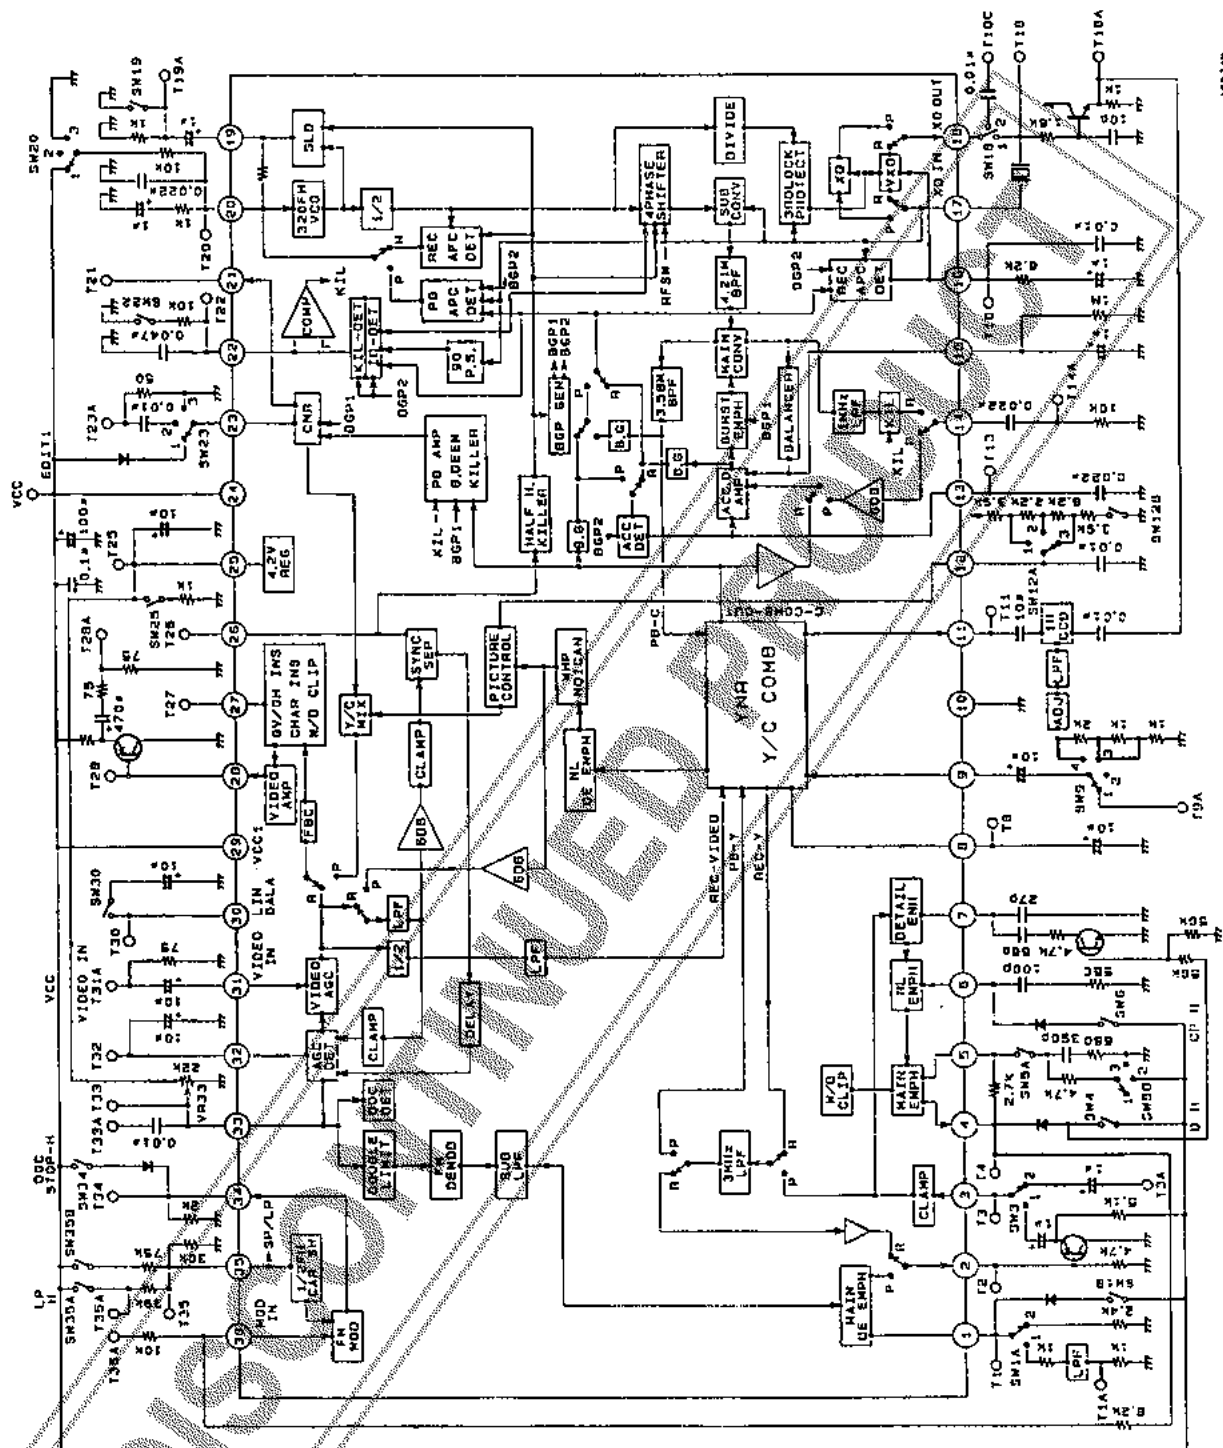
Continued on next page.

Continued from preceding page.

Parameter	Symbol	Conditions	min	typ	max	Unit
SLD detection current 2	I_{SLD2}	In PB mode, with S20: 3 and S19: off, input a 4 MHz 300 mVp-p continuous wave from T33A, input a 50% white signal from T3A, and measure the wave peak at T19A  $I_{SLD2} = V_{OS2}/1\text{ k}\Omega$	110	160	210	μA
4.2 V regulator operation confirmation (1)	V42(R)	SW25 → 1 measure T25 DC level REC mode		4.2		V_{DC}
4.2 V regulator operation confirmation (2)	V42(P1)	SW25 → 1 measure T25 DC level PB mode		4.2		V_{DC}
4.2 V regulator operation confirmation (3)	V42(P2)	SW25 → 2 measure T25 DC level PB mode		4.2		V_{DC}

DISCONTINUED PRODUCT

Test Circuit Diagram

Unit (resistance: Ω , capacitance: F)

LA7386 Mode Table

Mode	Edit	Y/C separation by comb filter Y (REC)	Y/C separation by comb filter C (REC)	1/2 fH shift (REC)	Burst emphasis (REC)	NL emphasis (REC)	YNR (REC)	YNR (PB)	High-pass, NC double type (PB)	CNR (PB)	PIC.CTL (PB)	Detail enhancer (REC)	APC. DET. (PB)	Crosstalk correlation switching (PB)
SP	Off (normal)	o	X	X	o	X	K0.5 LIM 3IRE	K0.2 LIM 5IRE	o	o	o(variable)	Strong (US) Medium	Before comb	o
	On (1) pin 23 H	o	X	X	o	X	X	X	o	X(off)	o	Medium	Before	o
	On (2) pin 12 H	o	X	X	o	X	X	X	o	o	Mid-point	Medium	Before	o
LP	Off (normal)	o	o	o	X	o	K0.65 LIM 5IRE	K0.5 LIM 11IRE	o	o	o	Strong	After comb	X
	On (1) pin 23 H	o	X	o	X	o	K0.25 LIM 3	K0.2 LIM 5	o	X	o	Medium	After	X
	On (2) pin 12 H	o	X	o	X	o	K0.25 LIM 3	K0.2 LIM 5	o	o	Mid-point	Medium	After	X
EP	Off (normal)	o	o	o	o	o	K0.65 LIM 5IRE	K0.5 LIM 5	o	o	o	Strong	After comb	X
	On (1) pin 23 H	o	X	o	o	o	K0.25 LIM 3	K0.2 LIM 5	o	X	o	Medium	After	X
	On (2) pin 12 H	o	X	o	o	o	K0.25 LIM 3	K0.2 LIM 5	o	o	Mid-point	Medium	After	X

Control Pin Function Chart

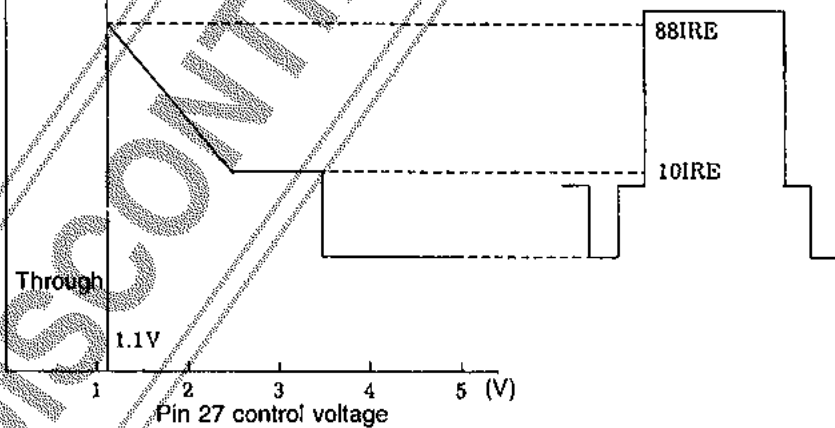
Pin No.	L	M	H
Pin 4 R/P switching	Open REC mode		Over 3.8 V PB mode
Pin 6 SP/EP switching	Open EP mode		Over 3.9 V SP mode
Pin 12 EDIT2 PIC-CTL	2 V to 2.5 V PIC-CTL SOFT	2.5 V to 3 V PIC-CTL HARD	Over 3.6 V EDIT2 on
Pin 16 Special playback switching		Open Before comb in SP	Over 3.5 V (over 200 μ A) After comb in SP
Pin 23 EDIT1 US	Under 1.5V US specifications	Open	Over 2.5 V EDIT1 on
Pin 27 QV, QH, CHAR		Refer to pin 27, QV, QH, CHAR, insertion diagram	
Pin 34 DOC STOP control	Open Normal mode		Over 3.9 V DOC STOP
Pin 35 ROTARY pulse LP switching			

LA7386

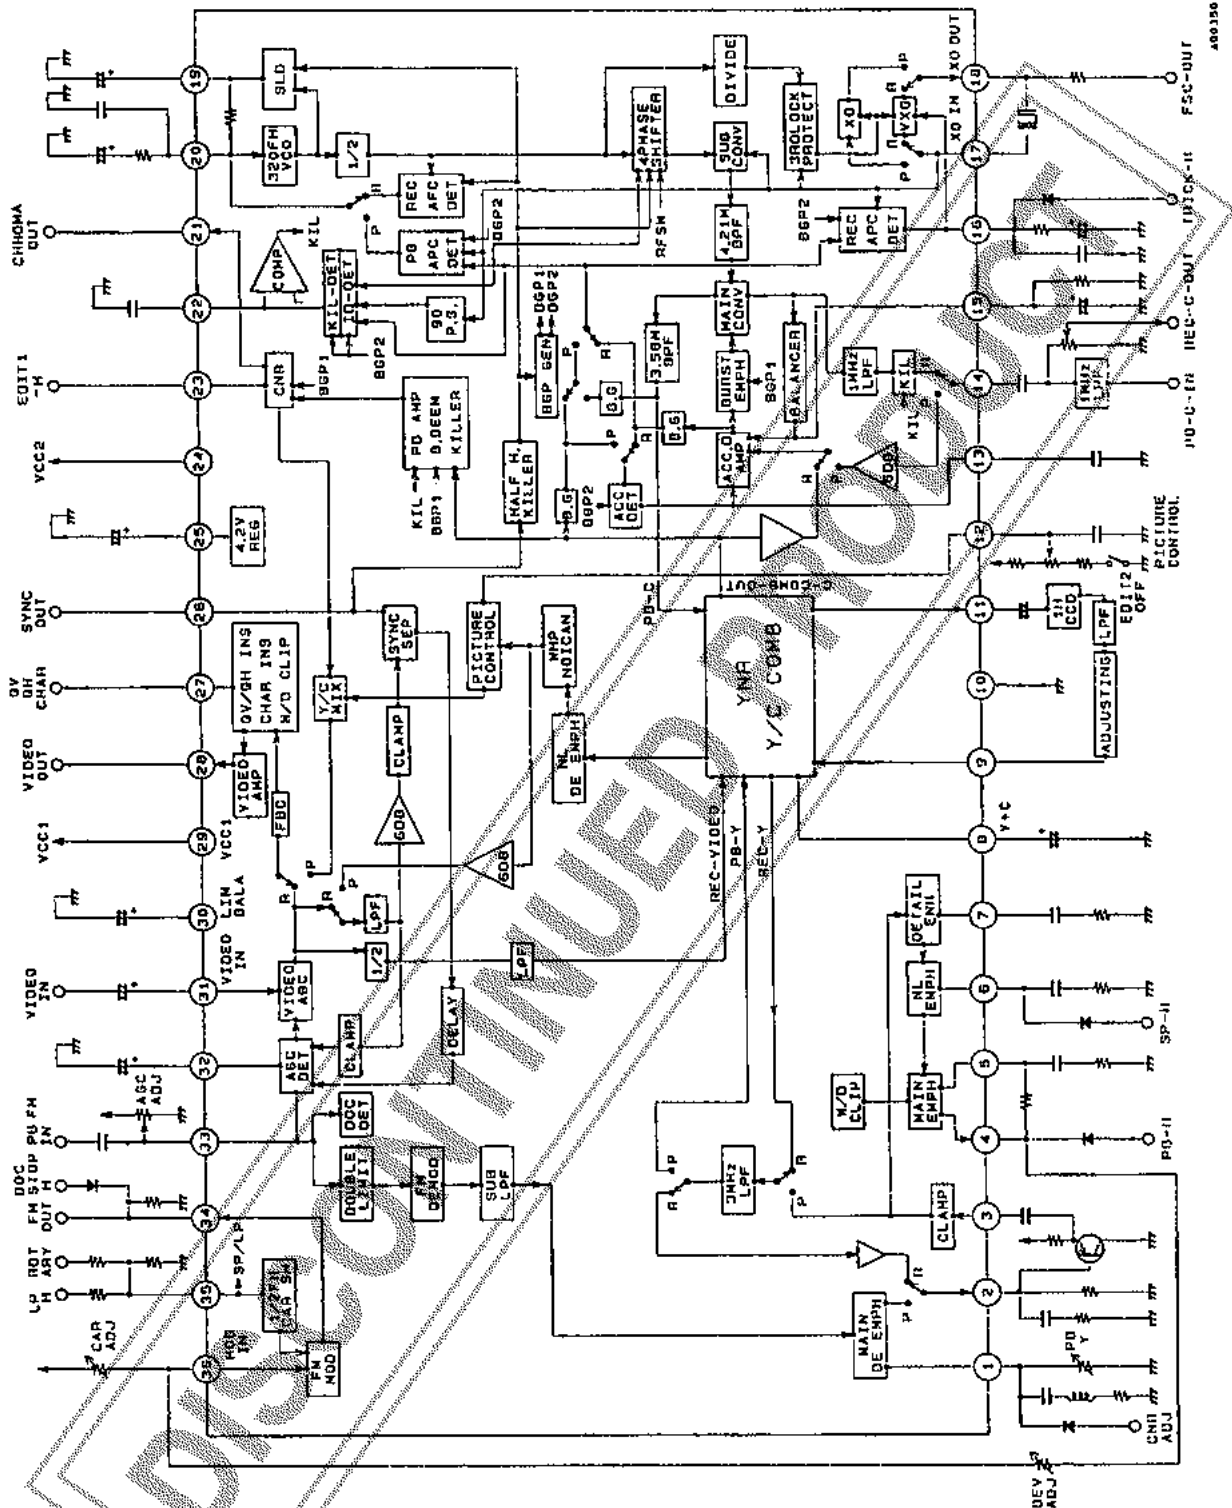
Pin 27

QV, QH, CHAR, insertion

Pin 28 output



Application Circuit Examples

Unit (resistance: Ω , capacitance: F)

DISCONTINUED PRODUCT

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of February, 1996. Specifications and information herein are subject to change without notice.