

DATA SHEET

BAND IV/V CIRCULATORS 300 W

Product specification
Supersedes data of October 1995
File under Professional Components, PC06


1998 Feb 20

BAND IV/V CIRCULATORS

300 W

Preferred application: UHF television

TYPE	DIMENSIONS Fig.	FREQUENCY RANGE MHz	MAXIMUM POWER	
			CW W	PEAK W
2722 162 01572	1	400 to 470	300	500
01582		470 to 600		
01592		590 to 720		
01612		710 to 860		
2722 162 01632	2	470 to 600	300	500
01642		590 to 720		
01662		710 to 860		

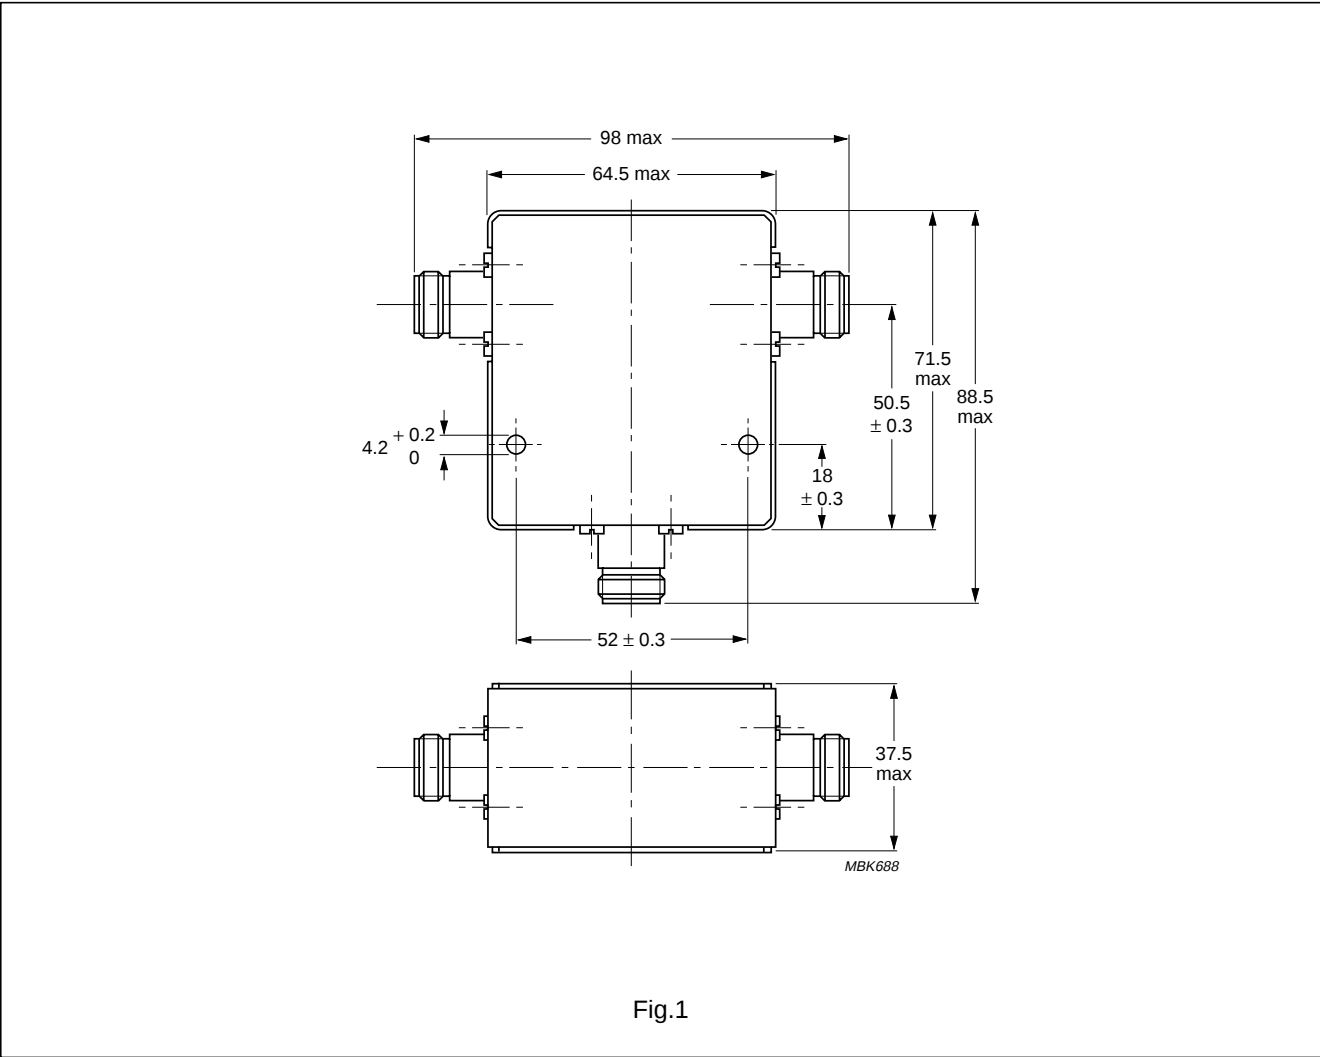

BAND IV/V CIRCULATORS
300 W

TYPE	ISOLATION		INSERTION LOSS		VSWR		TEMP. RANGE °C	CONNECTOR	MASS g
	MIN. dB	TYP. dB	MAX. dB	TYP. dB	MAX.	TYP.			
2722 162 01572 01582 01592 01612	20	25	0,35	0,20	1,25	1,15	-10 to +60	N female	900
2722 162 01632 01642 01662	20	25	0,35	0,20	1,25	1,15	-10 to +60	HF 7/16 female	1200

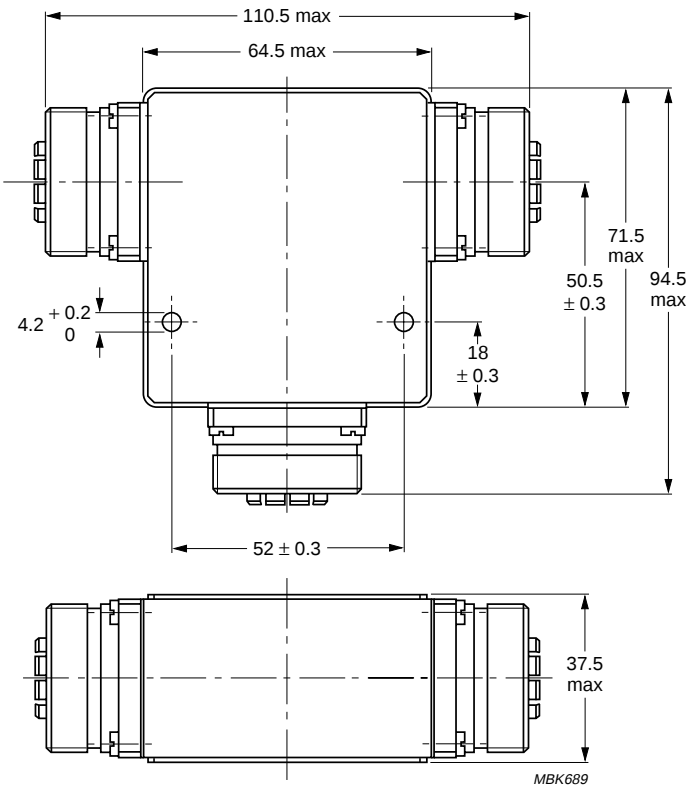


Fig.2