

DATA SHEET

BAND IV/V CIRCULATORS 500 AND 700 W

Product specification
Supersedes data of October 1995
File under Professional Components, PC06



1998 Feb 20

BAND IV/V CIRCULATORS

500 AND 700 W

Preferred application: UHF television

TYPE	DIMENSIONS Fig.	FREQUENCY RANGE MHz	MAXIMUM POWER	
			CW W	PEAK W
2722 162 01121 03191 01131 01141	1	470 to 600 600 to 800 590 to 720 710 to 860	500	900
2722 162 03221 03231 03241 03251	2	470 to 600 600 to 800 590 to 720 710 to 860	500	900
2722 162 03141 03151 03201 03211	3	470 to 600 600 to 800 590 to 720 710 to 860	500	900
2722 162 05371 05381 05391	3	470 to 600 590 to 720 710 to 860	700	8000

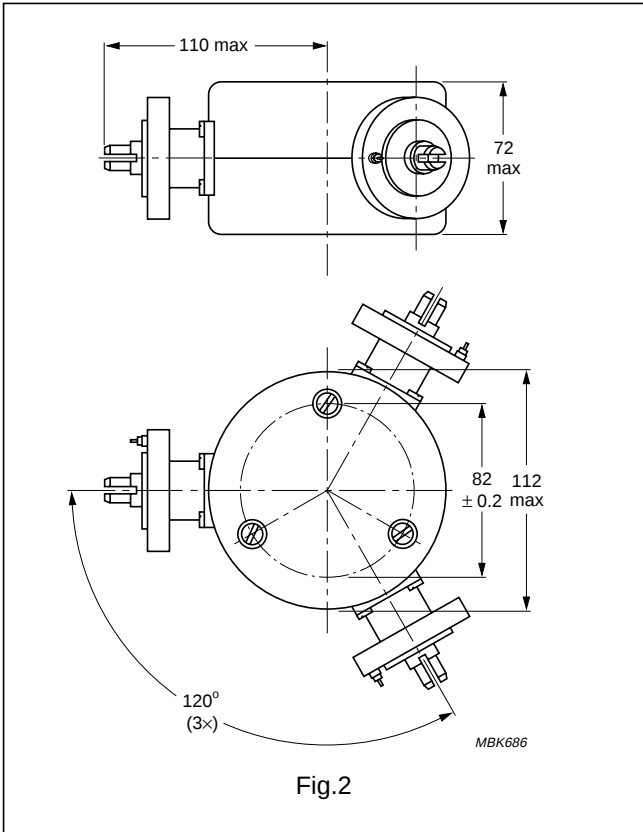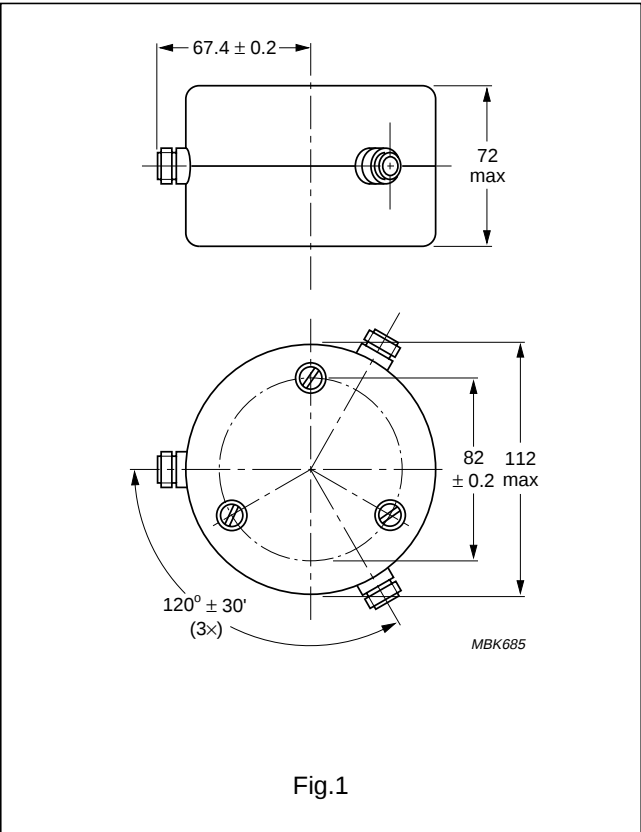

BAND IV/V CIRCULATORS
500 AND 700 W

TYPE	ISOLATION		INSERTION LOSS		VSWR		TEMP. RANGE °C	CONNECTOR	MASS g
	MIN. dB	TYP. dB	MAX. dB	TYP. dB	MAX.	TYP.			
2722 162 01121 03191 01131 01141	20	24	0,35	0,25	1,2	1,15	−10 to +70	N female	2080
2722 162 03221 03231 03241 03251									
2722 162 03141 03151 03201 03211									
2722 162 05371 05381 05391									

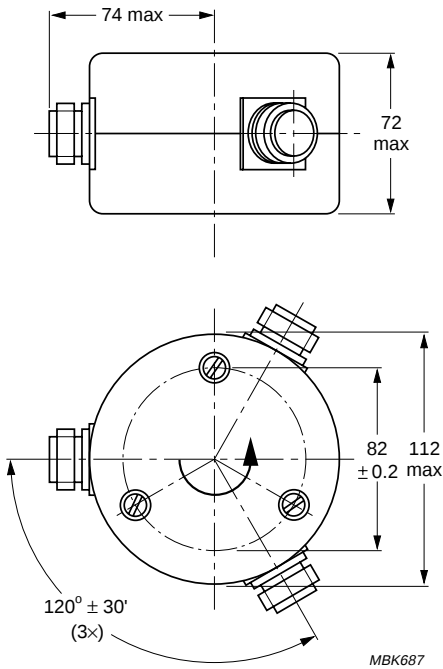


Fig.3