

DATA SHEET

4-PORT CIRCULATORS/ 2 GHz


Product specification
Supersedes data of October 1995
File under Professional Components, PC06

1998 Feb 20

4-PORT CIRCULATORS/
2 GHz

Preferred application: radio links

TYPE	DIMENSIONS Fig.	FREQUENCY RANGE MHz	MAXIMUM POWER	
			CW W	REFLECTED W
2722 162 04051 04061	1	1700 to 2100 1900 to 2300	30	15
2722 162 04091 04101	1	1700 to 2100 1900 to 2300	30	

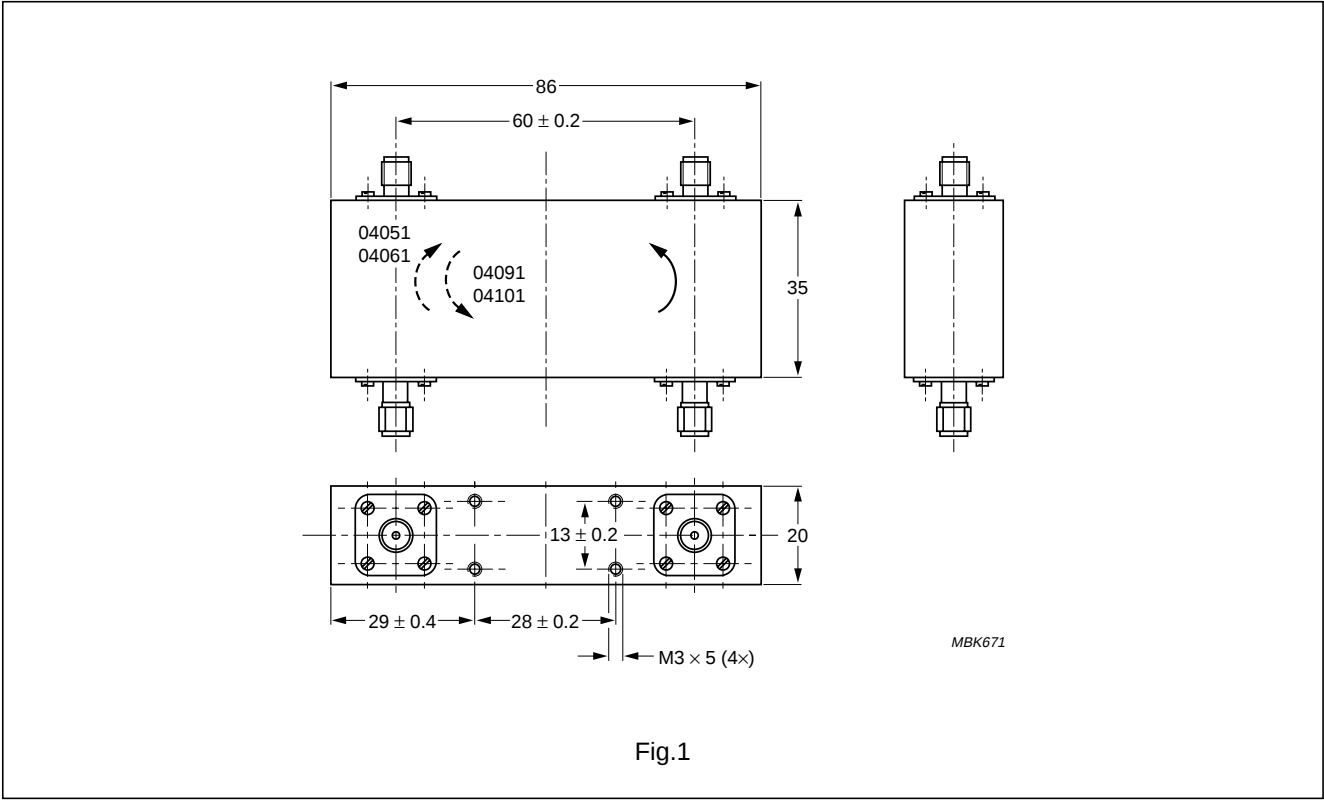

TYPE	ISOLATION		INSERTION LOSS		VSWR		TEMP. RANGE °C	CONNECTOR	MASS g
	MIN. dB	TYP. dB	MAX. dB	TYP. dB	MAX.	TYP.			
2722 162 04051 04061	26		0,25		1,11		0 to +55	SMA male 2 x female 2 x	220
2722 162 04091 04101	26		0,40		1,11		0 to +55	SMA male 2 x female 2 x	220