

EPROM Memory Programming Specification

This document includes the programming specifications for the following devices:

- PIC16C642
- PIC16C662

1.0 PROGRAMMING THE PIC16C64X/66X

The PIC16C64X/66X can be programmed using a serial method. In serial mode, the PIC16C64X/66X can be programmed while in the users system. This allows for increased design flexibility. This programming specification applies to PIC16C64X/66X devices in all packages.

1.1 Hardware Requirements


The PIC16C64X/66X requires two programmable power supplies, one for VDD (2.0V to 6.5V recommended) and one for VPP (12V to 14V). Both supplies should have a minimum resolution of 0.25V.

1.2 Programming Mode


The programming mode for the PIC16C64X/66X allows programming of user program memory, special locations used for ID, and the configuration word for the PIC16C64X/66X.

Pin Diagrams

PDIP, SOIC, Windowed Cerdip

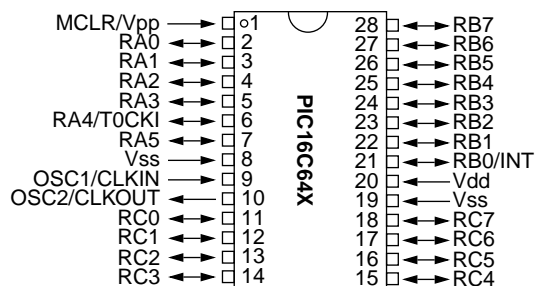

PDIP, Windowed Cerdip

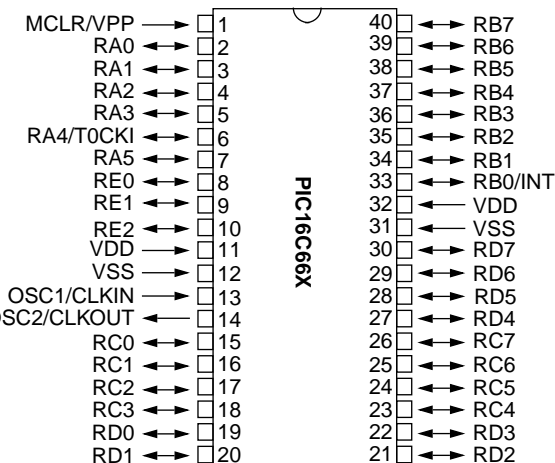

Note: Peripheral pinout functions are not shown (see data sheet for full pinout information).

TABLE 1-1: PIN DESCRIPTIONS (DURING PROGRAMMING): PIC16C64X/66X

Pin Name	During Programming		
	Pin Name	Pin Type	Pin Description
RB6	CLOCK	I	Clock input
RB7	DATA	I/O	Data input/output
MCLR/VPP	VPP	P	Programming Power
VDD	VDD	P	Power Supply
VSS	VSS	P	Ground

Legend: I = input, O = Output, P = Power

PIC16C64X/66X

2.0 PROGRAM MODE ENTRY

2.1 User Program Memory Map

The user memory space extends from 0x0000 to 0x1FFF (8K). Table shows actual implementation of program memory in the PIC16C64X/66X microcontroller family.

When the PC reaches the last location of the implemented program memory, it will wrap around and address a location within the physically implemented memory (Figure 2-1).

In Programming Mode, the program memory space extends from 0x0000 to 0x3FFF, with the first half (0x0000-0x1FFF) being user program memory and the second half (0x2000-0x3FFF) being configuration memory. The PC will increment from 0x0000 to 0x1FFF and wrap to 0x0000 or 0x2000 to 0x3FFF and wrap around to 0x2000 (not to 0x0000). Once in configuration memory, the highest bit of the PC stays a '1', thus always pointing to the configuration memory. The only way to point to user program memory is to reset the part and reenter program/verify mode, as described in Section 2.3.

In the configuration memory space, 0x2000-0x20FF or 0x2000-0x20FF are utilized. When in a configuration memory, as in the user memory, the 0x2000-0x2XFF segment is repeatedly accessed as PC exceeds 0x2XFF (Figure 2-1).

TABLE 2-1: IMPLEMENTATION OF PROGRAM MEMORY IN THE PIC16C64X/66X

Device	Program Memory Size
PIC16C642	0x000 -0xFFFF (4K)
PIC16C662	0x000 -0xFFFF (4K)

A user may store identification information (ID) in four ID locations. The ID locations are mapped in [0x2000: 0x2003]. It is recommended that the user use only the six least significant bits of each ID location where the least two significant bits are the parity bits. In some devices, the ID locations read-out in a scrambled fashion after code protection is enabled. For these devices, it is recommended that ID location is written as

"11 1111 1666 bbbb pp"

where 'bbbb' is ID information.


Note 1: All other locations are reserved and should not be programmed.

2: Parity bits must be clocked in/out for identification, but are ignored and not checked.

In other devices, the ID locations read out normally, even after code protection. To understand how the devices behave, refer to Table 4-1.

To understand the scrambling mechanism after code protection, refer to Section 4.1.

FIGURE 2-1: PROGRAM MEMORY MAPPING

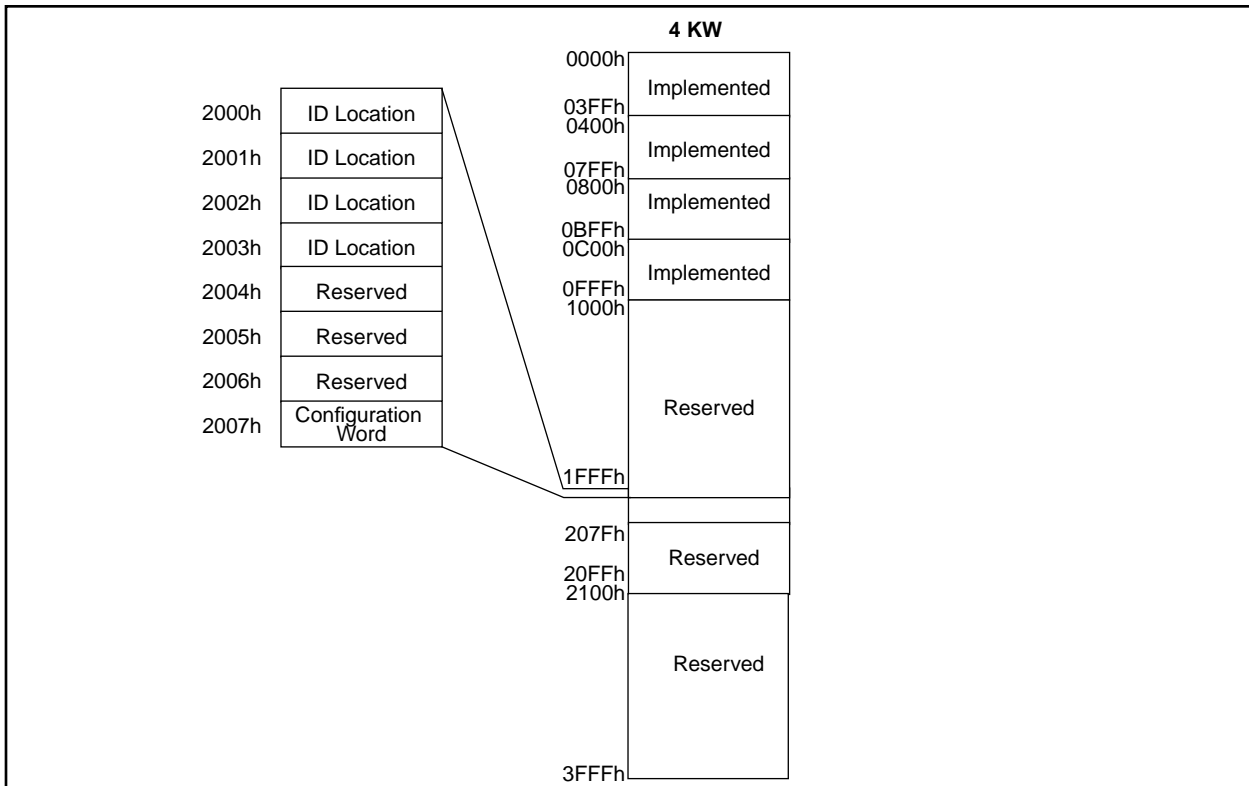


2.2 Program Memory Parity

The PIC16C66X has on-chip parity bits that can be used to verify the contents of the program memory during run time. Parity bits may be useful in applications in order to increase overall reliability of the system.

Due to the on-chip parity bits the entire program memory word has been enlarged to 16 bits.

The user is responsible to generate and program the correct parity for a given program memory word. The two parity bits are computed on alternating bits of the program word. One computation is performed using even parity, the other using odd parity as shown in Figure 2-2.

FIGURE 2-2: EPROM MEMORY WITH PARITY CHECKING

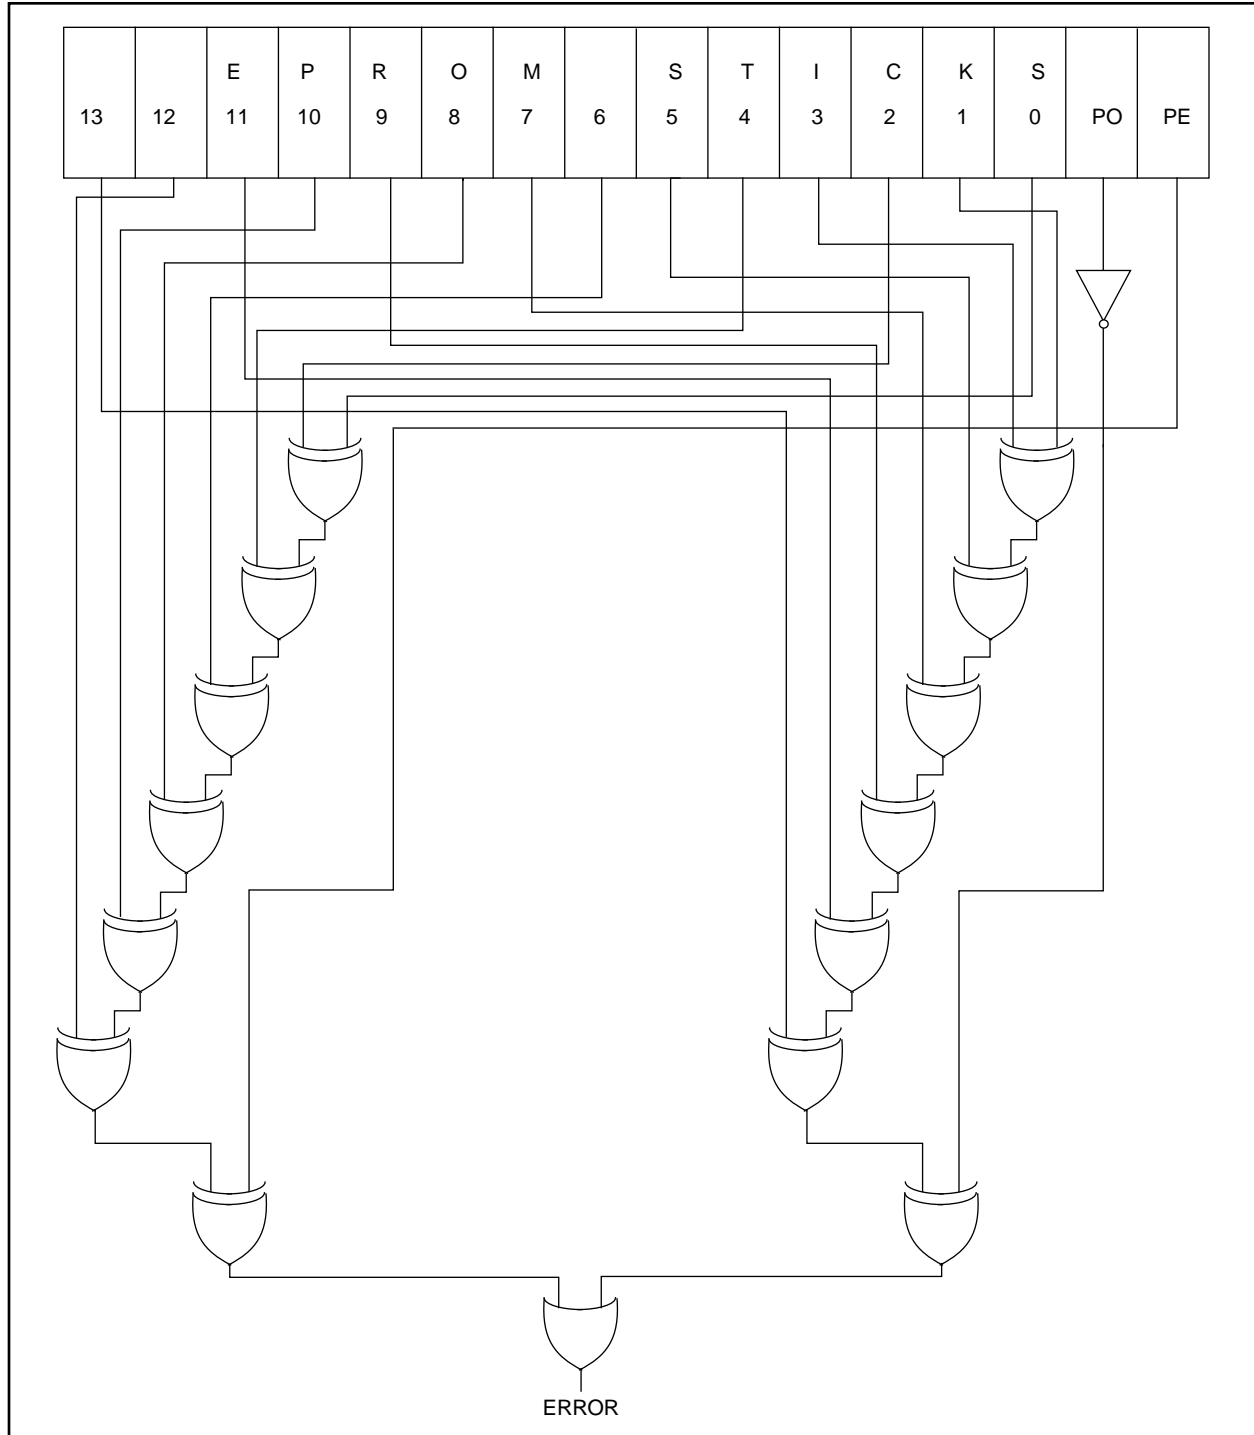

2.3 Program/Verify Mode

The Program/Verify mode is entered by holding pins RB6 and RB7 low while raising $\overline{\text{MCLR}}$ pin from V_{IL} to V_{IH} (high voltage). Once in this mode the user program memory and the configuration memory can be accessed and programmed in serial fashion. The mode of operation is serial, and the memory that is accessed is the user program memory. RB6 is a Schmitt Trigger input in this mode.

The sequence that enters the device into the programming/verify mode places all other logic into the reset state (the $\overline{\text{MCLR}}$ pin was initially at V_{IL}). This means that all I/O are in the reset state (Hi-impedance inputs).

Note: The $\overline{\text{MCLR}}$ pin should be raised as quickly as possible from V_{IL} to V_{IH} . This is to ensure that the device does not have the PC incremented while in valid operation range.

2.3.1 SERIAL PROGRAM/VERIFY OPERATION

The RB6 pin is used as a clock input pin, and the RB7 pin is used for entering command bits and data input/output during serial operation. To input a command, the clock pin (RB6) is cycled 6 times. Each command bit is latched on the falling edge of the clock with the least significant bit (LSB) of the command being input first. The data on pin RB7 is required to have a minimum setup and hold time of 100 ns with respect to the falling edge of the clock. Commands that have data associated with them (read and load) are specified to have a minimum delay of 1 μs between the command and the data. After this delay the clock pin is cycled 18 times with the first cycle being a start bit and the last cycle being a stop bit. Data is also input and output LSB first. Therefore, during a read operation the LSB will be transmitted onto pin RB7 on the rising edge of the second cycle, and during a load operation the LSB will be latched on the falling edge of the second cycle. A minimum 1 μs delay is also specified between consecutive commands.

2.3.2 LOAD CONFIGURATION

After receiving this command, the program counter (PC) will be set to 0x2000. By then applying 18 cycles to the clock pin, the chip will load 16-bits a "data word" as described above, to be programmed into the configuration memory. A description of the memory mapping schemes for normal operation and configuration mode operation is shown in Figure 2-1. After the configuration memory is entered, the only way to get back to the user program memory is to exit the program/verify test mode by taking $\overline{\text{MCLR}}$ low (V_{IL}).

TABLE 2-2: COMMAND MAPPING (SERIAL OPERATION)

Command	Mapping (MSb...LSb)	Data
Load Data, Set PC = 2000h	X X 0 0 0 X	start_bit, data (16), stop_bit
Load Data for Program Memory	X X 0 0 1 X	start_bit, data (16), stop_bit
Read Data	X X 0 1 0 X	start_bit, data (16), stop_bit
Increment Address	X X 0 1 1 X	
Begin Programming	X X 1 0 0 X	
End Programming	X X 1 1 1 X	

FIGURE 2-3: PROGRAM FLOW CHART - PIC16C64X/66X PROGRAM MEMORY


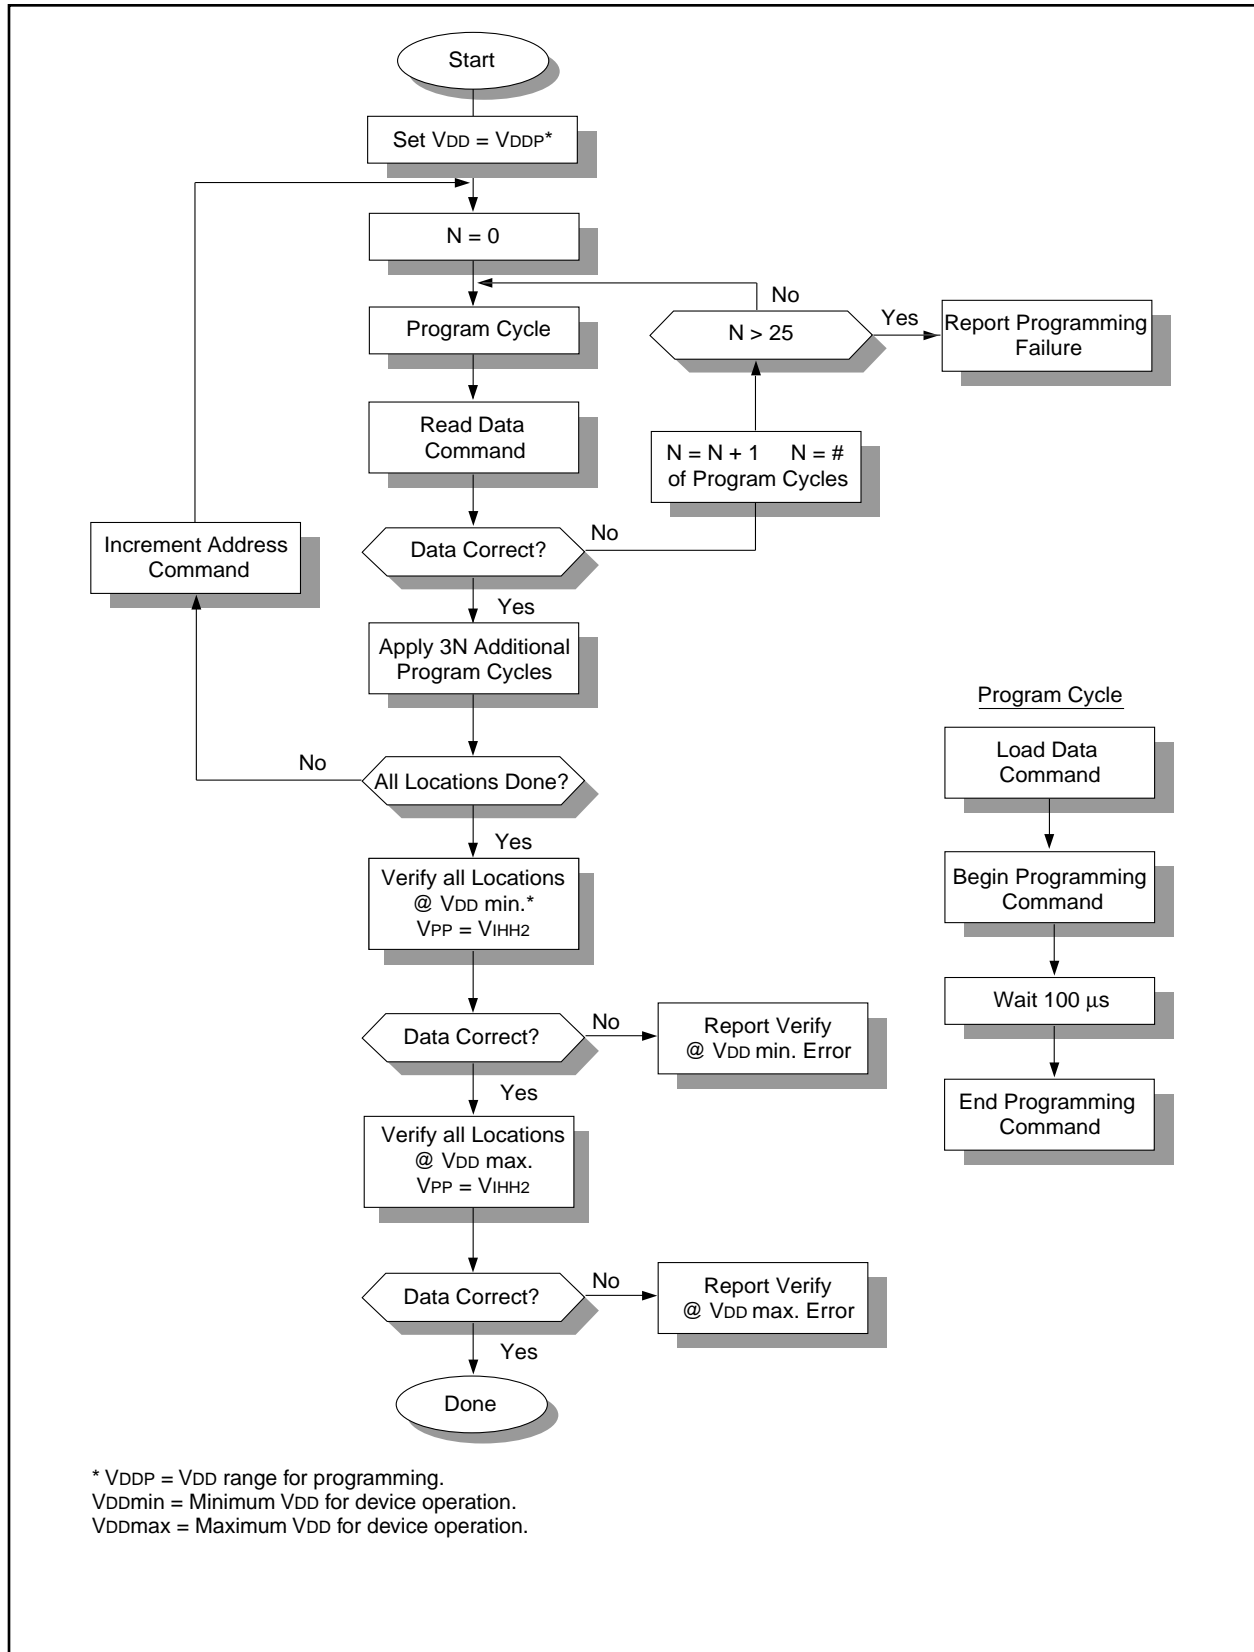


FIGURE 2-4: PROGRAM FLOW CHART - PIC16C64X/66X CONFIGURATION WORD & ID LOCATIONS

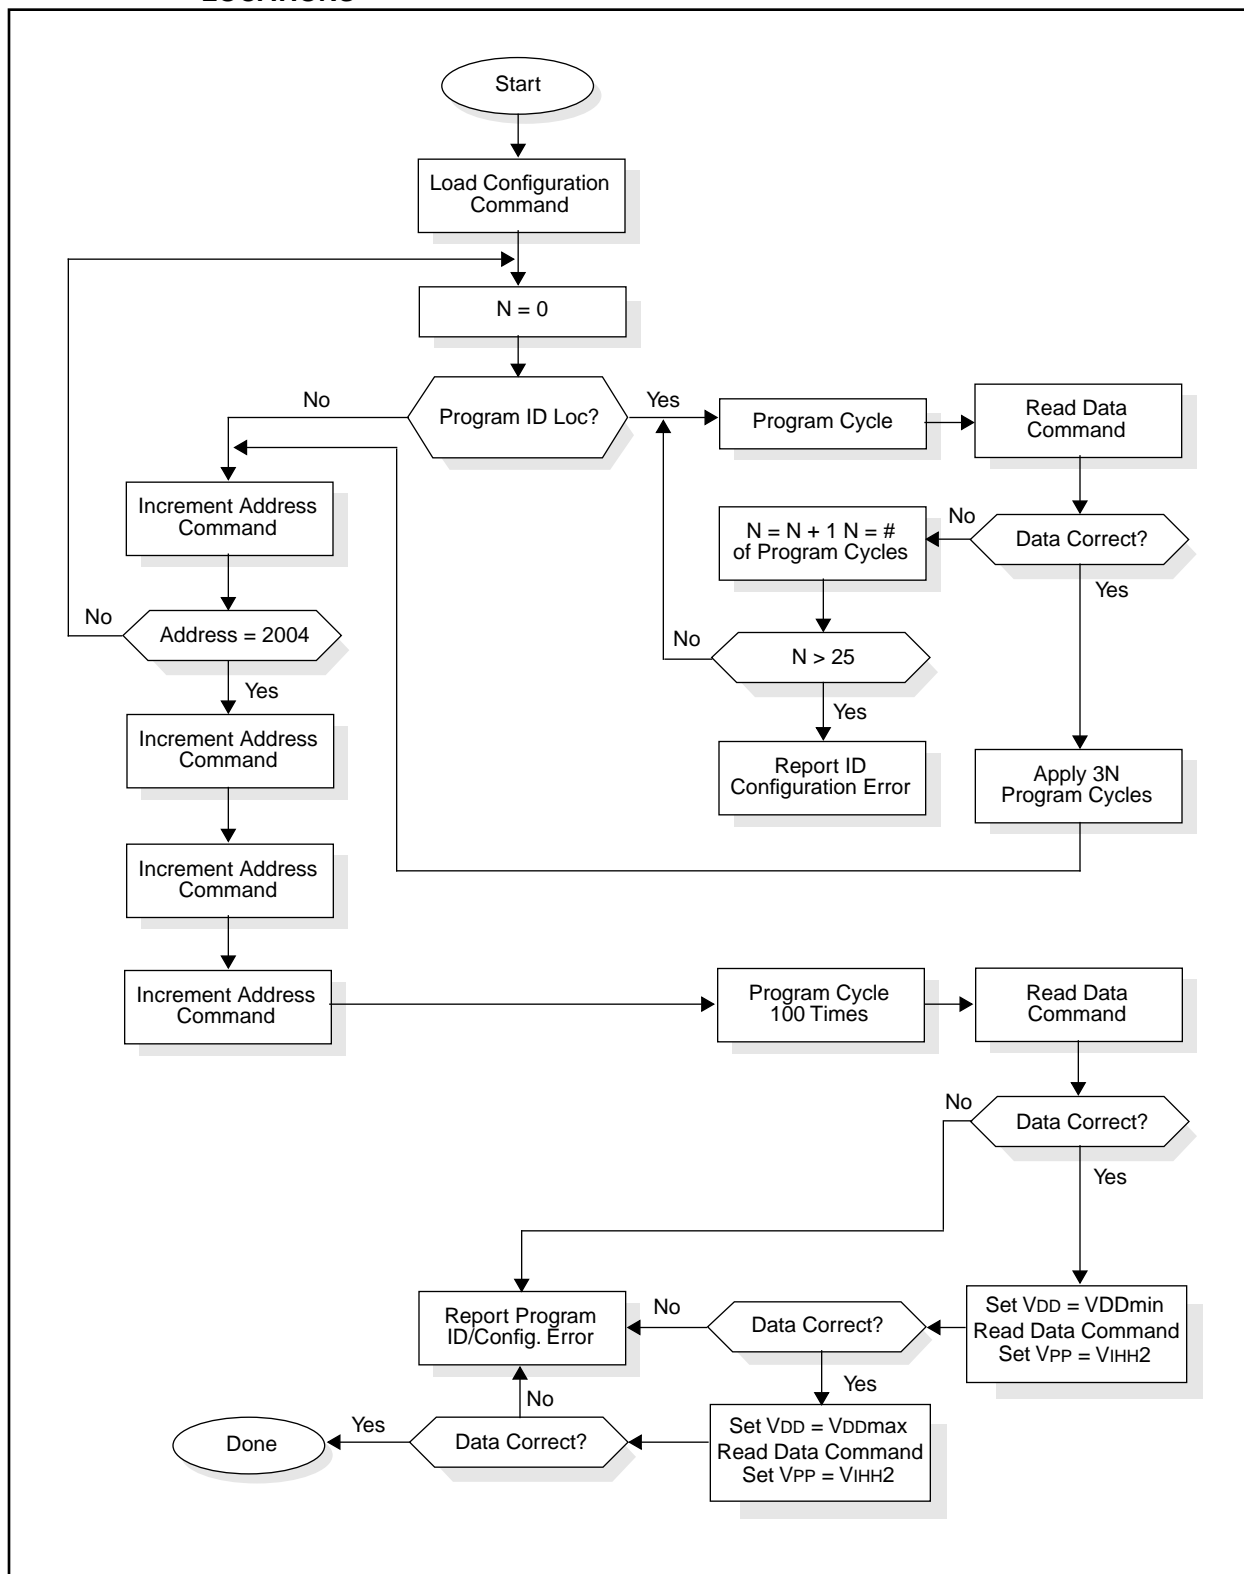

2.3.2.1 LOAD DATA

After receiving this command, the chip will load in a 16-bit "data word" when 18 cycles are applied, as described previously. A timing diagram for the load data command is shown in Figure 5-1.

2.3.2.2 READ DATA

After receiving this command, the chip will transmit data bits out of the memory currently accessed starting with the second rising edge of the clock input. The RB7 pin will go into output mode on the second rising clock edge, and it will revert back to input mode (hi-impedance) after the 18th rising edge. A timing diagram of this command is shown in Figure 5-2.

2.3.2.3 INCREMENT ADDRESS

The PC is incremented when this command is received. A timing diagram of this command is shown in Figure 5-3.

2.3.2.4 BEGIN PROGRAMMING

A load command (load configuration or load data) must be given before every begin programming command. Programming of the appropriate memory (test program memory or user program memory) will begin after this command is received and decoded. Programming should be performed with a series of 100 μ s programming pulses. A programming pulse is defined as the time between the begin programming command and the end programming command.

2.3.2.5 END PROGRAMMING

After receiving this command, the chip stops programming the memory (configuration program memory or user program memory) that it was programming at the time.

2.4 Programming Algorithm Requires Variable VDD

The PIC16C64X/66X uses an intelligent algorithm. The algorithm calls for program verification at VDDmin as well as VDDmax. Verification at VDDmin guarantees good "erase margin". Verification at VDDmax guarantees good "program margin."

The actual programming must be done with VDD in the VDDP range (4.75 - 5.25V).

VDDP = VCC range required during programming.

VDDmin = Minimum operating VDD spec for the part.

VDDmax = Maximum operating VDD spec for the part.

Programmers must verify the PIC16C64X/66X at its specified VDDmax and VDDmin levels. Since Microchip may introduce future versions of the PIC16C64X/66X with a broader VDD range, it is best that these levels are user selectable (defaults are ok).

Note: Any programmer not meeting these requirements may only be classified as "prototype" or "development" programmer but not a "production" quality programmer.


PIC16C64X/66X

3.0 CONFIGURATION WORD

The PIC16C64X/66X family members have several configuration bits. These bits can be programmed (reads '0') or left unprogrammed (reads '1') to select various device configurations. Figure 3-1 provides an overview of configuration bits.

Note: Parity bits for identification and configuration word must be clocked in/out, but are ignored and not checked.

FIGURE 3-1: CONFIGURATION WORD BIT MAP

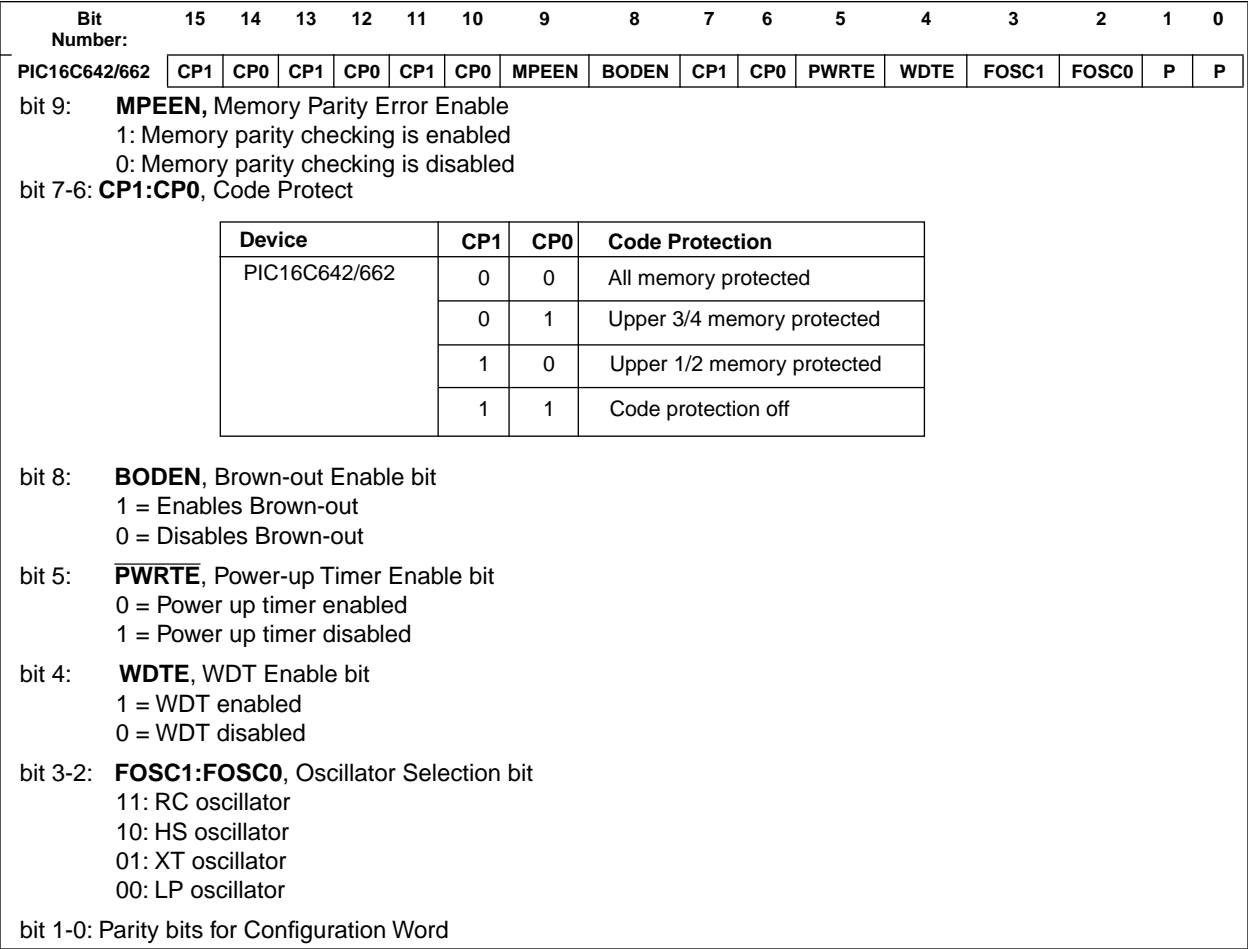

4.0 CODE PROTECTION

The program code written into the EPROM can be protected by writing to the CP0 & CP1 bits of the configuration word.

Note: Code protection should be the last test for a device, since the areas protected cannot be reprogrammed. Code protection is permanent for any device.

4.1 Programming Locations 0x000 to 0xFF after Code Protection

For all PIC16C64X/66X devices, once code protection is enabled, all protected segments read '0's (or "garbage values") and are prevented from further programming. All unprotected segments, including ID locations and configuration word, read normally. These locations can be programmed.

4.2 Embedding Configuration Word and ID Information in the Hex File

To allow portability of code, the programmer is required to read the configuration word and ID locations from the hex file when loading the hex file. If configuration word information was not present in the hex file then a simple warning message may be issued. Similarly, while saving a hex file, configuration word and ID information must be included. An option to not include this information may be provided.

Microchip Technology Inc. feels strongly that this feature is important for the benefit of the end customer.

TABLE 4-1: CONFIGURATION WORD

PIC16C642

To code protect:

- Protect all memory 0000001X00XXXXXX
- Protect upper 1/2 memory 101010XX10XXXXXX
- Protect upper 3/4 memory 010101XX01XXXXXX
- No code protection 1111111X11XXXXXX

Program Memory Segment	R/W in Protected Mode	R/W in Unprotected Mode
Configuration Word (0x2007)	Read Unscrambled, Write Enabled	Read Unscrambled, Write Enabled
Unprotected memory segment	Read Unscrambled, Write Enabled	Read Unscrambled, Write Enabled
Protected memory segment	Read All 0's, Write Disabled	Read Unscrambled, Write Enabled
ID Locations (0x2000 : 0x2003)	Read Unscrambled, Write Enabled	Read Unscrambled, Write Enabled

PIC16C662

To code protect:

- Protect all memory 0000001X00XXXXXX
- Protect upper 3/4 memory 0101011X01XXXXXX
- Protect upper 1/2 memory 1010101X10XXXXXX
- No code protection 1111111X11XXXXXX

Program Memory Segment	R/W in Protected Mode	R/W in Unprotected Mode
Configuration Word (0x2007)	Read Unscrambled, Write Enabled	Read Unscrambled, Write Enabled
Unprotected memory segment	Read Unscrambled, Write Enabled	Read Unscrambled, Write Enabled
Protected memory segment	Read All 0's, Write Disabled	Read Unscrambled, Write Enabled
ID Locations (0x2000 : 0x2003)	Read Unscrambled, Write Enabled	Read Unscrambled, Write Enabled

PIC16C64X/66X

4.3 Checksum

4.3.1 CHECKSUM CALCULATIONS

Checksum is calculated by reading the contents of the PIC16C64X/66X memory locations and adding up the opcodes up to the maximum user addressable location, e.g., 0xFFFF for the PIC16C662. Any carry bits exceeding 16-bits are neglected. Finally, the configuration word (appropriately masked) is added to the checksum. Checksum computation for each member of the PIC16C64X/66X devices is shown in Table 4-2.

The checksum is calculated by summing the following:

- The contents of all program memory locations
- The configuration word, appropriately masked
- Masked ID locations (when applicable)

The least significant 16 bits of this sum is the checksum.

The following table describes how to calculate the checksum for each device. Note that the checksum calculation differs depending on the code protect setting. Since the program memory locations read out differently depending on the code protect setting, the table describes how to manipulate the actual program memory values to simulate the values that would be read from a protected device. When calculating a checksum by reading a device, the entire program memory can simply be read and summed. The configuration word and ID locations can always be read.

Note that some older devices have an additional value added in the checksum. This is to maintain compatibility with older device programmer checksums.

TABLE 4-2: CHECKSUM COMPUTATION

Device	Code Protect	Checksum*	Blank Value	0x25E6 at 0 and Max Address
PIC16C642	OFF	SUM[0x0000:0x0FFF] + (CONFIG & 0x3FFF)	0x2FFF	0xFB CD
	1/2	SUM[0x0000:0x07FF] + (CONFIG & 0x3FFF) + SUM_ID	0x52EE	0x04 A3
	3/4	SUM[0x0000:0x03FF] + (CONFIG & 0x3FFF) + SUM_ID	0x41DE	0xF3 93
	ALL	(CONFIG & 0x3FFF) + SUM_ID	0x30CE	0xFC 9C
PIC16C662	OFF	SUM[0x0000:0x0FFF] + (CONFIG & 0x3FFF)	0x2FFF	0xFB CD
	1/2	SUM[0x0000:0x07FF] + (CONFIG & 0x3FFF) + SUM_ID	0x52EE	0x04 A3
	3/4	SUM[0x0000:0x03FF] + (CONFIG & 0x3FFF) + SUM_ID	0x41DE	0xF3 93
	ALL	(CONFIG & 0x3FFF) + SUM_ID	0x30CE	0xFC 9C

Legend: CFGW = Configuration Word

SUM[a:b] = [Sum of locations a through b inclusive]

SUM_ID = ID locations masked by 0xF then made into a 16-bit value with ID0 as the most significant nibble.

For example,

ID0 = 0x12, ID1 = 0x37, ID2 = 0x4, ID3 = 0x26, then SUM_ID = 0x2746.

*Checksum = [Sum of all the individual expressions] MODULO [0xFFFF]

+ = Addition

& = Bitwise AND

5.0 PROGRAM/VERIFY MODE

**TABLE 5-1: AC/DC CHARACTERISTICS
TIMING REQUIREMENTS FOR PROGRAM/VERIFY TEST MODE**

Standard Operating Conditions							
Operating Temperature: $+10^{\circ}\text{C} \leq T_A \leq +40^{\circ}\text{C}$, unless otherwise stated, (20°C recommended)							
Operating Voltage: $4.5\text{V} \leq V_{DD} \leq 5.5\text{V}$, unless otherwise stated.							
Parameter No.	Sym.	Characteristic	Min.	Typ	Max.	Units	Conditions
General							
P1	VDDP	Supply voltage during programming	4.75	5.0	5.25	V	
P2	IDDP	Supply current (from VDD) during programming	—	—	20	mA	
P3	VDDV	Supply voltage during verify	VDDmin	—	VDDmax	V	Note 1
P4	VIHH1	Voltage on $\overline{\text{MCLR}}/\text{VPP}$ during programming	12.75	—	13.25	V	Note 2
P5	VIHH2	Voltage on $\overline{\text{MCLR}}/\text{VPP}$ during verify	VDD + 4.0	—	13.5	—	
P6	IPP	Programming supply current (from VPP)	—	—	50	mA	
P9	VIH1	(RB6, RB7) input high level	0.8 VDD	—	—	V	Schmitt Trigger input
P8	VIL1	(RB6, RB7) input low level	0.2 VDD	—	—	V	Schmitt Trigger input

Serial Program Verify							
P1	TR	$\overline{\text{MCLR}}/\text{VPP}$ rise time (VSS to VHH) for test mode entry	—	—	8.0	μs	
P2	TF	$\overline{\text{MCLR}}$ Fall time	—	—	8.0	μs	
P3	TSET1	Data in setup time before clock \downarrow	100	—	—	ns	
P4	THLD1	Data in hold time after clock \downarrow	100	—	—	ns	
P5	TDLY1	Data input not driven to next clock input (delay required between command/data or command/command)	1.0	—	—	μs	
P6	TDLY2	Delay between clock \downarrow to clock \uparrow of next command or data	1.0	—	—	μs	
P7	TDLY3	Clock \uparrow to data out valid (during read data)	200	—	—	ns	
P8	THLD0	Hold time after $\overline{\text{MCLR}} \uparrow$	2	—	—	μs	

Note 1: Program must be verified at the minimum and maximum VDD limits for the part.

2: VIHH must be greater than VDD + 4.5V to stay in Programming/Verify mode.

FIGURE 5-1: LOAD DATA COMMAND (PROGRAM/VERIFY)

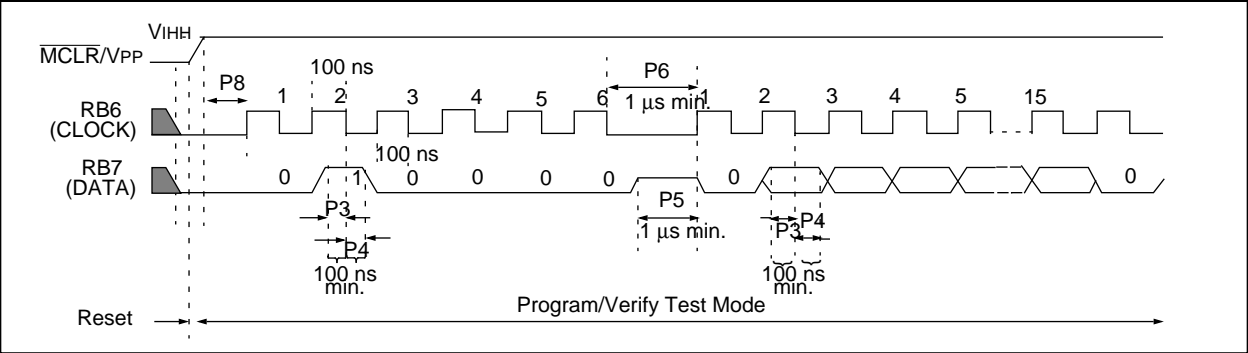


FIGURE 5-2: READ DATA COMMAND (PROGRAM/VERIFY)


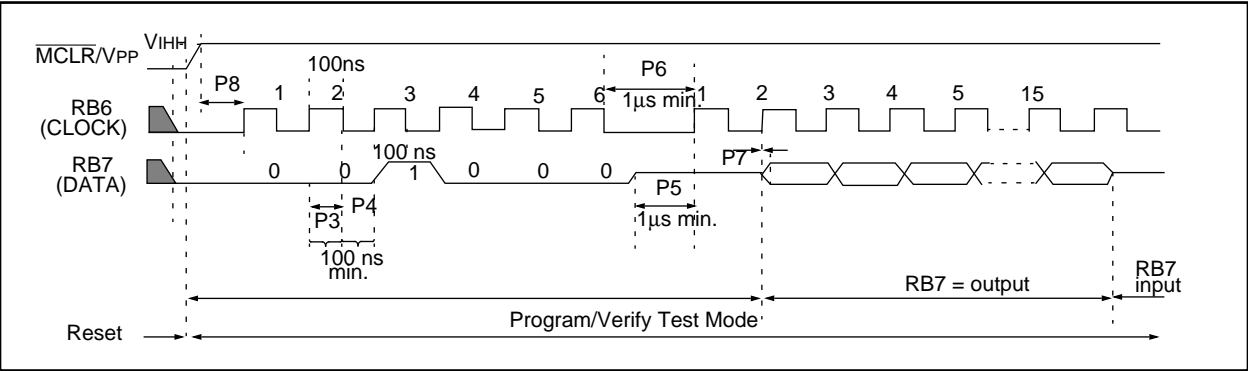


FIGURE 5-3: INCREMENT ADDRESS COMMAND (PROGRAM/VERIFY)

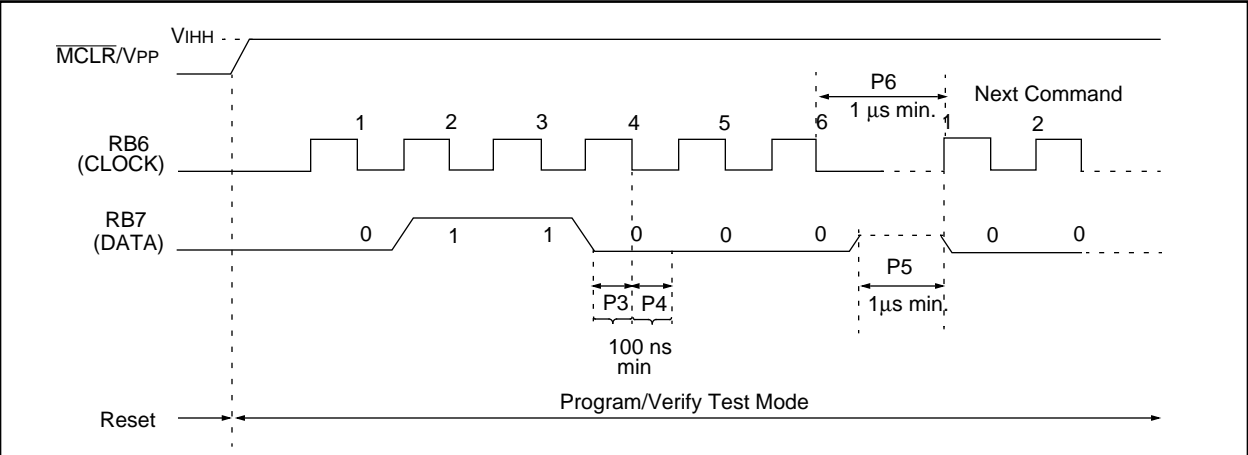

NOTES:

PIC16C64X/66X

NOTES:

NOTES:



MICROCHIP

WORLDWIDE SALES & SERVICE

AMERICAS

Corporate Office

Microchip Technology Inc.
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 602-786-7200 Fax: 602-786-7277
Technical Support: 602 786-7627
Web: <http://www.microchip.com>

Atlanta

Microchip Technology Inc.
500 Sugar Mill Road, Suite 200B
Atlanta, GA 30350
Tel: 770-640-0034 Fax: 770-640-0307

Boston

Microchip Technology Inc.
5 Mount Royal Avenue
Marlborough, MA 01752
Tel: 508-480-9990 Fax: 508-480-8575

Chicago

Microchip Technology Inc.
333 Pierce Road, Suite 180
Itasca, IL 60143
Tel: 630-285-0071 Fax: 630-285-0075

Dallas

Microchip Technology Inc.
14651 Dallas Parkway, Suite 816
Dallas, TX 75240-8809
Tel: 972-991-7177 Fax: 972-991-8588

Dayton

Microchip Technology Inc.
Two Prestige Place, Suite 150
Miamisburg, OH 45342
Tel: 937-291-1654 Fax: 937-291-9175

Los Angeles

Microchip Technology Inc.
18201 Von Karman, Suite 1090
Irvine, CA 92612
Tel: 714-263-1888 Fax: 714-263-1338

New York

Microchip Technology Inc.
150 Motor Parkway, Suite 416
Hauppauge, NY 11788
Tel: 516-273-5305 Fax: 516-273-5335

San Jose

Microchip Technology Inc.
2107 North First Street, Suite 590
San Jose, CA 95131
Tel: 408-436-7950 Fax: 408-436-7955

Toronto

Microchip Technology Inc.
5925 Airport Road, Suite 200
Mississauga, Ontario L4V 1W1, Canada
Tel: 905-405-6279 Fax: 905-405-6253

ASIA/PACIFIC

Hong Kong

Microchip Asia Pacific
RM 3801B, Tower Two
Metroplaza
223 Hing Fong Road
Kwai Fong, N.T., Hong Kong
Tel: 852-2-401-1200 Fax: 852-2-401-3431

India

Microchip Technology Inc.
India Liaison Office
No. 6, Legacy, Convent Road
Bangalore 560 025, India
Tel: 91-80-229-4036 Fax: 91-80-559-9840

Korea

Microchip Technology Korea
168-1, Youngbo Bldg. 3 Floor
Samsung-Dong, Kangnam-Ku
Seoul, Korea
Tel: 82-2-554-7200 Fax: 82-2-558-5934

Shanghai

Microchip Technology
RM 406 Shanghai Golden Bridge Bldg.
2077 Yan'an Road West, Hong Qiao District
Shanghai, PRC 200335
Tel: 86-21-6275-5700
Fax: 86 21-6275-5060

Singapore

Microchip Technology Taiwan
Singapore Branch
200 Middle Road
#10-03 Prime Centre
Singapore 188980
Tel: 65-334-8870 Fax: 65-334-8850

Taiwan, R.O.C

Microchip Technology Taiwan
10F-1C 207
Tung Hua North Road
Taipei, Taiwan, ROC
Tel: 886 2-717-7175 Fax: 886-2-545-0139

EUROPE

United Kingdom

Arizona Microchip Technology Ltd.
Unit 6, The Courtyard
Meadow Bank, Furlong Road
Bourne End, Buckinghamshire SL8 5AJ
Tel: 44-1628-851077 Fax: 44-1628-850259

France

Arizona Microchip Technology SARL
Zone Industrielle de la Bonde
2 Rue du Buisson aux Fraises
91300 Massy, France
Tel: 33-1-69-53-63-20 Fax: 33-1-69-30-90-79

Germany

Arizona Microchip Technology GmbH
Gustav-Heinemann-Ring 125
D-81739 München, Germany
Tel: 49-89-627-144 0 Fax: 49-89-627-144-44

Italy

Arizona Microchip Technology SRL
Centro Direzionale Colleoni
Palazzo Taurus 1 V. Le Colleoni 1
20041 Agrate Brianza
Milan, Italy
Tel: 39-39-6899939 Fax: 39-39-6899883

JAPAN

Microchip Technology Intl. Inc.
Benex S-1 6F
3-18-20, Shinyokohama
Kohoku-Ku, Yokohama-shi
Kanagawa 222 Japan
Tel: 81-45-471- 6166 Fax: 81-45-471-6122

7/29/97

All rights reserved. ©1997, Microchip Technology Incorporated, USA. 8/97



Printed on recycled paper.

Information contained in this publication regarding device applications and the like is intended for suggestion only and may be superseded by updates. No representation or warranty is given and no liability is assumed by Microchip Technology Incorporated with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Use of Microchip's products as critical components in life support systems is not authorized except with express written approval by Microchip. No licenses are conveyed, implicitly or otherwise, under any intellectual property rights. The Microchip logo and name are registered trademarks of Microchip Technology Inc. in the U.S.A. and other countries. All rights reserved. All other trademarks mentioned herein are the property of their respective companies.