

# Wide band IF detector for digital cordless phone and RF remote control units

## BH4126FV

The BH4126FV is an IC equipped with internal mixer, IF amplifier, and FM detector circuits, developed for use with digital cordless phone and RF remote control units.

### ●Applications


Digital cordless phones

Keyless entry

### ●Features

- 1) Equipped with internal mixer, IF, RSSI, and FM detection circuits.
- 2) Can be operated at mixer input frequencies ranging from 20MHz to 300MHz.
- 3) Equipped with a battery power saving function.
- 4) Fast RSSI response.

●Block diagram

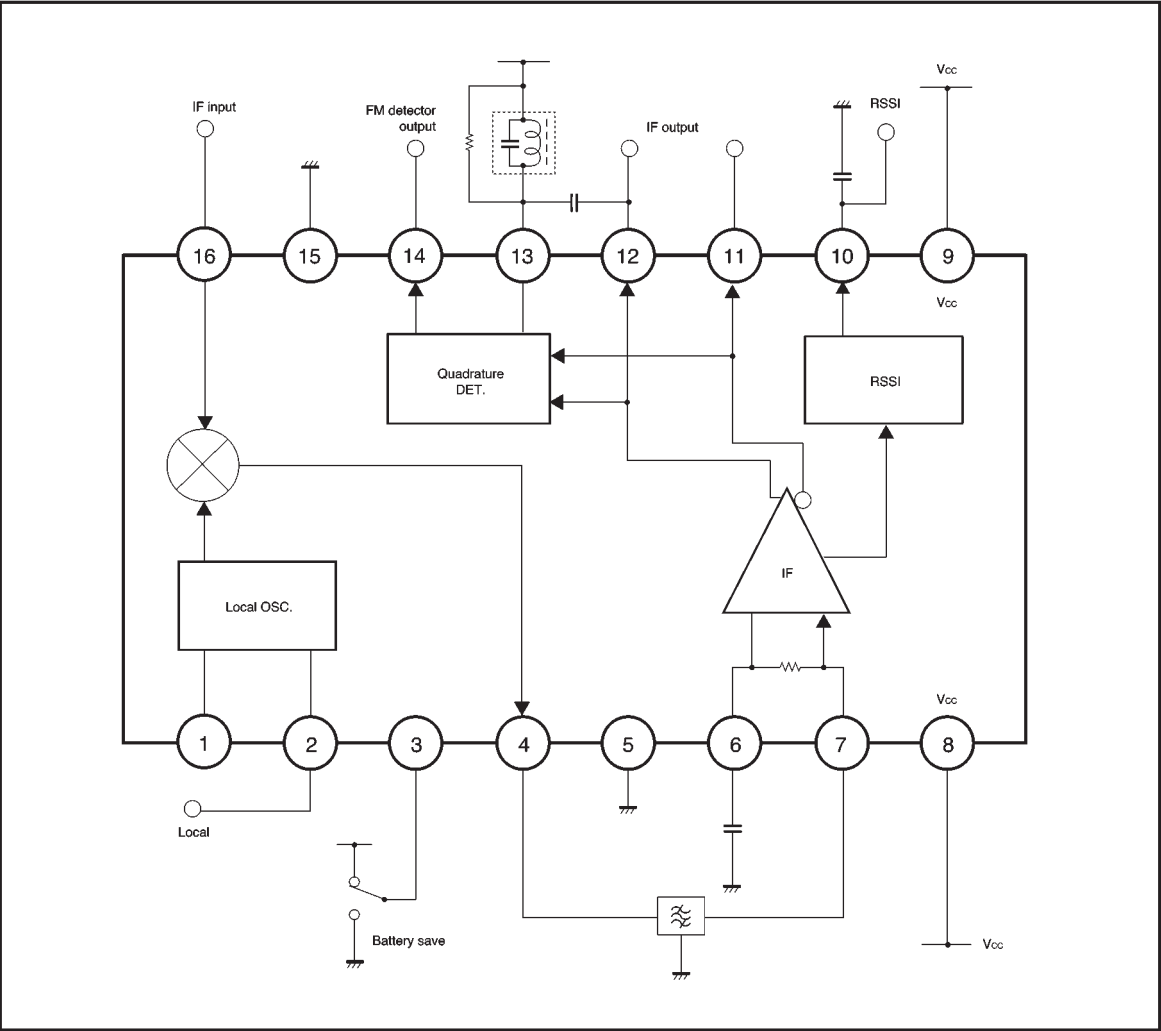

●Absolute maximum ratings (Ta=25°C, for measurement circuit)

Parameter	Symbol	Limits	Unit
Power supply voltage	V <sub>CC</sub>	7.0	V
Power dissipation	P <sub>D</sub>	350 *1	mW
Storage temperature	T <sub>stg</sub>	-55~+125	°C

\*1 Reduced by 3.5 mW for each increase in Ta of 1°C over 25°C.

●Operating range

Parameter	Symbol	Limits	Unit
Operating power supply voltage	V <sub>CC</sub>	2.3~5.5	V
Operating temperature	T <sub>opr</sub>	-40~+85	°C

## ● Pin descriptions

Pin No.	Function	Internal peripheral circuit	DC voltage (V)
1	Local oscillator pin (base) Connect crystal resonator and capacitor		$V_{CC}-0.6$
2	Local oscillator pin (emitter) Connect capacitor or input local signal from external oscillator		$V_{CC}$
3	Battery save pin "Pin 3 voltage" $\leq 0.2$ : Battery save $2\text{ V} \leq \text{"Pin 3 voltage"} \leq V_{CC}$ : Active		—
4	Mixer output pin Connect ceramic filter Output impedance: $330\ \Omega$		$V_{CC}-1.5$
5	GND pin	GND for IF stages and FM detection stages	GND

Pin No.	Function	Internal peripheral circuit	DC voltage (V)
6	IF amplifier bypass pin Connect capacitor		V <sub>CC</sub>
7	IF amplifier input pin Connect ceramic filter Input impedance: 330 Ω		V <sub>CC</sub>
8	V <sub>CC</sub> pin 1	V <sub>CC</sub> for MIX stages and IF front stage	V <sub>CC</sub>
9	V <sub>CC</sub> pin 2	V <sub>CC</sub> for IF rear stage and FM detection stage	V <sub>CC</sub>
10	RSSI output pin Connect capacitor		0.1
11 12	IF amplifier output pin Pins 11 and 12 are opposite-phase output		V <sub>CC</sub> - 1

Pin No.	Function	Internal peripheral circuit	DC voltage(V)
13	Discriminator pin Connect phase shift coil or ceramic discriminator		V <sub>CC</sub>
14	FM demodulation signal output pin Output impedance is 360 Ω		0.9
15	GND pin	GND for MIX stage	GND
16	Mixer pin Connect first IF signal from DC cutoff		1.0

●Electrical characteristics (unless otherwise noted, Ta=25°C, V<sub>CC</sub>=3.0V)

Signal source : f<sub>IN (MIX)</sub> = 248.45MHz, f<sub>IN (LO)</sub> = 237.65MHz, 100dBμV

AC level to be indicated by termination

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent current	I <sub>Q</sub>	4.4	5.5	6.6	mA	With local oscillation OFF
Battery save quiescent current	I <sub>Q (BS)</sub>	—	0	5	μA	
Battery save function input voltage	V <sub>TH-H</sub>	2	—	V <sub>CC</sub>	V	Active
	V <sub>TH-L</sub>	GND	—	0.2	V	Battery save
〈MIX - Oscillator section〉						
Mixer operating frequency	f <sub>MIX</sub>	20	—	300	MHz	
Mixer conversion gain	G <sub>VC</sub>	16	20	24	dB	V <sub>IN (MIX)</sub> = 60dB μV
—1dB compression output level	V <sub>OM</sub>	—	103	—	dB μV	
3rd order intercept point	IP3	—	110	—	dB μV	f1=248.75MHz, f2=249.05MHz
Noise figure	NF	—	9.7	—	dB	LC matching input
Mixer input admittance	Y <sub>IN (MIX)</sub>	—	1.25+j7.47	—	ms	f=248.45MHz
Mixer output resistance	R <sub>O (MIX)</sub>	—	330	—	Ω	
Local oscillator operating frequency	f <sub>LO</sub>	20	—	120	MHz	
Local input level	V <sub>IN (LO)</sub>	95	100	105	dB μV	
Local input admittance	Y <sub>IN (LO)</sub>	—	1.36+j9.72	—	ms	f=237.65MHz

Signal source :  $f_{IN(MIX)} = 248.45\text{MHz}$ ,  $f_{IN(LO)} = 237.65\text{MHz}$ ,  $100\text{dB}\mu\text{V}$ ,  $f_{IN(IF)} = 10.8\text{MHz}$ ;

AC level to be indicated by termination

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
〈IF section〉						
IF operating frequency	$f_{IF}$	4	—	15	MHz	
IF amplifier gain	$G_V$	—	75	—	dB	
IF input resistance	$R_{IN(IF)}$	—	330	—	$\Omega$	
IF output level	$V_{OIF}$	0.4	0.5	0.6	$V_{P-P}$	$V_{IN(IF)} = 80\text{dB}\mu\text{V}$
IF duty ratio	DR	40	50	60	%	$V_{IN(IF)} = 80\text{dB}\mu\text{V}$ , $C_L = 10\text{pF}$
〈RSSI section〉						
Output voltage 1	$V_{RSSI1}$	—	0.15	0.4	V	No input
Output voltage 2	$V_{RSSI2}$	1.0	1.2	1.4	V	$V_{IN(IF)} = 70\text{dB}\mu\text{V}$
Output voltage 3	$V_{RSSI3}$	1.8	2.0	2.2	V	$V_{IN(IF)} = 100\text{dB}\mu\text{V}$
Dynamic range	DR	—	70	—	dB	
Output resistance	$R_O(RSSI)$	12	15	18	$k\Omega$	
Rise time at power on	$T_{ON}$	—	20	—	$\mu\text{s}$	$C_L = 100\text{pF}$ , $V_{IN(MIX)} = 60\text{dB}\mu\text{V}$
Fall time at power off	$T_{OFF}$	—	5	—	$\mu\text{s}$	$C_L = 100\text{pF}$ , $V_{IN(MIX)} = 60\text{dB}\mu\text{V}$
RSSI rise time	$T_R$	—	9	—	$\mu\text{s}$	$C_L = 100\text{pF}$ , $V_{IN(MIX)} = 60\text{dB}\mu\text{V}$
RSSI fall time	$T_F$	—	11	—	$\mu\text{s}$	$C_L = 100\text{pF}$ , $V_{IN(MIX)} = 60\text{dB}\mu\text{V}$

Signal source :  $f_{IN(IF)} = 10.8\text{MHz}$ ,  $\Delta f = \pm 10\text{kHz dev}$ ,  $f_m = 1\text{kHz}$ ;

AC level to be indicated by termination

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
〈Detector unit (for RF remote control)〉						
Detection sensitivity	$S_{DET}$	—	21.2	—	$\text{mV} / \text{kHz}$	$V_{IN(IF)} = 80\text{dB}\mu\text{V}$
Detection output level	$V_O$	110	150	195	$\text{mV}_{rms}$	$V_{IN(IF)} = 80\text{dB}\mu\text{V}$
Detection frequency	$f_{DET}$	—	100	—	kHz	$V_{IN(IF)} = 80\text{dB}\mu\text{V}$
12 dB SINAD sensitivity	$S_{(12dB)}$	12	16	20	$\text{dB}\mu\text{V}$	
S / N ratio	S / N	40	48	—	dB	$V_{IN(IF)} = 80\text{dB}\mu\text{V}$
AM rejection ratio	AMR	—	40	—	dB	$V_{IN(IF)} = 80\text{dB}\mu\text{V}$ , AM=30%

## ● Measurement circuit

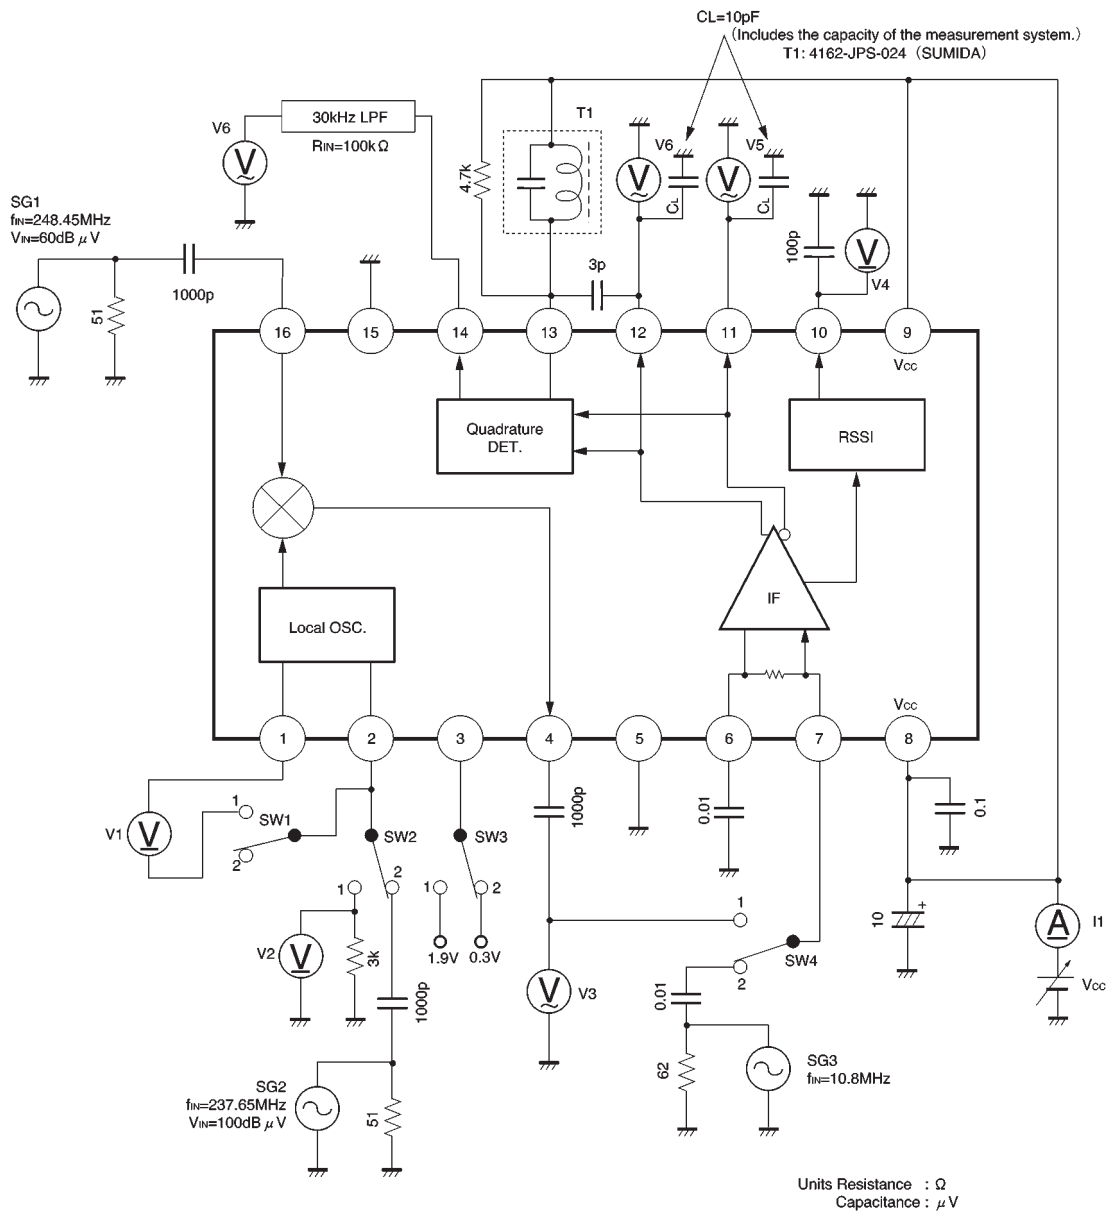


Fig. 1



## ●Application example

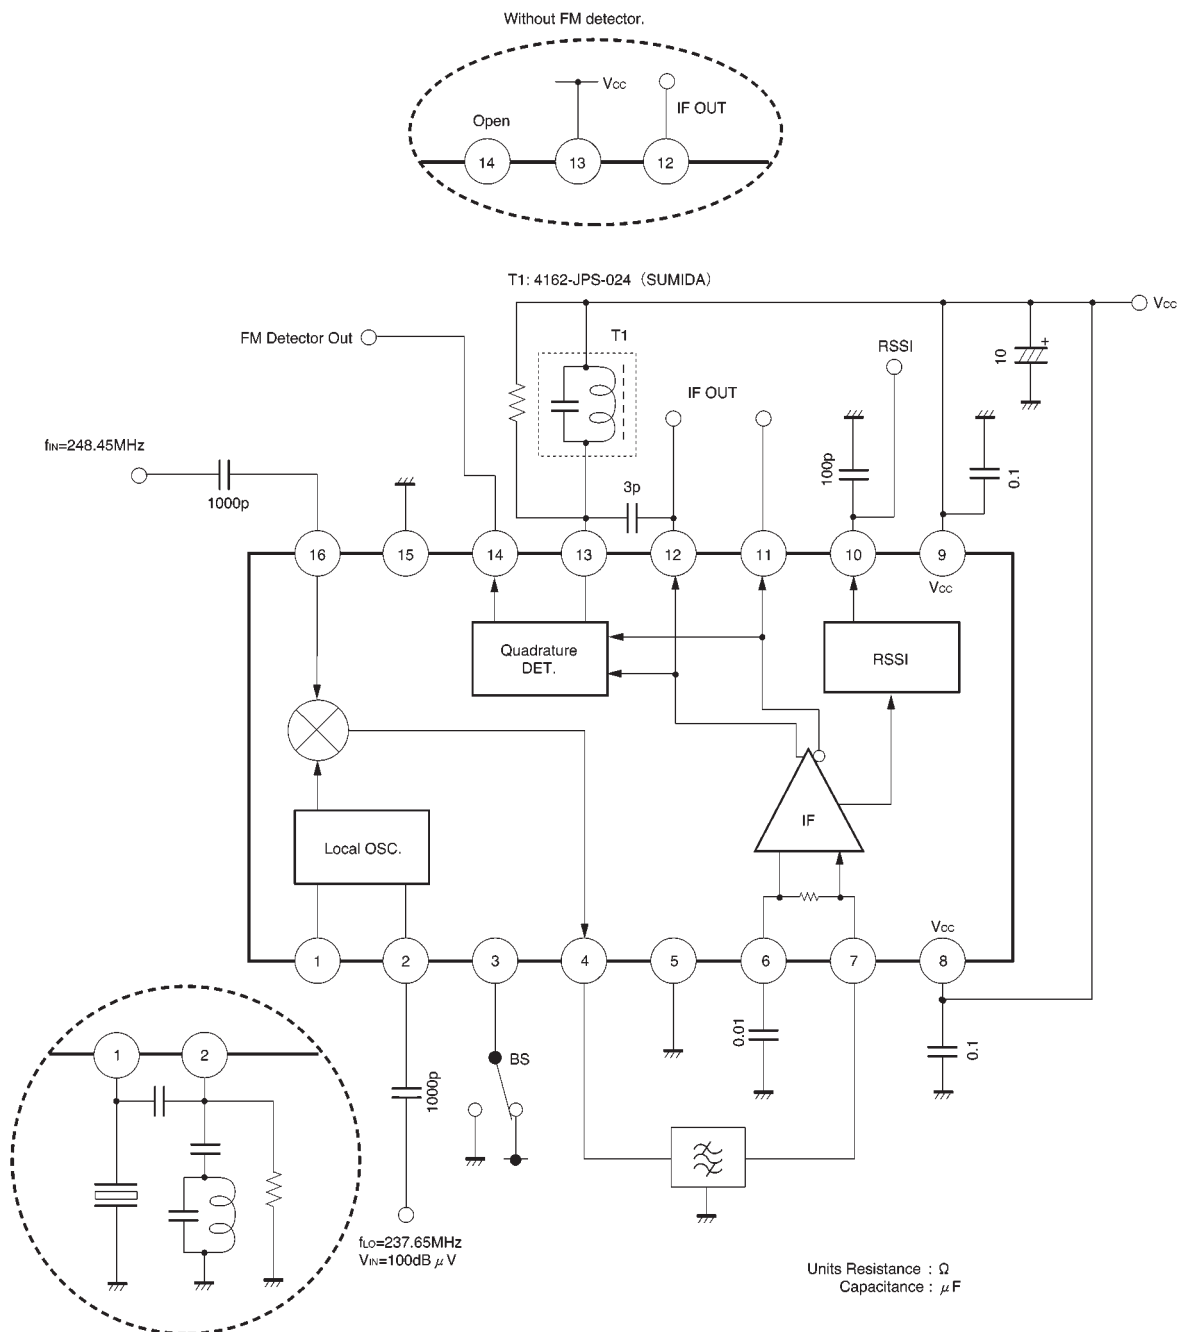


Fig. 2

●External dimensions (Units: mm)

