

# AlGaAs laser diodes

## RLD-78MV

The RLD-78MV is the world's first mass-produced laser diodes to be mass produced by molecular beam epitaxy. Low-noise is achieved through self-pulsation. This laser diode is ideal for use in video disc players.


### ●Applications

Video disc players (VD) (LD)

### ●Features

- 1) Low noise.
- 2) Low astigmatism.
- 3) Noise is independent of optical feedback.
- 4) Signal-to-noise ratio guaranteed over entire operating temperature range.
- 5) High-precision, compact package.

### ●External dimensions (Units: mm)

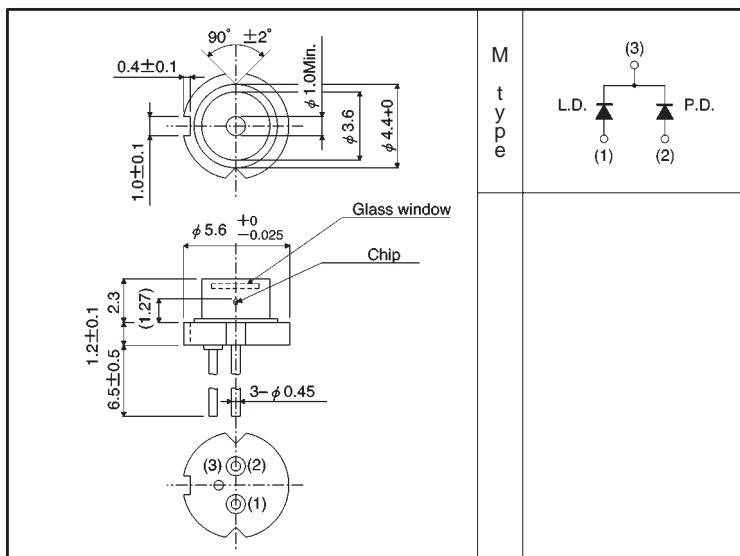

### ●Absolute maximum ratings ( $T_c = 25^\circ\text{C}$ )

Parameter		Symbol	Limits	Unit
Output		$P_o$	5	mW
Reverse voltage	Laser	$V_R$	2	V
	PIN photodiode	$V_R$ (PIN)	30	V
Operating temperature		$T_{opr}$	$-10 \sim +60$	$^\circ\text{C}$
Storage temperature		$T_{stg}$	$-40 \sim +85$	$^\circ\text{C}$

●Electrical and optical characteristics (Tc = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Threshold current	$I_{th}$	—	45	60	mA	—
Operating current	$I_{op}$	—	55	70	mA	Po=3mW
Operating voltage	$V_{op}$	—	1.9	2.3	V	Po=3mW
Differential efficiency	$\eta$	0.1	0.25	0.6	mW / mA	$\frac{2mW}{I(3mW)-I(1mW)}$
Monitor current	$I_m$	0.1	0.2	0.6	mA	Po=3mW, V <sub>R(PIN)</sub> =15V
Parallel divergence angle	$\theta_{//}^*$	8	11	15	deg	Po=3mW
Perpendicular divergence angle	$\theta_{\perp}^*$	20	37	45	deg	
Parallel deviation angle	$\Delta \theta_{//}$	—	—	±2	deg	
Perpendicular deviation angle	$\Delta \theta_{\perp}$	—	—	±3	deg	
Emission point accuracy	$\Delta X$ $\Delta Y$ $\Delta Z$	—	—	±80	μm	—
Peak emission wavelength	$\lambda$	770	785	810	nm	Po=3mW
Signal-to-noise ratio	S / N	60	—	—	dB	f=10kHz, Δf=10kHz

\*  $\theta_{//}$  and  $\theta_{\perp}$  are defined as the angle within which the intensity is 50% of the peak value.

●Electrical and optical characteristic curves

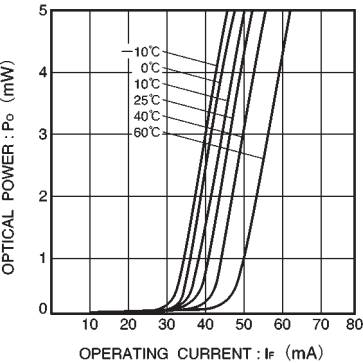


Fig. 1 Optical output vs. operating current

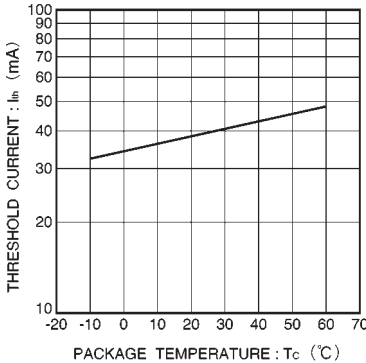


Fig. 2 Dependence of threshold current on temperature

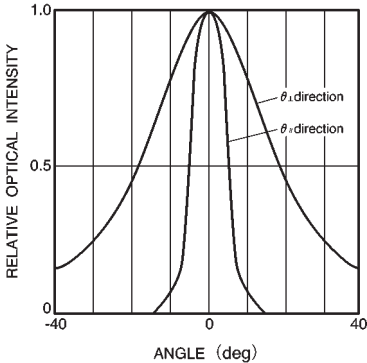


Fig. 3 Far field pattern

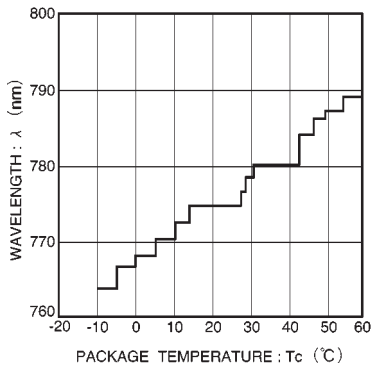


Fig. 4 Dependence of wavelength on temperature

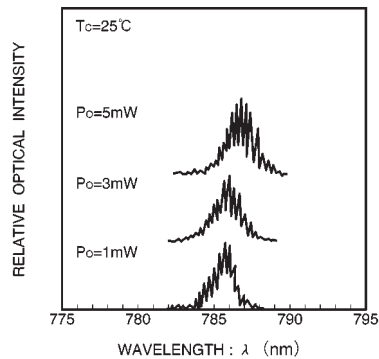


Fig. 5 Dependence of emission spectrum on optical output

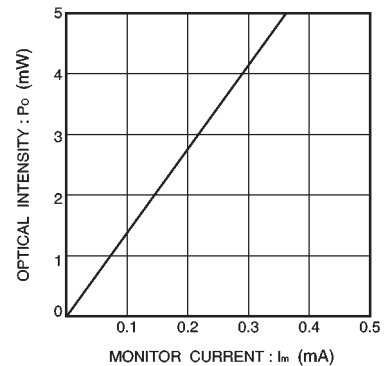


Fig. 6 Monitor current vs. optical output

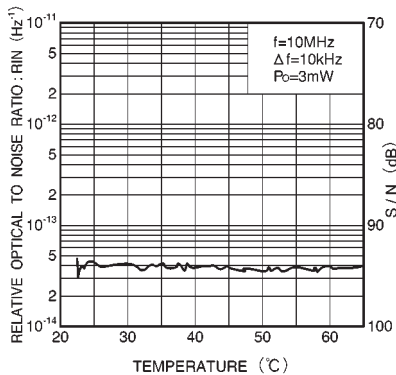


Fig. 7 Temperature dependence of noise

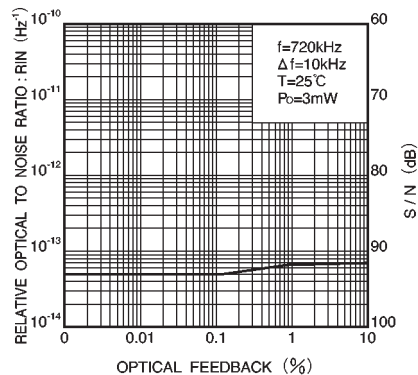


Fig. 8 Dependence of noise on optical feedback