

TOSHIBA Transistor Silicon NPN Epitaxial Type (PCT process)

2SC3803

High Frequency Amplifier Applications
Video Amplifier Applications
High Speed Switching Applications


- High transition frequency: $f_T = 200\text{ MHz (typ.)}$
- Low collector output capacitance: $C_{ob} = 3.5\text{ pF (typ.)}$
- Complementary to 2SA1483

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Collector-base voltage	V_{CBO}	60	V
Collector-emitter voltage	V_{CEO}	45	V
Emitter-base voltage	V_{EBO}	5	V
Continuous collector current	I_C	200	mA
Continuous base current	I_B	50	mA
Collector power dissipation	P_C	500	mW
	P_C (Note 1)	1000	
Junction temperature	T_j	150	°C
Storage temperature range	T_{stg}	-55 to 150	°C


Note 1: Mounted on ceramic substrate (250 mm² × 0.8 t)

Unit: mm

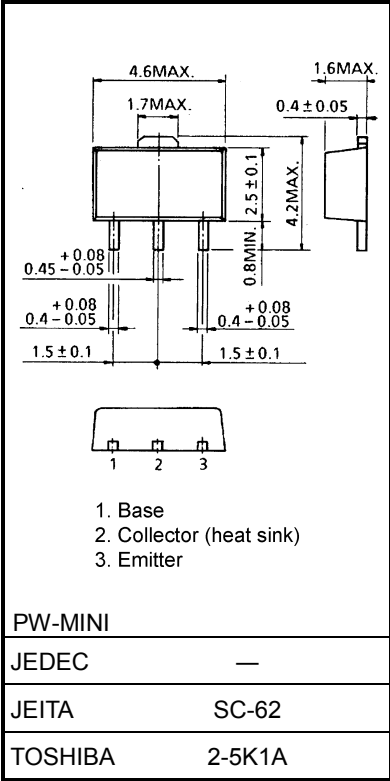


Weight: 0.05 g (typ.)








Electrical Characteristics (Ta = 25°C)

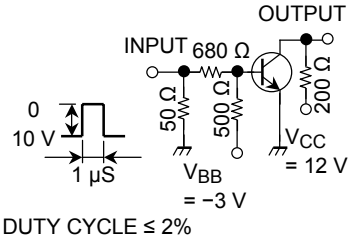Characteristics		Symbol	Test Condition	Min	Typ.	Max	Unit
Collector cut-off current		ICBO	V _{CB} = 45 V, I _E = 0	—	—	0.1	μA
Emitter cut-off current		IEBO	V _{EB} = 5 V, I _C = 0	—	—	0.1	μA
DC current gain	h _{FE} (1) (Note 2)		V _{CE} = 1 V, I _C = 10 mA	40	—	240	
	h _{FE} (2)		V _{CE} = 3 V, I _C = 200 mA	20	—	—	
Collector-emitter saturation voltage		V _{CE} (sat)	I _C = 100 mA, I _B = 10 mA	—	—	0.3	V
Base-emitter saturation voltage		V _{BE} (sat)	I _C = 100 mA, I _B = 10 mA	—	—	1.0	V
Transition frequency		f _T	V _{CE} = 10 V, I _C = 10 mA	100	200	—	MHz
Input impedance (real part)		Re (h _{ie})	V _{CE} = 10 V, I _E = -10 mA, f = 200 MHz	—	—	120	Ω
Collector output capacitance		C _{ob}	V _{CB} = 10 V, I _E = 0, f = 1 MHz	—	3.5	5.0	pF
Switching time	Turn-on time	t _{on}	 DUTY CYCLE ≤ 2%	—	40	—	ns
	Storage time	t _{stg}		—	250	—	
	Fall time	t _f		—	30	—	

Note 2: h_{FE} (1) classification R: 40 to 80, O: 70 to 140, Y: 120 to 240

Marking

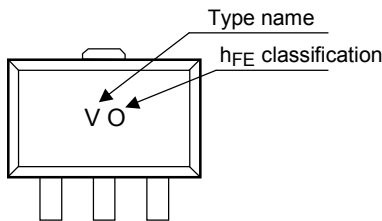

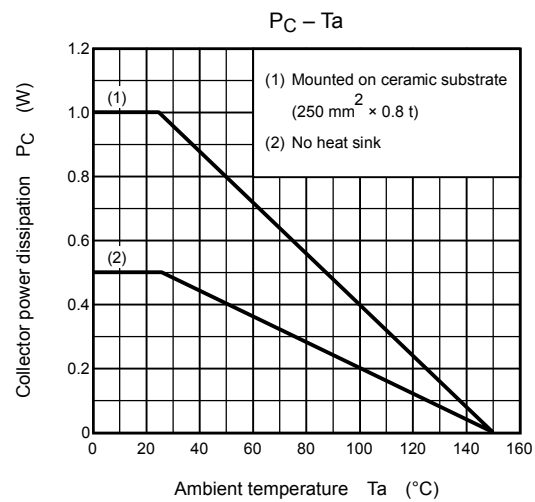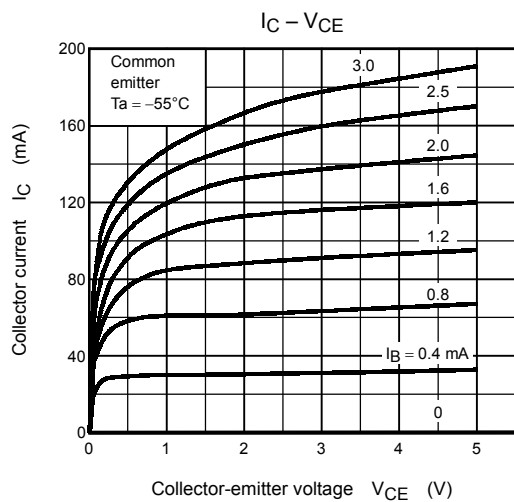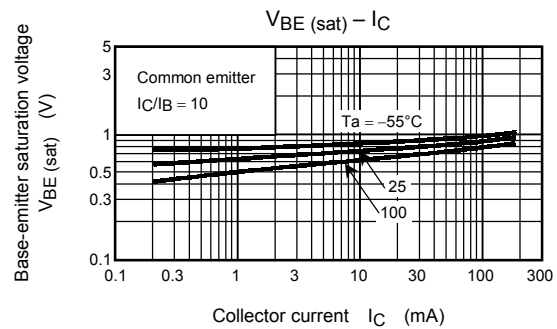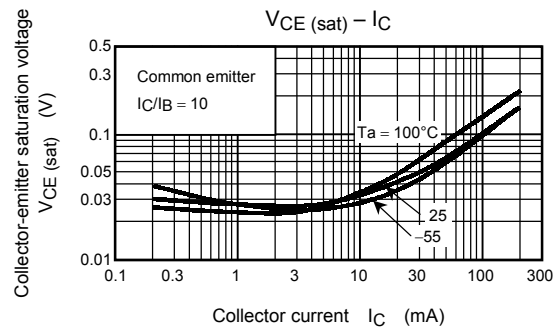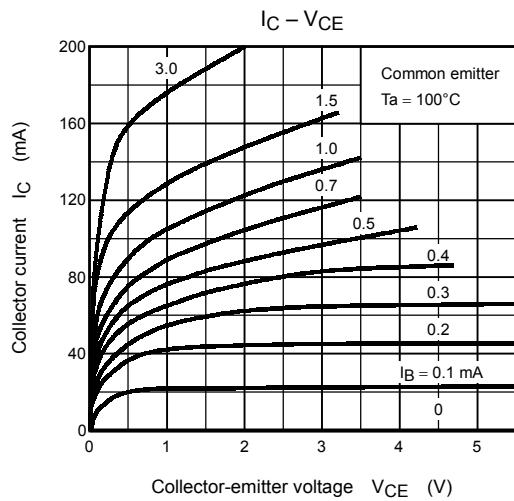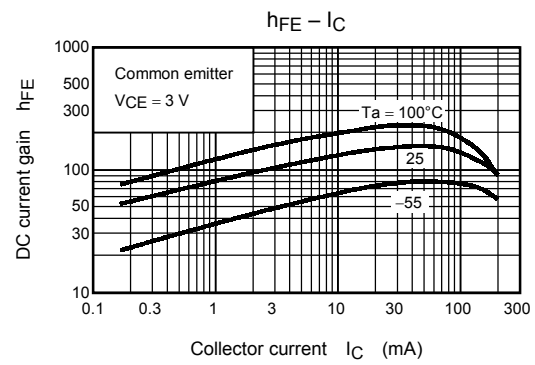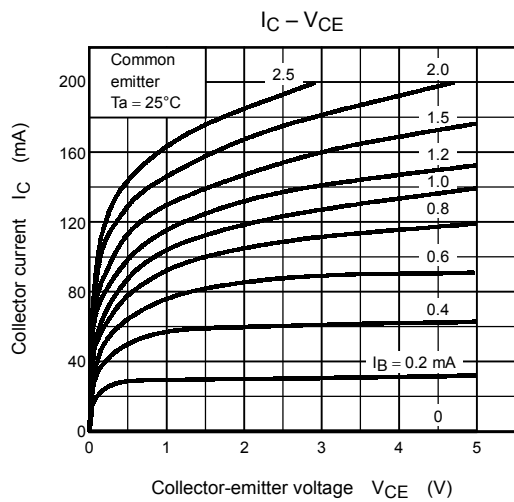

RESTRICTIONS ON PRODUCT USE

000707EAA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.