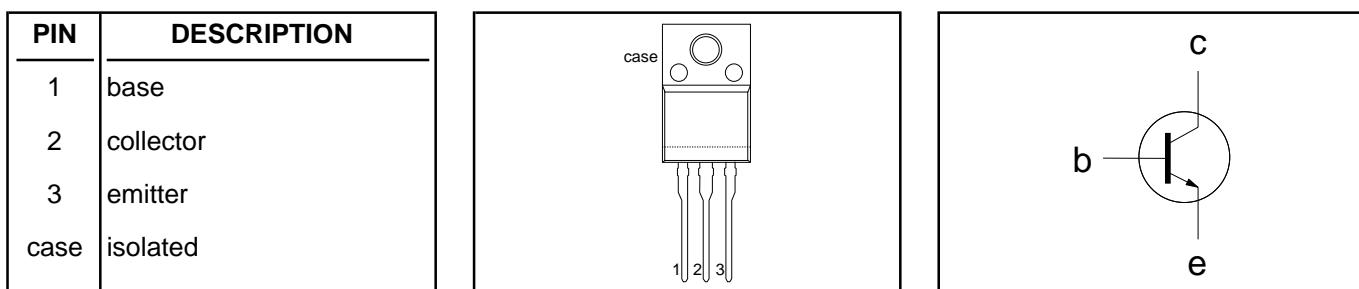


**Silicon Diffused Power Transistor****BUT12XI****GENERAL DESCRIPTION**

Improved high-voltage, high-speed glass-passivated npn power transistor in a plastic full-pack envelope specially suited for overhead/high frequency lighting ballast applications and converters, inverters, switching regulators, motor control systems, etc.

**QUICK REFERENCE DATA**

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$V_{CESM}$	Collector-emitter voltage peak value	$V_{BE} = 0 \text{ V}$	-	1000	V
$V_{CEO}$	Collector-emitter voltage (open base)		-	450	V
$I_C$	Collector current (DC)		-	8	A
$I_{CM}$	Collector current peak value		-	20	A
$P_{tot}$	Total power dissipation	$T_{hs} \leq 25 \text{ }^\circ\text{C}$	-	33	W
$V_{CEsat}$	Collector-emitter saturation voltage	$I_C = 5.0 \text{ A}; I_B = 0.86 \text{ A}$	-	1.5	V
$I_{Csat}$	Collector saturation current		5	-	A
$t_f$	Inductive fall time	$I_{Con} = 5.0 \text{ A}; I_{Bon} = 1.0 \text{ A}, T_j \leq 100^\circ\text{C}$	-	300	ns

**PINNING - SOT186A****PIN CONFIGURATION****SYMBOL****LIMITING VALUES**

Limiting values in accordance with the Absolute Maximum Rating System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{CESM}$	Collector-emitter voltage peak value	$V_{BE} = 0 \text{ V}$	-	1000	V
$V_{CEO}$	Collector-emitter voltage (open base)		-	450	V
$I_C$	Collector current (DC)		-	8	A
$I_{CM}$	Collector current peak value		-	20	A
$I_B$	Base current (DC)		-	4	A
$I_{BM}$	Base current peak value		-	6	A
$P_{tot}$	Total power dissipation	$T_{hs} \leq 25 \text{ }^\circ\text{C}$	-	33	W
$T_{stg}$	Storage temperature		-65	150	°C
$T_j$	Junction temperature		-	150	°C

**THERMAL RESISTANCES**

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$R_{th j-hs}$	Junction to heatsink	with heatsink compound	-	3.65	K/W
$R_{th j-a}$	Junction to ambient	in free air	55	-	K/W

## Silicon Diffused Power Transistor

BUT12XI

**ISOLATION LIMITING VALUE & CHARACTERISTIC** $T_{hs} = 25^\circ C$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{isol}$	R.M.S. isolation voltage from all three terminals to external heatsink	$f = 50-60 \text{ Hz}$ ; sinusoidal waveform; R.H. $\leq 65\%$ ; clean and dustfree	-		2500	V
$C_{isol}$	Capacitance from T2 to external heatsink	$f = 1 \text{ MHz}$	-	10	-	pF

**STATIC CHARACTERISTICS** $T_{hs} = 25^\circ C$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$I_{CES}$	Collector cut-off current <sup>1</sup>	$V_{BE} = 0 \text{ V}$ ; $V_{CE} = V_{CESMmax}$	-	-	1.0	mA
$I_{CES}$		$V_{BE} = 0 \text{ V}$ ; $V_{CE} = V_{CESMmax}$	-	-	3.0	mA
$I_{EBO}$	Emitter cut-off current	$T_j = 125^\circ C$	-	-	10	mA
$V_{CEO_{sust}}$	Collector-emitter sustaining voltage	$V_{EB} = 9 \text{ V}$ ; $I_c = 0 \text{ A}$ $I_B = 0 \text{ A}$ ; $I_C = 100 \text{ mA}$ $L = 25 \text{ mH}$	450	-	-	V
$V_{CEsat}$	Collector-emitter saturation voltages	$I_C = 5 \text{ A}$ ; $I_B = 0.86 \text{ A}$	-	-	1.5	V
$V_{BEsat}$	Base-emitter saturation voltage	$I_C = 5 \text{ A}$ ; $I_B = 0.86 \text{ A}$	-	-	1.3	V
$h_{FE}$	DC current gain	$I_C = 10 \text{ mA}$ ; $V_{CE} = 5 \text{ V}$	10	18	35	
$h_{FE}$		$I_C = 1 \text{ A}$ ; $V_{CE} = 5 \text{ V}$	14	20	35	
$h_{FE_{sat}}$		$I_C = 5 \text{ A}$ ; $V_{CE} = 1.5 \text{ V}$	5.8	10	12.5	







**DYNAMIC CHARACTERISTICS** $T_{hs} = 25^\circ C$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
$t_{on}$	Switching times (resistive load)	$I_{Con} = 5.0 \text{ A}$ ; $I_{Bon} = -I_{Boff} = 1.0 \text{ A}$	-	1.0	$\mu\text{s}$
$t_s$	Turn-on time		-	4.0	$\mu\text{s}$
$t_f$	Turn-off storage time		-	0.8	$\mu\text{s}$
	Turn-off fall time				
$t_s$	Switching times (inductive load)	$I_{Con} = 5.0 \text{ A}$ ; $I_{Bon} = 1.0 \text{ A}$ ; $L_B = 1 \mu\text{H}$ $-V_{BB} = 5 \text{ V}$ ; $T_j = 100^\circ C$			
	Turn-off storage time		1.9	2.5	$\mu\text{s}$
	Turn-off fall time		150	300	ns

<sup>1</sup> Measured with half sine-wave voltage (curve tracer).

## Silicon Diffused Power Transistor

BUT12XI

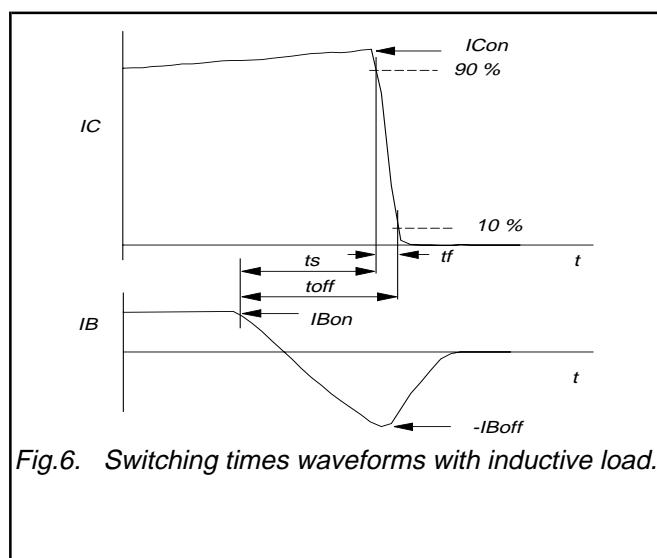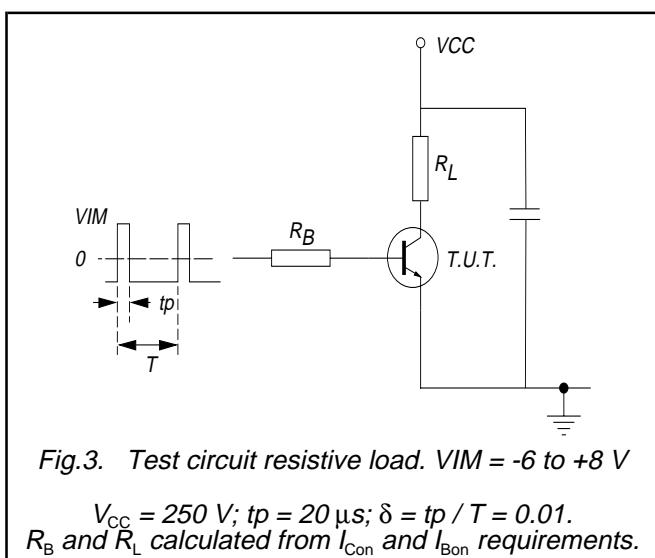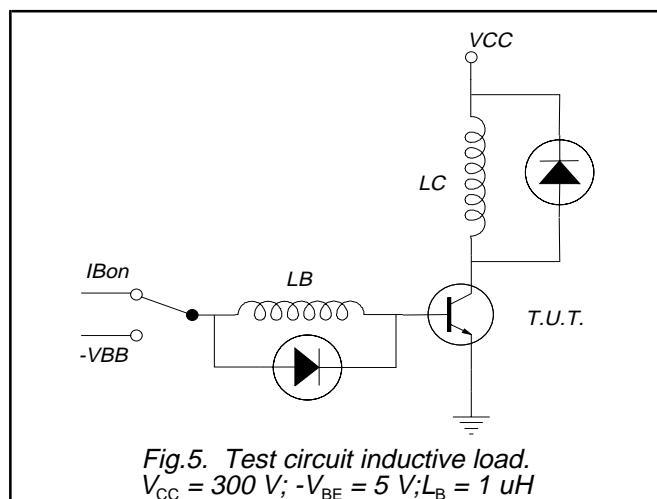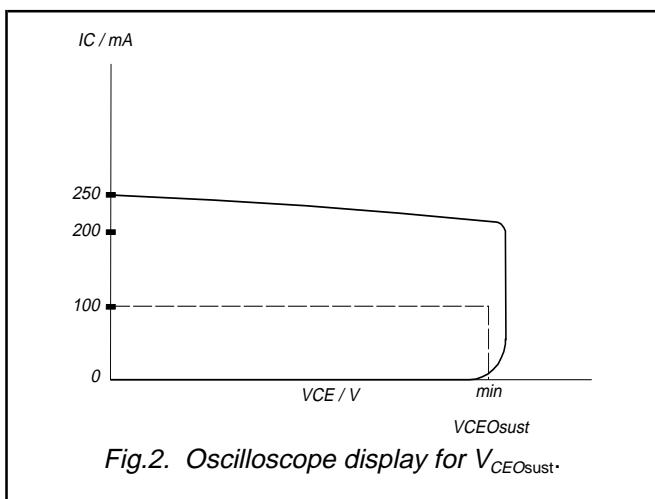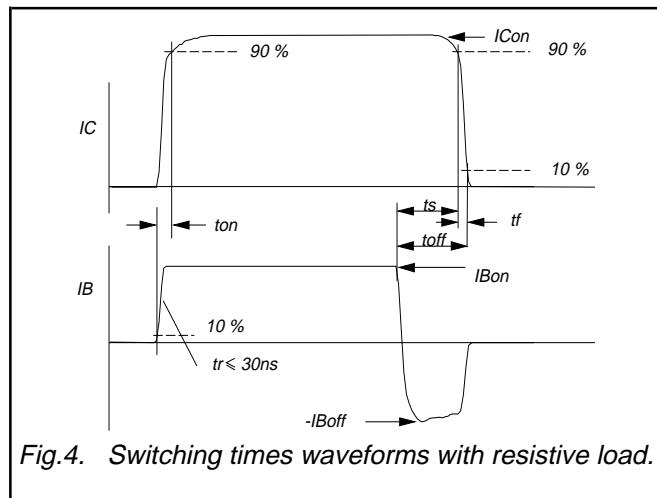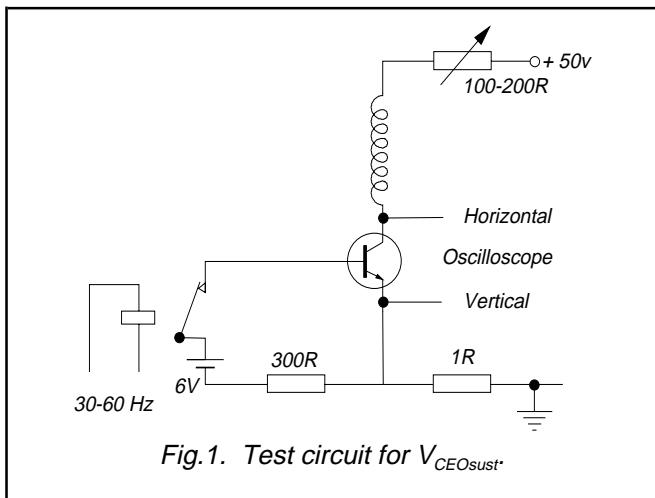

## Silicon Diffused Power Transistor

BUT12XI

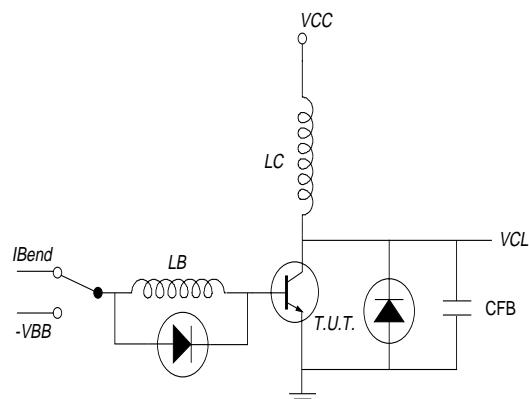


Fig.7. Test circuit RBSOA.  $V_{CC} = 150 \text{ V}$ ;  $-V_{BB} = 5 \text{ V}$   
 $L_C = 200 \mu\text{H}$ ;  $V_{CL} \leq 850 \text{ V}$ ;  $L_B = 1 \mu\text{H}$

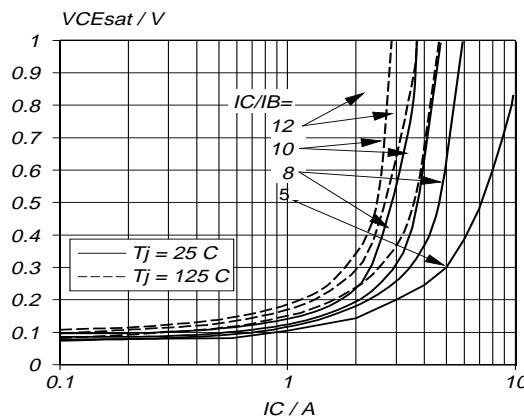


Fig.10. Typical collector-emitter saturation voltage.  
 $V_{CEsat} = f(I_C)$ ; parameter  $I_C/I_B$

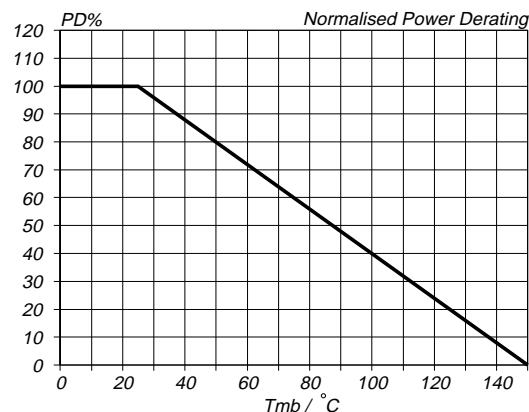


Fig.8. Normalised power dissipation.  
 $PD\% = 100 \cdot PD/PD_{25^\circ\text{C}} = f(T_{mb})$

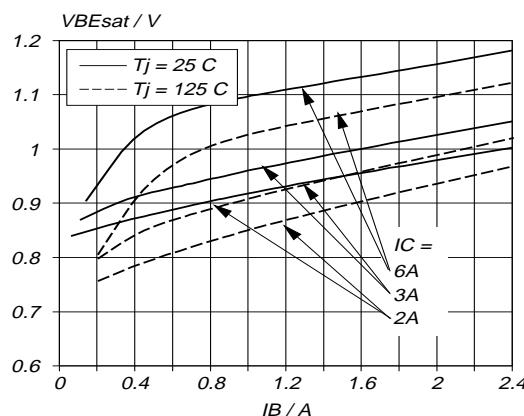


Fig.11. Typical base-emitter saturation voltage.  
 $V_{BEsat} = f(I_B)$ ; parameter  $I_C$

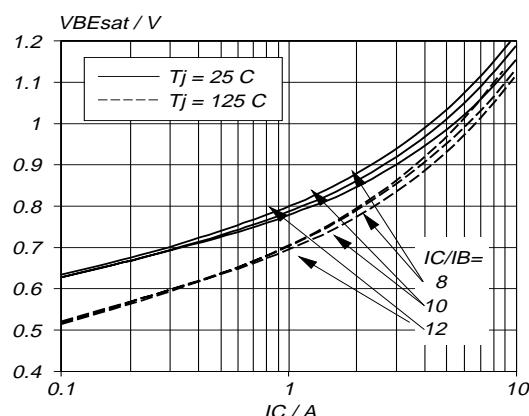


Fig.9. Typical base-emitter saturation voltage.  
 $V_{BEsat} = f(I_C)$ ; parameter  $I_C/I_B$

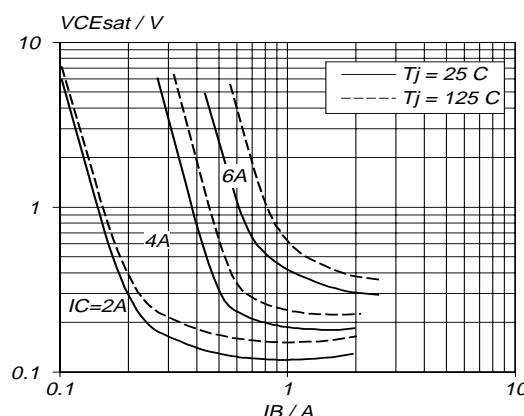
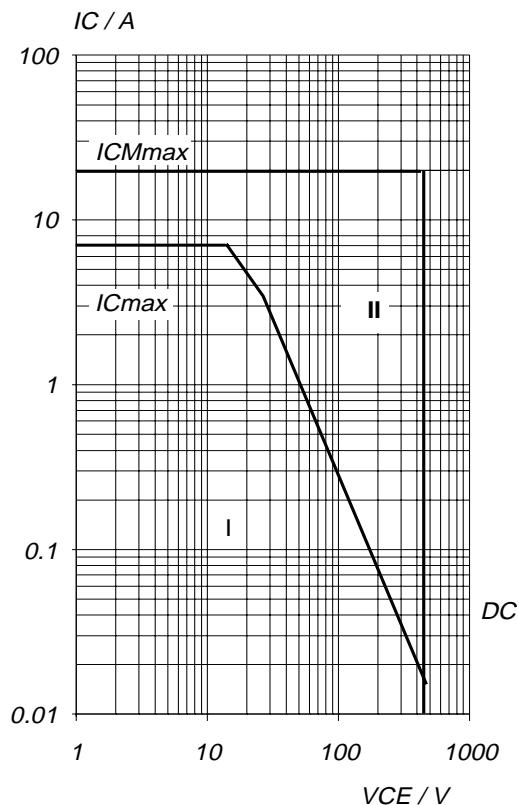





Fig.12. Typical collector-emitter saturation voltage.  
 $V_{CEsat} = f(I_B)$ ; parameter  $I_C$

## Silicon Diffused Power Transistor

BUT12XI

Fig.13. Forward bias safe operating area.  $T_{mb} = 25^\circ C$ 

- I      Region of permissible DC operation.
- II     Extension for repetitive pulse operation.
- NB:    Mounted with heatsink compound and  
           $30 \pm 5$  newton force on the centre of the  
          envelope.

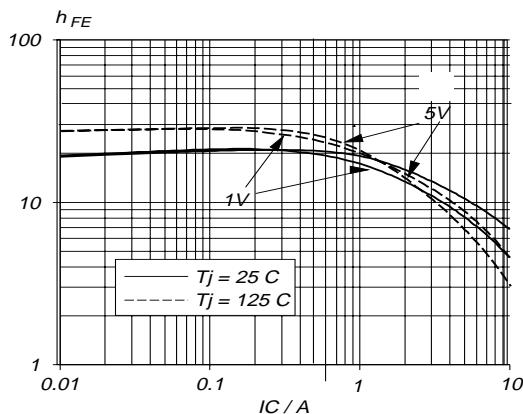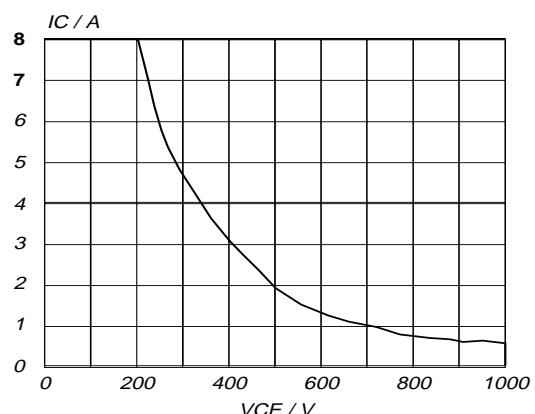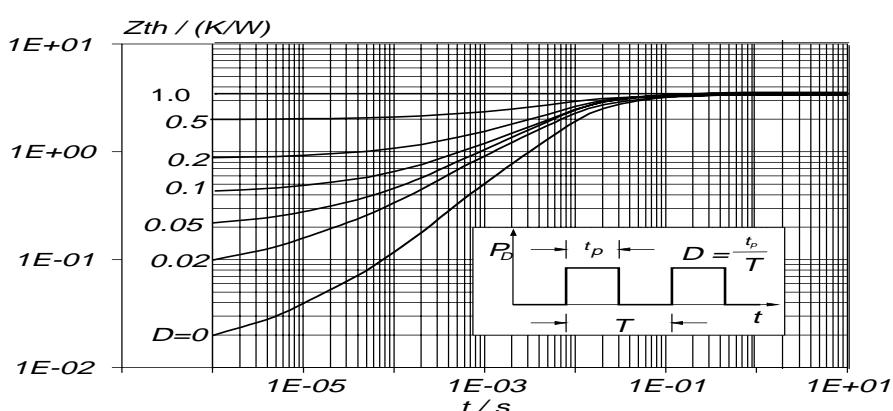Fig.14. Typical DC current gain.  $h_{FE} = f(I_C)$   
parameter  $V_{CE}$ Fig.15. Reverse bias safe operating area.  $T_j \leq T_{j\max}$ Fig.16. Transient thermal impedance.  $Z_{th} j\text{-mb} = f(t)$ ; parameter  $D = t_p/T$

## Silicon Diffused Power Transistor

BUT12XI

## MECHANICAL DATA

*Dimensions in mm*

Net Mass: 2 g

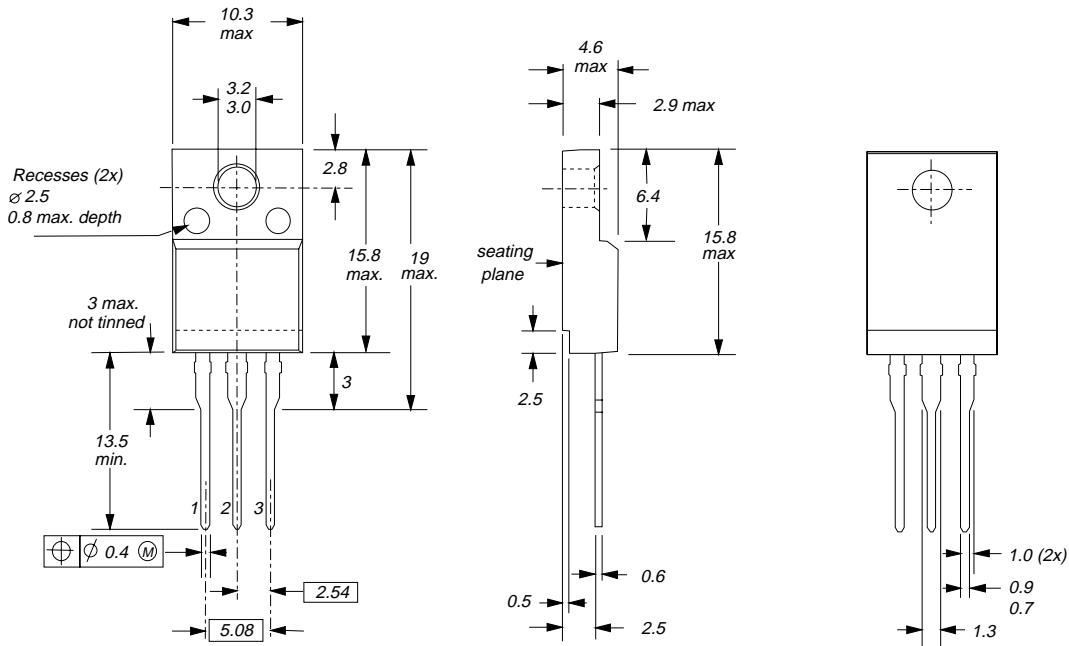


Fig.17. SOT186A; The seating plane is electrically isolated from all terminals.

## Notes

1. Refer to mounting instructions for F-pack envelopes.
2. Epoxy meets UL94 V0 at 1/8".

**Silicon Diffused Power Transistor****BUT12XI****DEFINITIONS**

<b>Data sheet status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	
<b>© Philips Electronics N.V. 1997</b>	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

**LIFE SUPPORT APPLICATIONS**

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.