



LC864332A/28A/24A/20A/16A/12A

8-bit Single Chip Microcontroller

Overview

The LC864332A/28A/24A/20A/16A/12A microcontrollers are 8-bit single chip microcontrollers with the following on-chip functional blocks:


- CPU : Operable at a minimum bus cycle time of 0.5 μ s
- On-chip ROM maximum capacity : 32K bytes
- On-chip RAM capacity : 384 bytes
- CRT display RAM : 640 $\times$ 9 bits
- Closed-caption TV controller and the on-screen display controller
- 16-bit timer/counter
- 4-channel $\times$ 5-bit A/D converter
- 8-bit synchronous serial-interface circuit
- Closed-caption data slicer
- 12-source 10-vectored interrupt system

All of the functions above are fabricated on a single chip.

Package Dimensions

unit : mm

3128-DIP52S

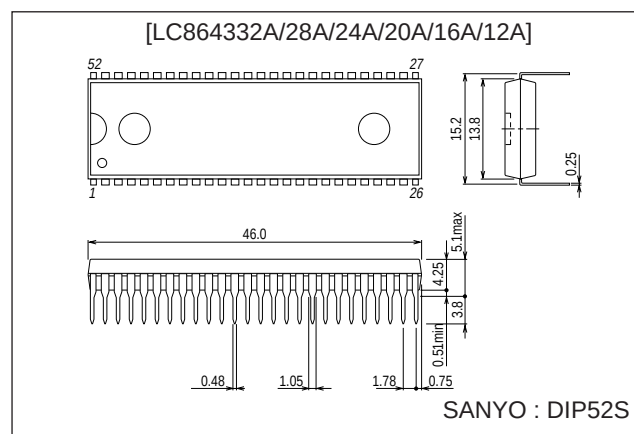

Feature

- | | | |
|----------------------------------|---------------------------------------|-----------------------|
| (1) Read-only memory (ROM) : | LC864332A | 32768 $\times$ 8 bits |
| | LC864328A | 28672 $\times$ 8 bits |
| | LC864324A | 24576 $\times$ 8 bits |
| | LC864320A | 20480 $\times$ 8 bits |
| | LC864316A | 16384 $\times$ 8 bits |
| | LC864312A | 12288 $\times$ 8 bits |
| (2) Random access memory (RAM) : | 384 $\times$ 8 bits | |
| | 640 $\times$ 9 bits (for CRT display) | |

(3) OSD functions

- Screen for display : 34 columns × 16 rows (at standard character size)
- Display for RAM : 640 × 9 bits (6 columns for control + 34 columns for display) × 16 rows × 9 bits
- 380 kinds of user specified characters
 - Caption/Text mode : (9 × 9 dots) × 126 kinds
 - OSD mode : (12 × 18 dots) × 254 characters (127 characters can also be used for Caption/Text mode)
- Various character attributes
 - Character colors : 16 colors
 - Character background colors : 16 colors
 - Fringe / shadow colors : 16 colors
 - Full screen colors : 16 colors
 - Fringe / shadow
 - Rounding
 - Underline
 - Italic character (slanting)
- Close-character attribute data changing available
- Vertical display start line setting in row unit available (Row overlapping available)
- Horizontal display start position setting available
- Display mode specification by row (Display mode mixable)
 - caption mode / text mode / OSD mode
- Eight kinds of character size
 - Horiz. × Vert. = (1 × 1), (1 × 2), (2 × 2), (2 × 4)
 - (1.5 × 1), (1.5 × 2), (3 × 2), (3 × 4)
- Shuttering and scrolling in row unit available
- Horizontal pitch of character selectable : 9 to 16 dots
- Polarity of R, G, B, I, BL output programmable
- Polarity of $\overline{\text{HS}}$, $\overline{\text{VS}}$ input programmable

(4) Data slicer clock switching function

Clock source can be selected from LC oscillation or CF (or Crystal) oscillation.

(5) Bus cycle time / Instruction cycle time

The LC864332A/28A/24A/20A/16A/12A microcontrollers are designed to read the ROM twice within one instruction cycle. It has about 1.7 times performance capability within the same instruction-cycle compared to our 4-bit microcontrollers (LC66000 series).

The bus cycle time indicates the speed to read ROM.

Bus cycle time	Instruction cycle time	System clock oscillation	Oscillation frequency	Supply voltage
0.49 μs	0.99 μs	Ceramic or Crystal	12.08 MHz	4.5 V to 5.5 V
7.5 μs	15.0 μs	Internal RC	800 kHz	4.5 V to 5.5 V

(6) Ports

- Input/output port : 2 ports (16 lines)
- Input/output port programmable in nibble units : 1 port (8 lines)
- (When the N-ch open drain output is selected, bit-unit input is possible.)
- Input/output port programmable in a bit : 1 ports (8 lines)
- Input ports : 2 ports (8 lines)

(7) A/D converter

- 4-channel × 5-bit A/D converter (Converted with program)

(8) PWM output

- 10-channel × 7-bit PWM

(9) Timer

- Timer 0 : 16-bit timer / counter

2-bit prescaler + 8-bit built-in programmable prescaler

Mode 0 : Two 8-bit timers with a programmable prescaler

Mode 1 : 8-bit timer with a programmable prescaler + 8-bit counter

Mode 2 : 16-bit timer with a programmable prescaler

Mode 3 : 16-bit counter

The resolution of Timer is fixed to 1 tCYC.

- Timer 1 : 16-bit timer / PWM

Mode 0 : Two 8-bit timers

Mode 1 : 8-bit timer + 8-bit PWM

Mode 2 : 16-bit timer

Mode 3 : Variable-bit PWM (9 to 16 bits)

In Mode 0 and Mode 1, the resolution of Timer and PWM is tCYC.

In Mode 2 and Mode 3, the resolution of Timer and PWM can be selected with program : tCYC or 1/2tCYC.

(10) Remote-controlled receiver circuit (shares with the P73/INT3/T0IN terminal)

- Noise rejection function
- Polarity switching

(11) Watchdog timer

External RC circuit is required

Interrupt or system reset is selectable

(12) Interrupt system

- 12-source 10-vectored interrupts:

1. External interrupt INT0

2. External interrupt INT1

3. External interrupt INT2, Timer/counter T0L (lower 8 bits)

4. External interrupt INT3

5. Timer/counter T0H (upper 8 bits)

6. Timer T1H, T1L

7. Serial interface 0 (SIO0)

8. Data slicer

9. Vertical synchronous signal interrupt ($\overline{VS}$)

10. Port 0

- Interrupt priority control available

Three interrupt priorities are supported (low, high and the highest) and multilevel nesting is possible. Low or high priority can be assigned to the interrupts from 3 to 10 listed above. To the external interrupt INT0 and INT1, high or the highest priority can be given.

(13) Subroutine stack levels

- A maximum of 128 levels (Set the stack inside a RAM)

(14) Multiplication/division instruction

- 16 bits $\times$ 8 bits (7-instruction cycle times)

- 16 bits / 8 bits (7-instruction cycle times)

(15) 3 oscillation circuits

- On-chip RC oscillation circuit for the system clock
- On-chip CF oscillation circuit for the system clock
- On-chip LC oscillation circuit for the CRT synchronization

(16) Standby function

- HALT mode function

The HALT mode is used to reduce the power dissipation. In this mode, the program execution is stopped.

This mode can be released by the interrupt request signal or the system reset.

- HOLD Mode

The HOLD mode is used to stop oscillations ; the RC (internal) and the ceramic oscillations.

This mode can be released by the following operations.

- Set the reset terminal (RES) to low level.
- Feed the selected level to either P70/INT0 or P71/INT1.
- Feed the Port 0 interrupt condition.


(17) Factory shipment

DIP52S

(18) Development Tool

- Evaluation chip : LC866098
- EPROM with a Window : LC86E4332
- One time ROM version : LC86P4332
- Emulator : EVA86000 (Main) + ECB864300 (Evaluation board) + POD864100 (Pod)

System Block Diagram

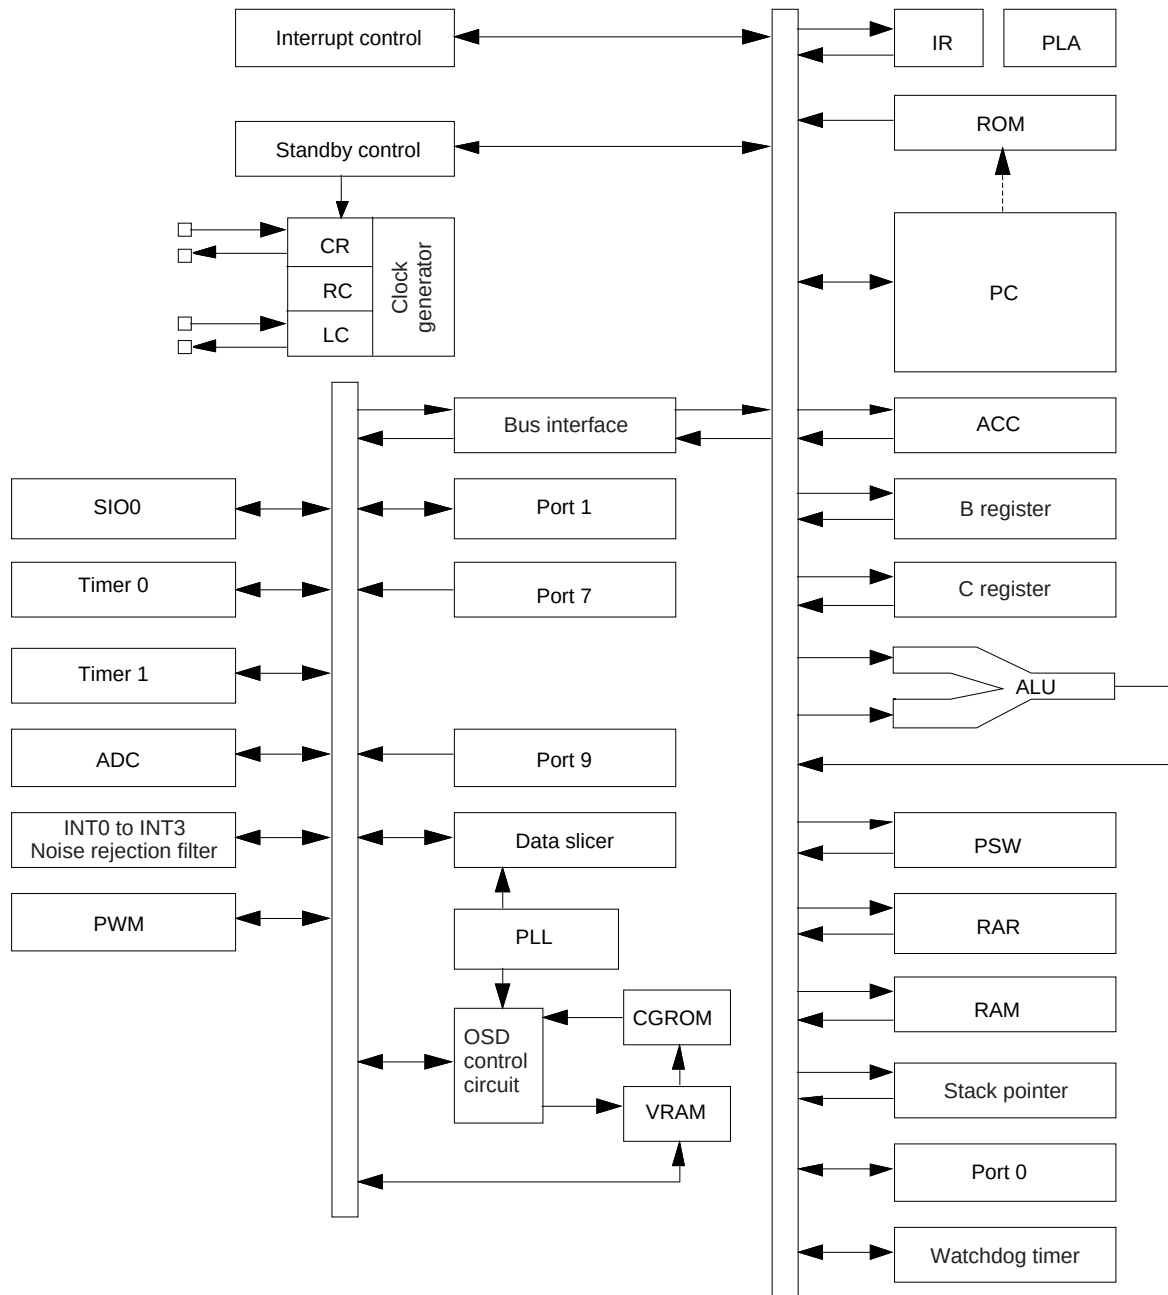

Pin Assignment

P10/S00	1	52	P07
P11/SI0/SB0	2	51	P06
P12/SCK0	3	50	P05
P13	4	49	P04
P14	5	48	P03
P15	6	47	P02
P16	7	46	P01
P17/PWM	8	45	P00
DVSS	9	44	P73/INT3/T0IN
CF1	10	43	P72/INT2/T0IN
CF2	11	42	P71/INT1
DVDD	12	41	P70/INT0
P90/AN0	13	40	PWM9
P91/AN1	14	39	PWM8
P92/AN2	15	38	PWM7
P93/AN3	16	37	PWM6
$\overline{\text{RES}}$	17	36	PWM5
LC1	18	35	PWM4
LC2	19	34	PWM3
FILT	20	33	PWM2
AVDD	21	32	PWM1
AVSS	22	31	PWM0
CVIN	23	30	BL
$\overline{\text{VS}}$	24	29	B
$\overline{\text{HS}}$	25	28	G
I	26	27	R

Top view

Pin Description

- Port option can be specified in bit units except the pull-up resistor selection of port 0.

Pin Description Table

Pin name	Pin No.	I/O	Function description					Option																																												
DVSS	9	—	Negative power supply for digital circuit																																																	
CF1	10	Input	Input terminal for ceramic resonator																																																	
CF2	11	Output	Output terminal for ceramic resonator																																																	
DVDD	12	—	Positive power supply for digital circuit																																																	
$\overline{\text{RES}}$	17	Input	Reset terminal																																																	
LC1	18	Input	LC oscillation circuit input terminal																																																	
LC2	19	Output	LC oscillation circuit output terminal																																																	
FILT	20	Output	Filter terminal for PLL																																																	
AVDD	21	—	Positive power supply for analog circuit																																																	
AVSS	22	—	Negative power supply for analog circuit																																																	
CVIN	23	Input	Video signal input terminal																																																	
$\overline{\text{VS}}$	24	Input	Vertical synchronization signal input terminal																																																	
$\overline{\text{HS}}$	25	Input	Horizontal synchronization signal input terminal																																																	
I	26	Output	Image intensity output																																																	
R	27	Output	Red (R) output terminal of RGB image output																																																	
G	28	Output	Green (G) output terminal of RGB image output																																																	
B	29	Output	Blue (B) output terminal of RGB image output																																																	
BL	30	Ouptut	Fast blanking control signal Switch TV image signal and caption / OSD image signal																																																	
PWM0 to PWM9	31 to 40	Output	PWM0 to 9 output terminal 15 V withstand																																																	
Port 0 P00 to P07	45 to 52	I/O	8-bit Input/output port Input/output can be specified in nibble units HOLD release input Interrupt input					Pull-up resistor Provided/not provided (in bit units) Output Format CMOS/Nch-OD (in bit units)																																												
Port 1 P10 to P17	1 to 8	I/O	8-bit Input/output port Input/output can be specified in bit units. Other function <table><tr><td>P10</td><td>SIO0 data output</td></tr><tr><td>P11</td><td>SIO0 data input / bus input / output</td></tr><tr><td>P12</td><td>SIO0 clock input / output</td></tr><tr><td>P17</td><td>Timrt 1 (PWM) output</td></tr></table>					P10	SIO0 data output	P11	SIO0 data input / bus input / output	P12	SIO0 clock input / output	P17	Timrt 1 (PWM) output	Output Format CMOS/Nch-OD (in bit units)																																				
P10	SIO0 data output																																																			
P11	SIO0 data input / bus input / output																																																			
P12	SIO0 clock input / output																																																			
P17	Timrt 1 (PWM) output																																																			
Port 7 P70 P71 to P73	41 42 to 44	I/O Input	4-bit input port Other function <table><tr><td>P70</td><td>INT0 input / HOLD release input / Nch-transistor output for watchdog timer</td></tr><tr><td>P71</td><td>INT1 input / HOLD release input</td></tr><tr><td>P72</td><td>INT2 input / timer 0 event input</td></tr><tr><td>P73</td><td>INT3 input (noise rejection filter attached input) / timer 0 event input</td></tr></table> Interrupt receiver format vector address <table><tr><td></td><td>Rising</td><td>Falling</td><td>Rising/falling</td><td>H level</td><td>L level</td><td>Vector</td></tr><tr><td>INT0</td><td>enable</td><td>enable</td><td>disable</td><td>enable</td><td>enable</td><td>03H</td></tr><tr><td>INT1</td><td>enable</td><td>enable</td><td>disable</td><td>enable</td><td>enable</td><td>0BH</td></tr><tr><td>INT2</td><td>enable</td><td>enable</td><td>enable</td><td>disable</td><td>disable</td><td>13H</td></tr><tr><td>INT3</td><td>enable</td><td>enable</td><td>enable</td><td>disable</td><td>disable</td><td>1BH</td></tr></table>					P70	INT0 input / HOLD release input / Nch-transistor output for watchdog timer	P71	INT1 input / HOLD release input	P72	INT2 input / timer 0 event input	P73	INT3 input (noise rejection filter attached input) / timer 0 event input		Rising	Falling	Rising/falling	H level	L level	Vector	INT0	enable	enable	disable	enable	enable	03H	INT1	enable	enable	disable	enable	enable	0BH	INT2	enable	enable	enable	disable	disable	13H	INT3	enable	enable	enable	disable	disable	1BH	Pull-up resistor provided/ not provided (in bit units)	
P70	INT0 input / HOLD release input / Nch-transistor output for watchdog timer																																																			
P71	INT1 input / HOLD release input																																																			
P72	INT2 input / timer 0 event input																																																			
P73	INT3 input (noise rejection filter attached input) / timer 0 event input																																																			
	Rising	Falling	Rising/falling	H level	L level	Vector																																														
INT0	enable	enable	disable	enable	enable	03H																																														
INT1	enable	enable	disable	enable	enable	0BH																																														
INT2	enable	enable	enable	disable	disable	13H																																														
INT3	enable	enable	enable	disable	disable	1BH																																														

LC864332A/28A/24A/20A/16A/12A


Pin name	Pin No.	I/O	Function Description	Option
Port 9	13 to 16	Input	4-bit input port	
P90 to P93			Other function AD converter input port (4 lines)	

- Any port option can be selected in bit units.
- Port 0 portion : Pull-up resistor is provided when CMOS output is selected.
The pull-up resistor is not provided when N-ch Open Drain is selected.
- Port 1 option : Programmable pull-up resistor is provided when any output form is selected.

- Port status during reset

Terminal	I/O	Pull-up resistor status at selecting pull-up option
Port 0	Input	Pull-up resistor OFF, ON after reset release
Port 1	Input	Programmable pull-up resistor OFF
Port 7	Input	Fixed pull-up resistor provided

- AVDD and AVSS are the power supply terminals for built-in analog circuit. DVDD and DVSS are the power supply terminals for built-in digital circuit. Connect them like the following figure to reduce the mutual noise-influence.

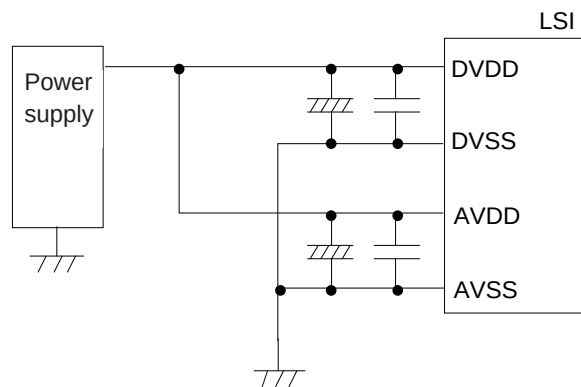

Specifications

1. Absolute Maximum Ratings at Ta=25°C , V_{SS} = 0 V

Parameter		Symbol	Pins	Conditions	V _{DD} [V]	Ratings			Unit
						min	typ	max	
Supply voltage		V _{DD} max	DVDD, AVDD	DVDD = AVDD		−0.3		+7.0	V
Input voltage		V _I (1)	• P71, 72, 73 • Port 9 • RES, $\overline{\text{HS}}$, $\overline{\text{VS}}$, CVIN			−0.3		V _{DD} +0.3	
Output voltage		V _O (1)	R, G, B, BL, I, FILT			−0.3		V _{DD} +0.3	
		V _O (2)	PWM0 to PWM9			−0.3		+15	
Input/output voltage		V _{IO}	Ports 0, 1, P70			−0.3		V _{DD} +0.3	
High-level output current	Peak output current	I _{OPH} (1)	Ports 0, 1	• Pull-up MOS transistor output • At each pin		−2			mA
		I _{OPH} (2)	Ports 0, 1	• CMOS output • At each pin		−4			
		I _{OPH} (3)	R, G, B, BL, I	• CMOS output • At each pin		−5			
	Total output current	ΣI _{OA} H(1)	Port 1	The total of all pins		−10			
		ΣI _{OA} H(2)	Port 0	The total of all pins		−10			
		ΣI _{OA} H(3)	R, G, B, BL, I	The total of all pins		−15			
Low-level output current	Peak output current	I _{OPL} (1)	Ports 0, 1	At each pin				20	
		I _{OPL} (2)	P70	At each pin				30	
		I _{OPL} (3)	• R, G, B, BL, I • PWM0 to PWM9	At each pin				5	
	Total output current	ΣI _{OA} L(1)	Port 0	The total of all pins				40	
		ΣI _{OA} L(2)	Port 1, P70	The total of all pins				40	
		ΣI _{OA} L(3)	R, G, B, BL, I	The total of all pins				15	
		ΣI _{OA} L(4)	PWM0 to PWM9	The total of all pins				30	
Maximum power dissipation		P _d max	DIP52S	T _a = −30 to +70°C				430	mW
Operating temperature range		T _{opr}				−30		+70	°C
Storage temperature range		T _{stg}				−55		+150	

* DVSS and AVSS must be supplied the same voltage, V_{SS}.
DVDD and AVDD must be supplied the same voltage, V_{DD}.

V_{SS} = DVSS = AVSS
V_{DD} = DVDD = AVDD

2. Recommended Operating Range at Ta = -30°C to +70°C, V_{SS} = 0 V

Parameter	Symbol	Pins	Conditions	Ratings				Unit
				V _{DD} [V]	min	typ	max	
Operating supply voltage range	V _{DD}	DVDD, AVDD	0.97 μs ≤ tCYC tCYC ≤ 1.02 μs		4.5		5.5	V
Hold voltage	V _{HD}	DVDD, AVDD	RAMs and the registers hold data at HOLD mode.		2.0		5.5	
Input high-level voltage	V _{IH} (1)	Port 0 (Schmitt)	Output disable	4.5 to 5.5	0.6V _{DD}		V _{DD}	
	V _{IH} (2)	• Port 1 (Schmitt) • P72, 73 • HS, VS	Output disable	4.5 to 5.5	0.75V _{DD}		V _{DD}	
	V _{IH} (3)	• P70 port input / interrupt • P71 • RES (Schmitt)	Output N-channel transistor OFF	4.5 to 5.5	0.75V _{DD}		V _{DD}	
	V _{IH} (4)	P70 Watchdog timer input	Output N-channel transistor OFF	4.5 to 5.5	V _{DD} -0.5		V _{DD}	
	V _{IH} (5)	Port 9 port input		4.5 to 5.5	0.7V _{DD}		V _{DD}	
Input low-level voltage	V _{IL} (1)	Port 0 (Schmitt)	Output disable	4.5 to 5.5	V _{SS}		0.2V _{DD}	
	V _{IL} (2)	• Port 1 (Schmitt) • P72, 73 • HS, VS • Port 9	Output disable	4.5 to 5.5	V _{SS}		0.25V _{DD}	
	V _{IL} (3)	• P70 port input / interrupt • P71 • RES (Schmitt)	N-channel transistor OFF	4.5 to 5.5	V _{SS}		0.25V _{DD}	
	V _{IL} (4)	P70 Watchdog timer input	N-channel transistor OFF	4.5 to 5.5	V _{SS}		0.6V _{DD}	
	V _{IL} (5)	Port 9 port input		4.5 to 5.5	V _{SS}		0.3V _{DD}	
CVIN input amplitude	V _{CVIN}	CVIN		5.0	1Vp-p -3dB	1Vp-p	1Vp-p +3dB	Vp-p *
Operation cycle time	tCYC(1)		OSD function	4.5 to 5.5	0.97	1	1.02	μs
	tCYC(2)		Except OSD function	4.5 to 5.5	0.97		40	

* Vp-p : Peak-to-peak voltage

LC864332A/28A/24A/20A/16A/12A

Parameter	Symbol	Pins	Conditions	V _{DD} [V]	Ratings			Unit
					min	typ	max	
Oscillation frequency range (Note 1)	FmCF(1)	CF1, CF2	12 MHz (ceramic resonator oscillation) Refer to Figure 1.	4.5 to 5.5	11.76	12	12.24	MHz
	FmCF(2)		12.08 MHz (ceramic resonator oscillation) Refer to Figure 1.		11.84	12.08	12.32	
	FmLC	LC1, LC2	14.11 MHz (LC oscillation) Refer to Figure 2.	4.5 to 5.5		14.11		
	FmRC		RC oscillation	4.5 to 5.5	0.3	0.8	2.0	
Oscillation stable time period (Note 2)	tmsCF(1)	CF1, CF2	12 MHz (ceramic resonator oscillation) Refer to Figure 3.	4.5 to 5.5		0.02	0.2	ms
	tmsCF(2)		12.08 MHz (ceramic resonator oscillation) Refer to Figure 3.			0.02	0.2	

(Note 1) Refer to Table 1 and 2 for the oscillation constant.

(Note 2) The oscillation stable time is a period necessary for the oscillation to be stable after the power first applied, the HOLD mode released the main-clock oscillation stop instruction released.
Refer to the Figure 3 for details.

3. Electrical Characteristics at Ta = -30°C to +70°C , V_{SS} = 0 V

Parameter	Symbol	Pins	Conditions	V _{DD} [V]	Ratings			Unit
					min	typ	max	
Input high-level current	I _{IH} (1)	- Port 1 - Port 0 without pull-up MOS transistor	- Output disable - Pull-up MOS transistor OFF - V_{IN} = V_{DD} (including the off-leak current of the output transistor)	4.5 to 5.5			1	μA
	I _{IH} (2)	- Port 7 without pull-up MOS transistor - Port 9 - RES - HS, VS	V _{IN} = V _{DD}	4.5 to 5.5			1	
Input low-level current	I _{IL} (1)	- Port 1 - Port 0 without pull-up MOS transistor	- Output disable - Pull-up MOS transistor OFF - V_{IN} = V_{SS} (including the off-leak current of the output transistor)	4.5 to 5.5	-1			
	I _{IL} (2)	- Port 7 without pull-up MOS transistor - Port 9	V _{IN} = V _{SS}	4.5 to 5.5	-1			
	I _{IL} (3)	- RES - HS, VS	V _{IN} = V _{SS}	4.5 to 5.5	-1			
Output high-level voltage	V _{OH} (1)	CMOS output of ports 0, 1	I _{OH} = -1.0 mA	4.5 to 5.5	V _{DD} -1			V
	V _{OH} (2)	R, G, B, BL, I	I _{OH} = -0.1 mA	4.5 to 5.5	V _{DD} -0.5			
Output low-level voltage	V _{OL} (1)	Ports 0, 1	I _{OL} = 10 mA	4.5 to 5.5			1.5	
	V _{OL} (2)	Ports 0, 1	- I_{OL} = 1.6 mA - The total current of the ports 0, 1 is 40 mA or less.	4.5 to 5.5			0.4	
	V _{OL} (3)	- R, G, B, BL, I - PWM0 to PWM9	- I_{OL} = 3.0 mA - The current of any unmeasured pin is 3 mA or less.	4.5 to 5.5			0.4	
	V _{OL} (4)	P70	I _{OL} = 1 mA	4.5 to 5.5			0.4	
Pull-up MOS transistor resistance	R _{pu}	- Ports 0, 1 - Port 7	V _{OH} = 0.9 V _{DD}	4.5 to 5.5	13	38	80	kΩ
Output off-leakage current	I _{OFF}	PWM0 to PWM9	V _{OUT} = 13.5 V	4.5 to 5.5			5	μA
Hysteresis voltage	V _{HIS}	- Ports 0, 1 - Port 7 - RES - HS, VS	Output disable	4.5 to 5.5		0.1V _{DD}		V

LC864332A/28A/24A/20A/16A/12A

Parameter	Symbol	Pins	Conditions	V _{DD} [V]	Ratings			Unit
					min	typ	max	
Input clamp voltage	V _{CLMP}	CVIN		5.0	2.3	2.5	2.7	V
Pin capacitance	CP	All pins	- f = 1MHz - Unmeasured terminals for the input are set to V_{SS} level. - Ta = 25°C	4.5 to 5.5		10		pF

4. Serial Input/Output Characteristics at Ta = -30°C to +70°C , V_{SS} = 0 V

Parameter			Symbol	Pins	Conditions	V _{DD} [V]	Ratings			Unit
							min	typ	max	
Serial clock	Input clock	Cycle	tCKCY(1)	• SCK0 • SCLK0	Refer to Figure 5.	4.5 to 5.5	2			tCYC
		Low level pulse width	tCKL(1)				1			
		High level pulse width	tCKH(1)				1			
	Output clock	Cycle	tCKCY(2)	• SCK0 • SCLK0	• Use an external pull-up resistor (1 kΩ) when an open drain output • Refer to Figure 5.	4.5 to 5.5	2			
		Low level pulse width	tCKL(2)					1/2tCKCY		
		High level pulse width	tCKH(2)					1/2tCKCY		
Serial input	Data set-up time	tICK	• SI0	• Set to the rise of SCK0 • Refer to Figure 5.	4.5 to 5.5	0.1			μs	
	Data hold time	tCKI			4.5 to 5.5	0.1				
Serial output	Output delay time (External serial clock)	tCKO(1)	• SO0	• Use an external pull-up resistor (1 kΩ) when an open drain output. • Set to the fall of SCK0 • Refer to Figure 5.	4.5 to 5.5			7/12tCYC +0.2	μs	
	Output delay time (Internal serial clock)	tCKO(2)			4.5 to 5.5			1/3tCYC +0.2		

5. Pulse Input Conditions at Ta = -30°C to +70°C, V_{SS} = 0 V

Parameter	Symbol	Pins	Conditions	Ratings				Unit
				V _{DD} [V]	min	typ	max	
High/low level pulse width	tPIH(1) tPIL(1)	• INT0, INT1 • INT2/T0IN	• Interrupt acceptable • Timer0-countable	4.5 to 5.5	1			tCYC
	tPIH(2) tPIL(2)	INT3/T0IN (The noise rejection clock is set to 1/1)	• Interrupt acceptable • Timer0-countable	4.5 to 5.5	2			
	tPIH(3) tPIL(3)	INT3/T0IN (The noise rejection clock is set to 1/16)	• Interrupt acceptable • Timer0-countable	4.5 to 5.5	32			
	tPIL(4)	$\overline{\text{RES}}$	Reset acceptable	4.5 to 5.5	200			μs
	tPIH(5) tPIL(5)	$\overline{\text{HS}}$, VS	Display position controllable Each active edge of $\overline{\text{HS}}$, VS must be more than 1tCYC. Refer to Figure 7.	4.5 to 5.5	10			tCYC
Rising/falling time	tTHL tTLH	$\overline{\text{HS}}$	Refer to Figure 7.	4.5 to 5.5			500	ns
Horizontal pull-in range	FH	$\overline{\text{HS}}$	The monitor point in Figure 10 is 1/2 V _{DD} .	4.5 to 5.5	15.23	15.73	16.23	kHz

6. A/D Converter Characteristics at Ta = -30°C to +70°C, V_{SS} = 0 V

Parameter	Symbol	Pins	Conditions	Ratings				Unit
				V _{DD} [V]	min	typ	max	
Resolution	N			4.5 to 5.5		5		bit
Absolute precision	ET	(Note 3)		4.5 to 5.5		±1/4	±3/4	LSB
Conversion time	tCAD	From Vref selection to when the result is output	1 bit conversion time = 2tCYC	4.5 to 5.5		2		μs
Reference current	I _{REF}		(Regulate the ladder resistor)	4.5 to 5.5		1.0	2.0	mA
Analog input voltage range	V _{AIN}	AN0 to AN3		4.5 to 5.5	V _{SS}		V _{DD}	V
Analog port input current	I _{AINH}		V _{AIN} = V _{DD}	4.5 to 5.5			1	μA
	I _{AINL}		V _{AIN} = V _{SS}	4.5 to 5.5	-1			

(Note 3) Absolute precision excepts quantizing error (±1/2 LSB).

7. Current Drain Characteristics at Ta = -30°C to +70°C , V_{SS} = 0 V

Parameter	Symbol	Pins	Conditions	V _{DD} [V]	Ratings			Unit
					min	typ	max	
Current drain during basic operation (Note 4)	I _{DDOP} (1)	DVDD, AVDD	- FmCF = 12 MHz or FmCF = 12.08 MHz When ceramic resonator oscillation - FmLC = 14.11 MHz When LC oscillation - System clock : CF oscillation - Internal RC oscillation stops	4.5 to 5.5		16	28	mA
Current drain in HALT mode (Note 4)	I _{DDHALT} (1)	DVDD, AVDD	- HALT mode - FmCF = 12 MHz or FmCF = 12.08 MHz When ceramic resonator oscillation - FmLC = 0 Hz (When oscillation stops) - System clock : CF oscillation - Internal RC oscillation stops.	4.5 to 5.5		5	10	mA
	I _{DDHALT} (2)	DVDD, AVDD	- HALT mode - FmCF = 0 MHz (When oscillation stops) - FmLC = 0 Hz (When oscillation stops) - System clock : Internal RC	4.5 to 5.5		600	1200	μA
Current drain in HOLD mode (Note 4)	I _{DDHOLD}	DVDD, AVDD	- HOLD mode - All oscillation stops.	4.5 to 5.5		0.05	20	μA

Note 4 : The currents to the output transistors and the pull-up MOS transistors are ignored.

Oscillation types	Manufacturer	Oscillator	C1	C2
12 MHz ceramic resonator oscillation	Murata	CSA12.0MTZ	33 pF	33 pF
		CST12.0MTW	on chip	
	Kyocera	KBR-12.0M	33 pF	33 pF
12.08 MHz ceramic resonator oscillation	Murata	CSA12.0MTZ021	33 pF	33 pF
	Kyocera	KBR-12.08M	33 pF	33 pF

* Both C1 and C2 must use a K rank ($\pm 10\%$) and SL characteristics.


Table 1. Ceramic Resonator Oscillation Guaranteed Constant (main-clock)

Oscillation type	L	C3	C4
14.11 MHz LC oscillation	4.7 μ H	33 pF	45 pF (Trimmer)
	4.7 μ H $\pm 10\%$ (Variable)	33 pF	33 pF

* See Figures 11 and 12.


Table 2. LC oscillation Guaranteed Constant (OSD clock)

- (Notes)
- Since the circuit pattern affects the oscillation frequency, place the oscillation-related parts as close to the oscillation pins as possible with the shortest pattern length.
 - If you use other oscillators than those shown above, we provide no guarantee for the characteristics.
 - Adjust the voltage of monitor point in figure 10 to $1/2 V_{DD} \pm 10\%$ by the LC oscillation constant 'L' or 'C' to lock the PLL circuit.



Main clock

Figure 1 Ceramic Resonator Oscillation

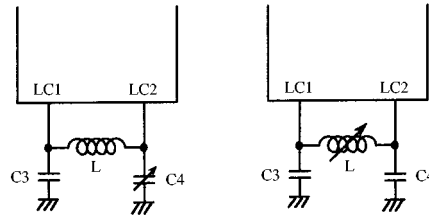

OSD clock

Figure 2 LC Resonator Oscillation


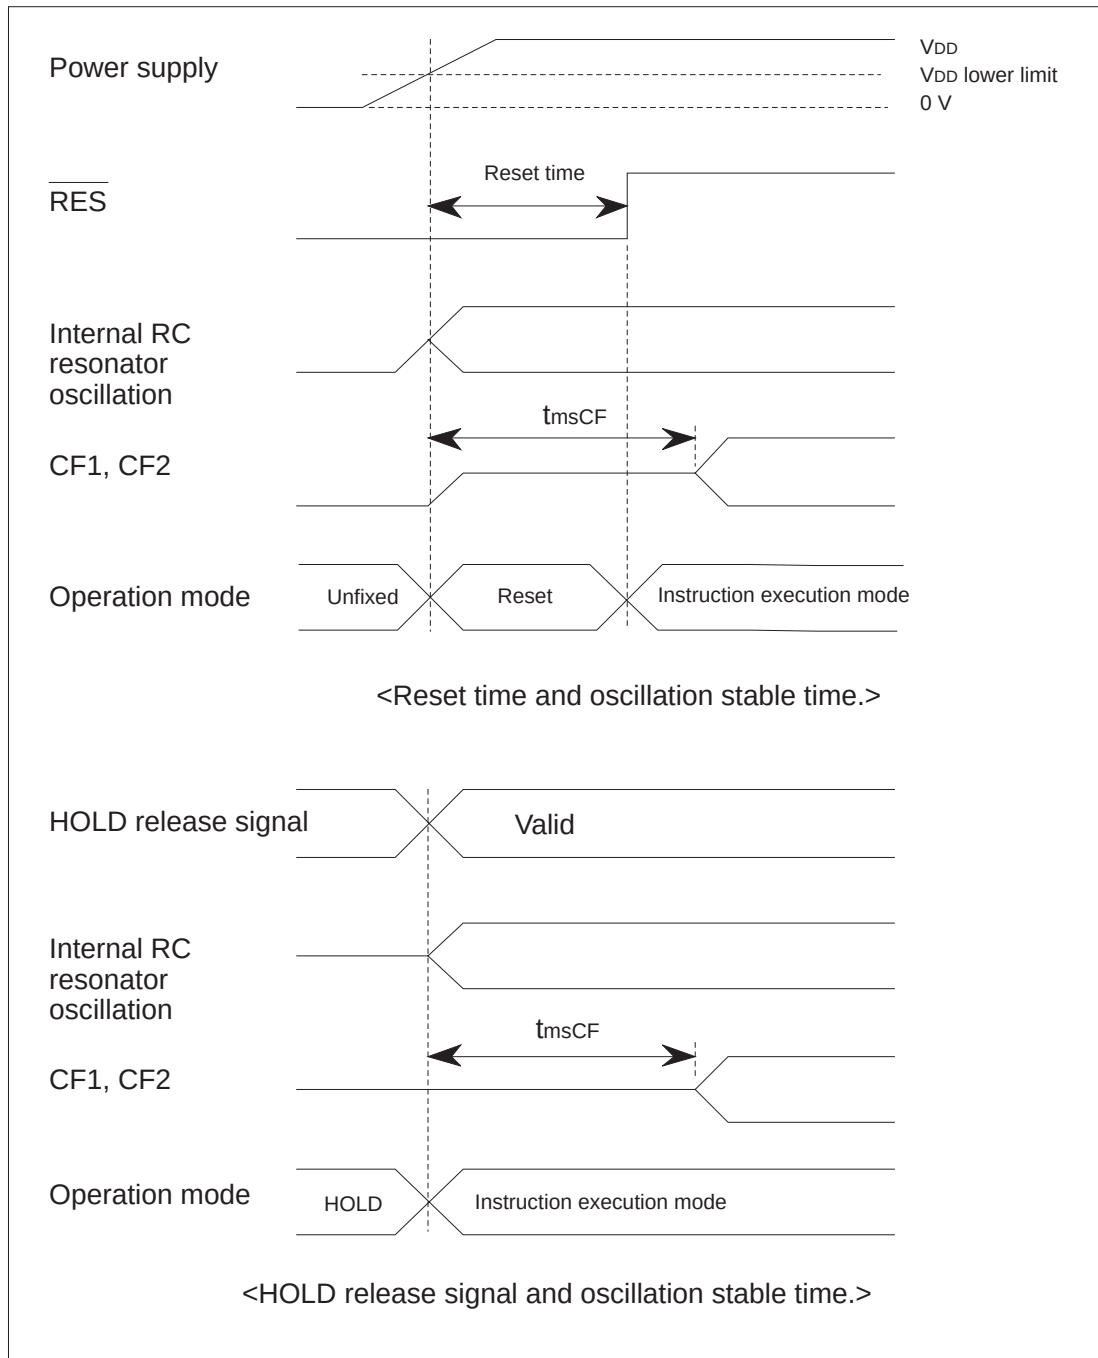


Figure 3 Oscillation Stable Time

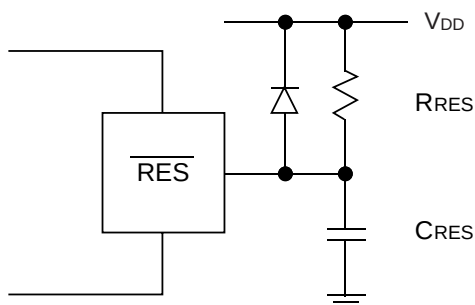

(Note) Set the values of C_{RES}, R_{RES} so that the reset time is 200 μ s or longer.

Figure 4 Reset Circuit

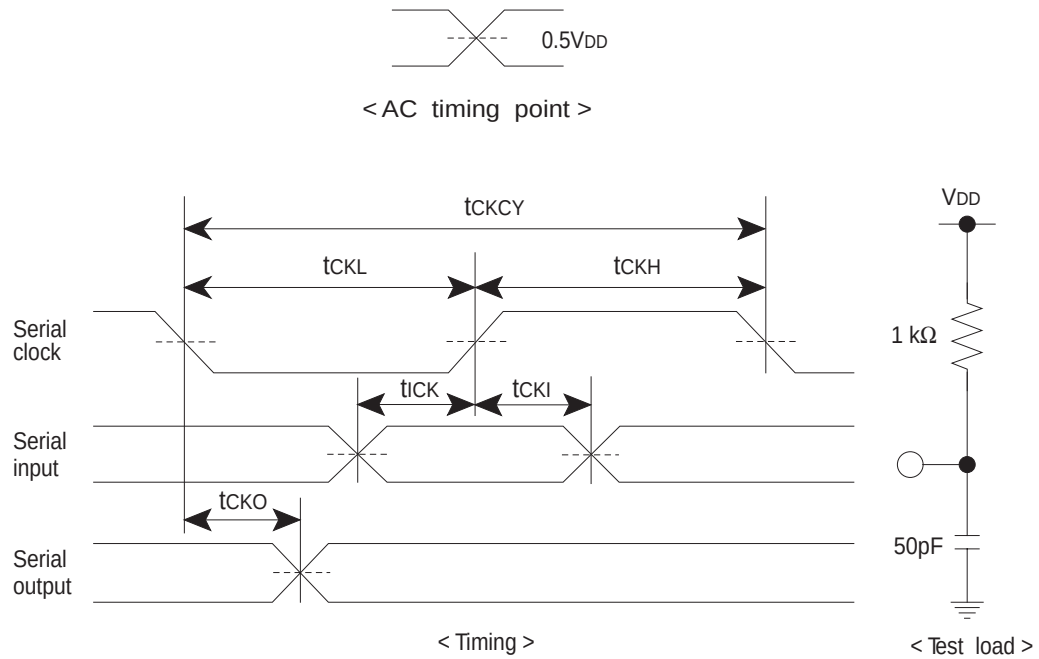


Figure 5 Serial Input/output Test Condition

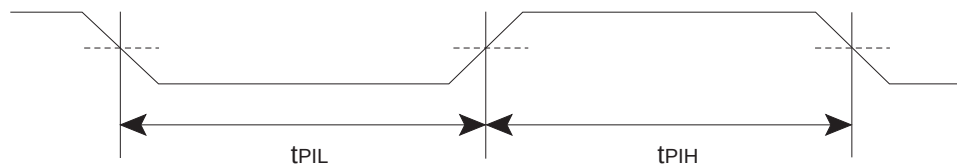


Figure 6 Pulse Input Timing Condition - 1

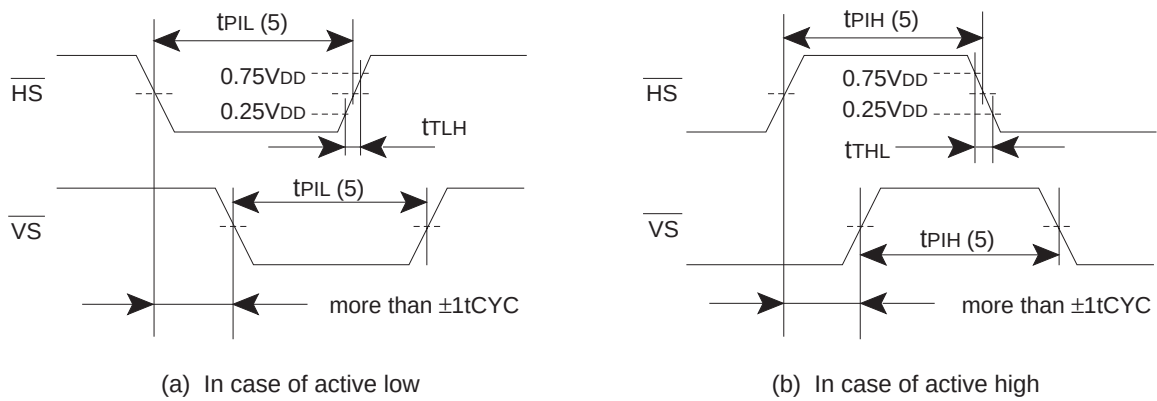


Figure 7 Pulse Input Timing Condition - 2

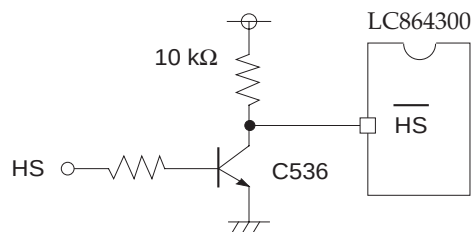


Figure 8 Recommended Interface Circuit

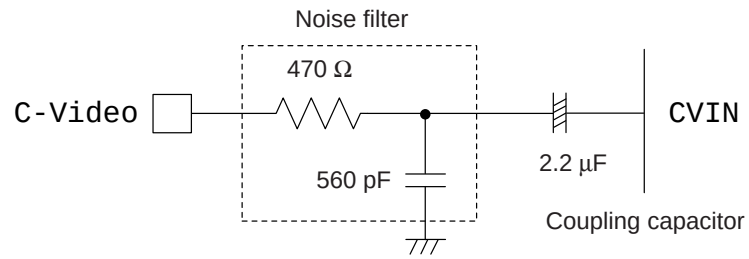


Figure 9 CVIN Recommended Circuit

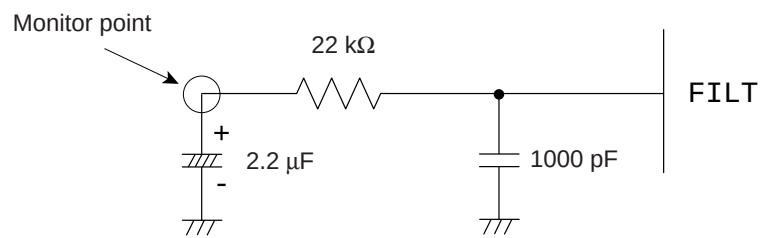


Figure 10 FILT Recommended Circuit

(Note) • Place the parts connected FILT terminal as close to the FILT as possible with the pattern length on the board.

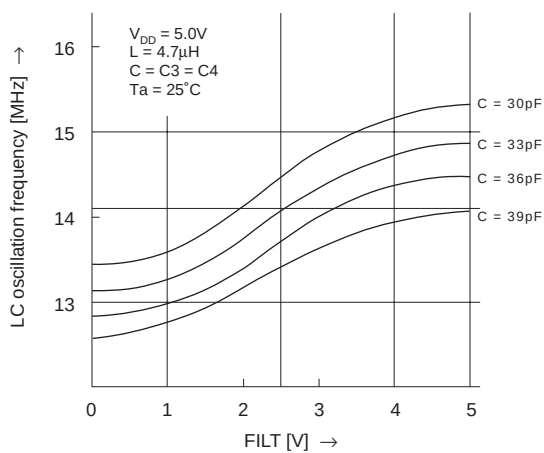


Figure 11 FILT-LC Oscillation Frequency(1)

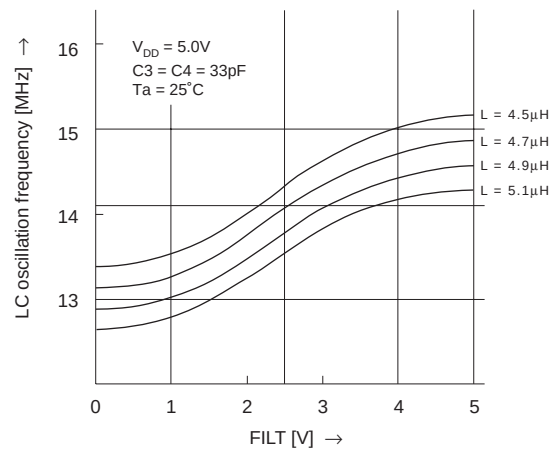


Figure 12 FILT-LC Oscillation Frequency(2)

- Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.
- SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.
- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data,services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of March, 1998. Specifications and information herein are subject to change without notice.