

MAXIM

Voltage Detectors

MAX6806/MAX6807/MAX6808

General Description

The MAX6806/MAX6807/MAX6808 precision voltage detectors are ideal for accurate monitoring of power supplies in digital systems. They provide circuit reliability and reduce total cost by eliminating external components and adjustments.

The MAX6806/MAX6807/MAX6808 assert a reset signal whenever the supply voltage (V_{CC}) falls below the factory-preset, $\pm 2\%$ accurate threshold. Internal hysteresis ensures stable switching. The MAX6806/MAX6807/MAX6808 are available in 4.6V and 2.6V thresholds (2.3V is also available for the MAX6806 only). The MAX6806 features an active-low, push-pull RESET output; the MAX6807 features an active-high, push-pull RESET output; and the MAX6808 features an active-low, open-drain RESET output. RESET is valid for V_{CC} down to 1V (MAX6806/MAX6808), and RESET (MAX6807) is guaranteed for V_{CC} down to 1.2V.


The MAX6806/MAX6807/MAX6808 are available in 3-pin SC70, 3-pin SOT23, 8-pin μ MAX, 8-pin SO, and 4-pin SOT143 packages. The SOT143 package includes a manual-reset input.

Applications

Computers Automotive
 Controllers Bar-Code Scanners
 Intelligent Instruments
 Critical μ P and μ C Power Monitoring
 Portable/Battery-Powered Equipment

Selector Guide and Pin Configurations appear at end of data sheet.

Typical Operating Circuit

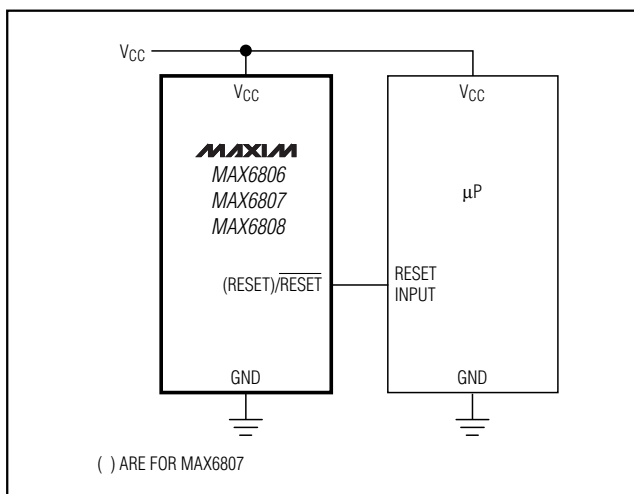

Features

- ◆ Preset Reset Thresholds: 4.6V and 2.6V (2.3V also available for MAX6806 only)
- ◆ $\pm 2\%$ Accurate Reset Thresholds
- ◆ Reset Output Available in Active-Low (MAX6806), Active-High (MAX6807), and Open-Drain (MAX6808) Versions
- ◆ Immune to Power-Supply Transients
- ◆ RESET Valid to $V_{CC} = 1.0V$ (MAX6806/MAX6808)
- ◆ 35 μ A Supply Current
- ◆ No External Components
- ◆ Manual Reset Available with 4-Pin SOT143 Package
- ◆ Miniature 3-Pin SC70, 3-Pin SOT23, and 4-Pin SOT143 Packages
- ◆ 8 Lead μ MAX and 8 Lead SO Packages are Pin Compatible with the MC33064/MC33164/MC34064/MC34164

Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
MAX6806 XR_ _ -T	-40°C to +85°C	3 SC70
MAX6806UR_ _ -T	-40°C to +85°C	3 SOT23
MAX6806US_ _ -T	-40°C to +85°C	4 SOT143
MAX6806UA_ _	-40°C to +85°C	8 μ MAX
MAX6806SA_ _	-40°C to +85°C	8 SO
MAX6807 XR_ _ -T	-40°C to +85°C	3 SC70
MAX6807UR_ _ -T	-40°C to +85°C	3 SOT23
MAX6807US_ _ -T	-40°C to +85°C	4 SOT143
MAX6807UA_ _	-40°C to +85°C	8 μ MAX
MAX6807SA_ _	-40°C to +85°C	8 SO
MAX6808 XR_ _ -T	-40°C to +85°C	3 SC70
MAX6808UR_ _ -T	-40°C to +85°C	3 SOT23
MAX6808US_ _ -T	-40°C to +85°C	4 SOT143
MAX6808UA_ _	-40°C to +85°C	8 μ MAX
MAX6808SA_ _	-40°C to +85°C	8 SO

* SOT23, SOT143, and SC70s are available in tape-and-reel only, 2500 piece minimum order quantity.

Note: Insert the desired number from the Selector Guide into the blank to complete the part number. Also see Selector Guide for top mark for SOT23

MAXIM

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

Voltage Detectors

ABSOLUTE MAXIMUM RATINGS

V_{CC} to GND-0.3V to +6.0V
 RESET, $\overline{\text{RESET}}$ to GND
 (MAX6806/MAX6807)-0.3V to (V_{CC} + 0.3V)
 RESET to GND (MAX6808).....-0.3V to + 6.0V
 MR to GND (SOT143 package only)-0.3V to + 6.0V
 Input Current, V_{CC}±20mA
 Output Current, RESET, $\overline{\text{RESET}}$ ±20mA
 Rate of Rise, V_{CC}100V/μs

Continuous Power Dissipation (T_A = +70°C)
 SOT23, SOT143 (derate 4mW/°C above +70°C)320mW
 SC70 (derate 2.17mW/°C above +70°C)174mW
 μMAX (derate 4.5mW/°C above +70°C)362mW
 SO (derate 5.9mW/°C above +70°C)471mW
 Operating Temperature Range-40°C to +85°C
 Storage Temperature Range-65°C to +160°C
 Lead Temperature (soldering, 10s)+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{CC} = +5V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Supply Voltage Range	V _{CC}	T _A = 0°C to +70°C		1.0		5.5	V
		T _A = -40°C to +85°C		1.2		5.5	
Supply Current	I _{CC}	V _{CC} = +3.6V, no load			35	60	μA
		V _{CC} = +5.5V, no load			50	80	
Reset Threshold	V _{TH-}	T _A = +25°C, V _{CC} falling	MAX680__ _46	4.508	4.60	4.692	V
			MAX680__ _32	3.136	3.20	3.264	
			MAX680__ _26	2.548	2.60	2.652	
			MAX680__ _23	2.254	2.30	2.346	
Reset Threshold Hysteresis	V _{HYST}	T _A = +25°C, Figure 2			0.02 V _{TH-}	0.03 V _{TH-}	V
$\overline{\text{RESET}}$ Output Voltage (MAX6806/MAX6808)	V _{OL}	I _{SINK} = 20μA, V _{CC} = 1.0V				0.3	V
		I _{SINK} = 1.0mA, V _{CC} = 2.0V				0.4	
	V _{OH}	I _{SOURCE} = 2.0mA, V _{CC} = 5.0V (MAX6806 only)		0.8V _{CC}			
$\overline{\text{RESET}}$ Output Leakage Current	I _{OH}	V _{CC} = 5.5V, $\overline{\text{RESET}}$ deasserted (MAX6808 only)				1	μA
RESET Output Voltage (MAX6807)	V _{OH}	I _{SOURCE} = 20μA, V _{CC} = 1.2V		0.8V _{CC}			V
		I _{SOURCE} = 400μA, V _{CC} = 2.0V		0.8V _{CC}			
	V _{OL}	I _{SINK} = 3.2mA, V _{CC} = 5.0V				0.4	
V _{CC} to Reset Delay (Note 2)		V _{CC} falling at 1mV/μs			30		μs
Reset Threshold Tempco					30		ppm/°C
MR Pull-Down Resistance	R _{MR}			40	80	120	kΩ
MR Input Threshold	V _{IL}	V _{CC} > V _{TH+}		0.6			V
	V _{IH}			0.7V _{CC}			





Note1: All devices are 100% production tested at T_A = +25°C, and are guaranteed by design for T_A = T_{MIN} to T_{MAX}, as specified.

Note 2: $\overline{\text{RESET}}$ output for MAX6806/MAX6808, RESET output for MAX6807.

Voltage Detectors

Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted.)

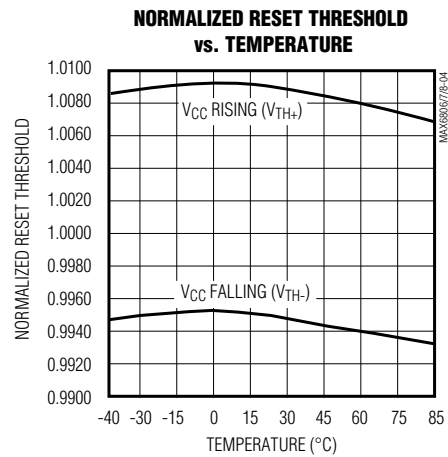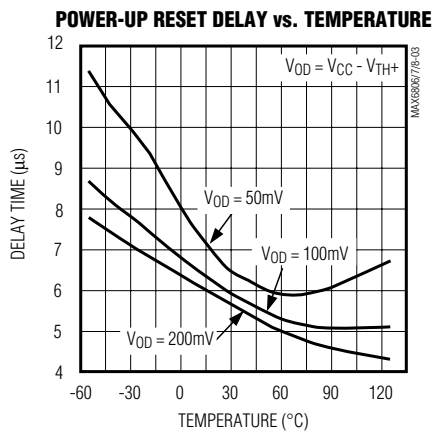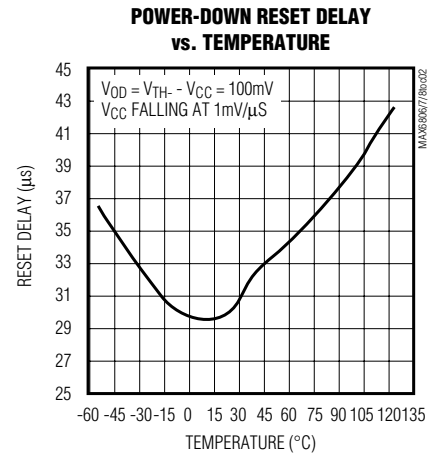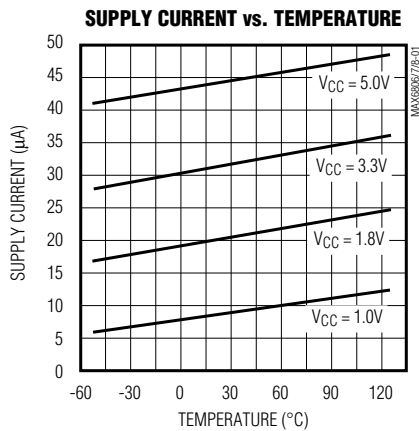

Pin Description

PIN			NAME	FUNCTION
SOT23/SC70	SOT143	µMAX/SO		
1	1	1	RESET	Active-Low Reset Output (MAX6806/MAX6808). RESET remains low while V_{CC} is below the reset-threshold voltage or while MR is held high.
			RESET	Active-High Reset Output (MAX6807). RESET remains high while V_{CC} is below the reset-threshold voltage or while MR is held high.
2	4	4	GND	Ground
3	3	2	VCC	Supply Voltage Input
—	2	—	MR	Active-High Manual Reset Input. Internal 80kΩ resistor to GND.
—	—	3, 5–8	N.C.	Not Internally Connected

Voltage Detectors

Detailed Description

Reset Output

The MAX6806 voltage detector features an active-low, push-pull $\overline{\text{RESET}}$ output, while the MAX6807 features an active-high, push-pull RESET output. Unlike micro-processor (μP) supervisory circuits that offer a reset timeout period, the MAX6806 and MAX6807 $\overline{\text{RESET}}$ goes high and RESET goes low virtually immediately once V_{CC} exceeds the reset threshold. If a brownout occurs (V_{CC} falls below the reset threshold), $\overline{\text{RESET}}$ goes low and RESET goes high. RESET is guaranteed to be a logic low for $V_{\text{CC}} \geq 1\text{V}$ and RESET is guaranteed to be a logic high for $V_{\text{CC}} \geq 1.2\text{V}$.

The MAX6808 features an active-low, open-drain $\overline{\text{RESET}}$ output. The output sinks current when V_{CC} falls below the reset threshold. Connect a pull-up resistor from $\overline{\text{RESET}}$ to any supply voltage up to 6V (Figure 1). Select a resistor value large enough to provide a logic low and small enough to provide a logic high while supplying all input and leakage currents connected to the $\overline{\text{RESET}}$ line. A 100k Ω resistor is sufficient in applications driving high-impedance loads.

The manual reset input (MR, 4-pin SOT143 package) can also initiate a reset (see *Manual Reset Input* section).

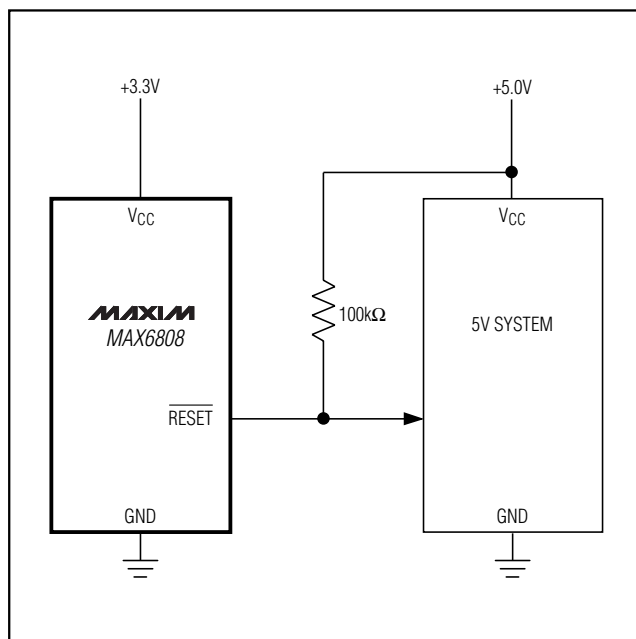


Figure 1. The MAX6808 open-drain $\overline{\text{RESET}}$ output allows use with multiple supplies.

Manual Reset Input

Many applications require manual-reset capabilities, allowing an operator, a test technician, or external logic circuitry to initiate a reset. A logic high on MR asserts a reset and remains asserted while MR is high. This input has an 80k Ω pull-down resistor, so the input may be left unconnected if not used. Connect a normally open momentary switch from MR to V_{CC} to create a manual-reset function. If MR is driven from long cables or if the device is used in a noisy environment, connecting a 0.1 μF capacitor from MR to ground provides noise immunity.

Hysteresis

The MAX6806/MAX6807/MAX6808 feature internal hysteresis that creates two trip points: one for the rising supply voltage and one for the falling supply voltage (Figure 2). The hysteresis prevents the output from oscillating (chattering) when V_{CC} is near the reset threshold.

Reset Threshold Accuracy

The MAX6806/MAX6807/MAX6808 are ideal for systems using a 5V $\pm 5\%$, 3V $\pm 5\%$, or 2.5V $\pm 5\%$ power supply with ICs specified for 5V $\pm 10\%$, 3V $\pm 10\%$, or 2.5V $\pm 10\%$, respectively. The reset is guaranteed to assert after the power supply falls out of regulation, but before power drops below the minimum specified operating voltage range for the system ICs.

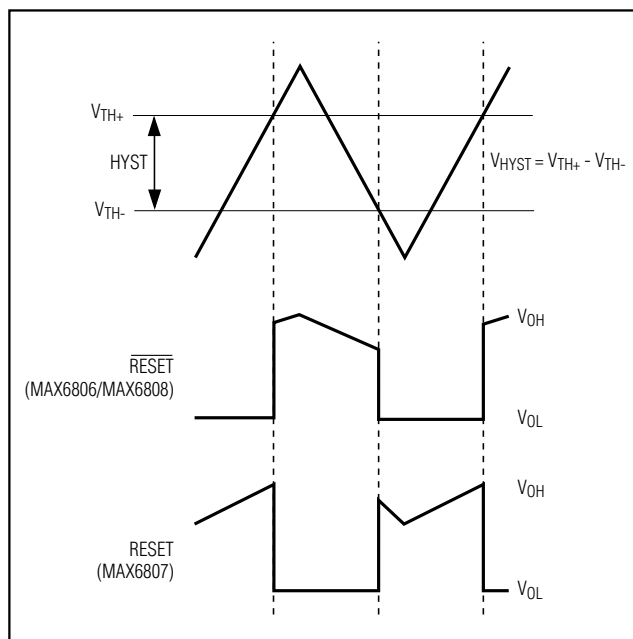


Figure 2. Input and Output Waveforms with V_{CC} Varied

Voltage Detectors

Applications Information

Negative-Going VCC Transients

In addition to asserting a reset signal during power-up, power-down, and brown-out conditions, the MAX6806/MAX6807/MAX6808 are immune to short-duration, negative-going VCC transients.

Figure 3 displays typical transient durations vs. reset-comparator overdrive for which the MAX6806/MAX6807/MAX6808 do **not** generate a reset pulse. The graph was generated using a negative-going pulse applied to VCC, starting 0.5V above the actual reset threshold and ending below it by the magnitude indicated (reset-comparator overdrive). The graph indicates the maximum pulse width a negative-going VCC transient can have without causing a reset pulse. As the magnitude of the transient increases (goes further below the reset threshold), the maximum allowable pulse width decreases. A 0.1μF capacitor mounted as close as possible to VCC provides additional transient immunity.

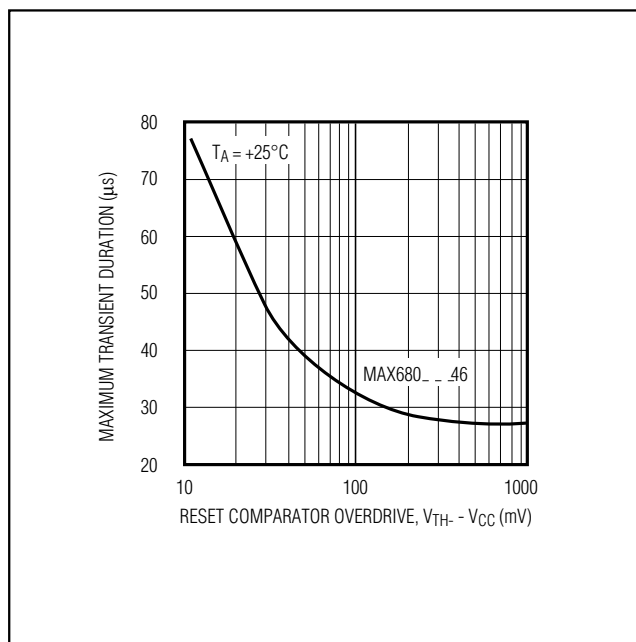


Figure 3. Maximum Transient Duration without Causing a Reset Pulse vs. Reset Comparator Overdrive

Ensuring a Valid Reset Output Down to VCC = Ground

When VCC falls below 1V, the MAX6806/MAX6808 $\overline{\text{RESET}}$ output no longer sinks current—it becomes an open circuit. Therefore, high-impedance CMOS logic inputs connected to $\overline{\text{RESET}}$ can drift to undetermined voltages. This presents no problem in most applications, since most circuitry is inoperative when VCC is below 1V. In applications where RESET must be valid down to ground, add a pull-down resistor to $\overline{\text{RESET}}$ so any stray leakage currents flow to ground, holding RESET low (Figure 4). Select R1 to be large enough not to load RESET and small enough to pull RESET to ground. For most applications, 100kΩ will not load RESET and will pull RESET to ground. Similarly, if RESET (MAX6807) must be valid below 1.2V, add a pull-up resistor to RESET.

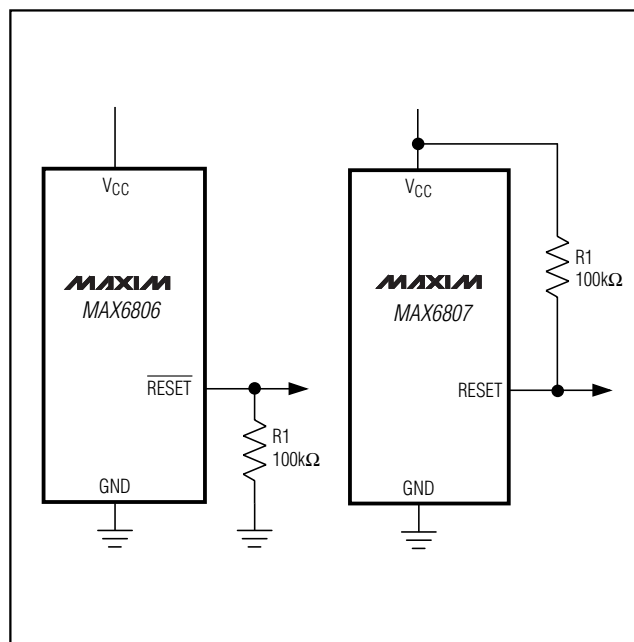


Figure 4. $\overline{\text{RESET}}$ / RESET Valid to VCC = Ground Circuit

Voltage Detectors

Interfacing to μ Ps with Bidirectional Reset Pins

μ Ps with bidirectional reset pins (such as the Motorola 68HC11 series) can contend with push-pull RESET outputs, resulting in indeterminate logic levels. Use the MAX6808 with the open-drain RESET when interfacing to this type of controller.

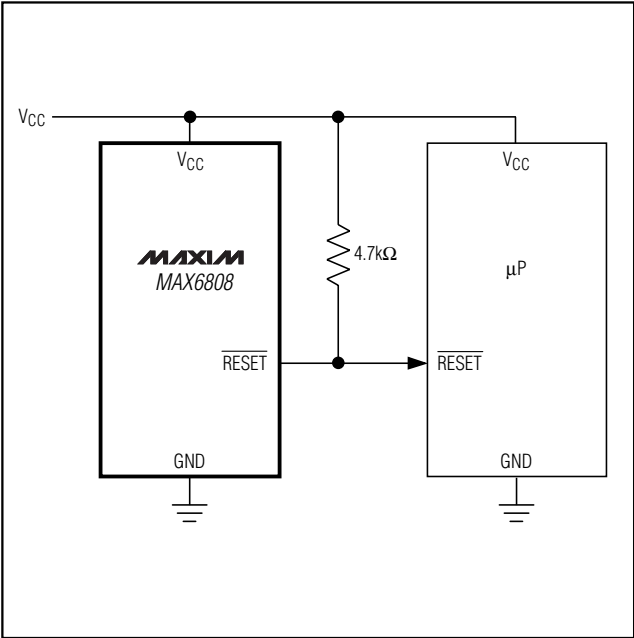


Figure 5. Interfacing to μ Ps with Bidirectional Reset I/O

Selector Guide

PART	RESET OUTPUT	TOP MARK CODE	NOMINAL V_{TH} (V)
MAX6806SA46	Active-Low, Push-Pull	—	4.6
MAX6806SA26		—	2.6
MAX6806SA23		—	2.3
MAX6806UA46		—	4.6
MAX6806UA26		—	2.6
MAX6806UA23		—	2.3
MAX6806UR46-T		FZDP	4.6
MAX6806UR26-T		FZDQ	2.6
MAX6806UR23-T		FZDR	2.3
MAX6806US46-T		KABT	4.6
MAX6806US26-T		KABU	2.6
MAX6806US23-T		KABV	2.3
MAX6806XR46-T		AAA	4.6
MAX6806XR26-T		AAB	2.6
MAX6806XR23-T		AAC	2.3

Voltage Detectors

Selector Guide (continued)


MAX6806/MAX6807/MAX6808

PART	RESET OUTPUT	TOP MARK CODE	NOMINAL V_{TH} (V)
MAX6807SA46	Active-High, Push-Pull	—	4.6
MAX6807SA26		—	2.6
MAX6807UA46		—	4.6
MAX6807UA26		—	2.6
MAX6807UR46-T		FZDS	4.6
MAX6807UR26-T		FZDT	2.6
MAX6807US46-T		KABW	4.6
MAX6807US26-T		KABX	2.6
MAX6807XR46-T		AAD	4.6
MAX6807XR26-T		AAE	2.6
MAX6808SA46	Active-Low, Open-Drain	—	4.6
MAX6808SA32		—	3.2
MAX6808SA26		—	2.6
MAX6808UA46		—	4.6
MAX6808UA32		—	3.2
MAX6808UA26		—	2.6
MAX6808UR46-T		FZDU	4.6
MAX6808UR32-T		FZFL	3.2
MAX6808UR26-T		FZDV	2.6
MAX6808US46-T		KABY	4.6
MAX6808US32-T		KACC	3.2
MAX6808US26-T		KABZ	2.6
MAX6808XR46-T		AAF	4.6
MAX6808XR32-T		ACD	3.2
MAX6808XR26-T		AAG	2.6

Other voltage thresholds may be available. Contact factory for availability.

Voltage Detectors

Pin Configurations

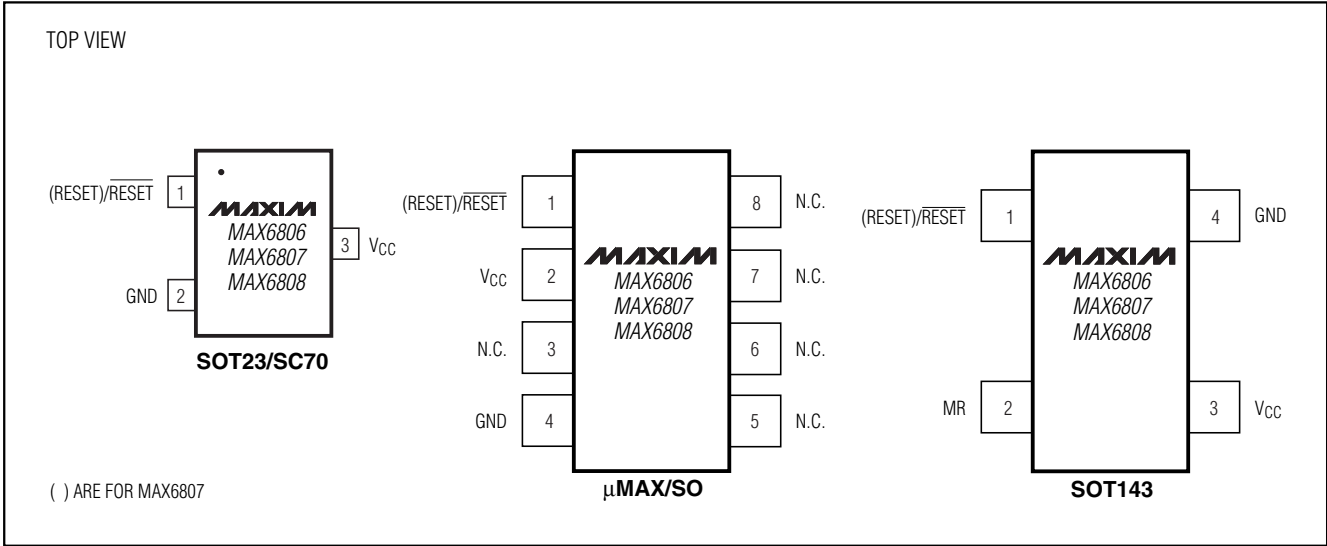

Chip Information



TRANSISTOR COUNT: 72

Voltage Detectors


Package Information

SC70, 3L EPS

MAX6806/MAX6807/MAX6808

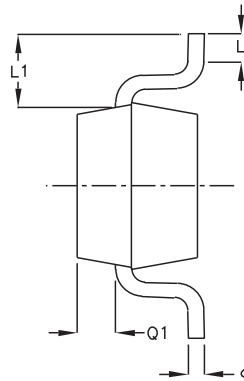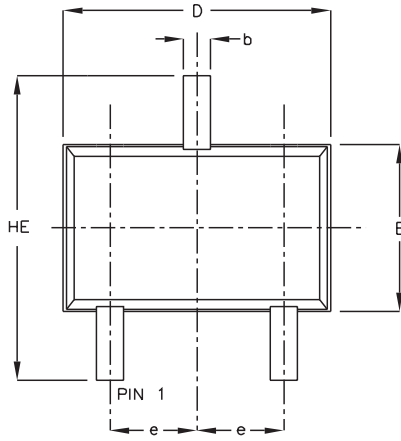

SYMBOL	MIN	MAX
e	0.65	BSC
D	1.80	2.20
b	0.25	0.40
E	1.15	1.35
HE	1.80	2.40
Q1	0.10	0.40
A2	0.80	1.00
A1	0.00	0.10
A	0.80	1.10
c	0.10	0.18
L	0.10	0.30
L1	0.425	TYP.

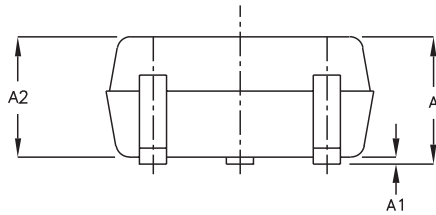

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS
2. DIMENSIONS ARE INCLUSIVE OF PLATING
3. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH & METAL BURR
4. ALL SPECIFICATIONS COMPLY TO EIAJ SC70
5. COPLANARITY 4 MILS. MAX.




MAXIM			
PROPRIETARY INFORMATION			
TITLE:			
PACKAGE OUTLINE, SC70, 3L			
APPROVAL	DOCUMENT CONTROL NO.	REV	1/1
	21-0075	B	

Voltage Detectors

Package Information (continued)

NOTES:

- 1. D&E DO NOT INCLUDE MOLD FLASH.
- 2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
- 3. CONTROLLING DIMENSION: MILLIMETER

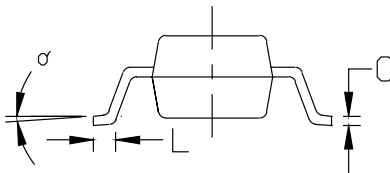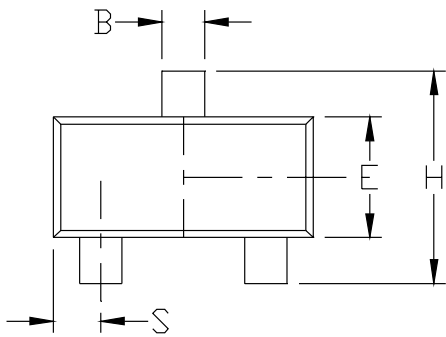

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.031	0.047	0.787	1.194
A1	0.001	0.005	0.025	0.127
B	0.014	0.022	0.356	0.559
C	0.0034	0.006	0.086	0.152
D	0.105	0.120	2.667	3.048
E	0.047	0.055	1.194	1.397
e	0.070	0.080	1.778	2.032
H	0.082	0.098	2.083	2.489
L	0.004	0.012	0.102	0.305
S	0.017	0.022	0.432	0.559
α	0°	8°	0°	8°


MAXIM			
PROPRIETARY INFORMATION			
TITLE:			
PACKAGE OUTLINE, SOT-23, 3L			
APPROVAL	DOCUMENT CONTROL NO.	REV	1/1
	21-0051	C	

SOT03.LPS

Voltage Detectors

Package Information (continued)

MAX6806/MAX6807/MAX6808

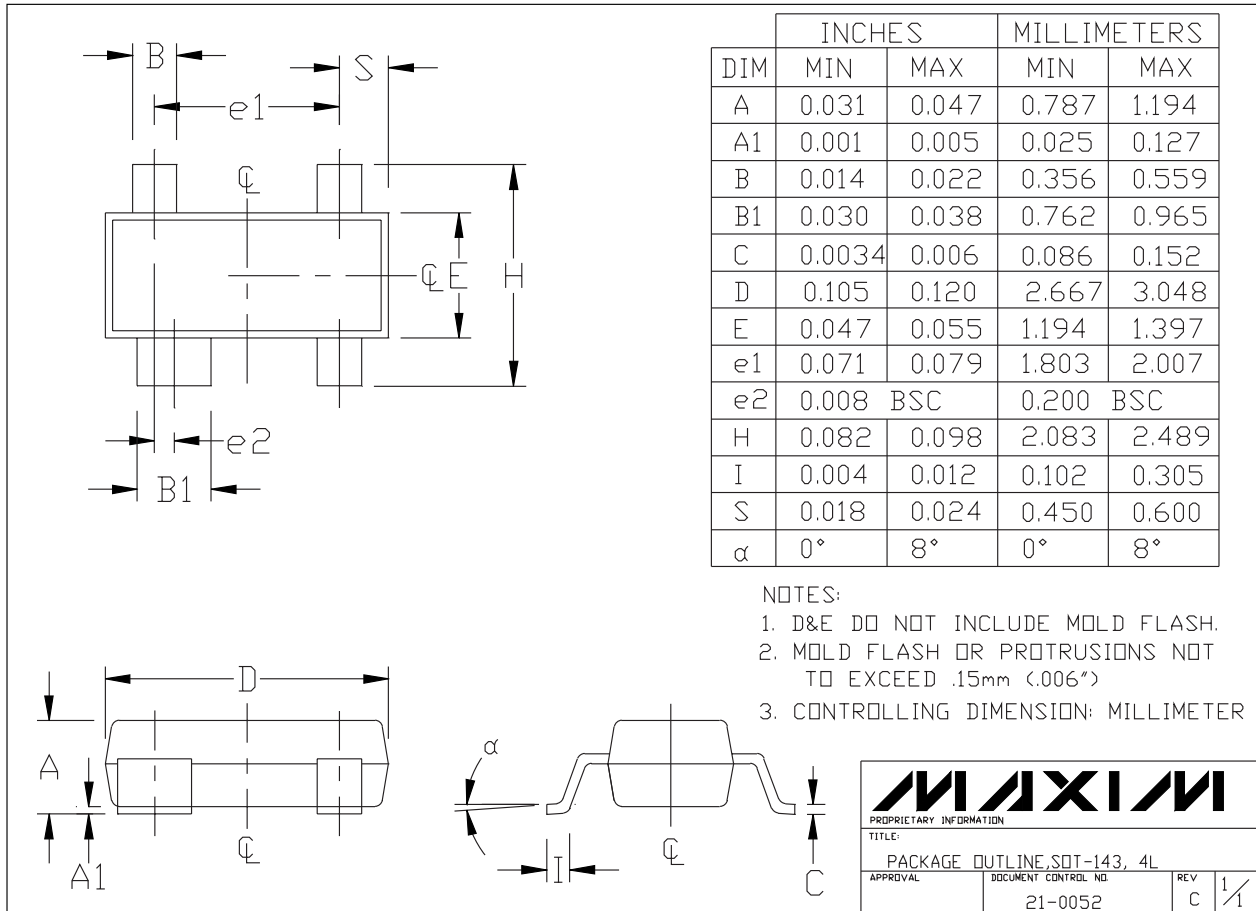


SOT143-EP5

Voltage Detectors

Package Information (continued)


8LUMAXD EPS

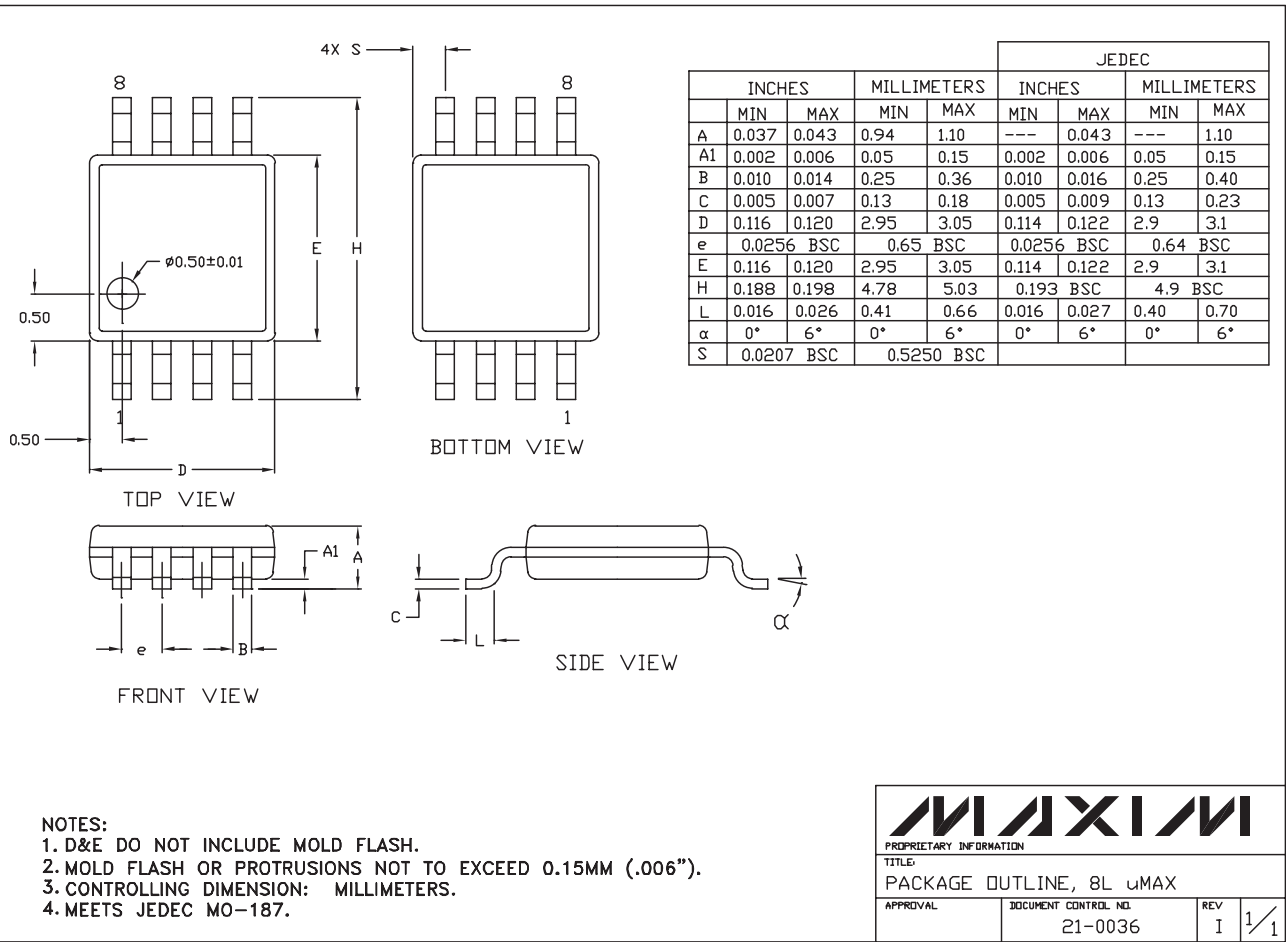

Voltage Detectors

Package Information (continued)

MAX6806/MAX6807/MAX6808

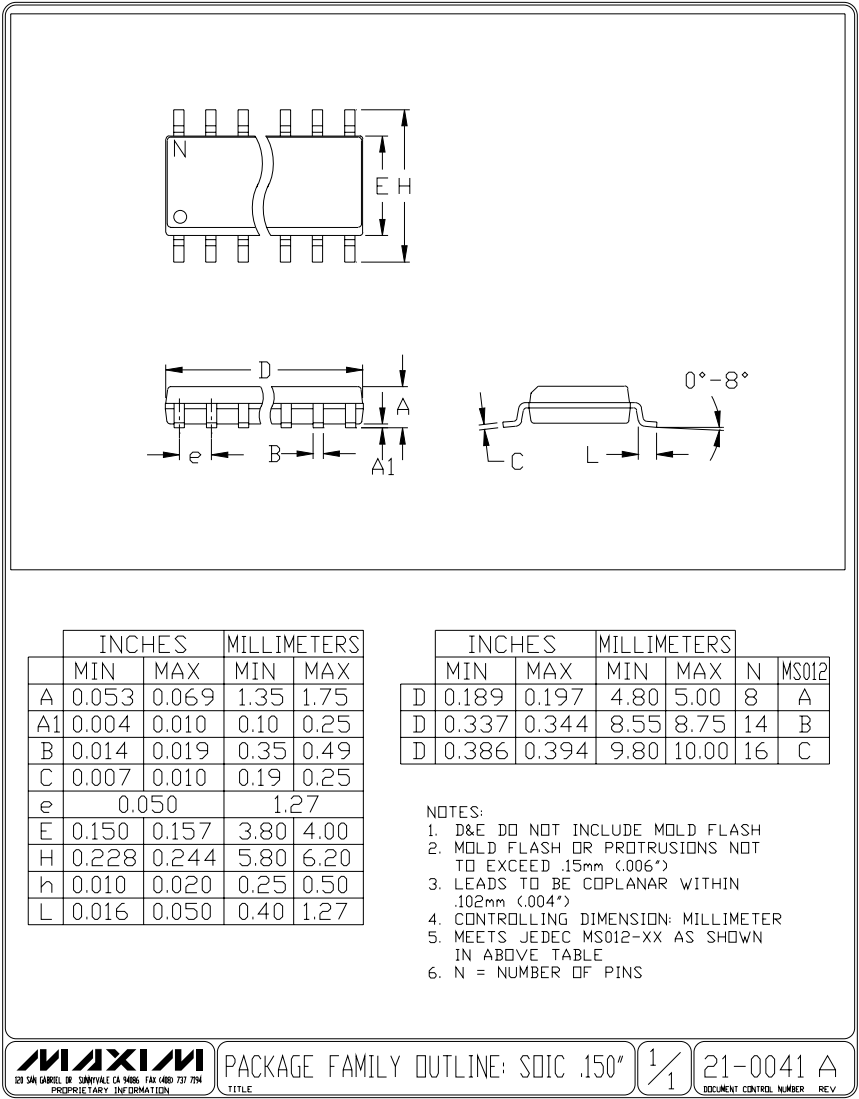

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 _____13