


Phase-Frequency Detector


The MC12040 is a phase-frequency detector intended for use in systems requiring zero phase and frequency difference at lock. In combination with a voltage controlled oscillator (such as the MC1648, MC12147, MC12148 or MC12149), it is useful in a broad range of phase-locked loop applications. Operation of this device is identical to that of Phase Detector #1 of the MC4044. A discussion of the theory of operation and applications information is given on the MC4344/4044 data sheet.

- Operating Frequency = 80MHz Typical

Pinout: 14-Lead Package (Top View)

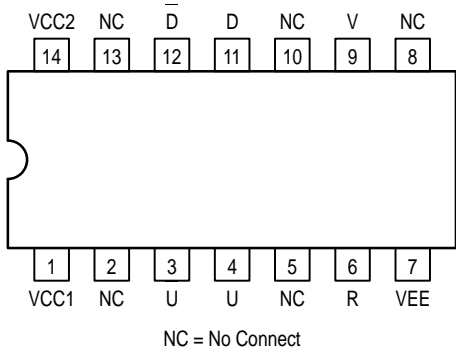

LOGIC DIAGRAM

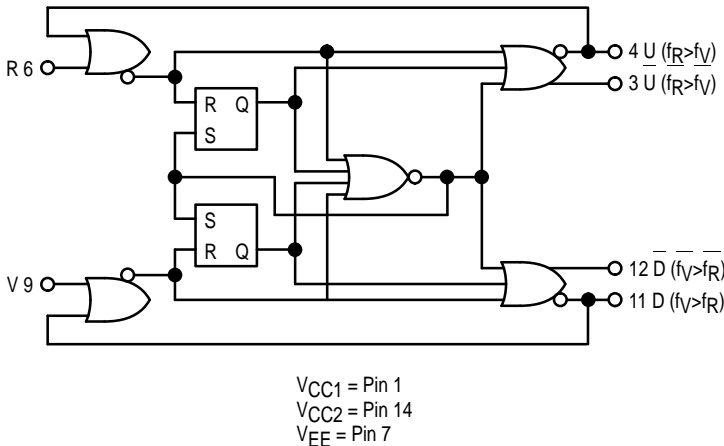


TRUTH TABLE

This is not strictly a functional truth table; i.e., it does not cover all possible modes of operation. However, it gives a sufficient number of tests to ensure that the device will function properly in all modes of operation.


MC12040

PHASE-FREQUENCY DETECTOR




L SUFFIX
CERAMIC PACKAGE
CASE 632-08

Not Recommended for New Designs



P SUFFIX
PLASTIC PACKAGE
CASE 646-06



FN SUFFIX
PLCC PACKAGE
CASE 775-02

Inputs		Outputs			
R	V	U	D	U	D
0	0	X	X	X	X
0	1	X	X	X	X
1	1	X	X	X	X
0	1	X	X	X	X
1	1	1	0	0	1
0	1	1	0	0	1
1	1	1	0	0	1
1	0	1	0	0	1
1	1	0	0	1	1
1	1	0	1	1	0
1	0	0	1	1	0
1	1	0	1	1	0
0	1	0	1	1	0
1	1	0	0	1	1


X = Don't Care



MC12040

ELECTRICAL CHARACTERISTICS

The MC12040 has been designed to meet the dc specifications shown in the test table after thermal equilibrium has been established. Outputs are terminated through a 50 ohm resistor to +3.0V for +5.0V tests and through a 50 ohm resistor to -2.0V for -5.2V tests.



NOTE: For more information on using an ECL device in a +5V system, refer to Motorola Application Note AN1406/D, "Designing with PECL (ECL at +5.0V)"

@ Test Temperature

0°C

25°C

75°C

TEST VOLTAGE VALUES

(Volts)

V _{IHmax}	V _{ILmin}	V _{IHAmin}	V _{ILAmax}	V _{EE}
-0.840	-1.870	-1.145	-1.490	-5.2
-0.810	-1.850	-1.105	-1.475	-5.2
-0.720	-1.830	-1.045	-1.450	-5.2

Supply Voltage = -5.2V

Symbol	Characteristics	Pin Under Test	MC12040							TEST VOLTAGE APPLIED TO PINS BELOW					(V _{CC}) G _{ND}
			0°C		25°C		75°C		Unit	V _{IH} max	V _{IL} min	V _{IH} Amin	V _{IL} Amax	V _{EE}	
			Min	Max	Min	Max	Min	Max							
I _E	Power Supply Drain	7			−120	−60			mAdc					7	1,14
I _{INH}	Input Current	6 9				350 350			μAdc	6 9				7 7	1,14 1,14
V _{OH} ¹	Logic "1" Output Voltage	3 4 11 12	−1.000	−0.840	−0.960	−0.810	−0.900	−0.720	Vdc					7	1,14
V _{OL} ¹	Logic "0" Output Voltage	3 4 11 12	−1.870	−1.635	−1.850	−1.620	−1.830	−1.595	Vdc					7	1,14
V _{OHA} ²	Logic "1" Input Voltage	3 4 11 12	−1.020		−0.980		−0.920		Vdc			6.9		7	1,14
V _{OLA} ²	Logic "0" Input Voltage	3 4 11 12		−1.615		−1.600		−1.575	Vdc			9 6 9 6	6 9 6 9	7	1,14

@ Test Temperature

0°C

25°C

75°C

TEST VOLTAGE VALUES

(Volts)

V _{IHmax}	V _{ILmin}	V _{IHAmin}	V _{ILAmax}	V _{EE}
+4.160	+3.130	+3.855	+3.510	+5.0
+4.190	+3.150	+3.895	+3.525	+5.0
+4.280	+3.170	+3.955	+3.550	+5.0

Supply Voltage = +5.0V

Symbol	Characteristics	Pin Under Test	MC12040							TEST VOLTAGE APPLIED TO PINS BELOW					(V _{CC}) Gnd
			0°C		25°C		75°C		Unit	V _{IHmax}	V _{ILmin}	V _{IHAmin}	V _{ILAmax}	V _{EE}	
			Min	Max	Min	Max	Min	Max							
I _E	Power Supply Drain	7			−115	−60			mAdc					1,14	7
I _{INH}	Input Current	6 9				350 350			μAdc	6 9				1,14 1,14	7 7
V _{OH} ¹	Logic "1" Output Voltage	3 4 11 12	4.000	4.160	4.040	4.190	4.100	4.280	Vdc					1,14	7
V _{OL} ¹	Logic "0" Output Voltage	3 4 11 12	3.190	3.430	3.210	3.440	3.230	3.470	Vdc					1,14	7
V _{OHA} ²	Logic "1" Input Voltage	3 4 11 12	3.980		4.020		4.080		Vdc			6.9		1,14	7
V _{OLA} ²	Logic "0" Input Voltage	3 4 11 12		3.450		3.460		3.490	Vdc			9 6 9 6	6 9 6 9	1,14	7

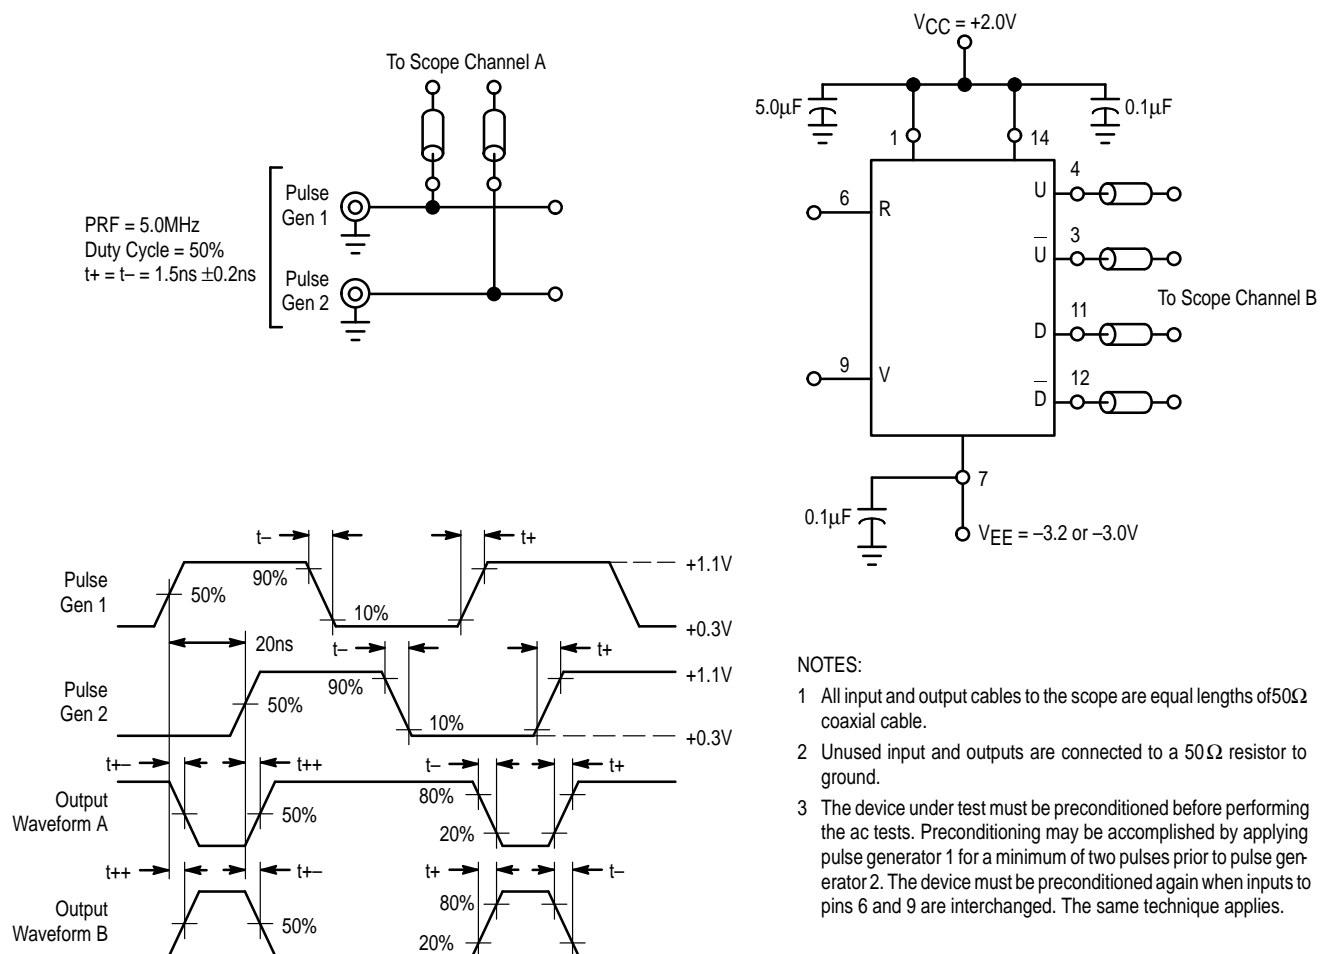


Figure 1. AC Tests

Symbol	Characteristic	Pin Under Test	Output Waveform	MC12040			Unit	TEST VOLTAGES/WAVEFORMS APPLIED TO PINS LISTED			
				0°C	25°C	85°C		Pulse Gen 1	Pulse Gen 2	V_{EE} -3.0 or -3.2V	V_{CC} +2.0V
				Max	Max	Max					
t_{6+4+}	Propagation Delay	6,4	B	4.6	4.6	5.0	ns	6	9	7	1,14
t_{6+12+}		6,12	A	6.0	6.0	6.6		9	6		
t_{6+3-}		6,3	A	4.5	4.5	4.9		6	9		
t_{6+11-}		6,11	B	6.4	6.4	7.0		9	6		
t_{9+11+}		9,11	B	4.6	4.6	5.0		9	6		
t_{9+3+}		9,3	A	6.0	6.0	6.6		6	9		
t_{9+12-}		9,12	A	4.5	4.5	4.9		9	6		
t_{9+4-}		9,4	B	6.4	6.4	7.0		6	9		
t_{3+}	Output Rise Time	3	A	3.4	3.4	3.8	ns	6	9	7	1,14
t_{4+}		4	B					6	9		
t_{11+}		11	B					9	6		
t_{14+}		14	A					9	6		
t_{3-}	Output Fall Time	3	A	3.4	3.4	3.8	ns	6	9	7	1,14
t_{4-}		4	B					6	9		
t_{11-}		11	B					9	6		
t_{14-}		14	A					9	6		

APPLICATIONS INFORMATION

The MC12040 is a logic network designed for use as a phase comparator for MECL-compatible input signals. It determines the "lead" or "lag" phase relationship and the time difference between the leading edges of the waveforms. Since these edges occur only once per cycle, the detector has a range of $\pm 2\pi$ radians.

Operation of the device may be illustrated by assuming two waveforms, R and V (Figure 2), of the same frequency but differing in phase. If the logic had established by past history that R was leading V, the U output of the detector (pin 4) would produce a positive pulse width equal to the phase difference and the D output (pin 11) would simply remain low.

On the other hand, it is also possible that V was leading R (Figure 2), giving rise to a positive pulse on the D output and a constant low level on the U output pin. Both outputs for the sample condition are valid since the determination of lead or lag is dependent on past edge crossing and initial conditions at start-up. A stable phase-locked loop will result from either condition.

Phase error information is contained in the output duty cycle—that is, the ratio of the output pulse width to total period. By integrating or low-pass filtering the outputs of the detector and shifting the level to accommodate ECL swings, usable analog information for the voltage controlled oscillator can be developed. A circuit useful for this function is shown in Figure 3.

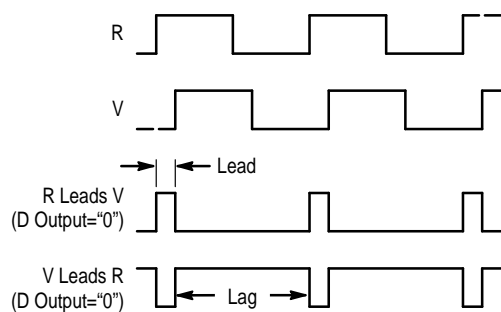


Figure 2. Timing Diagram


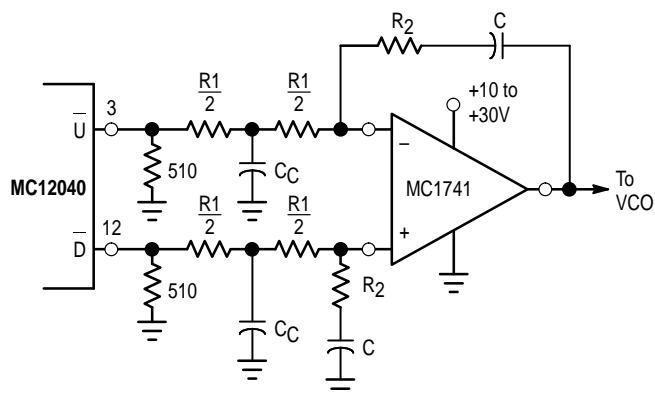


Figure 3. Typical Filter and Summing Network

OUTLINE DIMENSIONS

FN SUFFIX
PLASTIC PLCC PACKAGE
CASE 775-02
ISSUE C

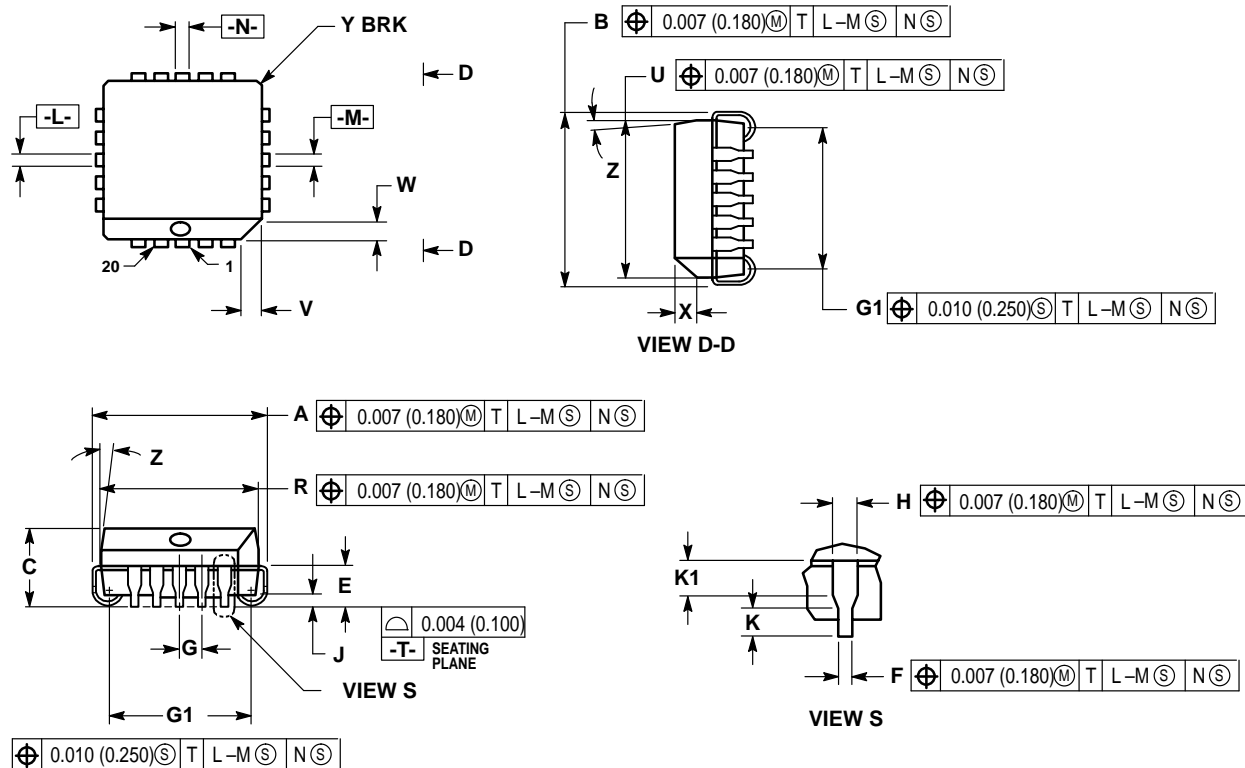


NOTES:

- DATUMS -L-, -M-, AND -N- DETERMINED WHERE TOP OF LEAD SHOULDER EXITS PLASTIC BODY AT MOLD PARTING LINE.
- DIM G1, TRUE POSITION TO BE MEASURED AT DATUM -T-, SEATING PLANE.
- DIM R AND U DO NOT INCLUDE MOLD FLASH. ALLOWABLE MOLD FLASH IS 0.010 (0.250) PER SIDE.
- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
- CONTROLLING DIMENSION: INCH.
- THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM BY UP TO 0.012 (0.300). DIMENSIONS R AND U ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY EXCLUSIVE OF MOLD FLASH, TIE BAR BURRS, GATE BURRS AND INTERLEAD FLASH, BUT INCLUDING ANY MISMATCH BETWEEN THE TOP AND BOTTOM OF THE PLASTIC BODY.
- DIMENSION H DOES NOT INCLUDE DAMBAR PROTRUSION OR INTRUSION. THE DAMBAR PROTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE GREATER THAN 0.037 (0.940). THE DAMBAR INTRUSION(S) SHALL NOT CAUSE THE H DIMENSION TO BE SMALLER THAN 0.025 (0.635).

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.385	0.395	9.78	10.03
B	0.385	0.395	9.78	10.03
C	0.165	0.180	4.20	4.57
E	0.090	0.110	2.29	2.79
F	0.013	0.019	0.33	0.48
G	0.050 BSC		1.27 BSC	
H	0.026	0.032	0.66	0.81
J	0.020	—	0.51	—
K	0.025	—	0.64	—
R	0.350	0.356	8.89	9.04
U	0.350	0.356	8.89	9.04
V	0.042	0.048	1.07	1.21
W	0.042	0.048	1.07	1.21
X	0.042	0.056	1.07	1.42
Y	—	0.020	—	0.50
Z	2°	10°	2°	10°
G1	0.310	0.330	7.88	8.38
K1	0.040	—	1.02	—

OUTLINE DIMENSIONS

L SUFFIX
CERAMIC PACKAGE
 CASE 632-08
 ISSUE Y

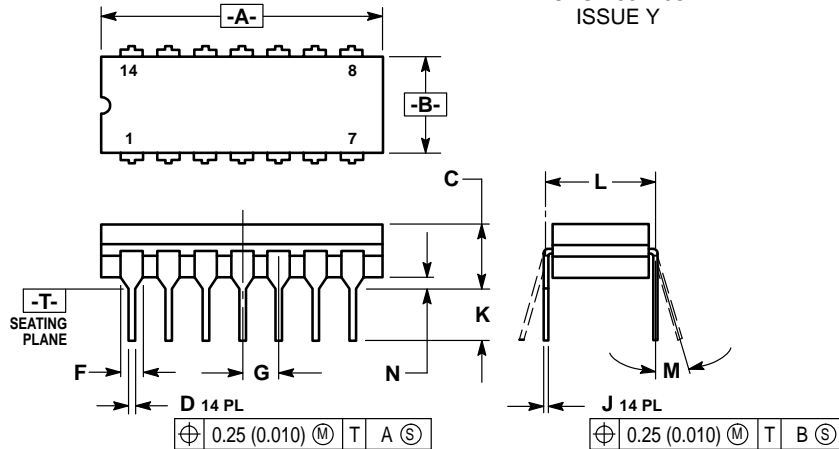


NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEAD WHEN FORMED PARALLEL.
4. DIMENSION F MAY NARROW TO 0.76 (0.030) WHERE THE LEAD ENTERS THE CERAMIC BODY.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.750	0.785	19.05	19.94
B	0.245	0.280	6.23	7.11
C	0.155	0.200	3.94	5.08
D	0.015	0.020	0.39	0.50
F	0.055	0.065	1.40	1.65
G	0.100 BSC		2.54 BSC	
J	0.008	0.015	0.21	0.38
K	0.125	0.170	3.18	4.31
L	0.300 BSC		7.62 BSC	
M	0°	15°	0°	15°
N	0.020	0.040	0.51	1.01


P SUFFIX
PLASTIC PACKAGE
 CASE 646-06
 ISSUE L

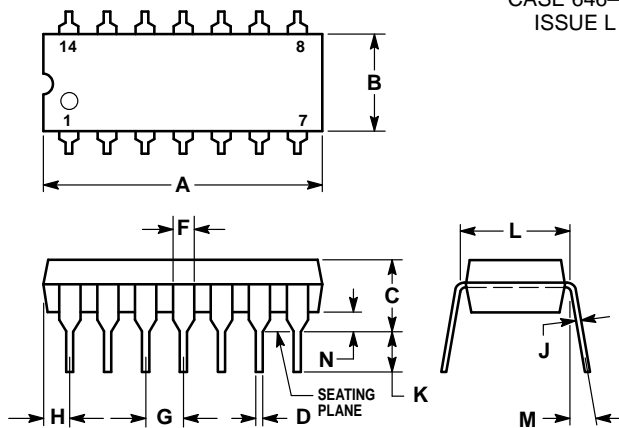

NOTES:

1. LEADS WITHIN 0.13 (0.005) RADIUS OF TRUE POSITION AT SEATING PLANE AT MAXIMUM MATERIAL CONDITION.
2. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
3. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
4. ROUNDED CORNERS OPTIONAL.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.715	0.770	18.16	19.56
B	0.240	0.260	6.10	6.60
C	0.145	0.185	3.69	4.69
D	0.015	0.021	0.38	0.53
F	0.040	0.070	1.02	1.78
G	0.100 BSC		2.54 BSC	
H	0.052	0.095	1.32	2.41
J	0.008	0.015	0.20	0.38
K	0.115	0.135	2.92	3.43
L	0.300 BSC		7.62 BSC	
M	0°	10°	0°	10°
N	0.015	0.039	0.39	1.01

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

