

1.1GHz Prescaler

The MC12073 is a divide by 64 prescaler. Typical frequency synthesis applications include electronically tuned TV/CATV and communication systems as well as instrumentation.

An internal preamplifier is included which isolates the differential inputs and provides gain for the input signal. Differential PECL outputs are provided.

- 1.1GHz Toggle Frequency
- Operating Supply Voltage of 4.5 to 5.5V
- Low-Power 23mA Typical at $V_{CC} = 5.0V$
- High Input Sensitivity, $20mV_{rms}$ at $V_{CC} = 5.0 \pm 10\%$, $T_A = 0^\circ C$ to $+70^\circ C$
- 800mV Minimum Peak-to-Peak Output Swing
- Differential PECL Outputs

MAXIMUM RATINGS

Symbol	Characteristic	Range	Unit
V_{CC}	Power Supply Voltage	7.0	Vdc
T_A	Operating Temperature Range	0 to +70	$^\circ C$
T_{stg}	Storage Temperature Range	-65 to +175	$^\circ C$

ELECTRICAL CHARACTERISTICS ($V_{CC} = 4.5$ to $5.5V$; $T_A = 0$ to $+70^\circ C$)

Symbol	Characteristic	Min	Typ*	Max	Unit
f_{max}^1 f_{min}	Toggle Frequency (Sine Wave Input)	1.1	1.3	90	GHz MHz
I_{CC}	Supply Current at 5.5V		23	30	mA
V_{out}	Output Voltage (Load = 10pF)	0.8	1.2		V_{pp}
$V_{in min}$	Input Voltage Sensitivity 150–1100MHz 90MHz		10	20 30	mV_{rms}
$V_{in max}$	Input Overload	200	400		mV_{rms}


* Typical measured at $+25^\circ C$, 5.0V

1. See Figure 1

MC12073

MECL PLL COMPONENTS

**$\div 64$
PRESCALER**




P SUFFIX
PLASTIC PACKAGE
CASE 626-05



D SUFFIX
PLASTIC SOIC PACKAGE CASE 751-05



Pinout: 8-Lead Plastic (Top View)


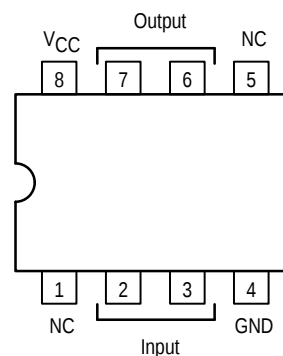


PRESCALER BLOCK DIAGRAM

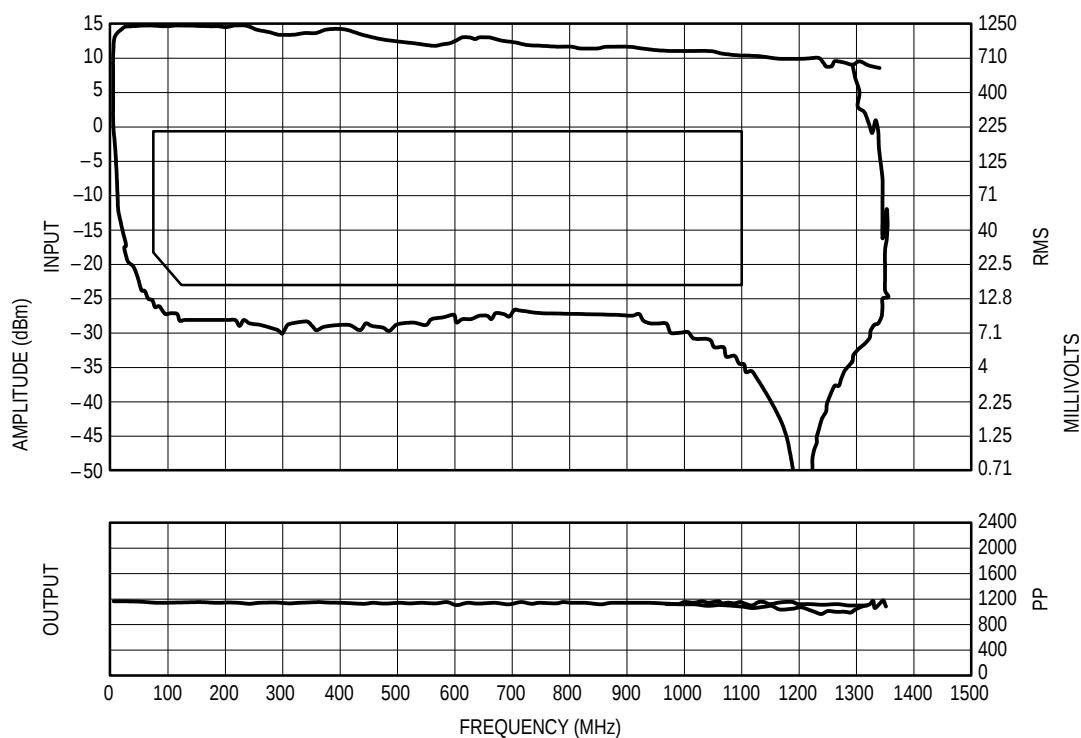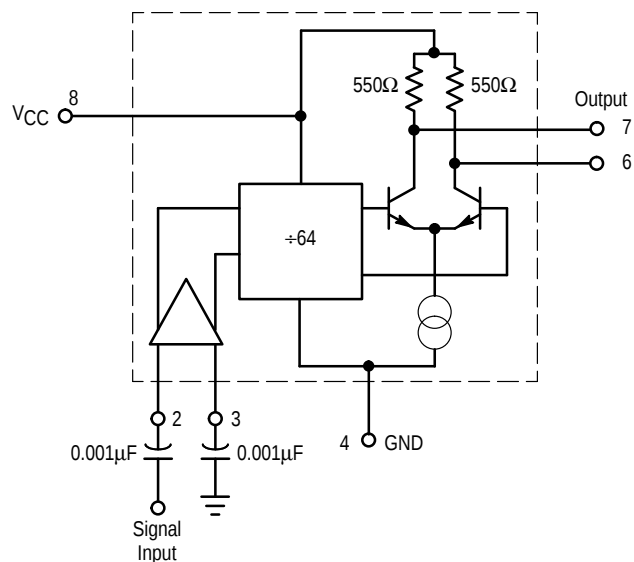**Figure 1. Divide Ratio = 64**

(Maximum Toggle Frequency: Min = 1348, Mean = 1348, Max = 1348
 Temp = 25°C, V_{CC} = 5.0V, Number of Devices = 1, I_{CC} (mA) = 22.51)

OUTLINE DIMENSIONS

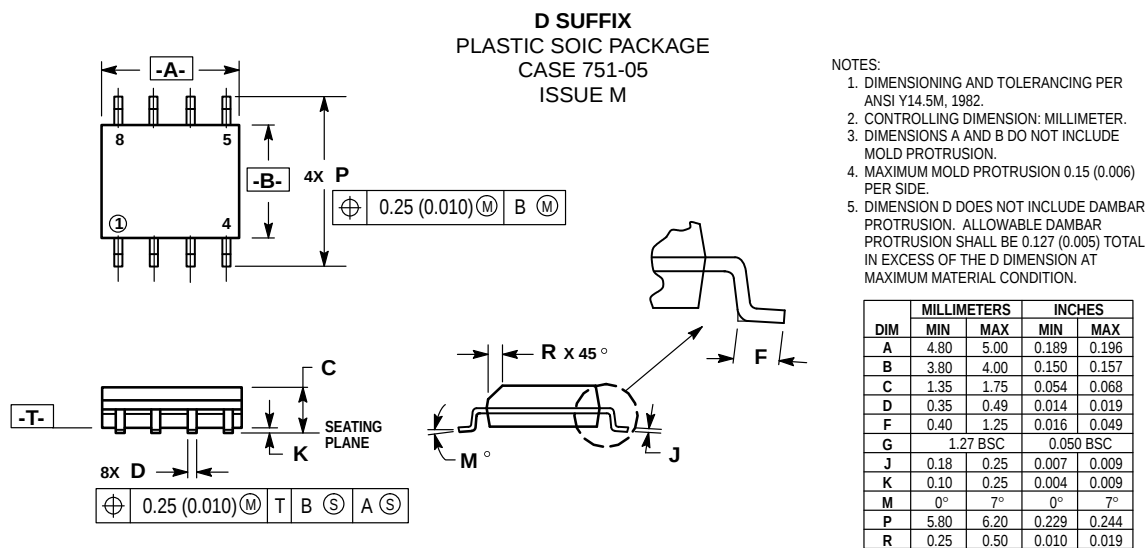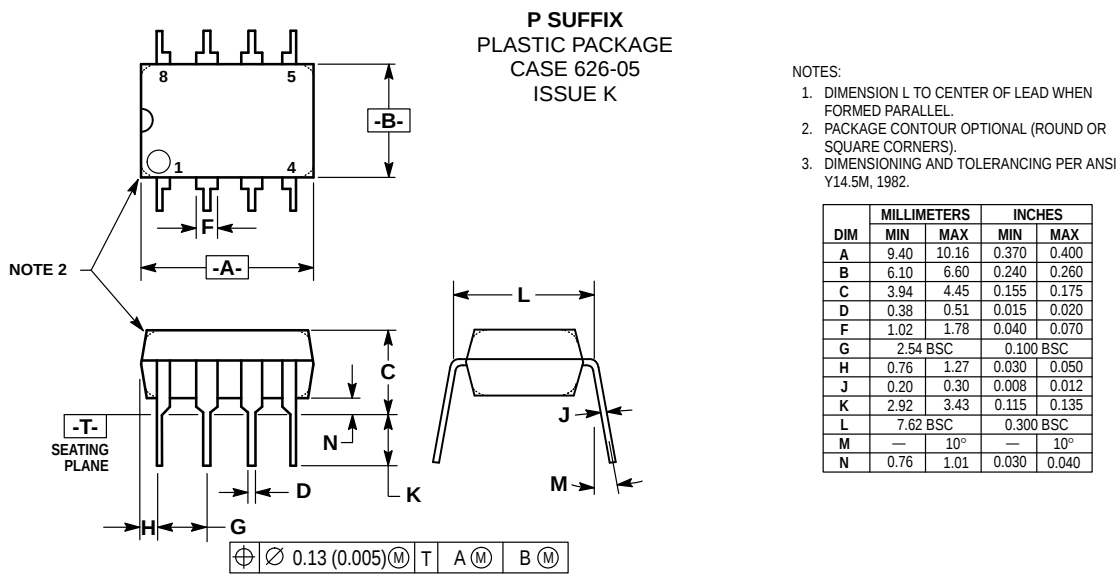

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:

USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.

EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.

JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141 Japan.

ASIA-PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.

