

TOSHIBA Transistor Silicon NPN Epitaxial Type (PCT Process)


## RN1507,RN1508,RN1509

Unit: mm


Switching, Inverter Circuit, Interface Circuit  
And Driver Circuit Applications

- Including two devices in SMV  
(super mini type with 5 leads)With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process
- Complementary to RN2507~RN2509

### Equivalent Circuit and Bias Resister Values



| Type No. | R1 (kΩ) | R2 (kΩ) |
|----------|---------|---------|
| RN1907   | 10      | 47      |
| RN1908   | 22      | 47      |
| RN1909   | 47      | 22      |

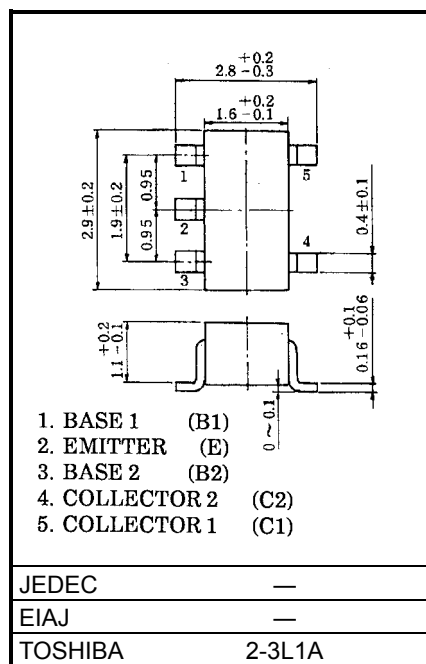


Weight: 0.014g

### Equivalent Circuit (Top View)

### Maximum Ratings (Ta = 25°C) (Q1, Q2 Common)

| Characteristic              |             | Symbol    | Rating  | Unit |
|-----------------------------|-------------|-----------|---------|------|
| Collector-base voltage      | RN1507~1509 | $V_{CBO}$ | 50      | V    |
| Collector-emitter voltage   |             | $V_{CEO}$ | 50      | V    |
| Emitter-base voltage        | RN1507      | $V_{EBO}$ | 6       | V    |
|                             | RN1508      |           | 7       |      |
|                             | RN1509      |           | 15      |      |
| Collector current           | RN1507~1509 | $I_C$     | 100     | mA   |
| Collector power dissipation |             | $P_C$ *   | 300     | mW   |
| Junction temperature        |             | $T_j$     | 150     | °C   |
| Storage temperature range   |             | $T_{stg}$ | -55~150 | °C   |

\* : Total rating



## Electrical Characteristics (Ta = 25°C) (Q1, Q2 Common)

| Characteristic                       |             | Symbol        | Test Circuit | Test Condition                    | Min   | Typ.  | Max   | Unit |
|--------------------------------------|-------------|---------------|--------------|-----------------------------------|-------|-------|-------|------|
| Collector cut-off current            | RN1507~1509 | $I_{CBO}$     | —            | $V_{CB} = 50V, I_E = 0$           | —     | —     | 100   | nA   |
|                                      |             | $I_{CEO}$     |              | $V_{CE} = 50V, I_B = 0$           | —     | —     | 500   | nA   |
| Emitter cut-off current              | RN1507      | $I_{EBO}$     | —            | $V_{EB} = 6V, I_C = 0$            | 0.081 | —     | 0.15  | mA   |
|                                      | RN1508      |               |              | $V_{EB} = 7V, I_C = 0$            | 0.078 | —     | 0.145 |      |
|                                      | RN1509      |               |              | $V_{EB} = 15V, I_C = 0$           | 0.167 | —     | 0.311 |      |
| DC current gain                      | RN1507      | $h_{FE}$      | —            | $V_{CE} = 5V, I_C = 10mA$         | 80    | —     | —     |      |
|                                      | RN1508      |               |              |                                   | 80    | —     | —     |      |
|                                      | RN1509      |               |              |                                   | 70    | —     | —     |      |
| Collector-emitter saturation voltage | RN1507~1509 | $V_{CE(sat)}$ | —            | $I_C = 5mA, I_B = 0.25mA$         | —     | 0.1   | 0.3   | V    |
| Input voltage (ON)                   | RN1507      | $V_{I(ON)}$   | —            | $V_{CE} = 0.2V, I_C = 5mA$        | 0.7   | —     | 1.8   | V    |
|                                      | RN1508      |               |              |                                   | 1.0   | —     | 2.6   |      |
|                                      | RN1509      |               |              |                                   | 2.2   | —     | 5.8   |      |
| Input voltage (OFF)                  | RN1507      | $V_{I(OFF)}$  | —            | $V_{CE} = 5V, I_C = 0.1mA$        | 0.5   | —     | 1.0   | V    |
|                                      | RN1508      |               |              |                                   | 0.6   | —     | 1.16  |      |
|                                      | RN1509      |               |              |                                   | 1.5   | —     | 2.6   |      |
| Transition frequency                 | RN1507~1509 | $f_T$         | —            | $V_{CE} = 10V, I_C = 5mA$         | —     | 250   | —     | MHz  |
| Collector Output capacitance         | RN1507~1509 | $C_{ob}$      | —            | $V_{CB} = 10V, I_E = 0, f = 1MHz$ | —     | 3     | 6     | pF   |
| Input resistor                       | RN1507      | R1            | —            |                                   | 7     | 10    | 13    | kΩ   |
|                                      | RN1508      |               |              |                                   | 15.4  | 22    | 28.6  |      |
|                                      | RN1509      |               |              |                                   | 32.9  | 47    | 61.1  |      |
| Resistor ratio                       | RN1507      | R1/R2         | —            |                                   | 0.191 | 0.213 | 0.232 |      |
|                                      | RN1508      |               |              |                                   | 0.421 | 0.468 | 0.515 |      |
|                                      | RN1509      |               |              |                                   | 1.92  | 2.14  | 2.35  |      |

