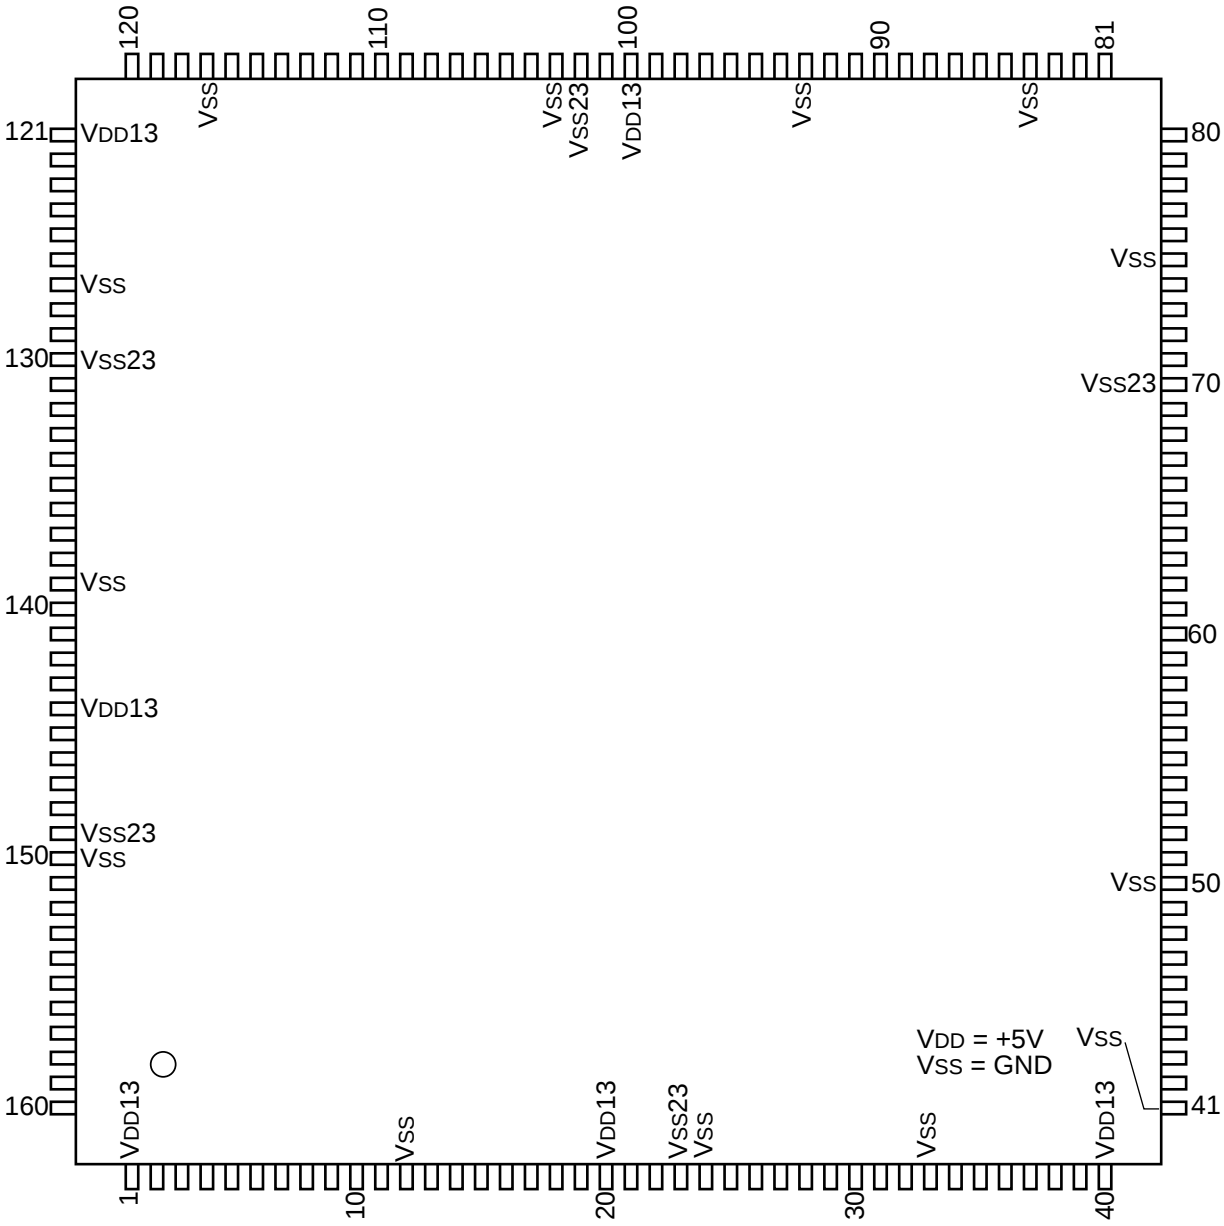

C-MOS ECC AND RLL1-7 ENCODE (GATE ARRAY)

-TOP VIEW-



PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL	PIN No.	I/O	SIGNAL
1	—	VDD	41	—	Vss	81	I/O	RAM2 I/O 5	121	—	VDD
2	O	DPBUF CS	42	I/O	RAM1 I/O 0	82	I/O	RAM2 I/O 6	122	I/O	DATA I/O 4
3	O	DP CS	43	I/O	RAM1 I/O 1	83	I/O	RAM2 I/O 7	123	I/O	DATA I/O 3
4	I	CK32M	44	I/O	RAM1 I/O 2	84	—	Vss	124	I/O	DATA I/O 2
5	O	SODN	45	I/O	RAM1 I/O 3	85	O	RAM2 WE	125	I/O	DATA I/O 1
6	O	SOCN	46	I/O	RAM1 I/O 4	86	O	RAM2 A0	126	I/O	DATA I/O 0
7	O	SODT	47	I/O	RAM1 I/O 5	87	O	RAM2 A1	127	—	Vss
8	O	SOCT	48	I/O	RAM1 I/O 6	88	O	RAM2 A2	128	I	CS3
9	I	CK46M	49	I/O	RAM1 I/O 7	89	O	RAM2 A3	129	I	CS4
10	O	PTC CS	50	—	Vss (FIX)	90	O	RAM2 A4	130	—	Vss (FIX)
11	O	BUFC CS	51	O	RAM1 WE	91	O	RAM2 A5	131	I	CS6
12	—	Vss	52	I	WEEXT	92	O	RAM2 A6	132	O	SPC R/W
13	O	PI OE1	53	O	WEINT	93	—	Vss	133	O	UDS
14	O	PO WE1	54	O	BP 0	94	O	RAM2 A7	134	O	LDS
15	O	PI OE2	55	O	BP 1	95	O	RAM2 A8	135	I	CPU CK
16	O	PO WE2	56			96	O	RAM2 A9	136	I	WRH
17	O	SPC CS0	57	I	SIDN 0	97	O	RAM2 A10	137	I	WRL
18	O	SPC CS1	58	I	SIDN 1	98	O	RAM2 A11	138	O	WAIT
19	O	SPS RST	59	I	SICN	99	O	RAM2 A12	139	—	Vss
20	—	VDD (FIX)	60	I	RENN	100	—	VDD (FIX)	140	I/O	CPU D0
21	I	CPU RST	61	I	RSMN	101	O	RAM2 A13	141	I/O	CPU D1
22	I	TGNTSEL	62	I	WRSTN	102	—	Vss	142	I/O	CPU D2
23	—	Vss	63	I	WRSTT	103	—	Vss	143	I/O	CPU D3
24	—	Vss	64	I	RENT	104	I	MCLK	144	—	VDD
25	O	RAM1 A0	65	I	RSMT	105	O	BP 4	145	I/O	CPU D4
26	O	RAM1 A1	66	O	BP 2	106	I	CK25M	146	I/O	CPU D5
27	O	RAM1 A2	67	O	BP 3	107	O	BUF EN	147	I/O	CPU D6
28	O	RAM1 A3	68	O	SM EN	108	O	BP 5	148	I/O	CPU D7
29	O	RAM1 A4	69	I	CHSEL	109	O	BP 6	149	—	Vss
30	O	RAM1 A5	70	—	Vss (FIX)	110	O	CRCERT	150	—	Vss (FIX)
31	O	RAM1 A6	71	I	SIDT 0	111	O	CRCERN	151	I	RD
32	O	RAM1 A7	72	I	SIDT 1	112	O	DERRT	152	I	CPU A0
33	—	Vss	73	—	VDD	113	O	DERRN	153	I	CPU A1
34	O	RAM1 A8	74	I	SICT	114	I	ECCTEST	154	I	CPU A2
35	O	RAM1 A9	75	—	Vss	115	O	DIR	155	I	CPU A3
36	O	RAM1 A10	76	I/O	RAM2 I/O 0	116	O	BP 7	156	I	CPU A4
37	O	RAM1 A11	77	I/O	RAM2 I/O 1	117	—	Vss	157	I	CPU A5
38	O	RAM1 A12	78	I/O	RAM2 I/O 2	118	I/O	DATA I/O 7	158	I	CPU A6
39	O	RAM1 A13	79	I/O	RAM2 I/O 3	119	I/O	DATA I/O 6	159	I	CPU A7
40	—	VDD	80	I/O	RAM2 I/O 4	120	I/O	DATA I/O 5	160	I	CA11

INPUT

CA11	; CPU ADDRESS 11
CHSEL	; CHANNEL SELECT (L : CH1/H : CH2)
CK25M	; MEMORY CONTROLLER CLOCK 2.5 MHz
CK32M	; CHANNEL CLOCK (INSIDE) 32 MHz
CK46M	; CHANNEL CLOCK (OUTSIDE) 46 MHz
CPU A 0-7	; CPU ADDRESS
CPU CK	; CPU CLOCK (20 MHz)
CPU RST	; RESET
CS3, 4, 6	; CHIP SELECT
ECCTEST	; H : ECC TEST MODE
MCLK	; ECC MASTER CLOCK (10 MHz)
RD	; CPU READ
RENN	; READ ENABLE (INSIDE)
RENT	; READ ENABLE (OUTSIDE)
RSMN	; RESET SECTOR MARK (INSIDE)
RSMT	; RESET SECTOR MARK (OUTSIDE)
SICN	; SERIAL IN CLOCK (INSIDE)
SICT	; SERIAL IN CLOCK (OUTSIDE)
SIDN 0, 1	; SERIAL IN DATA (INSIDE)
SIDT 0, 1	; SERIAL IN DATA (OUTSIDE)
TGNTSEL	; REF. TIMING SELECT (L : INSIDE, H : OUTSIDE)
WEEXT	; EXTERNAL WE IN
WRH	; CPU WRITE (HIGH)
WRL	; CPU WRITE (LOW)
WRSTN	; WRITE RESET (INSIDE)
WRSTT	; WRITE RESET (OUTSIDE)

OUTPUT

BP 0-7	; BIT PORT
BUF EN	; BUFFER ENABLE
BUFC CS	; BUFFER CONTROLLER CHIP SELECT [OCYCEND]
CRCERN	; CRC ERROR (INSIDE)
CRCERT	; CRC ERROR (OUTSIDE)
DERRN	; DATA ERROR (INSIDE)
DERRT	; DATA ERROR (OUTSIDE)
DIR	; DIRECTION L : ENCODE/H : DECODE
DP CS	; DUAL PORT RAM CHIP SELECT [OCDEND]
DPBUF CS	; DUAL PORT BUFFER CHIP SELECT [OSTART]
LDS	; SPC LOWER DATA SELECT
PI OE1	; PORT1 READ
PI OE2	; PORT2 READ [USGERR]
PO WE1	; PORT1 WRITE
PO WE2	; PORT2 WRITE
PTC CS	; PULSE TRAIN CONTROLLER CHIP SELECT
RAM1 A 0-13	; MEMORY1 ADDRESS
RAM1 WE	; MEMORY1 WRITE ENABLE
RAM2 A 0-13	; MEMORY2 ADDRESS
RAM2 WE	; MEMORY2 WRITE ENABLE
SM EN	; SECTOR MARK ENABLE
SOCN	; SERIAL OUT CLOCK (INSIDE)
SOCT	; SERIAL OUT CLOCK (OUTSIDE)
SODN	; SERIAL OUT DATA (INSIDE)
SODT	; SERIAL OUT DATA (OUTSIDE) [OCODEERR]
SPC CS 0, 1	; SCSI PROTOCOL CONTROLLER CHIP SELECT
SPC R W	; SPC READ/WRITE (H : READ/L : WRITE)
SPC RST	; SCSI PROTOCOL CONTROLLER RESET
UDS	; SPC UPPER DATA SELECT
WAIT	; CPU WAIT
WEINT	; INTERNAL WE OUT

INPUT/OUTPUT

CPU D 0-7	; CPU DATA
DATAIO 0-7	; DATA I/O
RAM1 IO 0-7	; MEMORY1 DATA
RAM2 IO 0-7	; MEMORY2 DATA