

Plug N Drive™ Integrated Power Module for Appliance Motor Drive

Description

International Rectifier's IRAMS10UP60A is an Integrated Power Module developed and optimized for electronic motor control in appliance applications such as washing machines and refrigerators. Plug N Drive technology offers an extremely compact, high performance AC motor-driver in a single isolated package for a very simple design.

A built-in temperature monitor and over-temperature/over-current protection, along with the short-circuit rated IGBTs and integrated under-voltage lockout function, deliver high level of protection and fail-safe operation.

The integration of the bootstrap diodes for the high-side driver section, and the single polarity power supply required to drive the internal circuitry, simplify the utilization of the module and deliver further cost reduction advantages.

Features


- Integrated Gate Drivers and Bootstrap Diodes.
- Temperature Monitor
- Temperature and Overcurrent shutdown
- Fully Isolated Package.
- Low VCE (on) Non Punch Through IGBT Technology
- Under-voltage lockout for all channels
- Matched propagation delay for all channels
- Low side IGBT emitter pins for current control
- Schmitt-triggered input logic
- Cross-conduction prevention logic
- Lower di/dt gate driver for better noise immunity



Absolute Maximum Ratings

Parameter	Description	Max. Value	Units
V_{CES}	Maximum IGBT Blocking Voltage	600	V
$I_o @ T_C - 25^{\circ}C$	RMS Phase Current	10	A
$I_o @ T_C - 100^{\circ}C$	RMS Phase Current	5	
I_{pk}	Maximum Peak Phase Current ($t_p < 100ms$)	15	
F_p	Maximum PWM Carrier Frequency	20	kHz
P_d	Maximum Power dissipation per Phase	20	W
V_{iso}	Isolation Voltage (1min)	2000	V_{RMS}
T_J (IGBT & Diodes)	Operating Junction temperature Range	-40 to +150	$^{\circ}C$
T_J (Driver IC)	Operating Junction temperature Range	-40 to +150	
T	Mounting torque Range (M3 screw)	0.8 to 1.0	Nm

Internal Electrical Schematic - IRAMS10UP60A

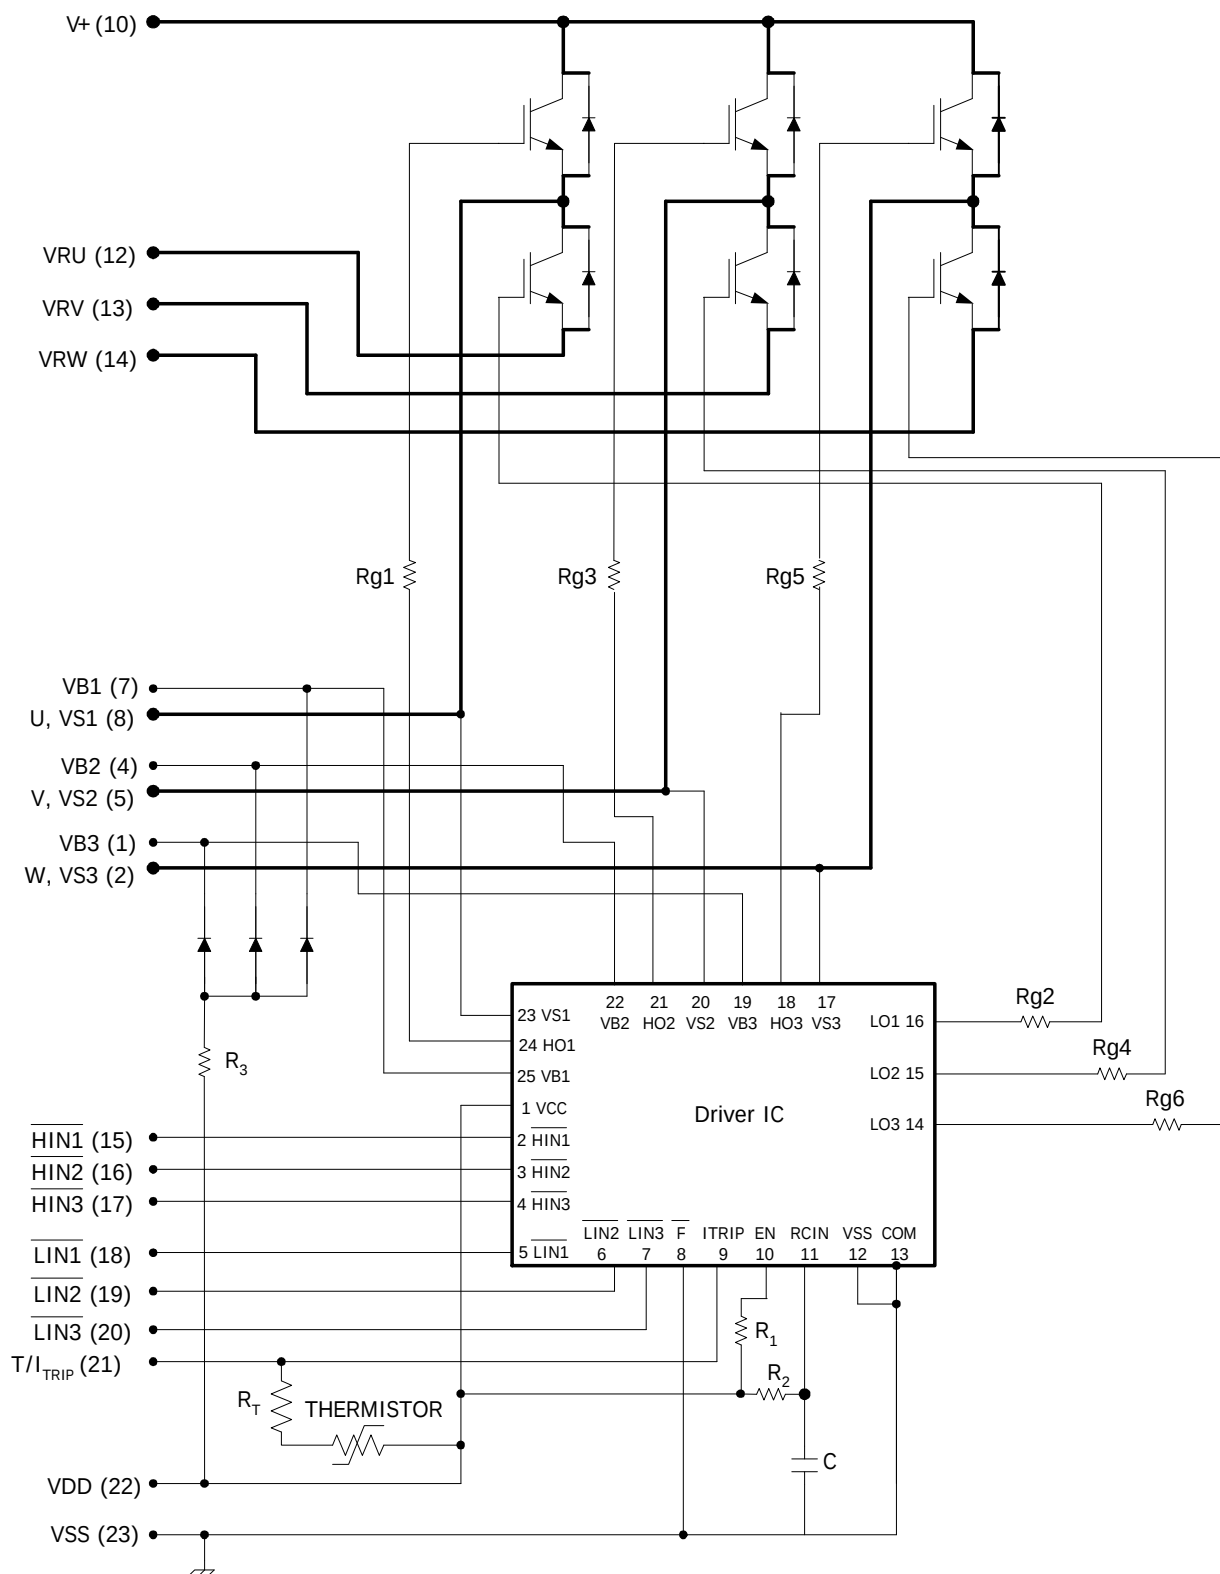

Inverter Section Electrical Characteristics @ $T_J = 25^\circ\text{C}$

Symbol	Parameter	Min	Typ	Max	Units	Conditions
$V_{(BR)CES}$	Collector-to-Emitter Breakdown Voltage	600	---	---	V	$V_{IN}=0V$, $I_C=20\mu A$
$\Delta V_{(BR)CES} / \Delta T$	Temperature Coeff. Of Breakdown Voltage	---	0.57	---	V/ $^\circ\text{C}$	$V_{IN}=0V$, $I_C=1.0mA$ ($25^\circ\text{C} - 150^\circ\text{C}$)
$V_{CE(ON)}$	Collector-to-Emitter Saturation Voltage	---	1.7	2.0	V	$I_C=5A$ $T_J=25^\circ\text{C}$, $V_{DD}=15V$
		---	2.0	2.4		$I_C=5A$ $T_J=150^\circ\text{C}$
I_{CES}	Zero Gate Voltage Collector Current	---	5	15	μA	$V_{IN}=5V$, $V^+=600V$
		---	10	40		$V_{IN}=5V$, $V^+=600V$, $T_J=150^\circ\text{C}$
V_{FM}	Diode Forward Voltage Drop	---	1.8	2.35	V	$I_C=5A$
		---	1.3	1.7		$I_C=5A$, $T_J=150^\circ\text{C}$

Inverter Section Switching Characteristics

Symbol	Parameter	Min	Typ	Max	Units	Conditions
E_{on}	Turn-On Switching Loss	---	200	235	μJ	$I_C=5A$, $V^+=400V$ $V_{DD}=15V$, $L=1mH$
E_{off}	Turn-Off Switching Loss	---	75	100		
E_{tot}	Total Switching Loss	---	275	335		$T_J=25^\circ\text{C}$
E_{on}	Turn-on Switching Loss	---	300	360	μJ	See CT1 $T_J=150^\circ\text{C}$
E_{off}	Turn-off Switching Loss	---	135	165		Energy losses include "tail" and diode reverse recovery
E_{tot}	Total Switching Loss	---	435	525		
E_{rec}	Diode Reverse Recovery energy	---	30	40	μJ	$T_J=150^\circ\text{C}$, $V^+=400V$ $V_{DD}=15V$, $I_F=5A$, $L=1mH$
t_{rr}	Diode Reverse Recovery time	---	100	145	ns	
RBSOA	Reverse Bias Safe Operating Area	FULL SQUARE				$T_J=150^\circ\text{C}$, $I_C=5A$, $V_P=600V$ $V^+=480V$, $V_{DD}=+15V$ to $0V$ See CT3
SCSOA	Short Circuit Safe Operating Area	10	---	---	μs	$T_J=150^\circ\text{C}$, $V_P=600V$, $V^+=360V$, $V_{DD}=+15V$ to $0V$ See CT2

Thermal Resistance

Symbol	Parameter	Min	Typ	Max	Units	Conditions
$R_{th(J-C)}$	Junction to case thermal resistance, each IGBT under inverter operation.	---	4.2	4.7	$^\circ\text{C}/W$	Flat, greased surface. Heatsink compound thermal conductivity - $1W/mK$
$R_{th(J-C)}$	Junction to case thermal resistance, each Diode under inverter operation.	---	5.5	6.5	$^\circ\text{C}/W$	
$R_{th(C-S)}$	Thermal Resistance case to sink	---	0.1	---	$^\circ\text{C}/W$	

Absolute Maximum Ratings Driver Function

Absolute Maximum Ratings indicate substaines limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to V_{SS} (Note 1)

Symbol	Definition	Min	Max	Units
$V_{S1,2,3}$	High Side offset voltage	-0.3	600	V
$V_{B1,2,3}$	High Side floating supply voltage	-0.3	20	V
V_{DD}	Low Side and logic fixed supply voltage	-0.3	20	V
V_{IN}	Input voltage LIN, HIN, T/I _{TRIP}	-0.3	7	V
T_J	Juction Temperature	-40	150	°C

Recommended Operating Conditions Driver Function

The Input/Output logic timing diagram is shown in Figure 1. For proper operation the device should be used within the recommended conditions. All voltages are absolute referenced to V_{SS} . The V_S offset is tested with all supplies biased at 15V differential (Note 1)

Symbol	Definition	Min	Max	Units
$V_{B1,2,3}$	High side floating supply voltage	V_S+12	V_S+20	V
$V_{S1,2,3}$	High side floating supply offset voltage	Note 2	450	
V_{DD}	Low side and logic fixed supply voltage	12	20	V
V_{ITRIP}	T/I _{TRIP} input voltage	V_{SS}	$V_{SS}+5$	
V_{IN}	Logic input voltage LIN, HIN	V_{SS}	$V_{SS}+5$	V

Static Electrical Characteristics Driver Function

V_{BIAS} (V_{CC} , $V_{BS1,2,3}$)=15V, unless otherwise specified. The V_{IN} and I_{IN} parameters are referenced to V_{SS} and are applicable to all six channels. (Note 1)

Symbol	Definition	Min	Typ	Max	Units
$V_{IN,th+}$	Positive going input threshold	3.0	---	---	V
$V_{IN,th-}$	Negative going input threshold	---	---	0.8	V
V_{CCUV+} V_{BSUV+}	V_{CC} and V_{BS} supply undervoltage Positive going threshold	10.6	11.1	11.6	V
V_{CCUV-} V_{BSUV-}	V_{CC} and V_{BS} supply undervoltage Negative going threshold	10.4	10.9	11.4	V
V_{CCUVH} V_{BSUVH}	V_{CC} and V_{BS} supply undervoltage $I_{lockout}$ hysteresis	---	0.2	---	V
I_{QBS}	Quiescent V_{BS} supply current	---	70	120	μA
I_{QCC}	Quiscent V_{CC} supply current	---	1.6	2.3	mA
I_{LK}	Offset Supply Leakage Current	---	---	50	μA
I_{IN+}	Input bias current (OUT=LO)	---	100	220	μA
I_{IN+}	Input bias current (OUT=HI)	---	200	300	μA
$V(I_{TRIP})$	I_{TRIP} threshold Voltage (OUT=HI or OUT=LO)	3.85	4.3	4.75	V

Dynamic Electrical Characteristics

$V_{DD}=V_{BS}=V_{BIAS}=15V$, $I_O=1A$, $V_D=9V$, $PWM_{IN}=2kHz$, $V_{IN_ON}=V_{IN_th+}$, $V_{IN_OFF}=V_{IN_th-}$
 $T_A=25^{\circ}C$, unless otherwise specified

Symbol	Definition	Min	Typ	Max	Units
T_{ON}	Input to output propagation turn-on delay time (see fig.11)	-	470	-	ns
T_{OFF}	Input to output propagation turn-off delay time (see fig. 11)	-	615	-	ns
D_T	Dead Time	-	300	-	ns
I/T_{Trip}	T/I_{Trip} to six switch to turn-off propagation delay (see fig. 2)	-	750	-	ns
T_{FCLTRL}	Post I_{Trip} to six switch to turn-off clear time (see fig. 2)	-	9	-	ms


Internal NTC - Thermistor Characteristics

Parameter	Typ	Units	Conditions
R_{25} Resistance	100 +/- 5%	k Ω	$T_C = 25^{\circ}C$
R_{125} Resistance	2.522 + 17.3 % /- 14.9%	k Ω	$T_C = 125^{\circ}C$
B B-Constant (25-50 $^{\circ}C$)	4250 +/- 3%	k	$R_2 = R_1 e^{[B(1/T_2 - 1/T_1)]}$
Temperature Range	-40 / 125	$^{\circ}C$	
Typ. Dissipation constant	1	mW/ $^{\circ}C$	$T_C = 25^{\circ}C$

Note 1: For more details, see IR21365 data sheet


Note 2: Logic operational for V_S from $V^- -5V$ to $V^- +600V$. Logic stata held for V_S from $V^- -5V$ to $V^- -V_{BS}$. (Please refer to DT97-3 for more details)

Thermistor Built-in IRAMS10UP60A

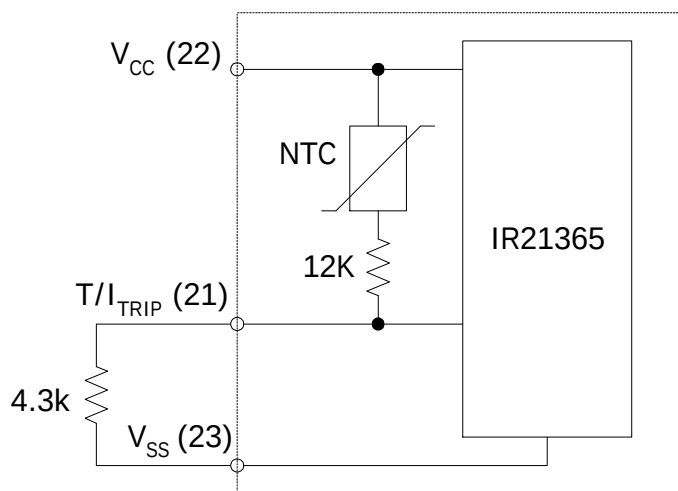


Note 3: The Maximum recommended sense voltage at the T/I_{TRIP} terminal under normal operating conditions is 3.3V.

Figure1. Input/Output Timing Diagram

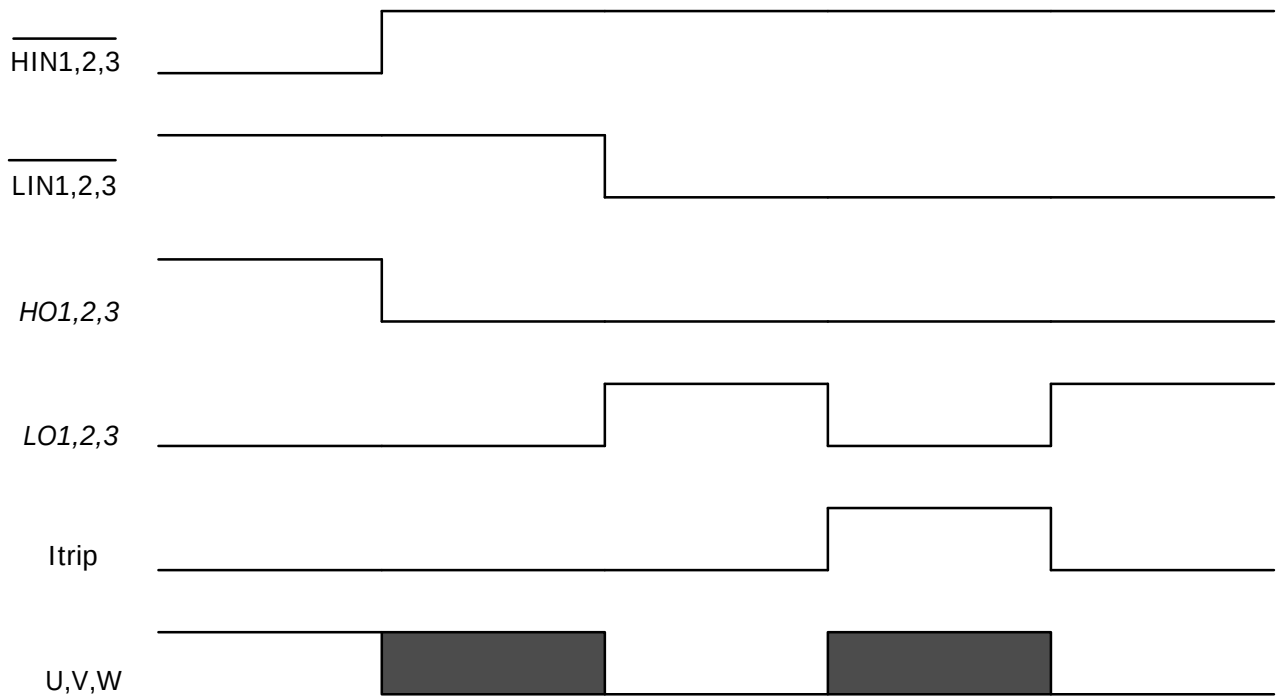


Note 4: The shaded area indicates that both high-side and low-side switches are off and therefore the half-bridge output voltage would be determined by the direction of current flow in the load.

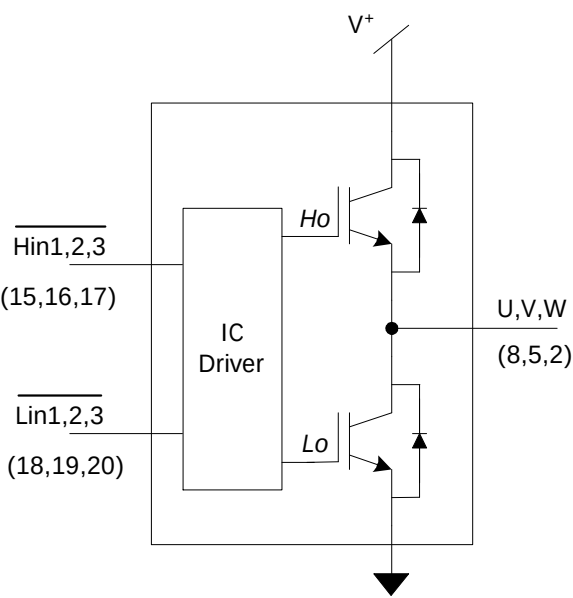

$Itrip$	$\overline{HIN1,2,3}$	$\overline{LIN1,2,3}$	U,V,W
0	0	1	V_{bus}
0	1	0	0
0	1	1	X
1	X	X	X

Figure 2. T/I_{Trip} Timing Waveform

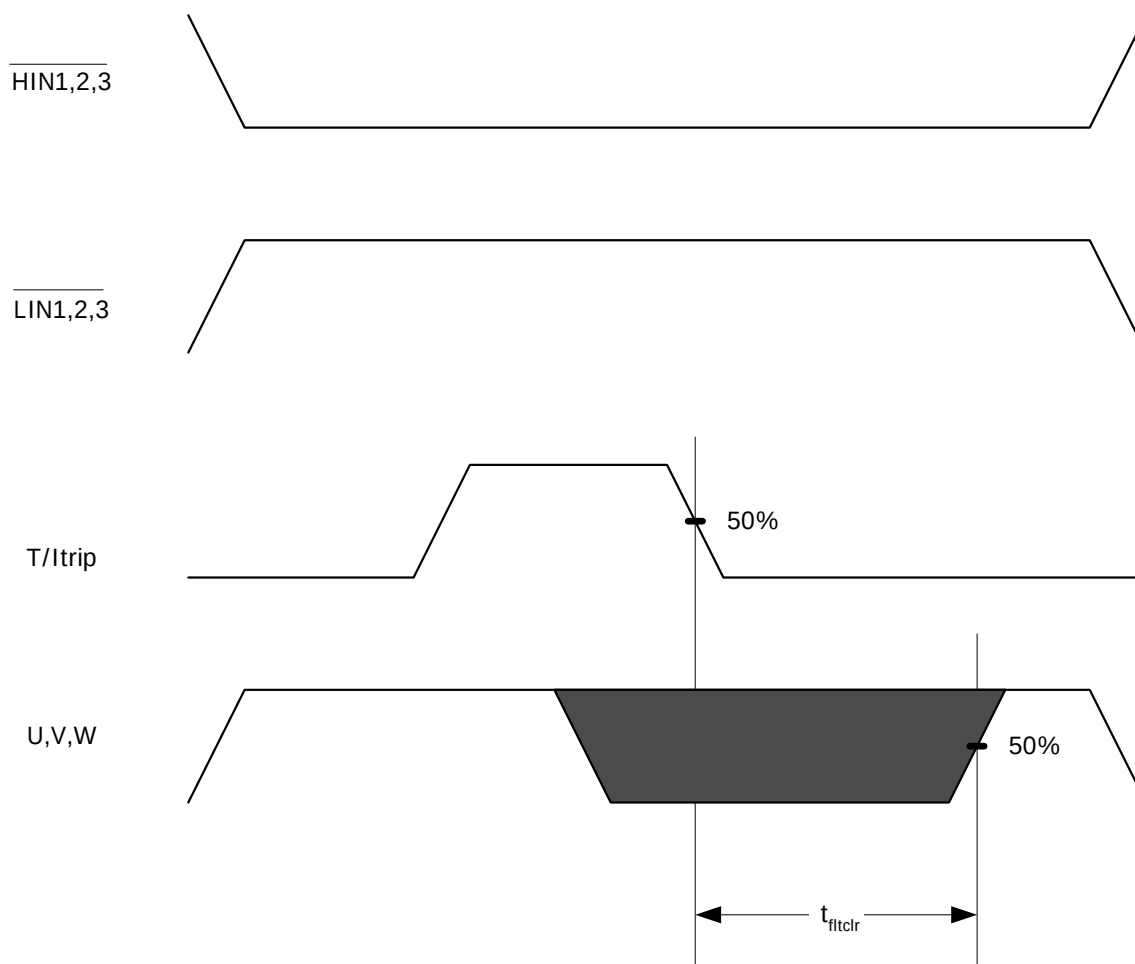


Note 5: The shaded area indicates that both high-side and low-side switches are off and therefore the half-bridge output voltage would be determined by the direction of current flow in the load.

Module Pin-Out Description

Pin	Name	Description
1	VB3	High Side Floating Supply Voltage 3
2	W,VS3	Output 3 - High Side Floating Supply Offset Voltage
3	na	none
4	VB2	High Side Floating Supply voltage 2
5	V,VS2	Output 2 - High Side Floating Supply Offset Voltage
6	na	none
7	VB1	High Side Floating Supply voltage 1
8	U,VS1	Output 1 - High Side Floating Supply Offset Voltage
9	na	none
10	V+	Positive Bus Input Voltage
11	na	none
12	LE1	Low Side Emitter Connection - Phase 1
13	LE2	Low Side Emitter Connection - Phase 2
14	LE3	Low Side Emitter Connection - Phase 3
15	HIN1	Logic Input High Side Gate Driver - Phase 1
16	HIN2	Logic Input High Side Gate Driver - Phase 2
17	HIN3	Logic Input High Side Gate Driver - Phase 3
18	LIN1	Logic Input Low Side Gate Driver - Phase 1
19	LIN2	Logic Input Low Side Gate Driver - Phase 2
20	LIN3	Logic Input Low Side Gate Driver - Phase 3
21	T/Itrip	Temperature Monitor and Shut-down Pin
22	VCC	+15V Main Supply
23	VSS	Negative Main Supply

Typical Application Connection IRAMS10UP60A

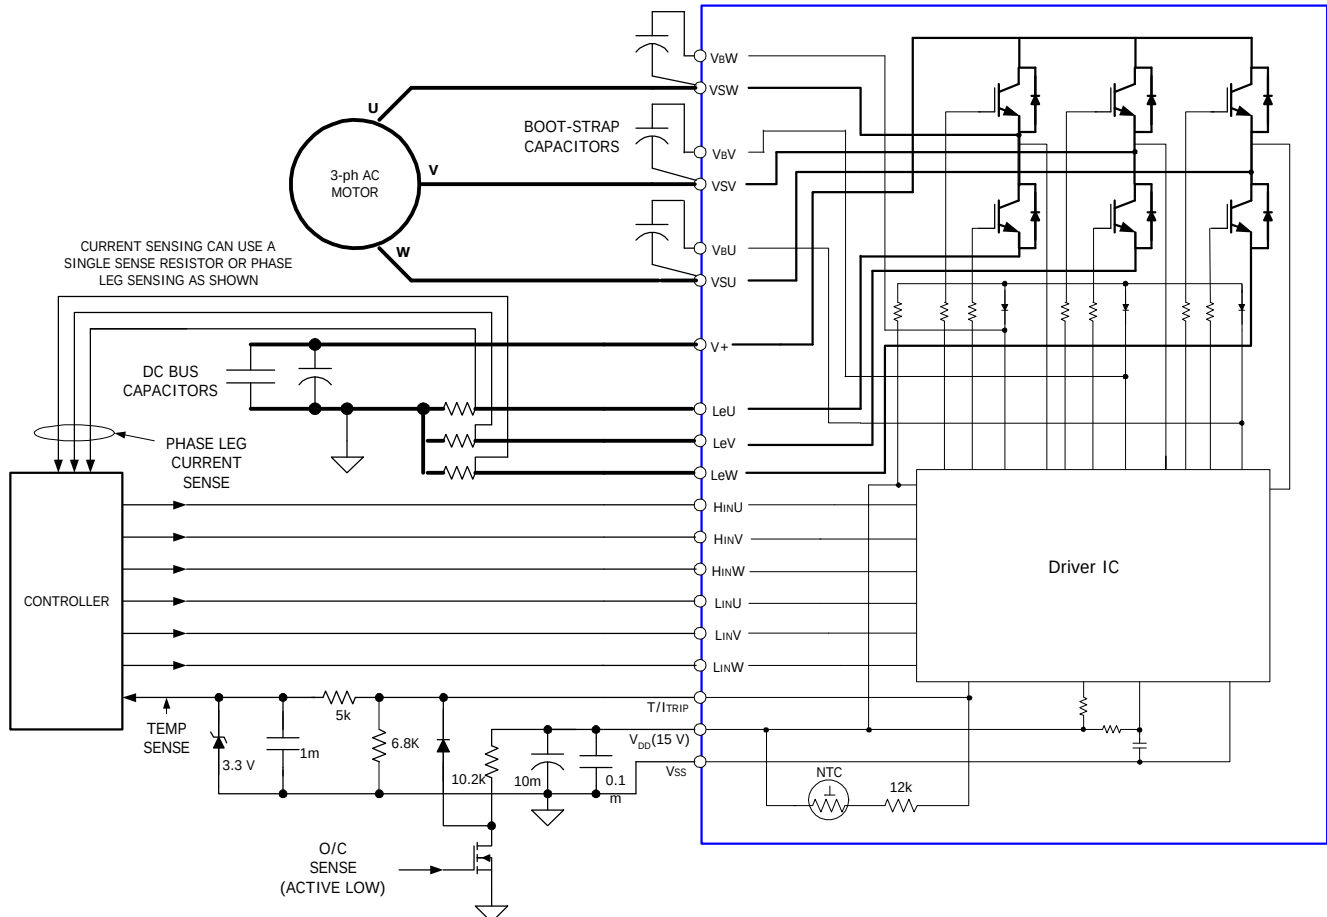

1. Electrolytic bus capacitors should be mounted as close to the module bus terminals as possible to reduce ringing and EMI problems. Additional high frequency ceramic capacitor mounted close to the module pins will further improve performance.
2. In order to provide good decoupling between V_{CC} -Gnd and V_B - V_{SS} terminals, the capacitors shown connected between these terminals should be located very close to the module pins. Additional high frequency capacitors, typically 0.1mF, are strongly recommended.
3. Value of the boot-strap capacitors depends upon the switching frequency. Their selection should be made based on IR design tip DN 98-2a, application note AN-1044 or Figure 9.
4. Low inductance shunt resistors should be used for phase leg current sensing. Similarly, the length of the traces between pins 12, 13 and 14 to the corresponding shunt resistors should be kept as small as possible.
5. Over-current sense signal can be obtained from external hardware detecting excessive instantaneous current in inverter.

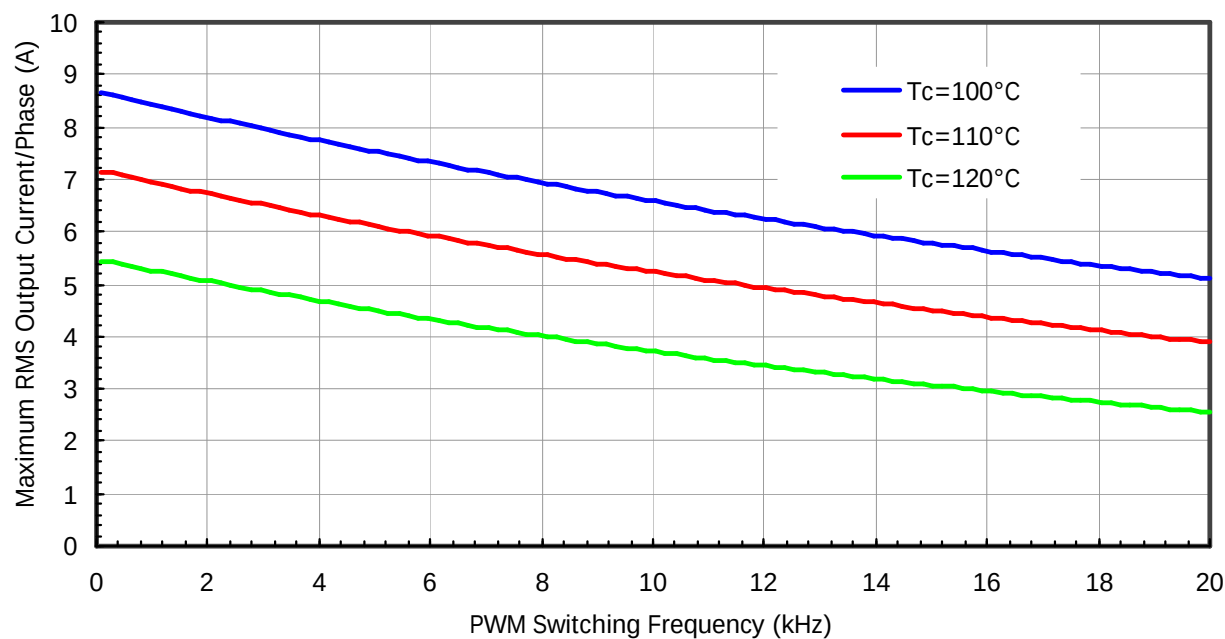


Figure 3. Maximum sinusoidal phase current as function of switching frequency

$V_{BUS}=400V$, $T_J=150^{\circ}C$, Modulation Depth=0.8, PF=0.6

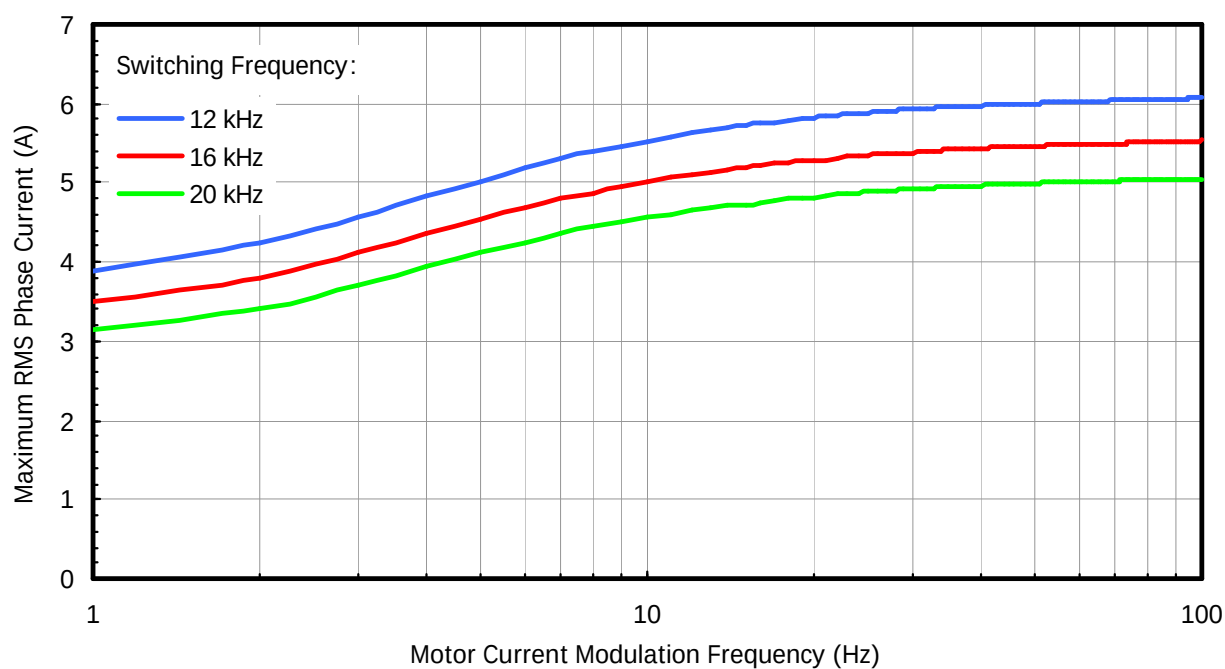


Figure 4. Maximum sinusoidal phase current as function of modulation frequency

$V_{BUS}=400V$, $T_J=150^{\circ}C$, $T_C=100^{\circ}C$, Modulation Depth=0.8, PF=0.6

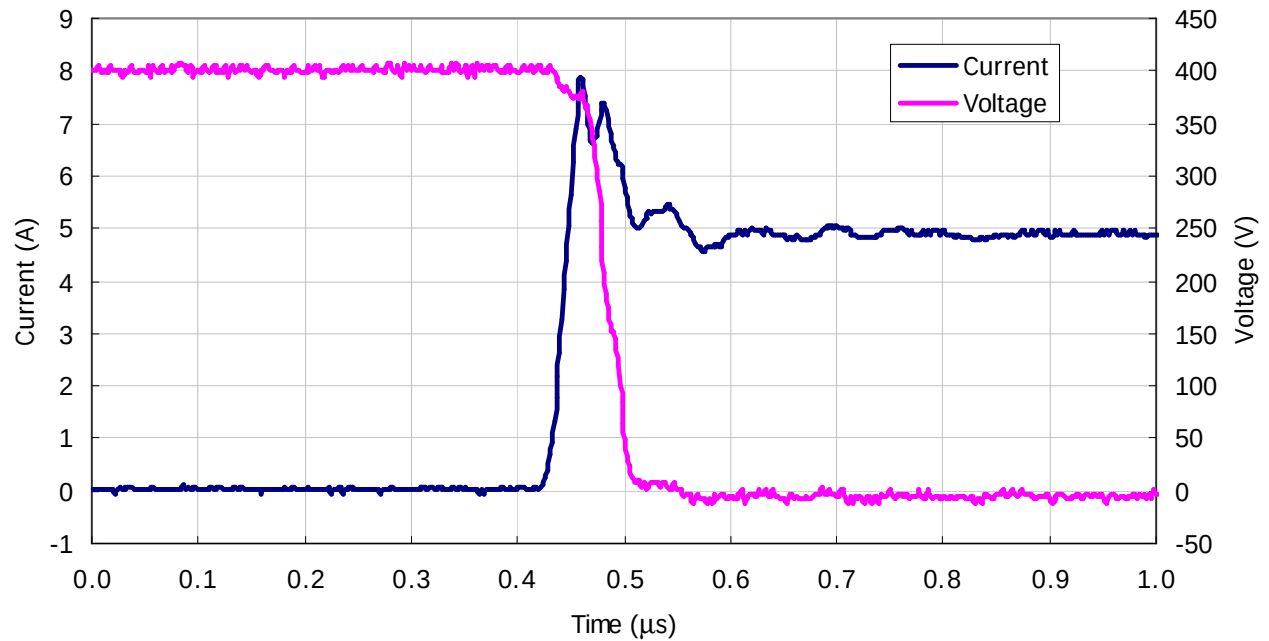


Figure 5. IGBT Turn-on. Typical turn-on waveform @ $T_J=125^{\circ}\text{C}$, $V_{\text{BUS}}=310\text{V}$

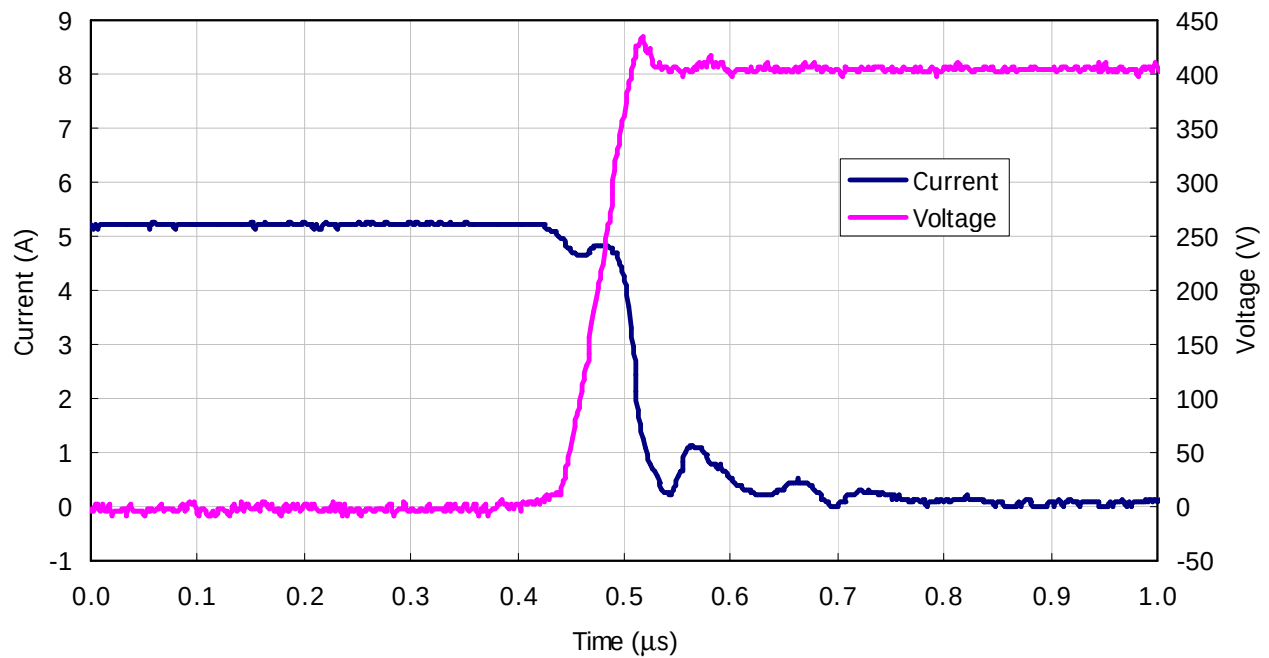


Figure 6. IGBT Turn-off. Typical turn-off waveform @ $T_J=125^{\circ}\text{C}$, $V_{\text{BUS}}=310\text{V}$

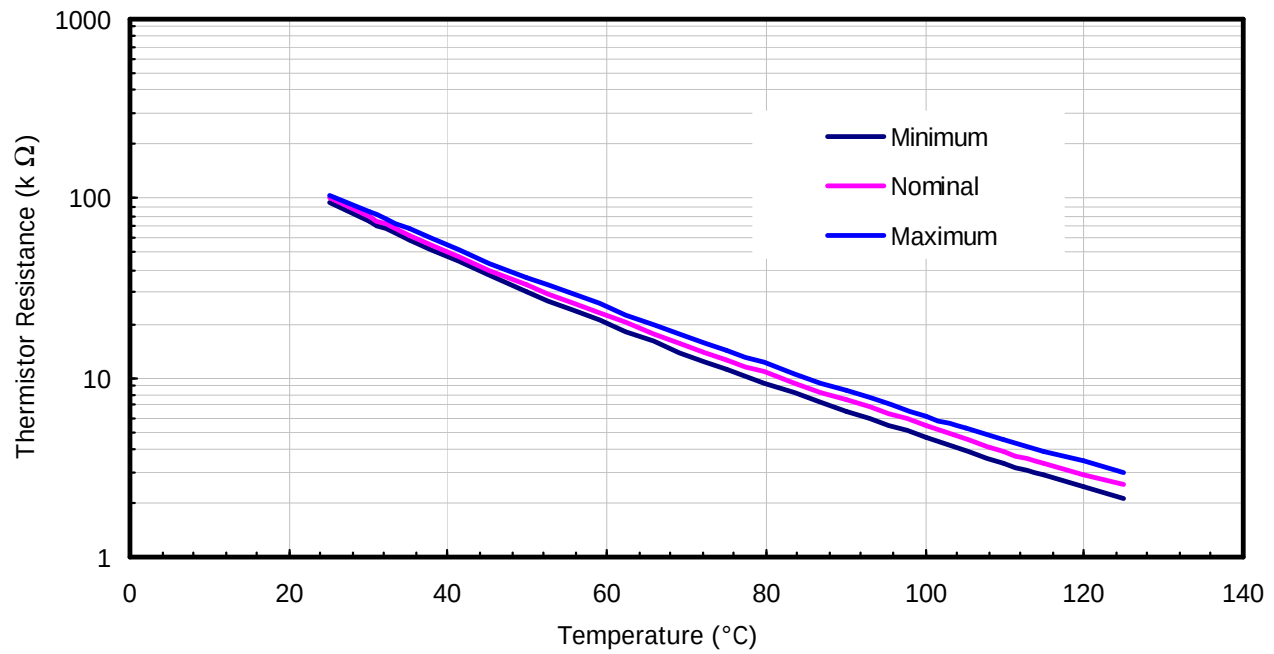


Figure 7. Variation of thermistor resistance with temperature

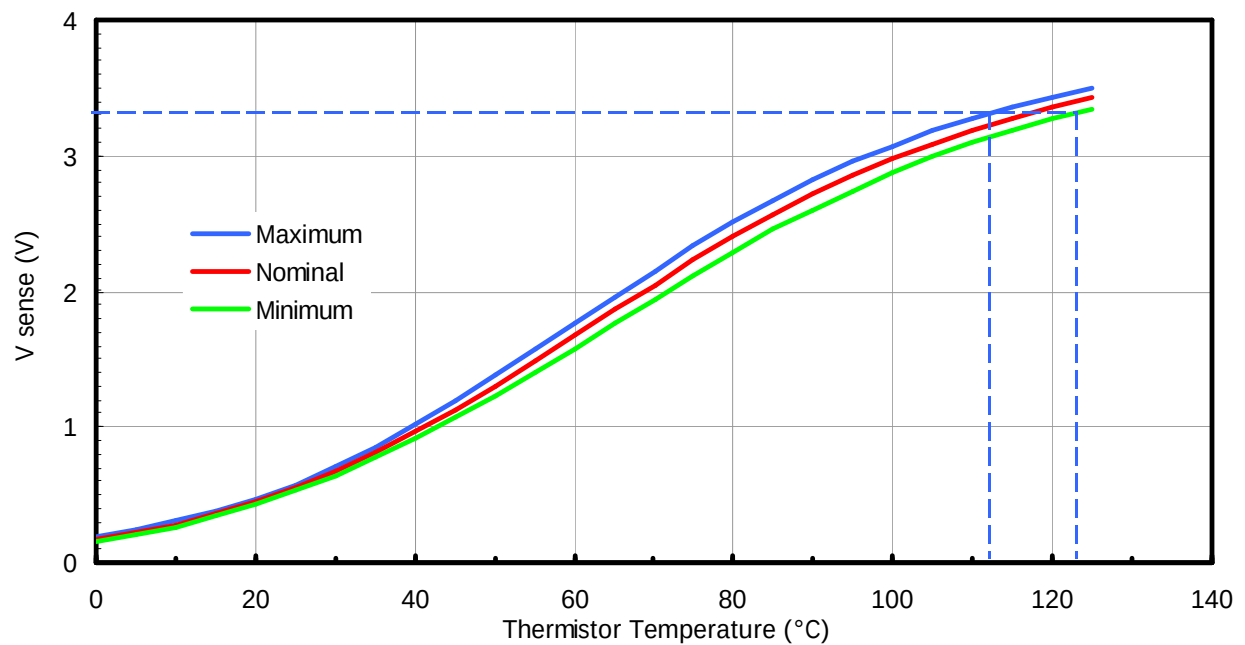


Figure 8. Variation of temperature sense voltage with thermistor temperature using external bias resistance of 4.3KΩ, $V_{CC}=15V$

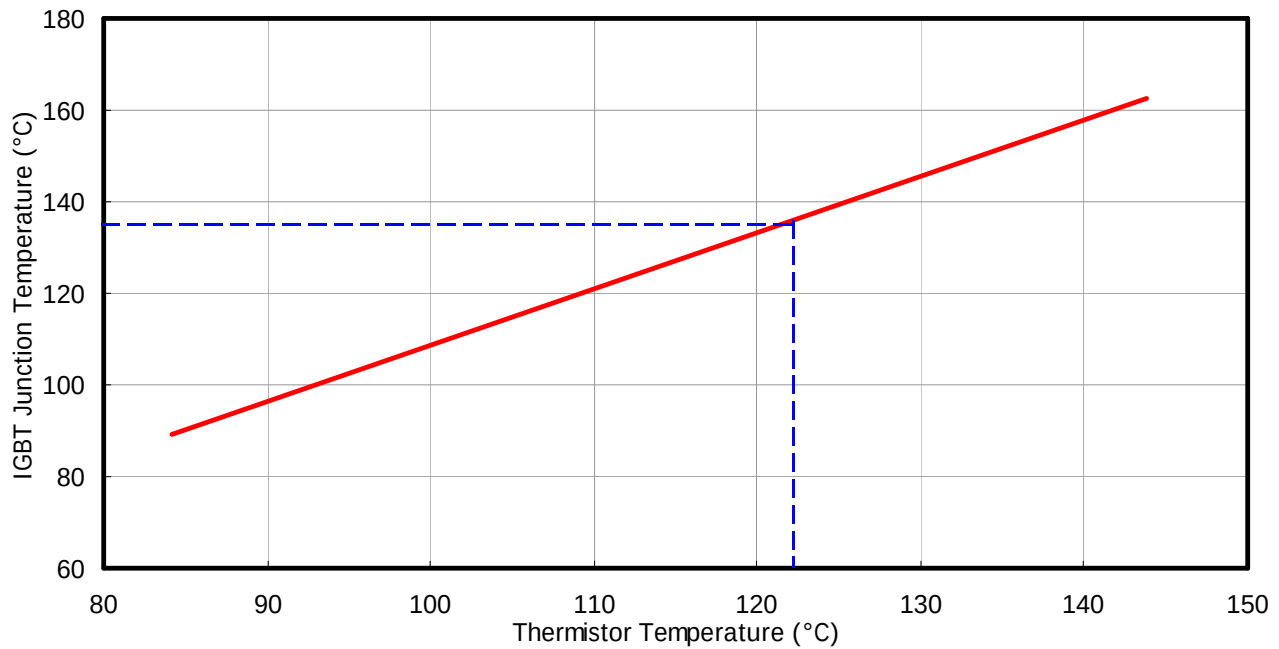


Figure 9. Estimated maximum IGBT junction temperature with thermistor temperature

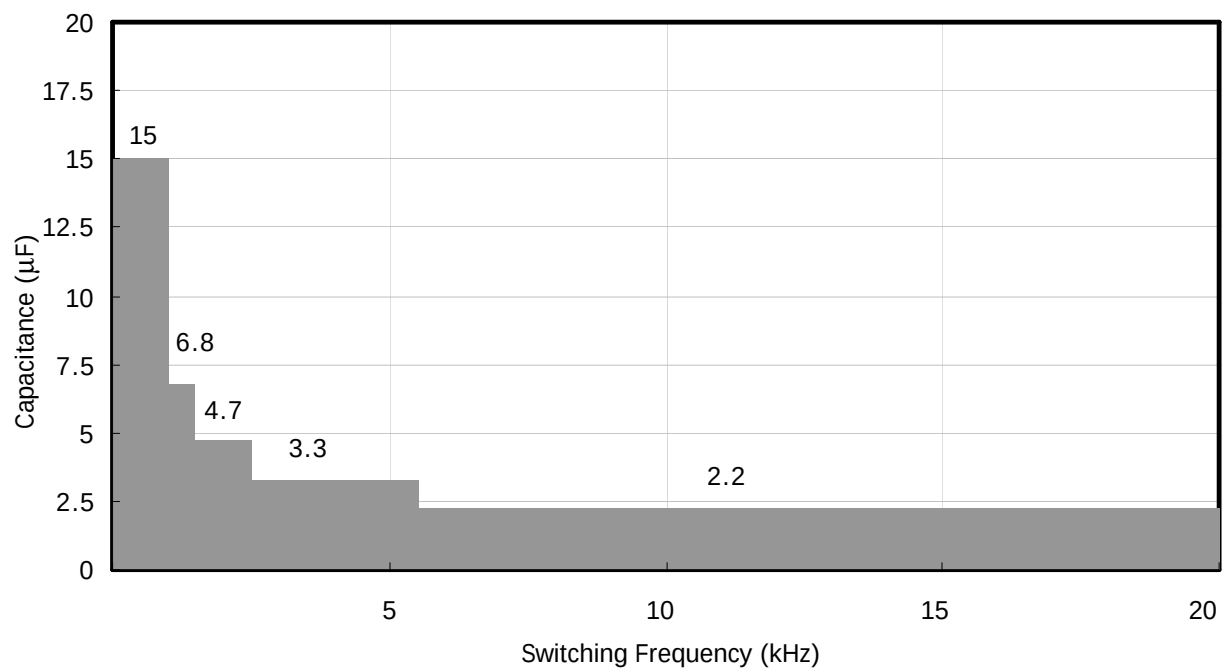


Figure 10. Recommended minimum Bootstrap Capacitor value Vs Switching Frequency

Figure 11. Switching Parameter Definitions

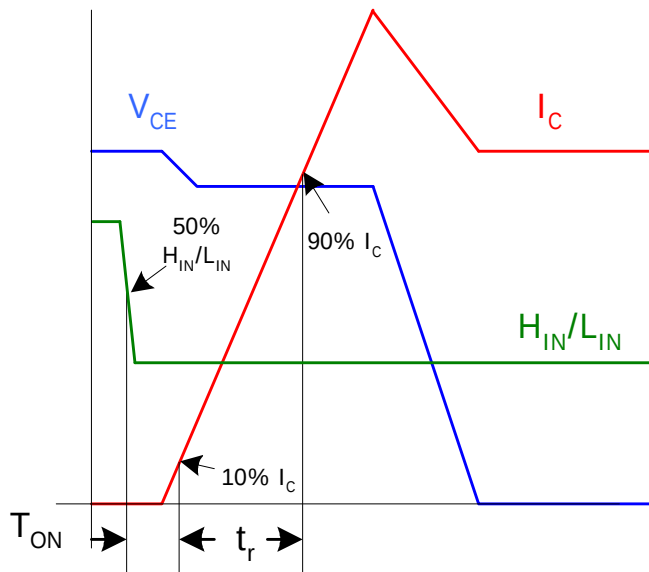


Figure 11a. Input to Output propagation turn-on delay time

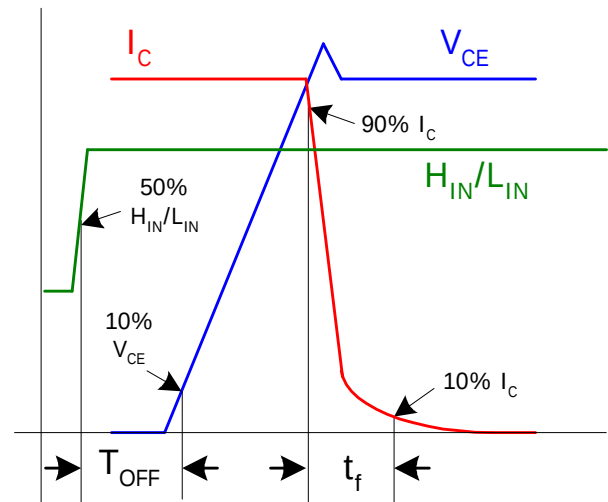


Figure 11b. Input to Output propagation turn-off delay time

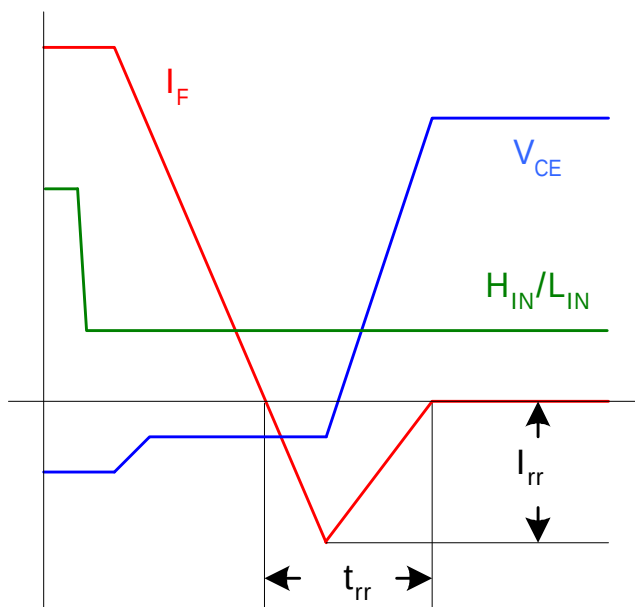


Figure 11c. Diode Reverse Recovery

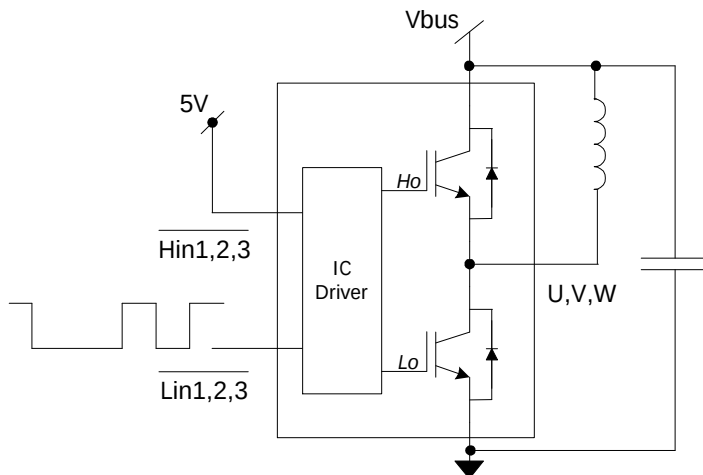


Figure CT1. Switching Loss Circuit

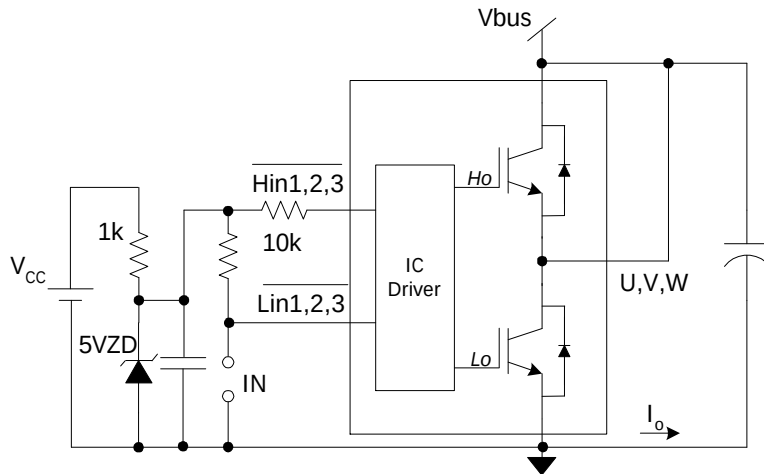


Figure CT2. S.C.SOA Circuit

IN PWM=4μs

Io

V_P =Peak Voltage on the IGBT die

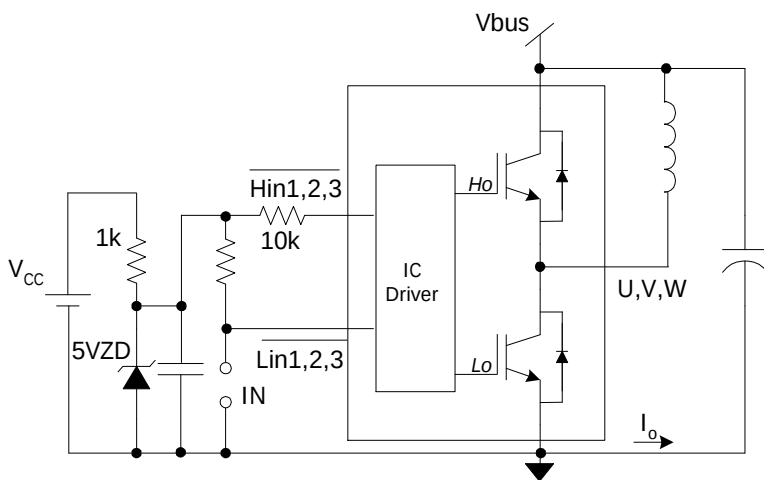


Figure CT3. R.B.SOA Circuit

IN

Io

V_P =Peak Voltage on the IGBT die


Technical drawing of the IRAMS10UP60A component, showing top, side, and detail views with dimensions and notes.

Top View:

- Overall width: 62
- Overall height: 21.8
- Pin pitch: 22 PITCHES = 44
- Pin diameter: $\phi 0.20$
- Pin length: 2 TYP.
- Pin spacing: 0.80 / 0.55 TYP.
- Pin 1 location: note 1
- Pin 23 location: note 2
- Pin 24 location: note 3
- Pin 25 location: note 4
- Pin 26 location: note 5
- Pin 27 location: note 6
- Pin 28 location: note 7
- Pin 29 location: note 8
- Pin 30 location: note 9
- Pin 31 location: note 10
- Pin 32 location: note 11
- Pin 33 location: note 12
- Pin 34 location: note 13
- Pin 35 location: note 14
- Pin 36 location: note 15
- Pin 37 location: note 16
- Pin 38 location: note 17
- Pin 39 location: note 18
- Pin 40 location: note 19
- Pin 41 location: note 20
- Pin 42 location: note 21
- Pin 43 location: note 22
- Pin 44 location: note 23
- Pin 45 location: note 24
- Pin 46 location: note 25
- Pin 47 location: note 26
- Pin 48 location: note 27
- Pin 49 location: note 28
- Pin 50 location: note 29
- Pin 51 location: note 30
- Pin 52 location: note 31
- Pin 53 location: note 32
- Pin 54 location: note 33
- Pin 55 location: note 34
- Pin 56 location: note 35
- Pin 57 location: note 36
- Pin 58 location: note 37
- Pin 59 location: note 38
- Pin 60 location: note 39
- Pin 61 location: note 40
- Pin 62 location: note 41
- Pin 63 location: note 42
- Pin 64 location: note 43
- Pin 65 location: note 44
- Pin 66 location: note 45
- Pin 67 location: note 46
- Pin 68 location: note 47
- Pin 69 location: note 48
- Pin 70 location: note 49
- Pin 71 location: note 50
- Pin 72 location: note 51
- Pin 73 location: note 52
- Pin 74 location: note 53
- Pin 75 location: note 54
- Pin 76 location: note 55
- Pin 77 location: note 56
- Pin 78 location: note 57
- Pin 79 location: note 58
- Pin 80 location: note 59
- Pin 81 location: note 60
- Pin 82 location: note 61
- Pin 83 location: note 62
- Pin 84 location: note 63
- Pin 85 location: note 64
- Pin 86 location: note 65
- Pin 87 location: note 66
- Pin 88 location: note 67
- Pin 89 location: note 68
- Pin 90 location: note 69
- Pin 91 location: note 70
- Pin 92 location: note 71
- Pin 93 location: note 72
- Pin 94 location: note 73
- Pin 95 location: note 74
- Pin 96 location: note 75
- Pin 97 location: note 76
- Pin 98 location: note 77
- Pin 99 location: note 78
- Pin 100 location: note 79
- Pin 101 location: note 80
- Pin 102 location: note 81
- Pin 103 location: note 82
- Pin 104 location: note 83
- Pin 105 location: note 84
- Pin 106 location: note 85
- Pin 107 location: note 86
- Pin 108 location: note 87
- Pin 109 location: note 88
- Pin 110 location: note 89
- Pin 111 location: note 90
- Pin 112 location: note 91
- Pin 113 location: note 92
- Pin 114 location: note 93
- Pin 115 location: note 94
- Pin 116 location: note 95
- Pin 117 location: note 96
- Pin 118 location: note 97
- Pin 119 location: note 98
- Pin 120 location: note 99
- Pin 121 location: note 100
- Pin 122 location: note 101
- Pin 123 location: note 102
- Pin 124 location: note 103
- Pin 125 location: note 104
- Pin 126 location: note 105
- Pin 127 location: note 106
- Pin 128 location: note 107
- Pin 129 location: note 108
- Pin 130 location: note 109
- Pin 131 location: note 110
- Pin 132 location: note 111
- Pin 133 location: note 112
- Pin 134 location: note 113
- Pin 135 location: note 114
- Pin 136 location: note 115
- Pin 137 location: note 116
- Pin 138 location: note 117
- Pin 139 location: note 118
- Pin 140 location: note 119
- Pin 141 location: note 120
- Pin 142 location: note 121
- Pin 143 location: note 122
- Pin 144 location: note 123
- Pin 145 location: note 124
- Pin 146 location: note 125
- Pin 147 location: note 126
- Pin 148 location: note 127
- Pin 149 location: note 128
- Pin 150 location: note 129
- Pin 151 location: note 130
- Pin 152 location: note 131
- Pin 153 location: note 132
- Pin 154 location: note 133
- Pin 155 location: note 134
- Pin 156 location: note 135
- Pin 157 location: note 136
- Pin 158 location: note 137
- Pin 159 location: note 138
- Pin 160 location: note 139
- Pin 161 location: note 140
- Pin 162 location: note 141
- Pin 163 location: note 142
- Pin 164 location: note 143
- Pin 165 location: note 144
- Pin 166 location: note 145
- Pin 167 location: note 146
- Pin 168 location: note 147
- Pin 169 location: note 148
- Pin 170 location: note 149
- Pin 171 location: note 150
- Pin 172 location: note 151
- Pin 173 location: note 152
- Pin 174 location: note 153
- Pin 175 location: note 154
- Pin 176 location: note 155
- Pin 177 location: note 156
- Pin 178 location: note 157
- Pin 179 location: note 158
- Pin 180 location: note 159
- Pin 181 location: note 160
- Pin 182 location: note 161
- Pin 183 location: note 162
- Pin 184 location: note 163
- Pin 185 location: note 164
- Pin 186 location: note 165
- Pin 187 location: note 166
- Pin 188 location: note 167
- Pin 189 location: note 168
- Pin 190 location: note 169
- Pin 191 location: note 170
- Pin 192 location: note 171
- Pin 193 location: note 172
- Pin 194 location: note 173
- Pin 195 location: note 174
- Pin 196 location: note 175
- Pin 197 location: note 176
- Pin 198 location: note 177
- Pin 199 location: note 178
- Pin 200 location: note 179
- Pin 201 location: note 180
- Pin 202 location: note 181
- Pin 203 location: note 182
- Pin 204 location: note 183
- Pin 205 location: note 184
- Pin 206 location: note 185
- Pin 207 location: note 186
- Pin 208 location: note 187
- Pin 209 location: note 188
- Pin 210 location: note 189
- Pin 211 location: note 190
- Pin 212 location: note 191
- Pin 213 location: note 192
- Pin 214 location: note 193
- Pin 215 location: note 194
- Pin 216 location: note 195
- Pin 217 location: note 196
- Pin 218 location: note 197
- Pin 219 location: note 198
- Pin 220 location: note 199
- Pin 221 location: note 200
- Pin 222 location: note 201
- Pin 223 location: note 202
- Pin 224 location: note 203
- Pin 225 location: note 204
- Pin 226 location: note 205
- Pin 227 location: note 206
- Pin 228 location: note 207
- Pin 229 location: note 208
- Pin 230 location: note 209
- Pin 231 location: note 210
- Pin 232 location: note 211
- Pin 233 location: note 212
- Pin 234 location: note 213
- Pin 235 location: note 214
- Pin 236 location: note 215
- Pin 237 location: note 216
- Pin 238 location: note 217
- Pin 239 location: note 218
- Pin 240 location: note 219
- Pin 241 location: note 220
- Pin 242 location: note 221
- Pin 243 location: note 222
- Pin 244 location: note 223
- Pin 245 location: note 224
- Pin 246 location: note 225
- Pin 247 location: note 226
- Pin 248 location: note 227
- Pin 249 location: note 228

www.irf.com

Package Outline

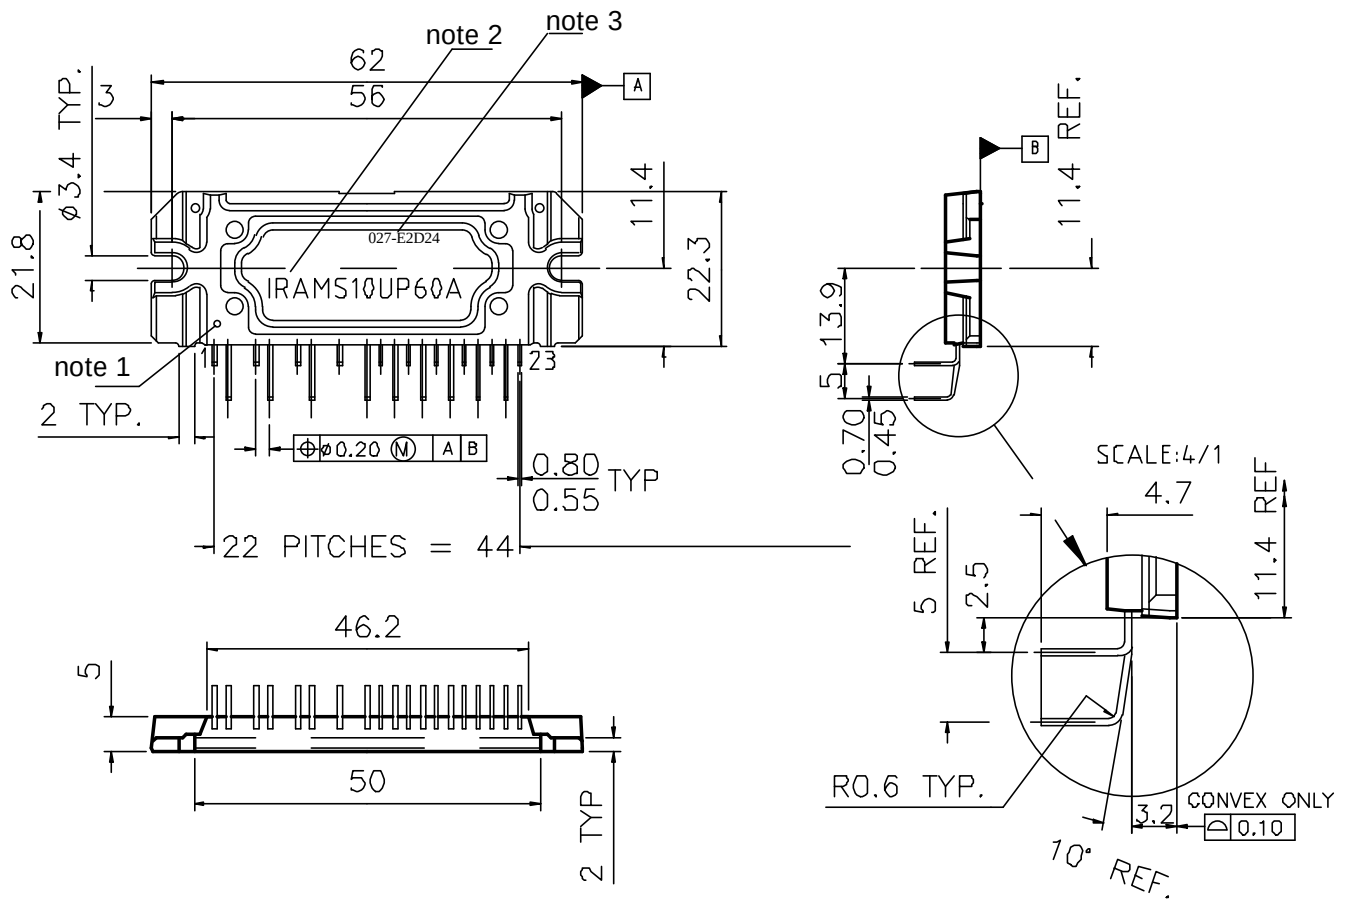

Pin leadforming option -2

Notes:

Dimensions in mm

- 1 - Marking for pin 1 identification
- 2- Product Part Number
- 3- Lot and Date code marking

Data and Specifications are subject to change without notice

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information

Rev D, 01/04