



*The Infinite Bandwidth Company™*

## MIC1810

### Microprocessor Reset Circuit

#### Final Information

### General Description

The MIC1810 is an inexpensive microprocessor supervisory circuit that monitors power supplies in microprocessor based systems.

The function of these devices is to assert a reset if the power supply drops below a designated reset threshold level. Several different reset threshold levels are available to accommodate 5%, 10%, or 15% drop in 5V powered systems.

The MIC1810 has an active low /RESET output. The reset output is guaranteed to remain asserted for a minimum of 100ms after  $V_{CC}$  has risen above the designated reset threshold level. The MIC1810 comes in a 3-pin SOT-23 package.

### Features

- Precision voltage monitor for 5%, 10%, or 15% drop in 5V power supplies
- /RESET remains valid with  $V_{CC}$  as low as 1.4V
- 9 $\mu$ A supply current (typical)
- 100ms minimum reset pulse width
- No external components required
- Available in 3-pin SOT-23 package


### Applications

- Portable equipment
- Intelligent instruments
- Critical microprocessor power monitoring
- Printers/computers
- Embedded controllers


### Ordering Information

Part Number	Marking	Threshold Voltage	Operating Temp. Range	Package
MIC1810-5U	NA	4.62V	-40°C to +85°C	SOT-23
MIC1810-10U	NB	4.37V	-40°C to +85°C	SOT-23
MIC1810-15U	NC	4.12V	-40°C to +85°C	SOT-23

### Typical Application

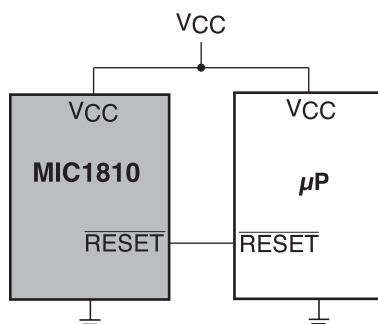

## Pin Configuration

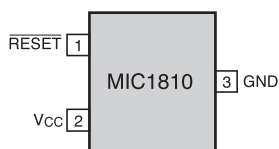

**3-Lead SOT-23**

## Pin Description

Pin Number	Pin Name	Pin Function
1	/RESET	/RESET goes low if $V_{CC}$ falls below the reset threshold and remains asserted for one reset timeout period (100ms min) after $V_{CC}$ exceeds the reset threshold.
2	VCC	Power supply input.
3	GND	IC ground pin

**Absolute Maximum Ratings**(Note 1)

Terminal Voltage ( $V_{CC}$ )	.....	–0.3V to +6V
Input Current ( $V_{CC}$ )	.....	20mA
Output Current, /RESET	.....	20mA
Rate of Rise ( $V_{CC}$ )	.....	100V/ $\mu$ s
Lead Temperature (soldering, 10 sec.)	.....	300°C
Storage Temperature ( $T_S$ )	.....	–65°C to 150°C
ESD Rating, <b>Note 3</b>		

**Operating Ratings**(Note 2)

Operating Temperature Range	
MIC1810-5U	..... –40°C to +85°C
MIC1810-10U	..... –40°C to +85°C
MIC1810-15U	..... –40°C to +85°C
Power Dissipation ( $T_A = +70^\circ\text{C}$ )	..... 320mW

**Electrical Characteristics**


For typical values  $V_{CC} = 5\text{V}$ ,  $T_A = 25^\circ\text{C}$ ; **bold** values indicate  $-40^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ ; unless noted

Symbol	Parameter	Condition	Min	Typ	Max	Units
	Operating Voltage Range	$T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$	<b>1.7</b>		<b>5.5</b>	V
		$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$	<b>1.5</b>		<b>5.5</b>	V
$I_{CC}$	Supply Current			9	<b>20</b>	$\mu\text{A}$
$V_{TH}$	Reset Voltage Threshold	MIC1810-5	<b>4.50</b>	4.62	<b>4.75</b>	V
		MIC1810-10	<b>4.25</b>	4.37	<b>4.50</b>	V
		MIC1810-15	<b>4.00</b>	4.12	<b>4.24</b>	V
$t_{RST}$	Reset Timeout Period		<b>100</b>	150	<b>250</b>	ms
$V_{OH}$	/RESET Output Voltage, High	$I_{SOURCE} = 800\mu\text{A}$	$V_{CC}-1.5$			V
$V_{OL}$	/RESET Output Voltage, Low	$V_{CC} = V_{TH}$ min., $I_{SINK} = 3.2\text{mA}$			<b>0.4</b>	V
		$V_{CC} > 1.4\text{V}$ , $I_{SINK} = 50\mu\text{A}$			<b>0.3</b>	V

**Note 1.** Exceeding the absolute maximum rating may damage the device.


**Note 2.** The device is not guaranteed to function outside its operating rating.

**Note 3.** Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.

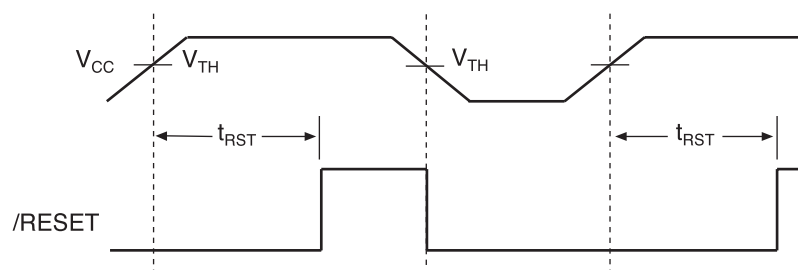**Timing Diagram**

**Reset Timing Diagram**

## Functional Diagram

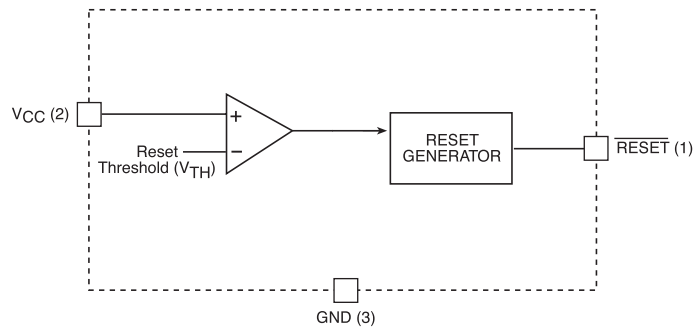

## Applications Information

### Microprocessor Reset


The /RESET pin is asserted whenever  $V_{CC}$  falls below the reset threshold voltage. The reset pin remains asserted for a period of  $t_{RST}$  after  $V_{CC}$  has risen above the reset threshold voltage. The reset function ensures the microprocessor is properly reset and powers up into a known condition after a power failure. /RESET will remain valid with  $V_{CC}$  as low as 1.4V.

### $V_{CC}$ Transients


The MIC1810 is relatively immune to negative-going  $V_{CC}$  glitches below the reset threshold. Typically, a negative-going transient 125mV below the reset threshold with a duration of 50 $\mu$ s or less will not cause an unwanted reset.

### /RESET Valid at Low Voltage

A resistor can be added from the /RESET pin to ground to ensure the /RESET output remains low with  $V_{CC}$  down to 0V. A 100k $\Omega$  resistor connected from /RESET to ground is recommended. The resistor should be large enough not to load the /RESET output and small enough to pull-down any stray leakage currents. See Figure below.

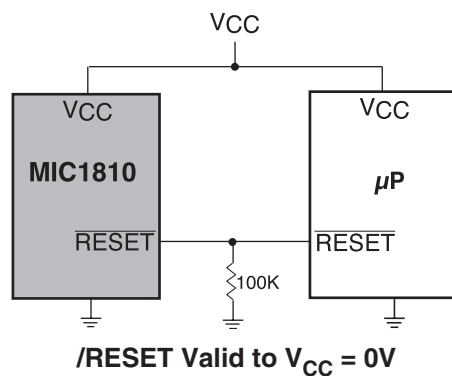

## Package Information

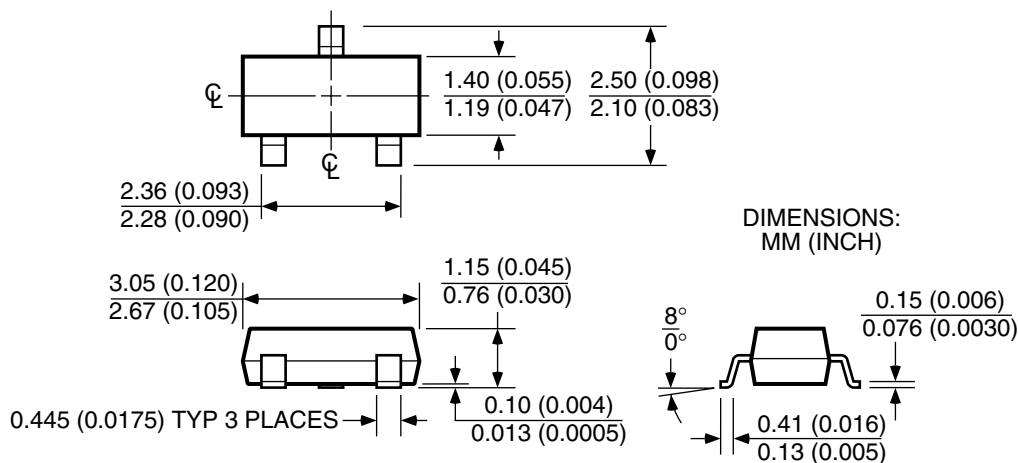

**3-Pin SOT-23 Small Outline Transistor**

**MICREL, INC. 1849 FORTUNE DRIVE SAN JOSE, CA 95131 USA**

TEL + 1 (408) 944-0800 FAX + 1 (408) 944-0970 WEB <http://www.micrel.com>

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify

Micrel for any damages resulting from such use or sale.

© 2003 Micrel, Incorporated.