



The Infinite Bandwidth Company™

MIC4575

200kHz Simple 1A Buck Regulator

Final Information

General Description

The MIC4575 is a series of easy to use fixed and adjustable BiCMOS step-down (buck) switch-mode voltage regulators. The 200kHz MIC4575 duplicates the pinout and function of the 52kHz LM2575. The higher switching frequency may allow up to a 2:1 reduction in output filter inductor size.

The MIC4575 is available in 3.3V, and 5V fixed output versions or a 1.23V to 20V adjustable output version. Both versions are capable of driving a 1A load with excellent line and load regulation.

The feedback voltage is guaranteed to $\pm 2\%$ tolerance for adjustable versions, and the output voltage is guaranteed to $\pm 3\%$ for fixed versions, within specified voltages and load conditions. The oscillator frequency is guaranteed to $\pm 10\%$.

In shutdown mode, the regulator draws less than 200 μ A standby current. The regulator performs cycle-by-cycle current limiting and thermal shutdown for protection under fault conditions.

This series of simple switch-mode regulators requires a minimum number of external components and can operate using a standard series of inductors. Frequency compensation is provided internally.

The MIC4575 is available in TO-220 (T) and TO-263 (U) packages for the industrial temperature range.


Features

- Fixed 200kHz operation
- 3.3V, 5V, and adjustable output versions
- Voltage over specified line and load conditions:
 - Fixed version: $\pm 3\%$ max. output voltage
 - Adjustable version: $\pm 2\%$ max. feedback voltage
- Guaranteed 1A switch current
- Wide 4V to 24V input voltage range
- Wide 1.23V to 20V output voltage range
- Requires minimum external components
- < 200 μ A typical shutdown mode
- 75% efficiency (adjustable version > 75% typical)
- Standard inductors and capacitors are 25% of typical LM2575 values.
- Thermal shutdown
- Overcurrent protection
- 100% electrical thermal limit burn-in


Applications

- Simple high-efficiency step-down (buck) regulator
- Efficient preregulator for linear regulators
- On-card switching regulators
- Positive-to-negative converter (inverting buck-boost)
- Battery Charger
- Negative boost converter
- Step-down 6V to 3.3V for Intel Pentium™ and similar microprocessors

Typical Applications

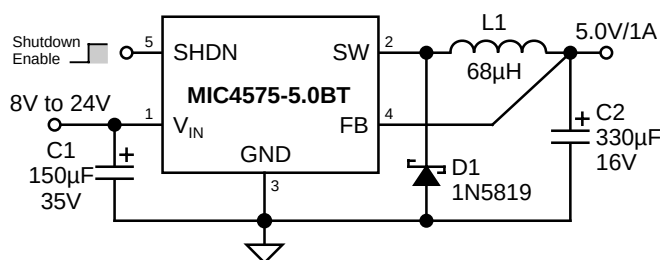

Fixed Regulator

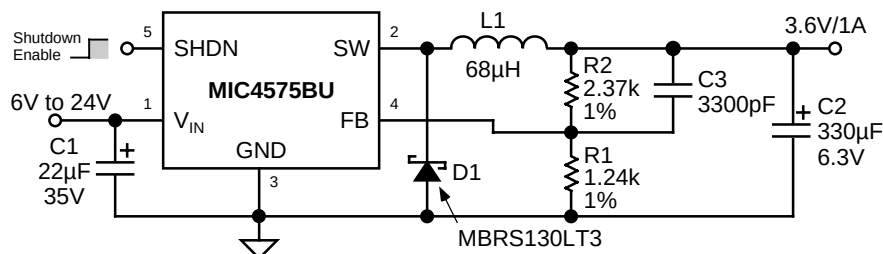


Adjustable Regulator


Ordering Information

Part Number	Voltage	Temperature Range	Package
MIC4575-3.3BT	3.3V	–40°C to +85°C	TO-220-5
MIC4575-5.0BT	5.0V	–40°C to +85°C	TO-220-5
MIC4575BT	Adjustable	–40°C to +85°C	TO-220-5
MIC4575-3.3BU	3.3V	–40°C to +85°C	TO-263-5
MIC4575-5.0BU	5.0V	–40°C to +85°C	TO-263-5
MIC4575BU	Adjustable	–40°C to +85°C	TO-263-5

Pin Configuration

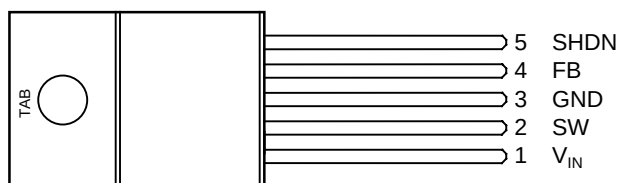

5-Lead TO-220 (T)

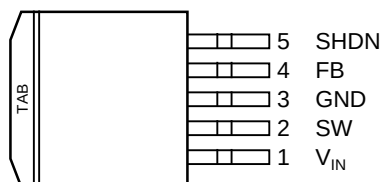

5-Lead TO-263 (U)

Pin Description

Pin Number	Pin Name	Pin Function
1	V_{IN}	Supply Voltage (Input): Unregulated +4V to +40V supply voltage.
2	SW	Switch (Output): Emitter of NPN output switch. Connect to external storage inductor and Schottky diode.
3, TAB	GND	Ground
4	FB	Feedback (Input): Output voltage feedback to regulator. Connect to output of supply for fixed versions. Connect to 1.23V tap of resistive divider for adjustable versions.
5	SHDN	Shutdown (Input): Logic low enables regulator. Logic high (> 2.4V) shuts down regulator.

Absolute Maximum Ratings

Supply Voltage (V_{IN}) **Note 1** +40V
 Shutdown Voltage (V_{SHDN}) -0.3V to +36V
 Output Switch (V_{SW}) steady state -1V
 Storage Temperature (T_S) -65°C to 150°C

Operating Ratings

Supply Voltage (V_{IN}) +24V
 Junction Temperature +150°C
 Package Thermal Resistance
 TO-220, TO-263 (θ_{JA}) 65°C/W
 TO-220, TO-263 (θ_{JC}) 2°C/W

Electrical Characteristics (Note 2)

$V_{IN} = 12V$; $I_{LOAD} = 200mA$; $T_J = 25^\circ C$, **bold** values indicate $-40^\circ C \leq T_J \leq +85^\circ C$; unless noted.


Parameter	Condition	Min	Typ	Max	Units
MIC4575 [Adjustable]					
Feedback Voltage		1.217	1.230	1.243	V
Feedback Voltage	$8V \leq V_{IN} \leq 24V$, $0.2A \leq I_{LOAD} \leq 1A$	1.193 1.180	1.230	1.267 1.280	V V
Efficiency	$I_{LOAD} = 1A$, $V_{OUT} = 5V$		77		%
Feedback Bias Current			50	100 500	nA nA
MIC4575-3.3					
Output Voltage		3.234	3.3	3.366	V
Output Voltage	$6V \leq V_{IN} \leq 24V$, $0.2A \leq I_{LOAD} \leq 1A$	3.168 3.135	3.3	3.432 3.465	V V
Efficiency	$I_{LOAD} = 1A$		72		%
MIC4575-5.0					
Output Voltage		4.900	5.0	5.100	V
Output Voltage	$8V \leq V_{IN} \leq 24V$, $0.2A \leq I_{LOAD} \leq 1A$	4.800 4.750	5.0	5.200 5.250	V V
Efficiency	$I_{LOAD} = 1A$		77		%
MIC4575 / -3.3 / -5.0					
Oscillator Frequency		180	200	220	kHz
Saturation Voltage	$I_{OUT} = 1A$		1	1.3 1.5	V V
Maximum Duty Cycle (On)	FB connected to 0V	90	95		%
Current Limit	Peak Current, $t_{ON} \leq 3\mu s$	1.7 1.3	2.2	3.0 3.2	A A
Output Leakage Current	$V_{IN} = 24V$, FB connected to 0V Output = 0V Output = -1V		0 7.5	2 30	mA mA
Quiescent Current			5	10	mA
Standby Quiescent Current	SHDN = 5V (regulator off)		50	200	μA
SHDN Input Logic Level	$V_{OUT} = 0V$ (regulator off)	2.2 2.4	1.4		V V
SHDN Input Current	$V_{OUT} = 3.3$ or $5V$ (regulator on)		1.2	1.0 0.8	V V
	SHDN = 5V (regulator off) SHDN = 0V (regulator on)	-10	4 0.01	30 10	μA μA

General Note: Devices are ESD protected, however, handling precautions are recommended.


Note 1: The MIC4575 is not guaranteed to survive a short circuit to ground for input voltage above 24V.

Note 2: Specification for packaged product only.

Block Diagrams

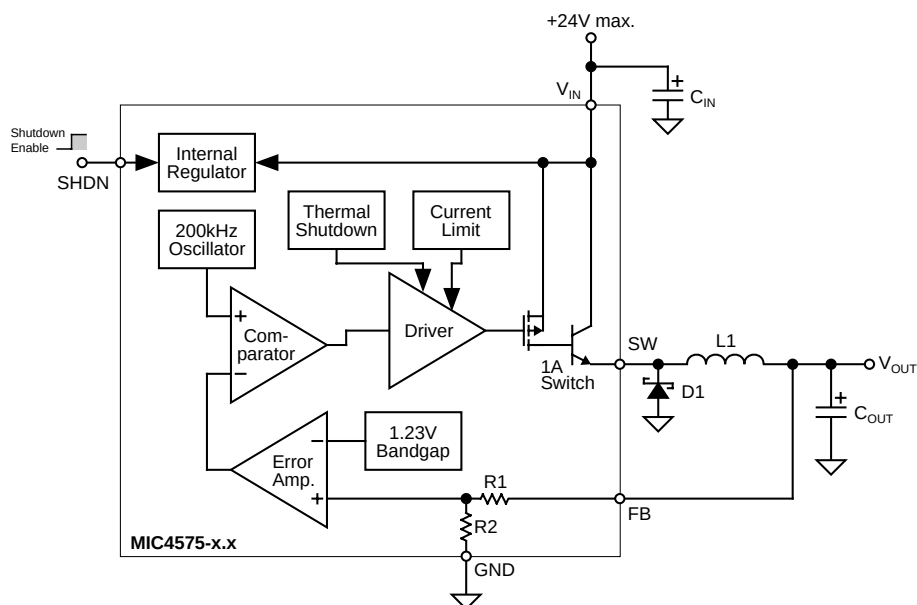

**Block Diagram with External Components
Fixed Step-Down Regulator**

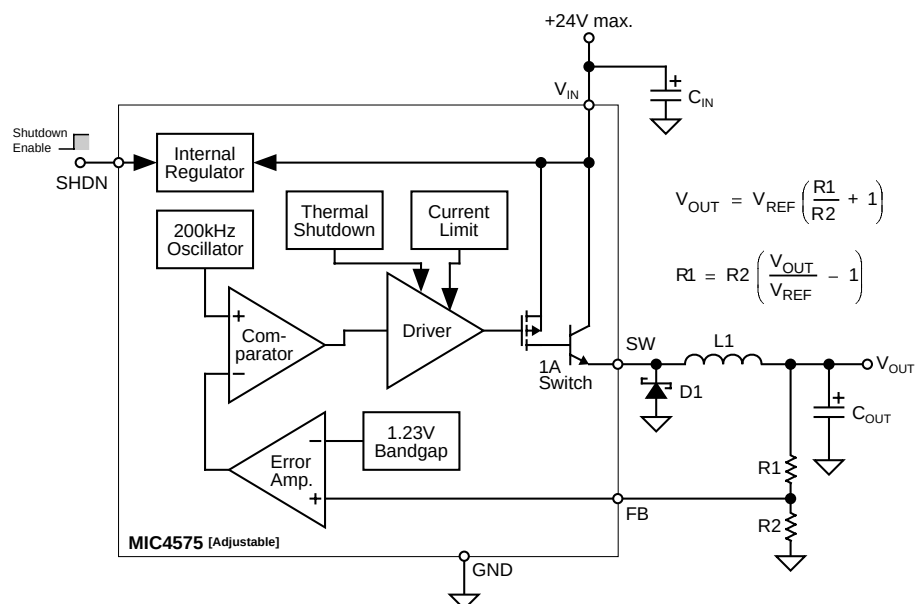

**Block Diagram with External Components
Adjustable Step-Down Regulator**

Functional Description

The MIC4575 is a variable duty cycle switch-mode regulator with an internal power switch. Refer to the block diagrams.

Supply Voltage

The MIC4575 operates from a +4V to +24V unregulated input. Highest efficiency operation is from a supply voltage around +15V.

Enable/Shutdown

The shutdown (SHDN) input is TTL compatible. Ground the input if unused. A logic-low enables the regulator. A logic-high shuts down the internal regulator which reduces the current to typically 50 μ A.

Feedback

Fixed versions of the regulator have an internal resistive divider from the feedback (FB) pin. Connect FB directly to the output line.

Adjustable versions require an external resistive voltage divider from the output voltage to ground, connected from the 1.23V tap to FB.

Duty Cycle Control

A fixed-gain error amplifier compares the feedback signal with a 1.23V bandgap voltage reference. The resulting error amplifier output voltage is compared to a 200kHz sawtooth waveform to produce a voltage controlled variable duty cycle output.

A higher feedback voltage increases the error amplifier output voltage. A higher error amplifier voltage (comparator inverting input) causes the comparator to detect only the peaks of the sawtooth, reducing the duty cycle of the comparator output. A lower feedback voltage increases the duty cycle.

Output Switching

When the internal switch is on, an increasing current flows from the supply V_{IN} through external storage inductor L1, to output capacitor C_{OUT} and the load. Energy is stored in the inductor as the current increases with time.

When the internal switch is turned off, the collapse of the magnetic field in L1 forces current to flow through fast recovery diode D1, charging C_{OUT} .

Output Capacitor

External output capacitor C_{OUT} provides stabilization and reduces ripple.

Return Paths

During the on portion of the cycle, the output capacitor and load currents return to the supply ground. During the off portion of the cycle, current is being supplied to the output capacitor and load by storage inductor L1, which means that D1 is part of the high-current return path.

Applications Information

The applications circuits that follow have been constructed and tested. Refer to Application Note 15 for additional information, including efficiency graphs and manufacturer's addresses and telephone numbers for most circuits.

For a mathematical approach to component selection and circuit design, refer to Application Note 14.

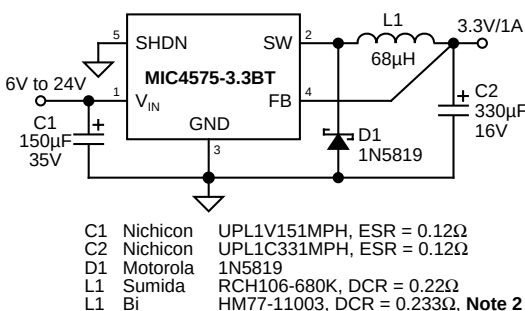


Figure 1. 6V–24V to 3.3V/1A Buck Converter Through Hole

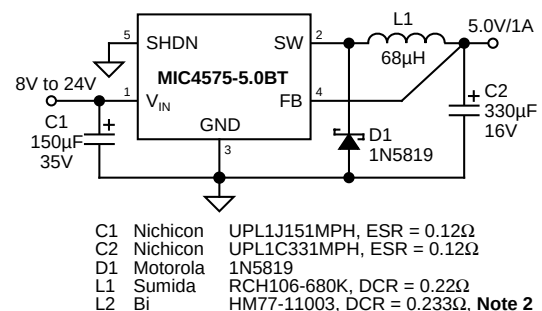


Figure 2. 8V–24V to 5V/1A Buck Converter Through Hole



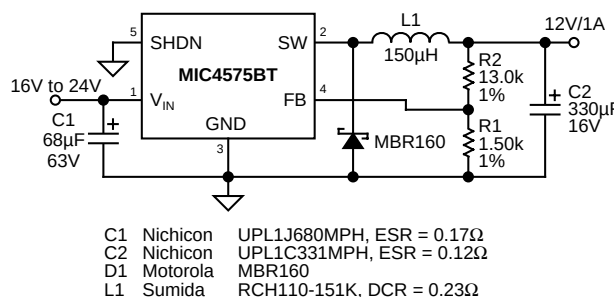


Figure 3. 16V–24V to 12V/1A Buck Converter, Through Hole


Note 2: Surface-mount component.

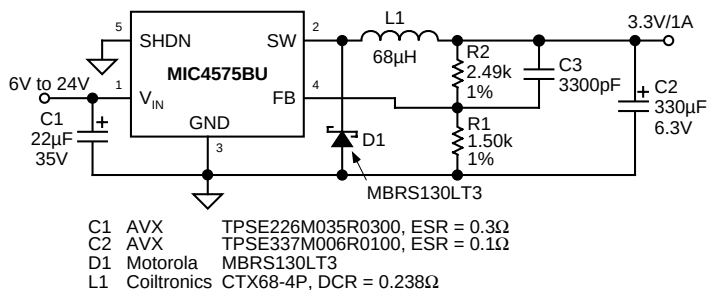


**Figure 4. 6V–24V to 3.3V/1A Buck Converter
Low-Profile Surface Mount**

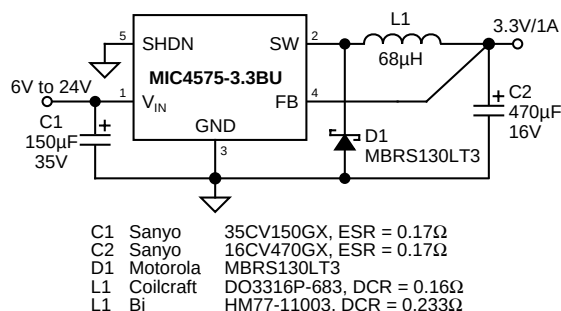


**Figure 7. 6V–24V to 3.3V/1A Buck Converter
Lower-Cost Surface Mount**

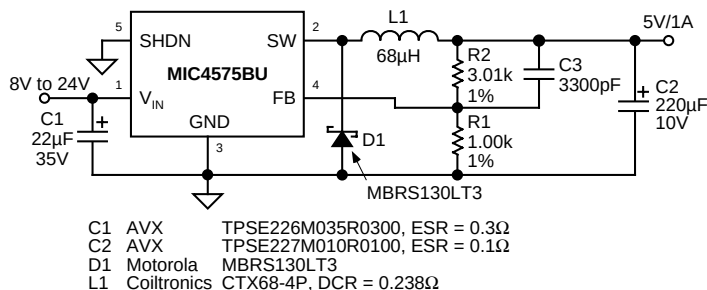


**Figure 5. 8V–24V to 5V/1A Buck Converter
Low-Profile Surface Mount**

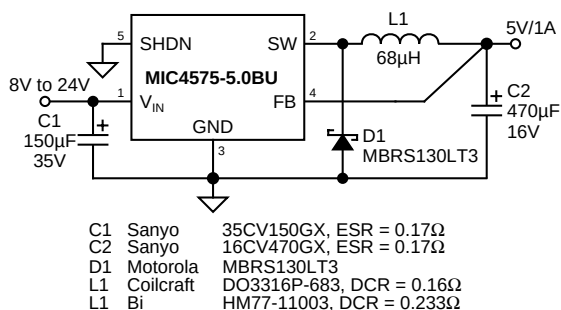


**Figure 8. 8V–24V to 5V/1A Buck Converter
Lower-Cost Surface Mount**

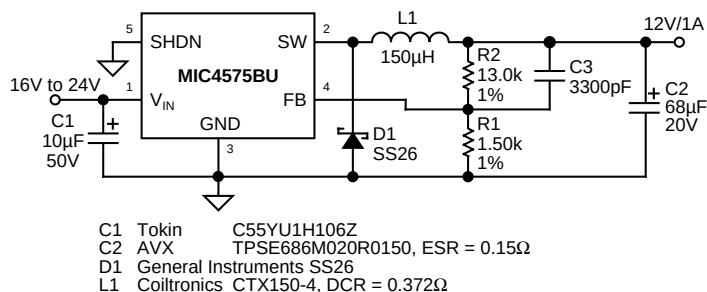

**Figure 6. 16V–24V to 12V/1A Buck Converter
Low-Profile Surface Mount**

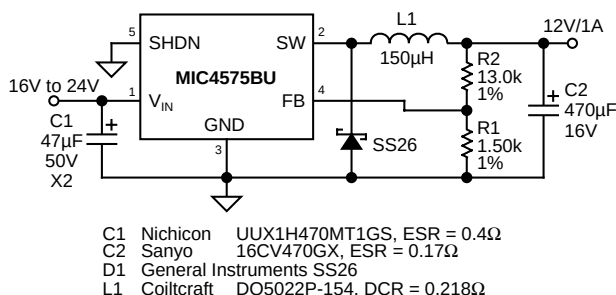

**Figure 9. 16V–24V to 12V/1A Buck Converter
Lower-Cost Surface Mount**

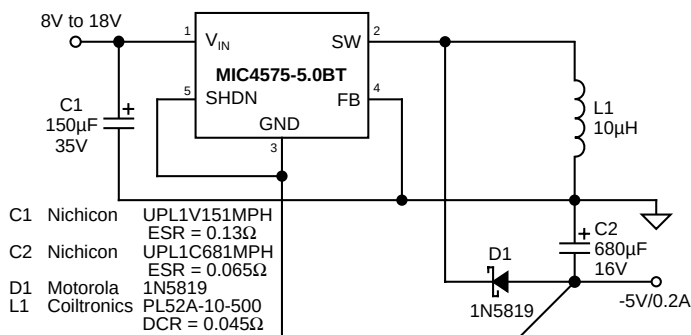

**Figure 10. 8V–18V to -5V/0.2A Buck-Boost Converter
Through Hole**

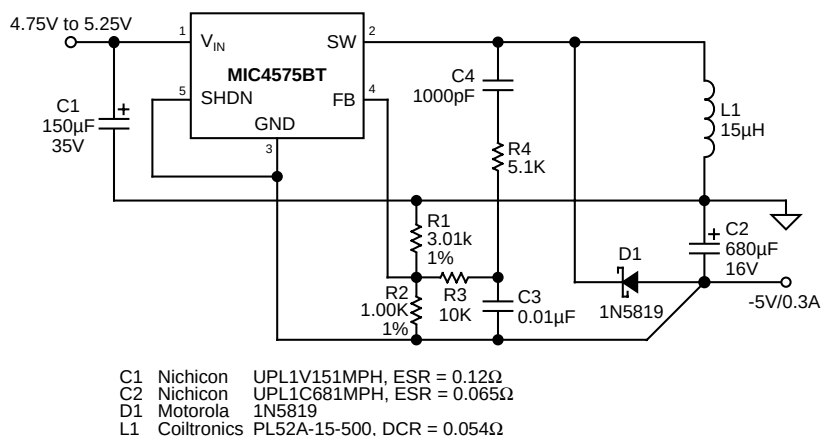


Figure 11. 5V to -5V/0.3A Buck-Boost Converter Through Hole

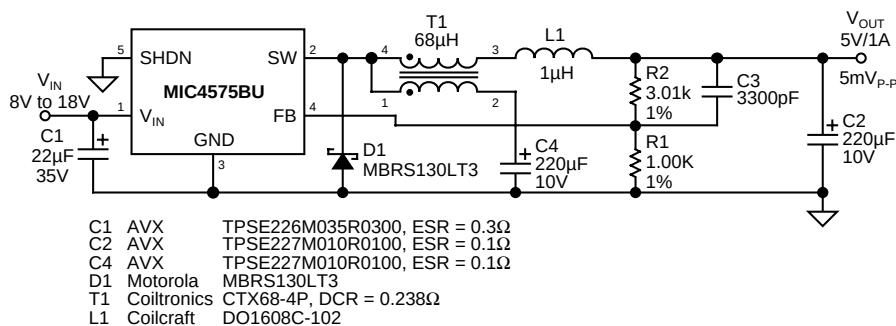


Figure 12. Low Output-Noise Regulator (5mV Output Ripple)

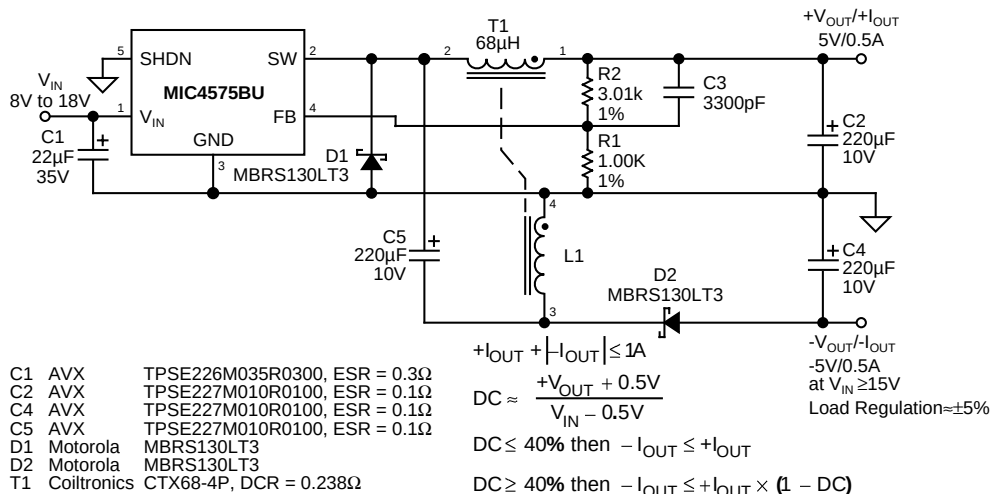


Figure 13. Split ±5V Supply

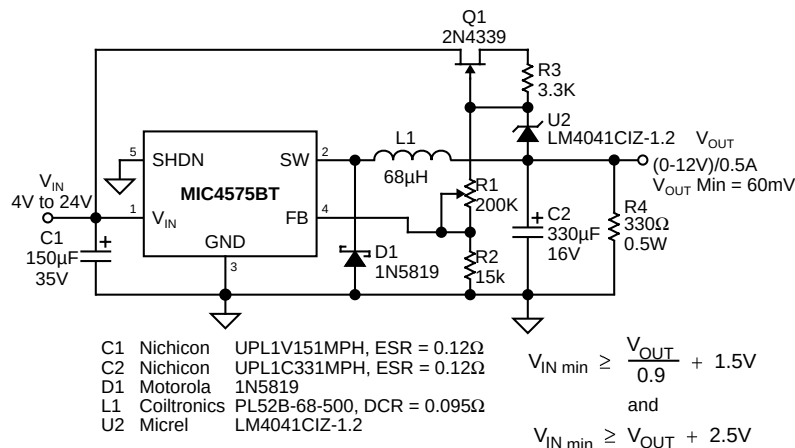


Figure 14. Adjustable (0V-12V) Output-Voltage Regulator

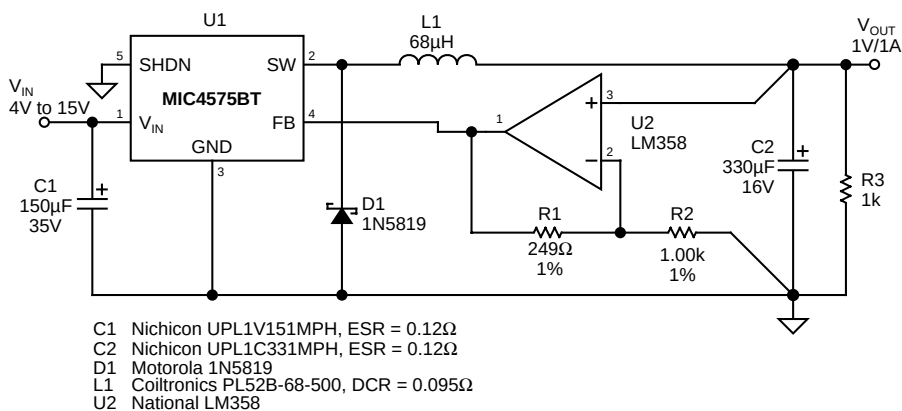


Figure 15. Low Output-Voltage Regulator (1V)

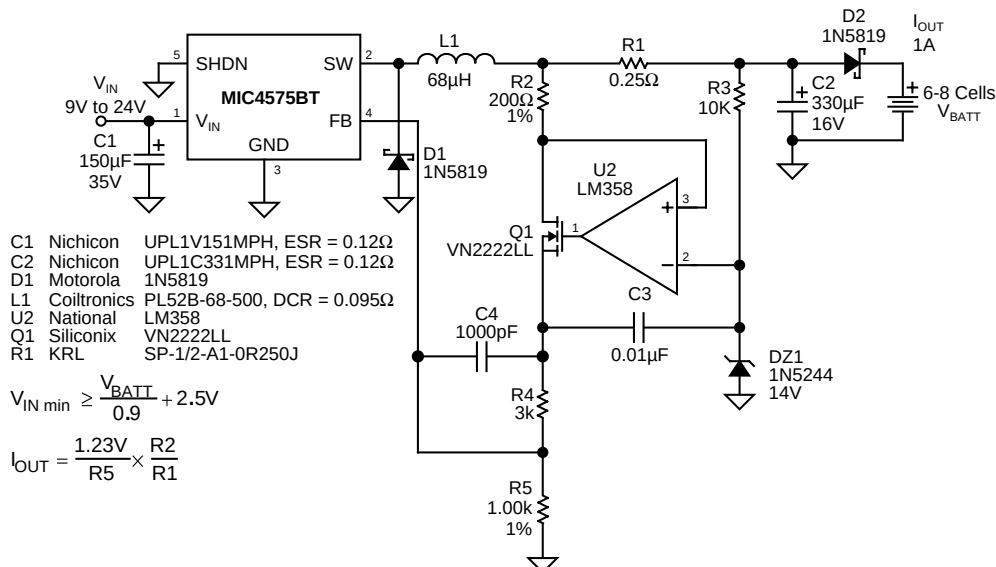


Figure 16. 1A Battery Charger (6-8 cells)

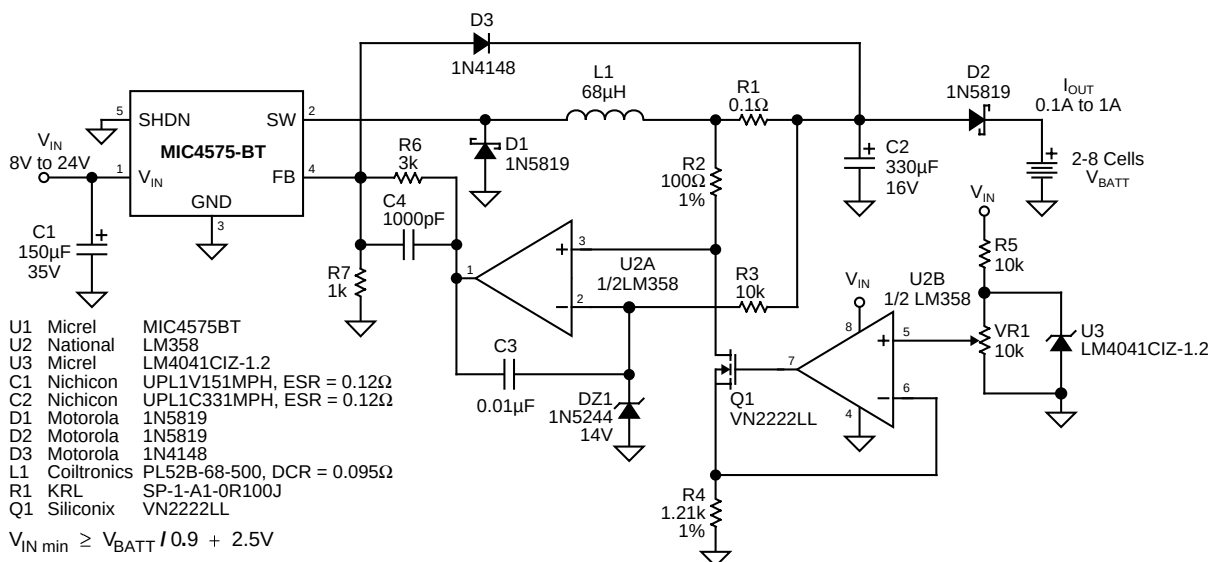


Figure 17. 0.1A–1A Variable-Current Battery Charger

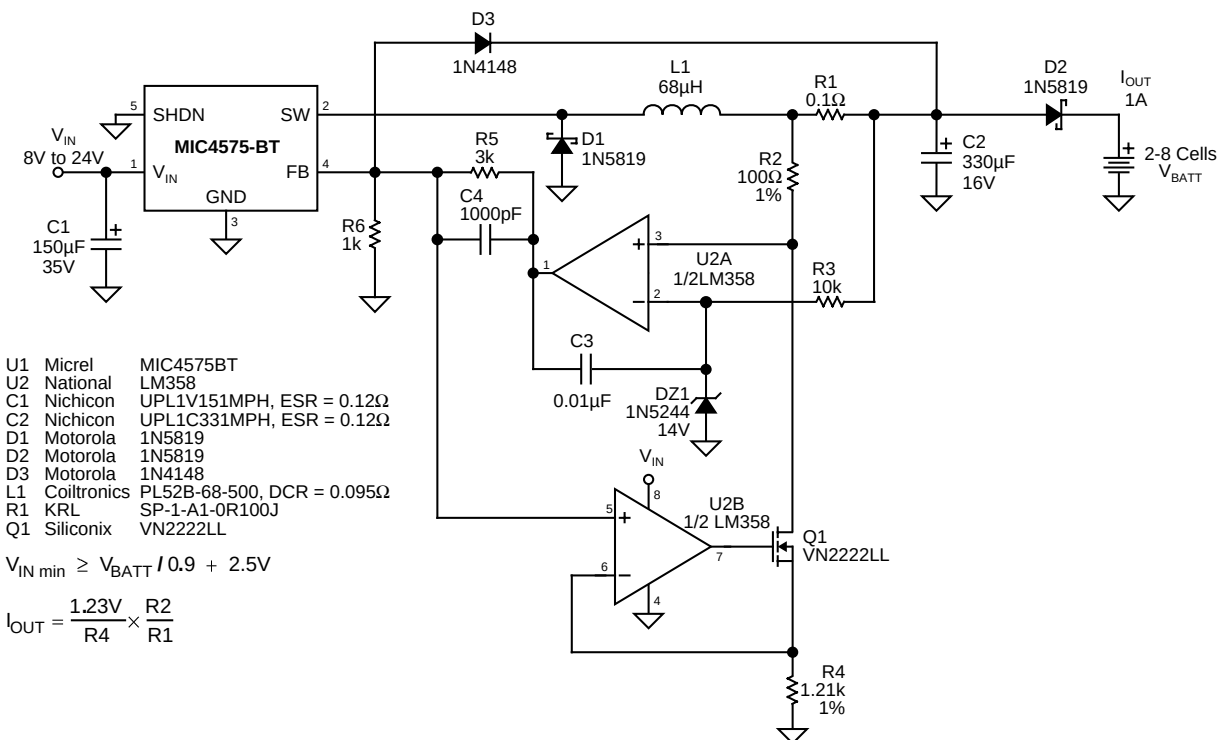


Figure 18. 1A Battery Charger (2–8 Cells)

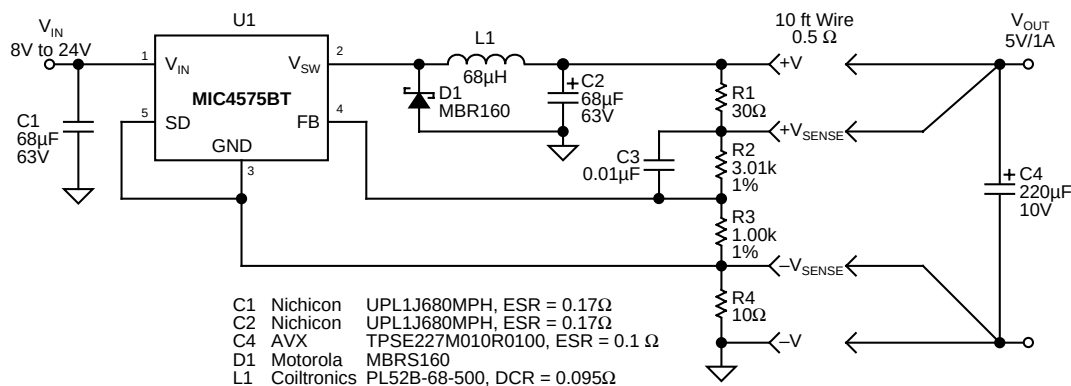


Figure 19. Remote-Sensing Regulator

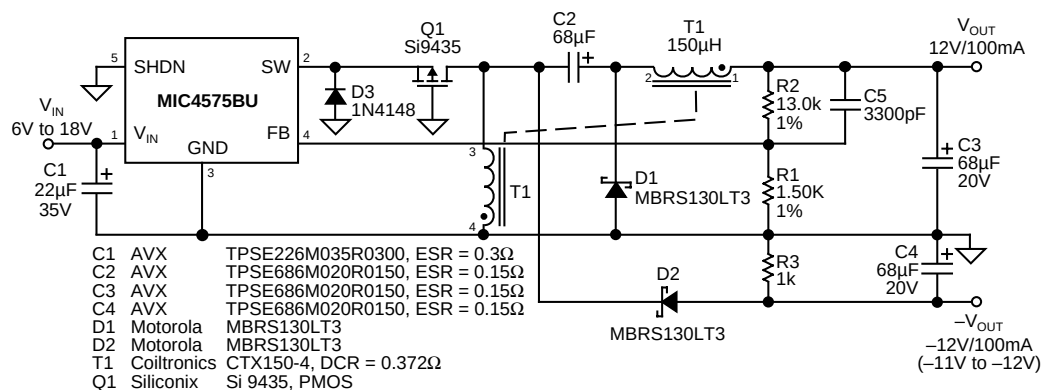


Figure 20. 6V-18V to Split ±12V/100mA Supply


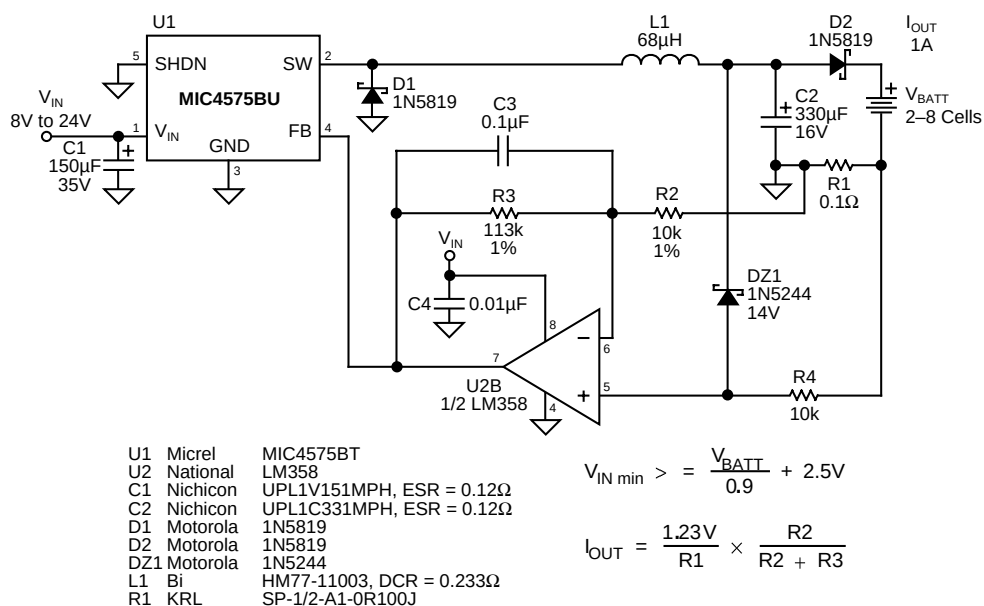


Figure 21. 1A Battery Charger

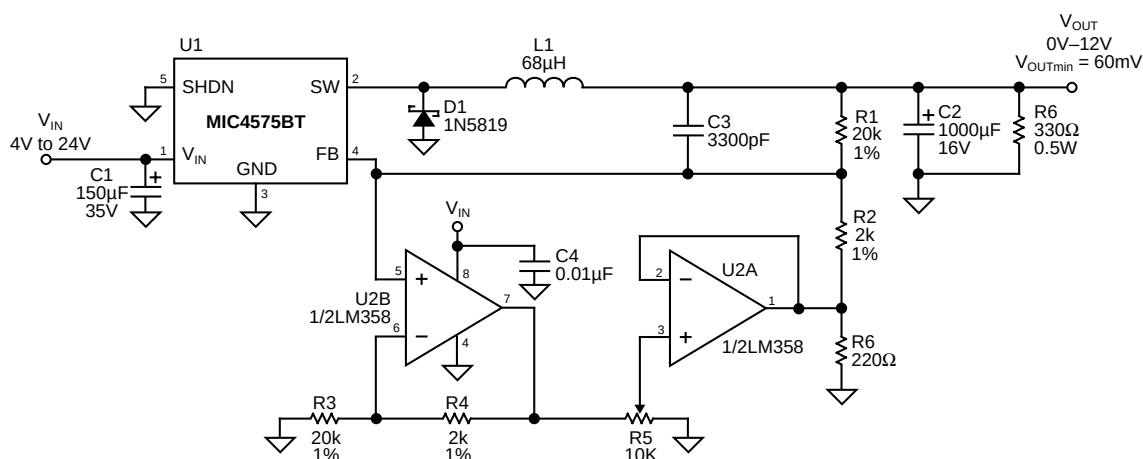


U1 Micrel MIC4575BT
 U2 National LM358
 C1 Nichicon UPL1V151MPH, ESR = 0.12Ω
 C2 Nichicon UPL1C102MPH, ESR = 0.047Ω
 D1 Motorola 1N5819
 L1 Bi HM77-11003, DCR = 0.233Ω

$$V_{IN\ min} > = \frac{V_{OUT}}{0.9} + 2.5V$$

$$V_{OUT\ max} = 1.23V \times \left(1 + \frac{R1}{R2}\right)$$

$$R1 = R3 \text{ and } R2 = R4$$

Figure 22. Improved Adjustable Output-Voltage Regulator (0V-12V)

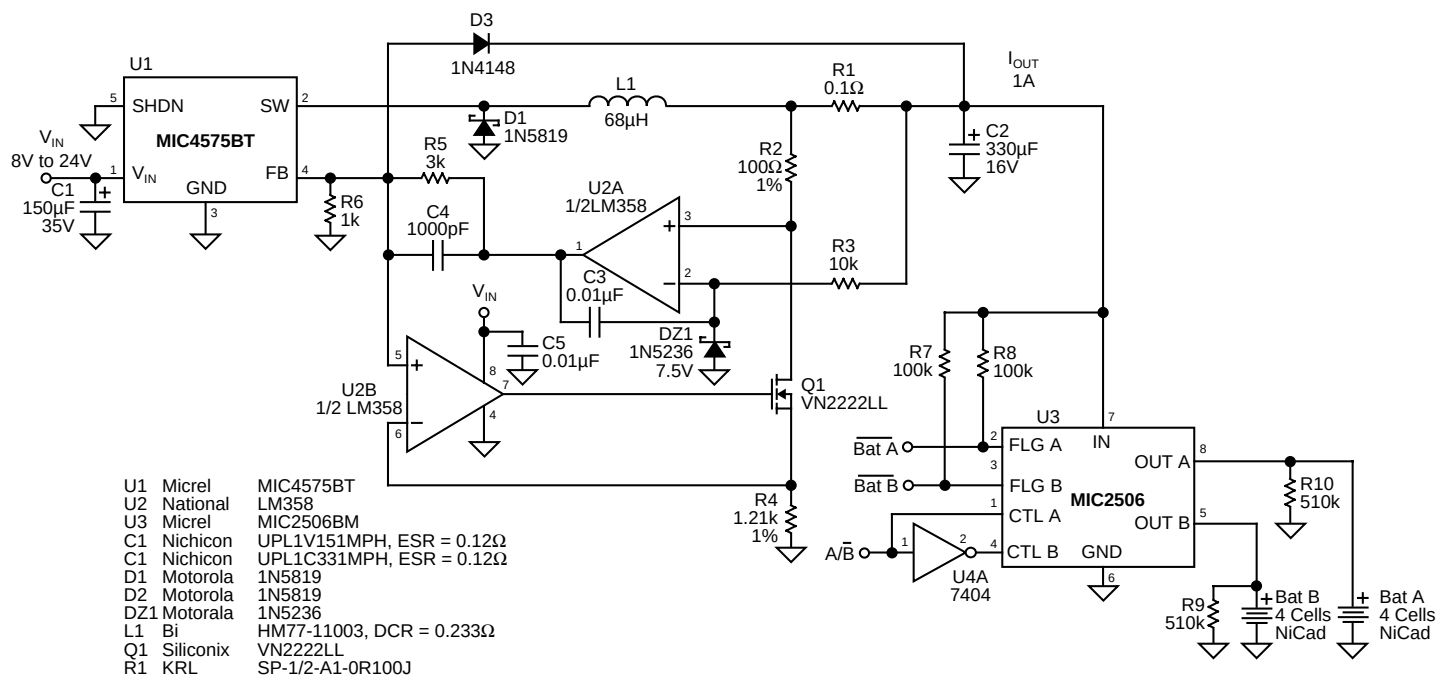

U1 Micrel MIC4575BT
 U2 National LM358
 U3 Micrel MIC2506BM
 C1 Nichicon UPL1V151MPH, ESR = 0.12Ω
 C2 Nichicon UPL1C331MPH, ESR = 0.12Ω
 D1 Motorola 1N5819
 D2 Motorola 1N5819
 DZ1 Motorola 1N5236
 L1 Bi HM77-11003, DCR = 0.233Ω
 Q1 Siliconix VN2222LL
 R1 KRL SP-1/2-A1-0R100J

Figure 23. Switchable Battery-Pack Charger

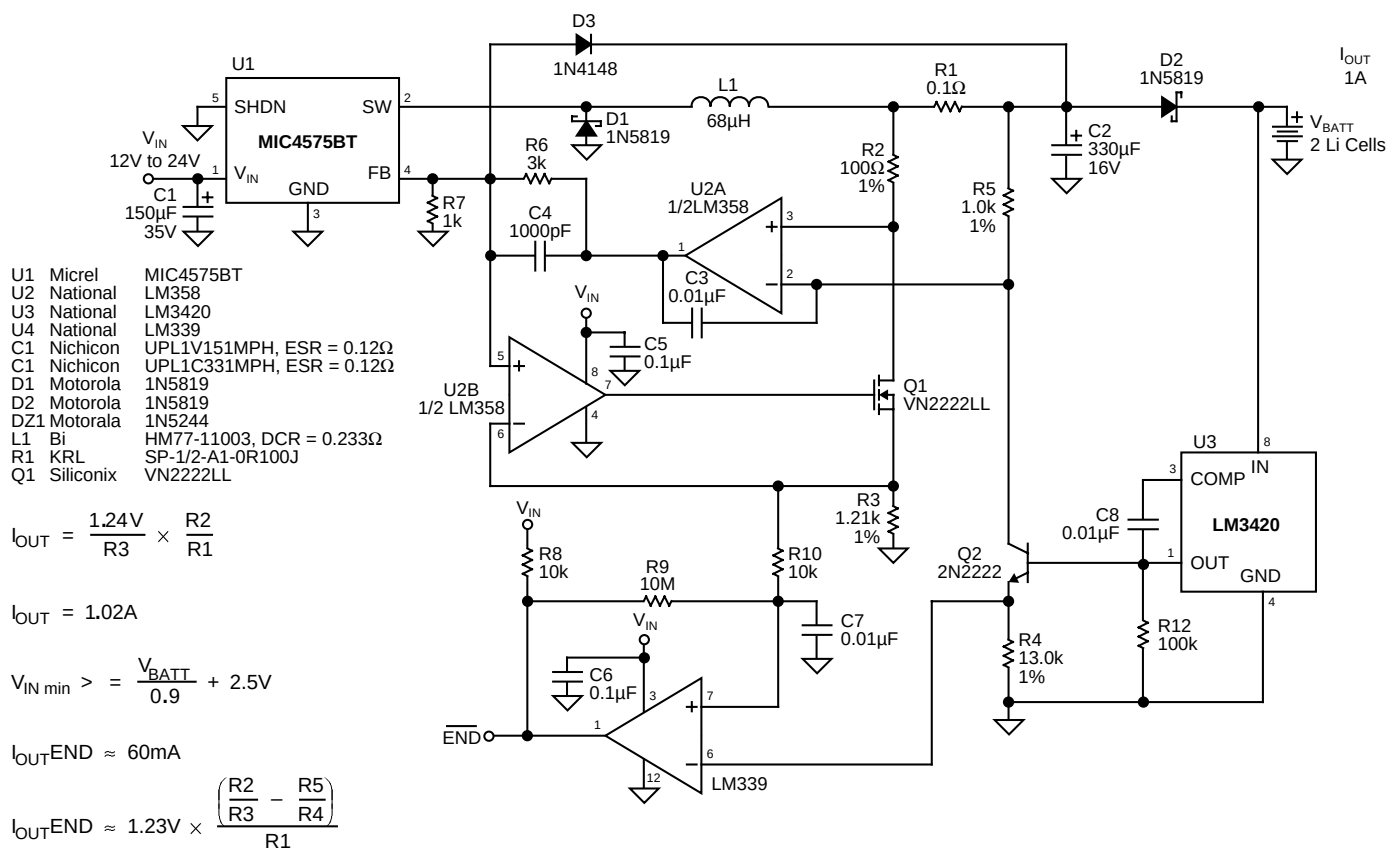


Figure 24. Lithium-Ion Battery Charger with End-of-Charge Flag



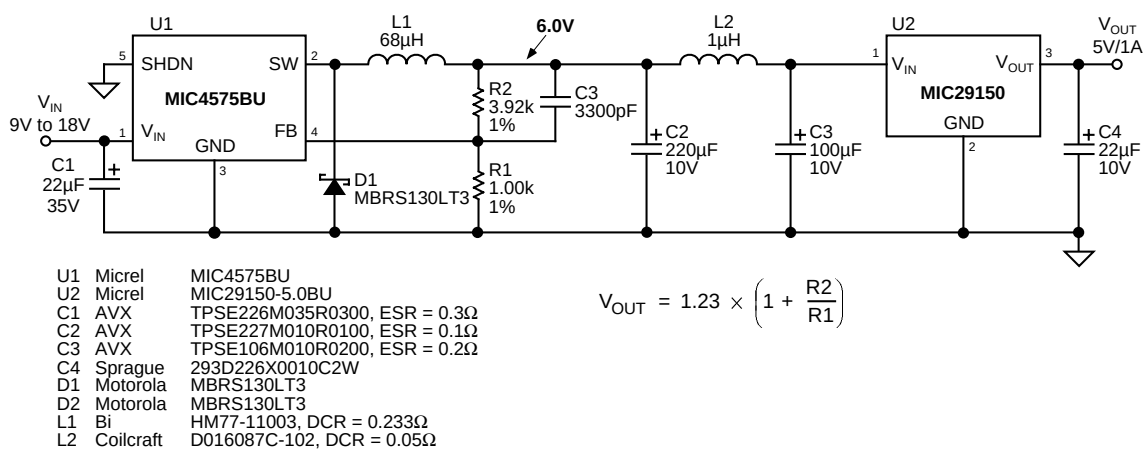


Figure 25. Low Output-Noise Regulator (<1mV)

Package Information

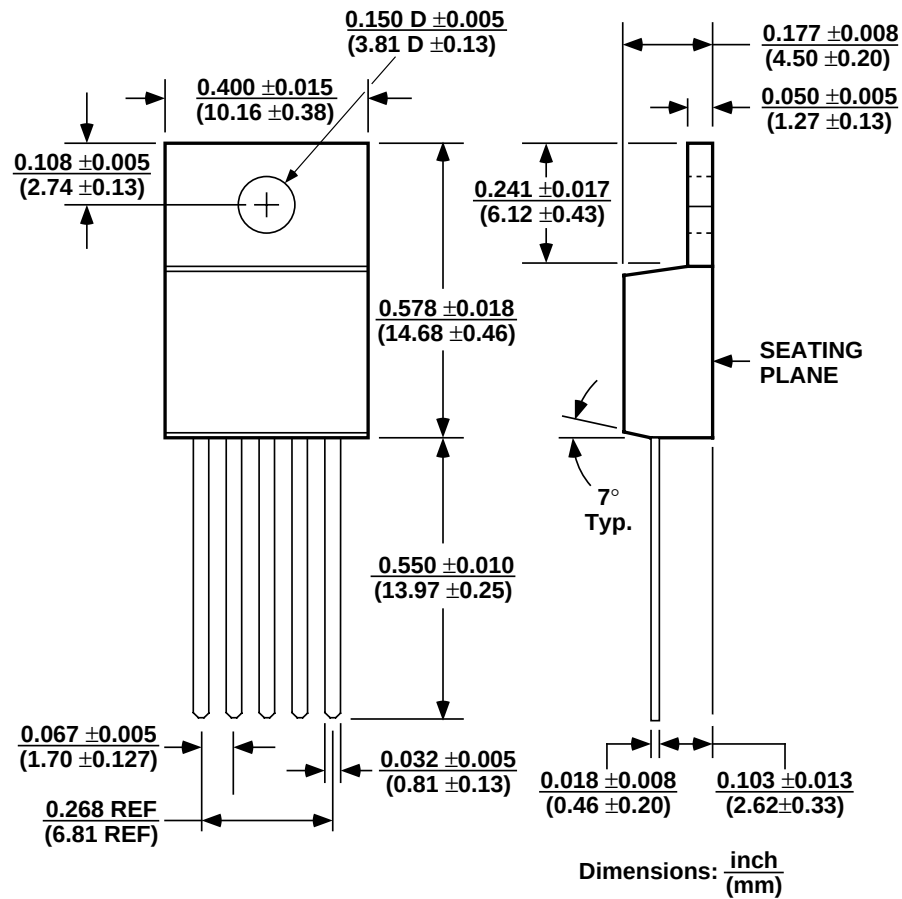

5-Lead TO-220 (T)

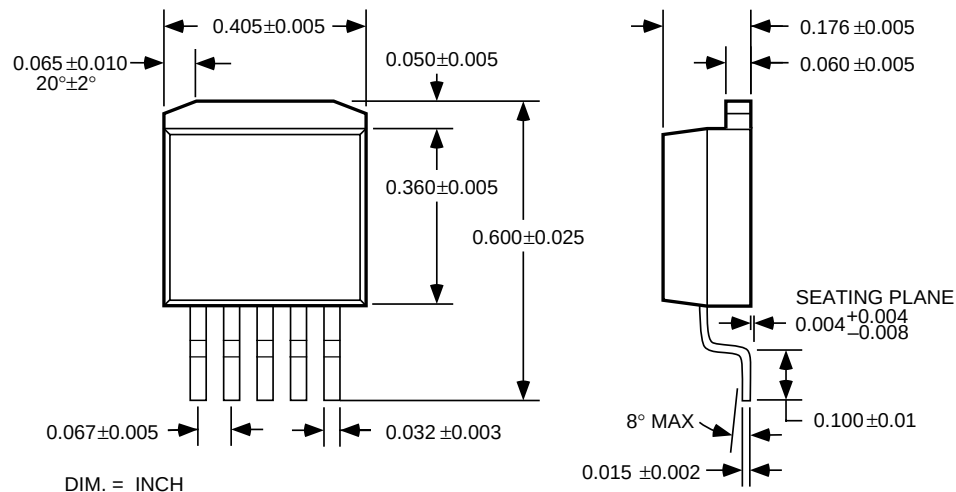

5-Lead TO-263 (U)

MICREL INC. 1849 FORTUNE DRIVE SAN JOSE, CA 95131 USA

TEL + 1 (408) 944-0800 FAX + 1 (408) 944-0970 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2001 Micrel Incorporated