


## ANALOG MULTIPLEXER/DEMULTIPLEXER


### 4067B-SINGLE 16-CHANNEL

### 4097B-DIFFERENTIAL 8-CHANNEL

- LOW ON RESISTANCE: 125Ω (typ.) OVER 15 Vp-p SIGNAL INPUT RANGE FOR  $V_{DD} - V_{SS} = 15V$
- HIGH OFF RESISTANCE: CHANNEL LEAKAGE OF  $\pm 10pA$  (typ.) @  $V_{DD} - V_{SS} = 10V$
- MATCHED SWITCH CHARACTERISTICS:  $\Delta R_{ON} = 5\Omega$  (typ.) FOR  $V_{DD} - V_{SS} = 15V$
- VERY LOW QUIESCENT POWER DISSIPATION UNDER A DIGITAL CONTROL INPUT AND SUPPLY CONDITIONS: 0.2μW (typ.) @  $V_{DD} - V_{SS} = 10V$
- BINARY ADDRESS DECODING ON CHIP
- QUIESCENT CURRENT SPECIFIED TO 20V FOR HCC DEVICE
- STANDARDIZED SYMMETRICAL OUTPUT CHARACTERISTICS
- 5V, 10V AND 15V PARAMETRIC RATINGS
- INPUT CURRENT OF 100nA AT 18V AND 25°C FOR HCC DEVICE
- 100% TESTED FOR QUIESCENT CURRENT
- MEETS ALL REQUIREMENTS OF JEDEC TENTATIVE STANDARD No 13A, "STANDARD SPECIFICATIONS FOR DESCRIPTION OF B-SERIE CMOS DEVICES"



**EY**  
(Plastic Package)



**F**  
(Ceramic Package)



**M1**  
(Micro Package)




**C1**  
(Chip Carrier)

#### ORDER CODES :

|            |            |
|------------|------------|
| HCC40XXBF  | HCF40XXBM1 |
| HCF40XXBEY | HCF40XXBC1 |

### PIN CONNECTIONS

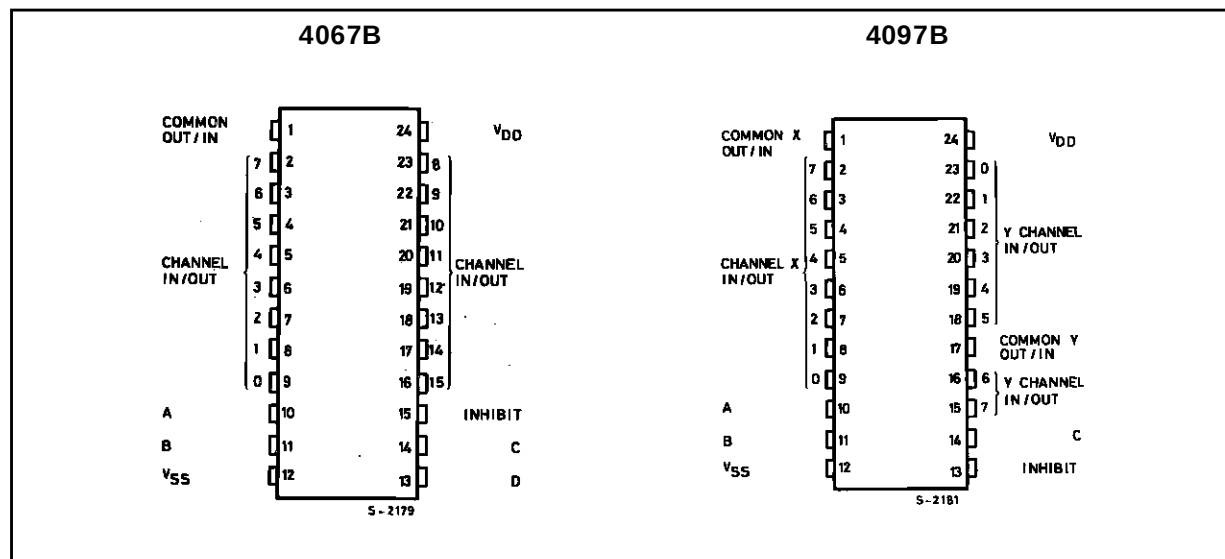

## DESCRIPTION

The **HCC4067B**, **HCC4097B** (extended temperature range) and **HCF4067B**, **HCF4097B** (intermediate temperature range) are monolithic integrated circuits available in 24-lead dual in line plastic or ceramic package.


The **HCC/HCF4067B** and **HCC/HCF4097B** COS/MOS analog multiplexers/demultiplexers are digitally controlled analog switches having low ON impedance, low OFF leakage current and internal

address decoding. in addition, the ON resistance is relatively constant over the full input-signal range.


The **HCC/HCF4067B** is a 16-channel multiplexer with four binary control inputs A, B, C, D, and an inhibit input, arranged so that any combination of the inputs selects one switch.

The **HCC/HCF4097** is a differential 8-channel multiplexer having three binary control inputs A, B, C, and an inhibit input. The inputs permit selection of one


## FUNCTIONAL DIAGRAM

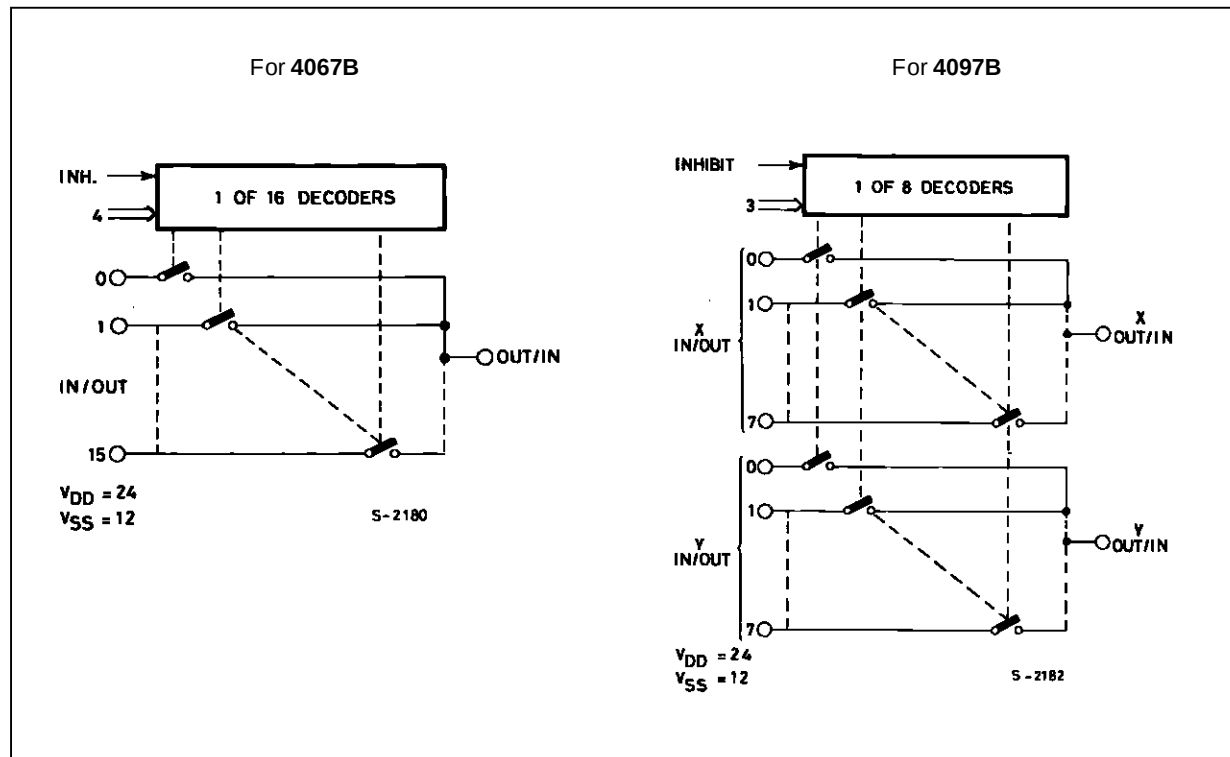

## LOGIC DIAGRAM

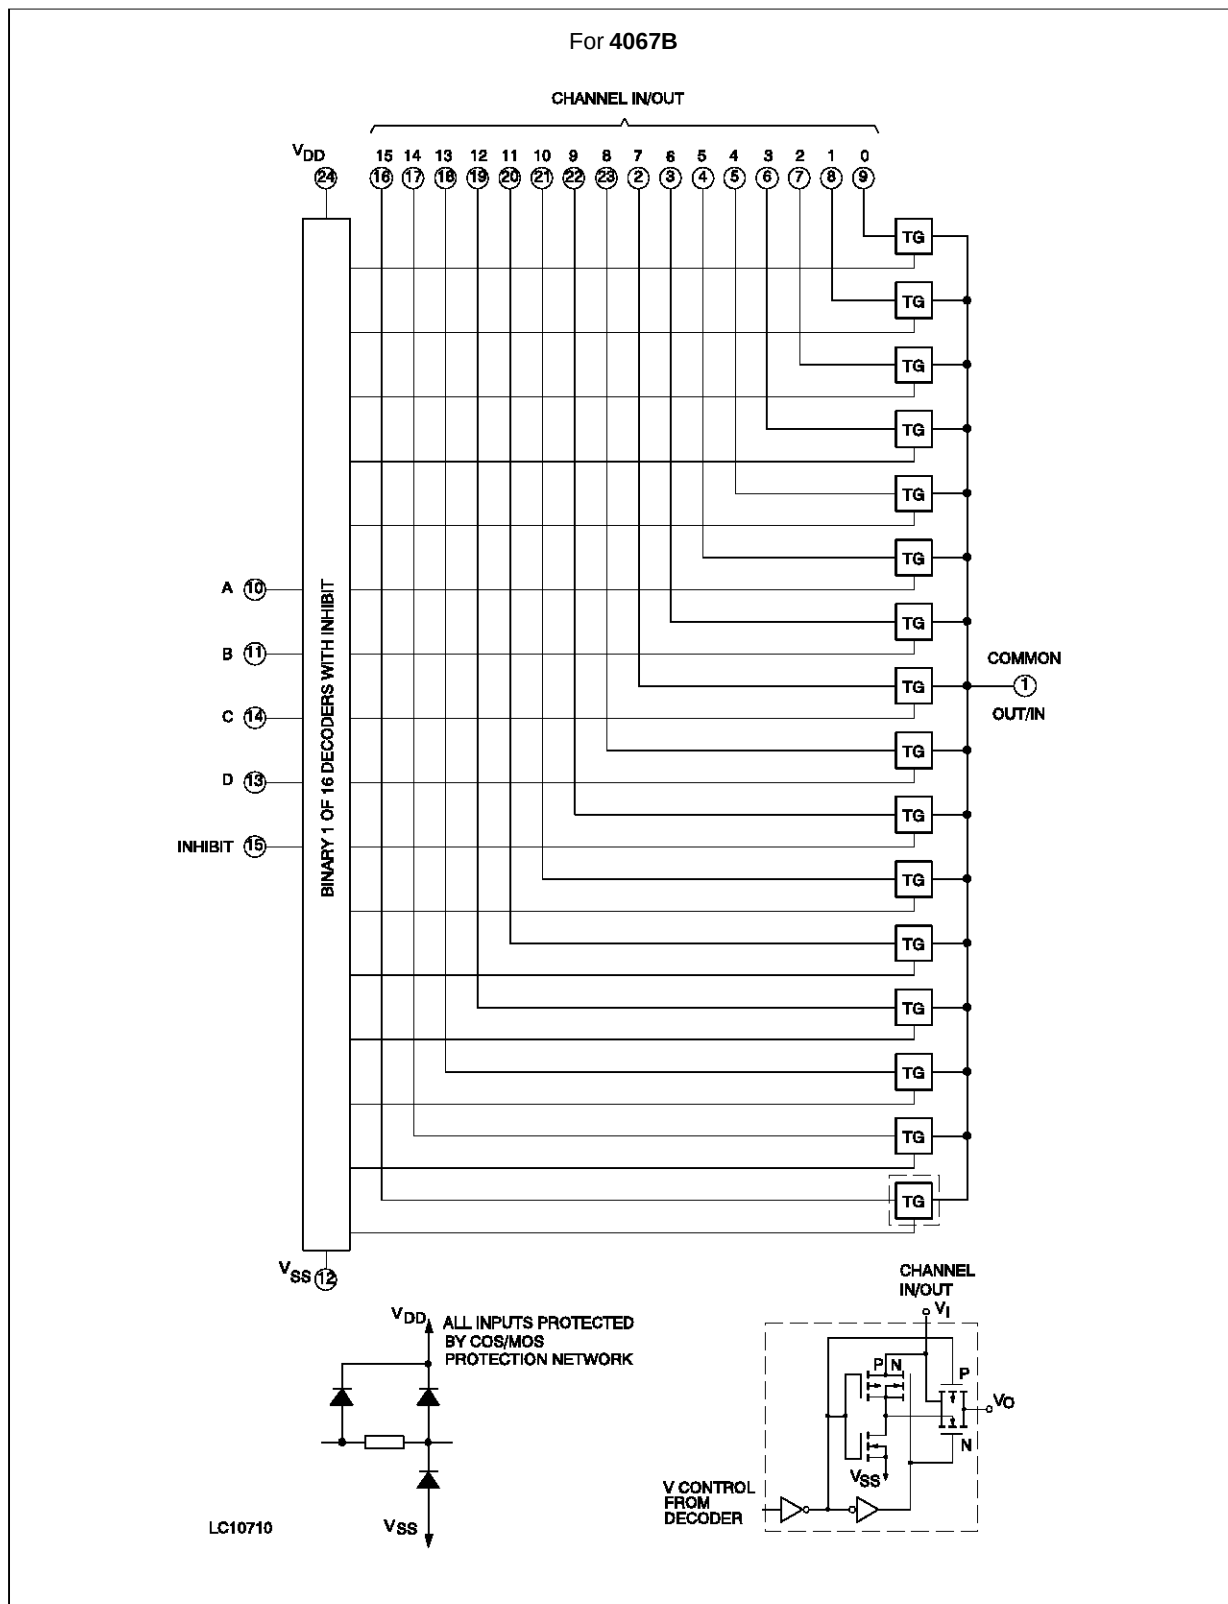

## LOGIC DIAGRAM

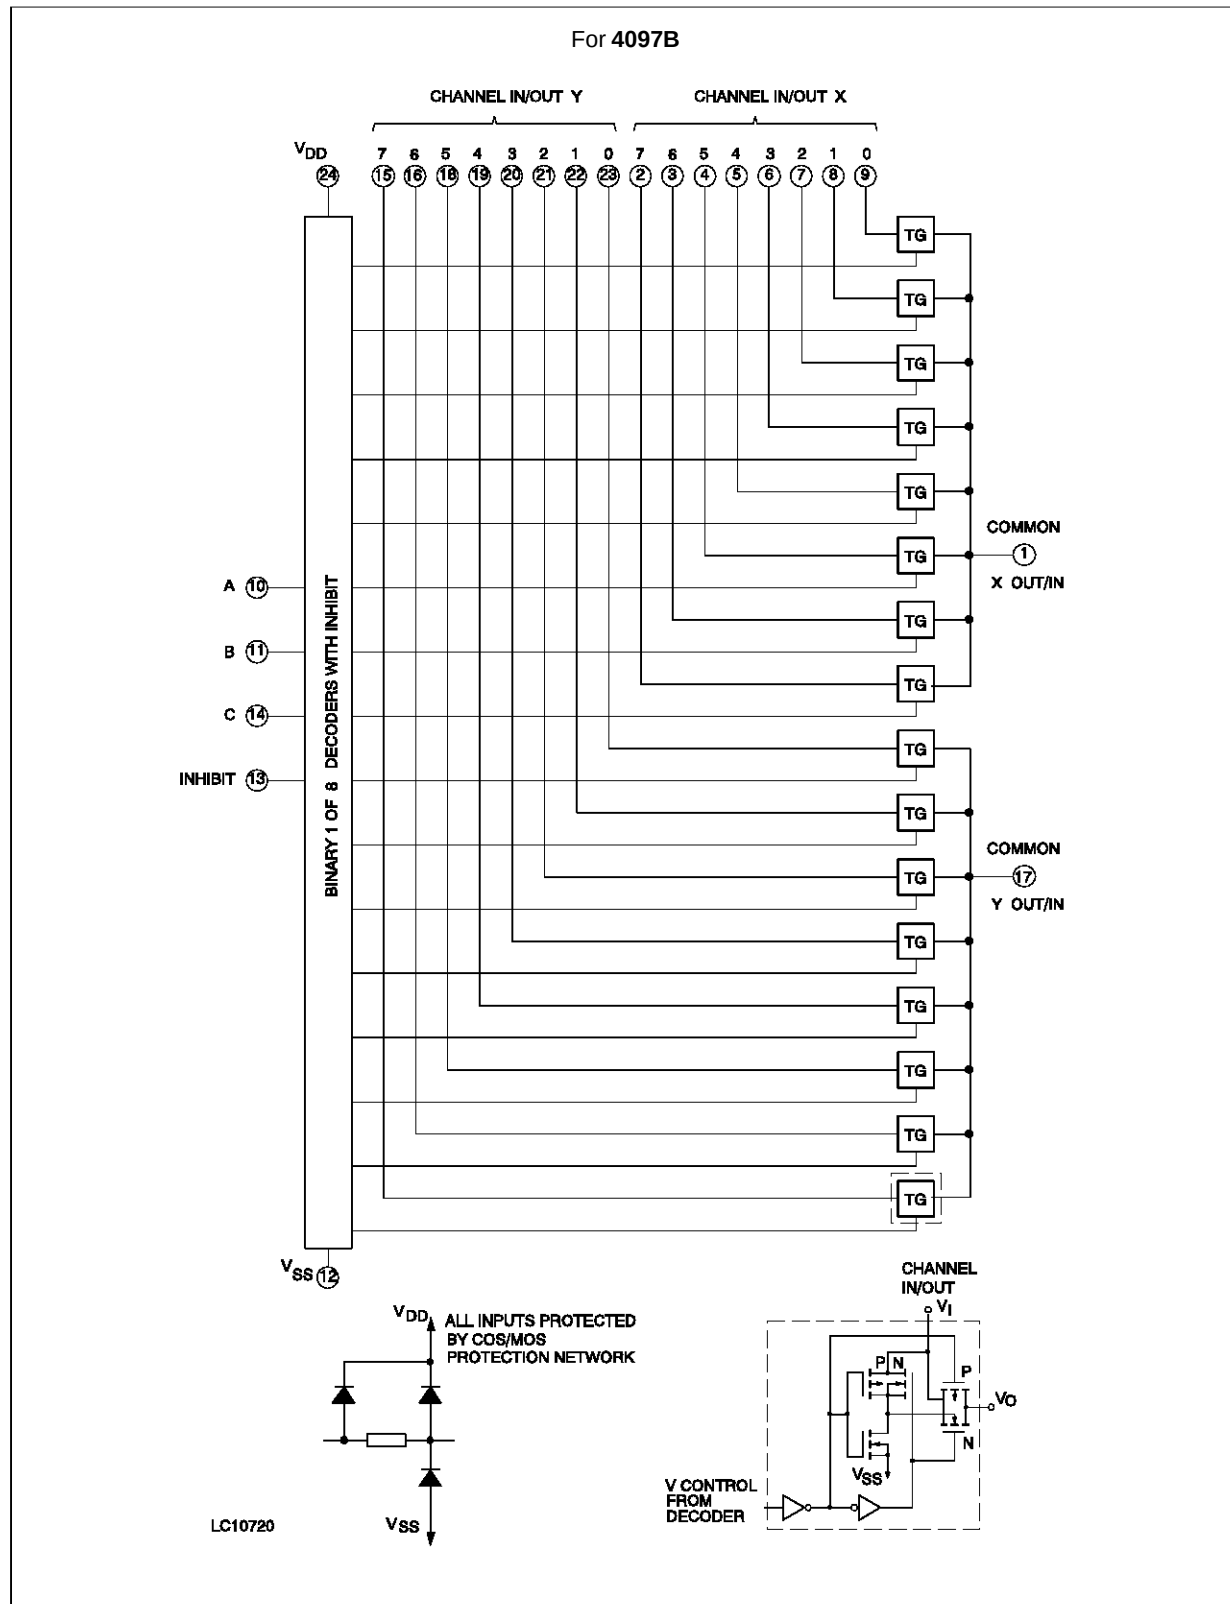

TRUTH TABLES FOR HCC/HCF4067B

| A | B | C | D | INH | SELECTED CHANNEL |
|---|---|---|---|-----|------------------|
| X | X | X | X | 1   | None             |
| 0 | 0 | 0 | 0 | 0   | 0                |
| 1 | 0 | 0 | 0 | 0   | 1                |
| 0 | 1 | 0 | 0 | 0   | 2                |
| 1 | 1 | 0 | 0 | 0   | 3                |
| 0 | 0 | 1 | 0 | 0   | 4                |
| 1 | 0 | 1 | 0 | 0   | 5                |
| 0 | 1 | 1 | 0 | 0   | 6                |
| 1 | 1 | 1 | 0 | 0   | 7                |
| 0 | 0 | 0 | 1 | 0   | 8                |
| 1 | 0 | 0 | 1 | 0   | 9                |
| 0 | 1 | 0 | 1 | 0   | 10               |
| 1 | 1 | 0 | 1 | 0   | 11               |
| 0 | 0 | 1 | 1 | 0   | 12               |
| 1 | 0 | 1 | 1 | 0   | 13               |
| 0 | 1 | 1 | 1 | 0   | 14               |
| 1 | 1 | 1 | 1 | 0   | 15               |

TRUTH TABLE FOR HCC/HCF4097B

| A | B | C | INH | SELECTED CHANNEL |
|---|---|---|-----|------------------|
| X | X | X | 1   | None             |
| 0 | 0 | 0 | 0   | 0X 0Y            |
| 1 | 0 | 0 | 0   | 1X 1Y            |
| 0 | 1 | 0 | 0   | 2X 2Y            |
| 1 | 1 | 0 | 0   | 3X 3Y            |
| 0 | 0 | 1 | 0   | 4X 4Y            |
| 1 | 0 | 1 | 0   | 5X 5Y            |
| 0 | 1 | 1 | 0   | 6X 6Y            |
| 1 | 1 | 1 | 0   | 7X 7Y            |

## ABSOLUTE MAXIMUM RATING

| Symbol     | Parameter                                                                                                                   | Value                      | Unit                                     |
|------------|-----------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------------------------|
| $V_{DD}^*$ | Supply Voltage: <b>HCC</b> Types<br><b>HCF</b> Types                                                                        | -0.5 to +20<br>-0.5 to +18 | V<br>V                                   |
| $V_i$      | Input Voltage                                                                                                               | -0.5 to $V_{DD} + 0.5$     | V                                        |
| $I_i$      | DC Input Current (any one input)                                                                                            | $\pm 10$                   | mA                                       |
| $P_{tot}$  | Total Power Dissipation (per package)<br>Dissipation per Output Transistor<br>for $T_{op}$ = Full Package Temperature Range | 200<br>100                 | mW<br>mW                                 |
| $T_{op}$   | Operating Temperature: <b>HCC</b> Types<br><b>HCF</b> Types                                                                 | -55 to +125<br>-40 to +85  | $^{\circ}\text{C}$<br>$^{\circ}\text{C}$ |
| $T_{stg}$  | Storage Temperature                                                                                                         | -65 to +150                | $^{\circ}\text{C}$                       |

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for external periods may affect device reliability.

\* All voltage values are referred to  $V_{SS}$  pin voltage.

## RECOMMENDED OPERATING CONDITIONS

| Symbol   | Parameter                                                   | Value                     | Unit                                     |
|----------|-------------------------------------------------------------|---------------------------|------------------------------------------|
| $V_{DD}$ | Supply Voltage: <b>HCC</b> Types<br><b>HCF</b> Types        | 3 to 18<br>3 to 15        | V<br>V                                   |
| $V_i$    | Input Voltage                                               | 0 to $V_{DD}$             | V                                        |
| $T_{op}$ | Operating Temperature: <b>HCC</b> Types<br><b>HCF</b> Types | -55 to +125<br>-40 to +85 | $^{\circ}\text{C}$<br>$^{\circ}\text{C}$ |

**STATIC ELECTRICAL CHARACTERISTICS** (over recommended operating conditions)

| Symbol                             | Parameter                                                              |           | Test Conditions                      |                                                                                                                           |                        |                        | Value              |      |       |                   |      |                     |      | Unit |   |
|------------------------------------|------------------------------------------------------------------------|-----------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------|--------------------|------|-------|-------------------|------|---------------------|------|------|---|
|                                    |                                                                        |           | V <sub>IS</sub><br>(V)               | V <sub>EE</sub><br>(V)                                                                                                    | V <sub>SS</sub><br>(V) | V <sub>DD</sub><br>(V) | T <sub>LOW</sub> * |      | 25 °C |                   |      | T <sub>HIGH</sub> * |      |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        |                        | Min.               | Max. | Min.  | Typ.              | Max. | Min.                | Max. |      |   |
| I <sub>L</sub>                     | Quiescent Supply Current                                               | HCC types |                                      |                                                                                                                           |                        | 5                      |                    | 5    |       | 0.04              | 5    |                     | 150  | μA   |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 10                     |                    | 10   |       | 0.04              | 10   |                     | 300  |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 15                     |                    | 20   |       | 0.04              | 20   |                     | 600  |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 20                     |                    | 100  |       | 0.08              | 100  |                     | 3000 |      |   |
|                                    |                                                                        | HCF types |                                      |                                                                                                                           |                        | 5                      |                    | 20   |       | 0.04              | 20   |                     | 150  |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 10                     |                    | 40   |       | 0.04              | 40   |                     | 300  |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 15                     |                    | 80   |       | 0.04              | 80   |                     | 600  |      |   |
| SWITCH                             |                                                                        |           |                                      |                                                                                                                           |                        |                        |                    |      |       |                   |      |                     |      |      |   |
| R <sub>ON</sub>                    | On Resistance                                                          | HCC types | 0 ≤ V <sub>I</sub> ≤ V <sub>DD</sub> | 0                                                                                                                         | 0                      | 5                      |                    | 800  |       | 470               | 1050 |                     | 1300 | Ω    |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 10                     |                    | 310  |       | 180               | 400  |                     | 580  |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 15                     |                    | 200  |       | 125               | 240  |                     | 320  |      |   |
|                                    |                                                                        | HCF types | 0 ≤ V <sub>I</sub> ≤ V <sub>DD</sub> | 0                                                                                                                         | 0                      | 5                      |                    | 850  |       | 470               | 1050 |                     | 1200 |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 10                     |                    | 330  |       | 180               | 400  |                     | 520  |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 15                     |                    | 210  |       | 125               | 240  |                     | 300  |      |   |
| ΔON                                | Resistance ΔR <sub>ON</sub><br>(Between any two channels)              |           |                                      | 0                                                                                                                         | 0                      | 5                      |                    |      |       | 10                |      |                     | Ω    |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 10                     |                    |      |       | 10                |      |                     |      |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        | 15                     |                    |      |       | 5                 |      |                     |      |      |   |
| OFF (●)<br>Channel Leakage Current | Any Channel OFF                                                        | HCC types |                                      | 0                                                                                                                         | 0                      | 18                     |                    | 100  |       | ±0.1              | 100  |                     | 1000 | μA   |   |
|                                    | All Channel OFF (common OUT/IN)                                        | HCC types |                                      | 0                                                                                                                         | 0                      | 18                     |                    | 100  |       | ±0.1              | 100  |                     | 1000 |      |   |
|                                    | Any Channel OFF                                                        | HCF types |                                      | 0                                                                                                                         | 0                      | 15                     |                    | 300  |       | ±0.1              | 300  |                     | 1000 |      |   |
|                                    | All Channel OFF (common OUT/IN)                                        | HCF types |                                      | 0                                                                                                                         | 0                      | 15                     |                    | 300  |       | ±0.1              | 300  |                     | 1000 |      |   |
| C                                  | Capacitance Input<br>Output for 4067<br>Output for 4097<br>Feedthrough |           |                                      |                                                                                                                           | -5                     | 5                      |                    |      |       | 5                 |      |                     |      | pF   |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        |                        |                    |      |       | 55                |      |                     |      |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        |                        |                    |      |       | 35                |      |                     |      |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           |                        |                        |                    |      |       | 0.2               |      |                     |      |      |   |
| CONTROL                            |                                                                        |           |                                      |                                                                                                                           |                        |                        |                    |      |       |                   |      |                     |      |      |   |
| V <sub>IL</sub>                    | Input Low Voltage                                                      |           | = V <sub>DD</sub> thru 1KΩ           | V <sub>EE</sub> =V <sub>SS</sub><br>R <sub>L</sub> =1KΩ to V <sub>SS</sub><br>I <sub>IS</sub> < 2μA (on all OFF channels) | 5                      |                        | 1.5                |      |       | 1.5               |      | 1.5                 |      | V    |   |
|                                    |                                                                        |           |                                      |                                                                                                                           | 10                     |                        | 3                  |      |       | 3                 |      | 3                   |      |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           | 15                     |                        | 4                  |      |       | 4                 |      | 4                   |      |      |   |
| V <sub>IH</sub>                    | Input High Voltage                                                     |           |                                      |                                                                                                                           | 5                      | 3.5                    |                    | 3.5  |       |                   |      | 3.5                 |      |      | V |
|                                    |                                                                        |           |                                      |                                                                                                                           | 10                     | 7                      |                    | 7    |       |                   |      | 7                   |      |      |   |
|                                    |                                                                        |           |                                      |                                                                                                                           | 15                     | 11                     |                    | 11   |       |                   |      | 11                  |      |      |   |
| I <sub>IH</sub> I <sub>IL</sub>    | Input Leakage Current                                                  | HCC types | V <sub>I</sub> = 0/18V               |                                                                                                                           |                        | 18                     |                    | ±0.1 |       | ±10 <sup>-3</sup> | ±0.1 |                     | ±1   | μA   |   |
|                                    |                                                                        | HCF types | V <sub>I</sub> = 0/15V               |                                                                                                                           |                        | 15                     |                    | ±0.3 |       | ±10 <sup>-3</sup> | ±0.3 |                     | ±1   |      |   |
| C <sub>I</sub>                     | Input Capacitance                                                      |           | Any Address or Inhibit Input         |                                                                                                                           |                        |                        |                    |      |       | 5                 | 7.5  |                     |      | pF   |   |

• Determined by minimum feasible leakage measurement for automatic testing

\* T<sub>LOW</sub> = -55 °C for **HCC** device; -40 °C for **HCF** device.

\* T<sub>HIGH</sub> = +125 °C for **HCC** device; +85 °C for **HCF** device.

The Noise Margin for both "1" and "0" level is: 1V min. with V<sub>DD</sub> = 5 V, 2 V min. with V<sub>DD</sub> = 10 V, 2.5 V min. with V<sub>DD</sub> = 15 V


**DYNAMIC ELECTRICAL CHARACTERISTICS** ( $T_{amb} = 25^{\circ}\text{C}$ ,  $C_L = 50\text{ pF}$ ,  $R_L = 200\text{ K}\Omega$ , typical temperature coefficient for all  $V_{DD}$  values is  $03\text{ }^{\circ}\text{C}/^{\circ}\text{C}$ , all input rise and fall times =  $20\text{ ns}$ )

| Symbol                               | Parameter                                                                                            | Test Conditions                                                                     |                        |                                                                                   |                       |                        |                        |                                       | Value                   |      | Unit    |
|--------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------|-----------------------|------------------------|------------------------|---------------------------------------|-------------------------|------|---------|
|                                      |                                                                                                      | V <sub>C</sub><br>(V)                                                               | R <sub>L</sub><br>(KΩ) | f <sub>i</sub><br>(KHz)                                                           | V <sub>I</sub><br>(V) | V <sub>SS</sub><br>(V) | V <sub>DD</sub><br>(V) |                                       | Typ.                    | Max. |         |
| SWITCH                               |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        |                        |                                       |                         |      |         |
| t <sub>pd</sub>                      | Propagation Delay Time (Signal Input to Output)                                                      | = V <sub>DD</sub>                                                                   | 200                    |  | 0                     |                        | 5                      |                                       | 30                      | 60   | ns      |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        | 10                     |                                       | 15                      | 30   |         |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        | 15                     |                                       | 11                      | 20   |         |
|                                      | Frequency Response Channel "ON" (Sine Wave Input) at $20\text{ Log } \frac{V_O}{V_I} = -3\text{ dB}$ | = V <sub>DD</sub>                                                                   | 1                      |                                                                                   | 5 (●)                 | 0                      | 10                     | V <sub>O</sub> at Common OUT/IN       | 4067B                   | 14   | ns      |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        |                        |                                       | 4097B                   | 20   |         |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        |                        | V <sub>O</sub> at Any Channel         |                         | 60   |         |
|                                      | Feedthrough (All Channels OFF) at $20\text{ Log } \frac{V_O}{V_I} = -40\text{ dB}$                   | = V <sub>SS</sub>                                                                   | 1                      |                                                                                   | 5 (●)                 | 0                      | 10                     | V <sub>O</sub> at Common OUT/IN       | 4067B                   | 20   | MHz     |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        |                        |                                       | 4097B                   | 12   |         |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        |                        | V <sub>O</sub> at Any Channel         |                         | 8    |         |
|                                      | Frequency Signal Crosstalk at $20\text{Log } \frac{V_{\alpha(B)}}{V_{I(A)}} = -40\text{dB}$          | V <sub>C(A)</sub> =V <sub>DD</sub><br>V <sub>C(B)</sub> =V <sub>SS</sub>            | 1                      |                                                                                   | 5 (●)                 | 0                      | 10                     | Between Any two (A and B) Channels    |                         | 1    | MHz     |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        |                        | Between Sections (A and B) 4097B only | Measured on common      | 10   |         |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        |                        |                                       | Measured on Any Channel | 18   |         |
| t <sub>w</sub>                       | Sine Wave Distortion (f <sub>is</sub> = 1KHz sine wave)                                              | 5                                                                                   | 10                     | 1                                                                                 | 2 (●)                 | 0                      | 5                      |                                       | 0.3                     |      | %       |
|                                      |                                                                                                      | 10                                                                                  | 10                     | 1                                                                                 | 3 (●)                 | 0                      | 10                     |                                       | 0.2                     |      |         |
|                                      |                                                                                                      | 15                                                                                  | 10                     | 1                                                                                 | 5 (●)                 | 0                      | 15                     |                                       | 0.12                    |      |         |
| CONTROL (address or Inhibit)         |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        |                        |                                       |                         |      |         |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay Time: Address or Inhibit to Signal OUT (Channel Turning ON)                        |  | 1                      |                                                                                   |                       |                        | 0                      | 5                                     | 325                     | 650  | ns      |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        | 0                      | 10                                    | 135                     | 270  |         |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        | 0                      | 15                                    | 95                      | 190  |         |
| t <sub>PLH</sub><br>t <sub>PHL</sub> | Propagation Delay Time: Address or Inhibit to Signal OUT (Channel Turning OFF)                       |  | 0.3                    |                                                                                   |                       |                        | 0                      | 5                                     | 220                     | 440  | ns      |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        | 0                      | 10                                    | 90                      | 180  |         |
|                                      |                                                                                                      |                                                                                     |                        |                                                                                   |                       |                        | 0                      | 15                                    | 65                      | 130  |         |
|                                      | Address or Inhibit to Signal Crosstalk                                                               |  | 10*                    |                                                                                   |                       |                        | 0                      | 10                                    | 75                      |      | mV peak |


(●) Peak to peak voltage symmetrical about  $\frac{V_{DD} - V_{SS}}{2}$

(\*) Both ends of channel


Typical ON Resistance vs Input Signal Voltage  
(All Types)

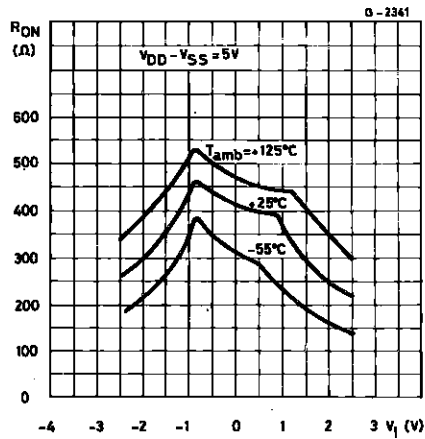


Typical ON Resistance vs Input Signal Voltage  
(All Types)

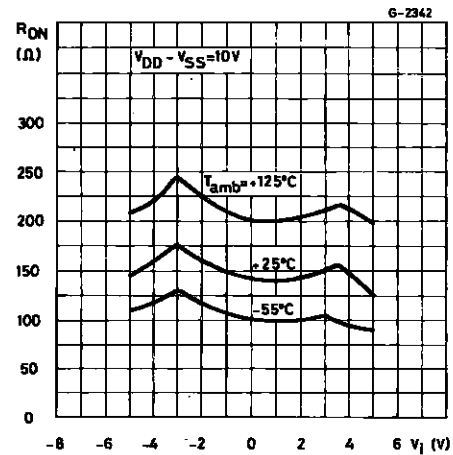

Typical ON Resistance vs Input Signal Voltage  
(All Types)

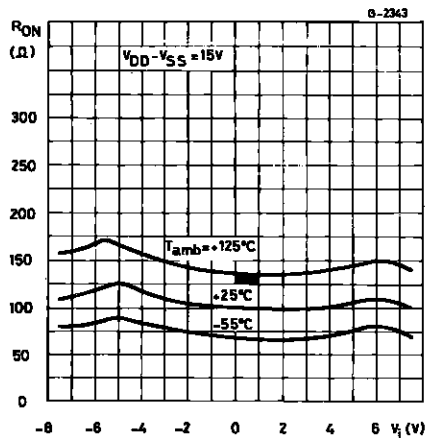


Typical ON Resistance vs Input Signal Voltage  
(All Types)

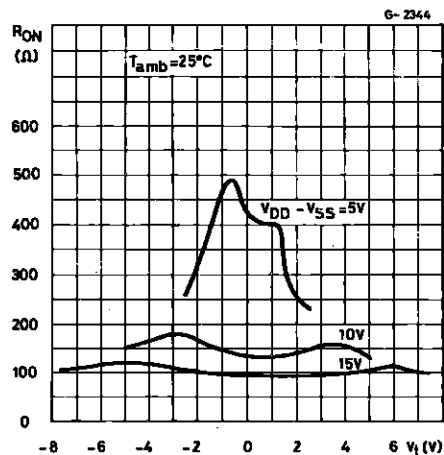


## TEST CIRCUITS

OFF Channel Leakage Current Any Channel OFF

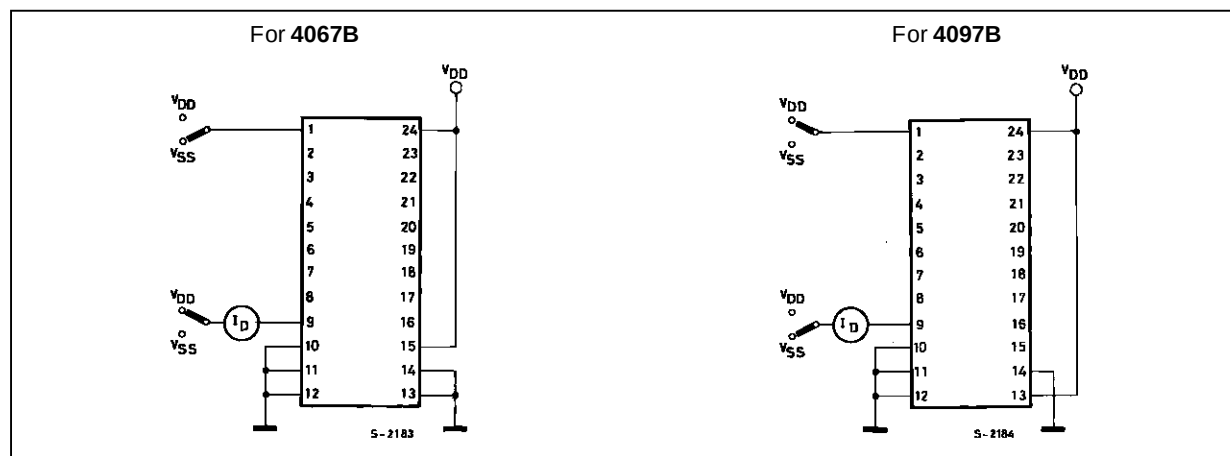





OFF Channel Leakage Current All Channels OFF

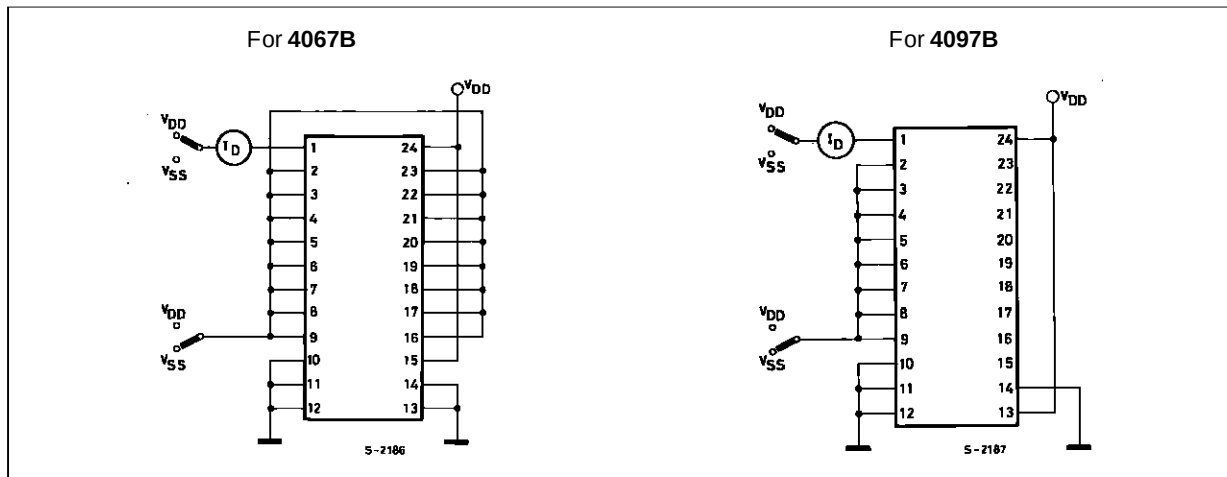


Input Voltage Measure < 2  $\mu$ A an All OFF Channels (e.g. Channel 12)

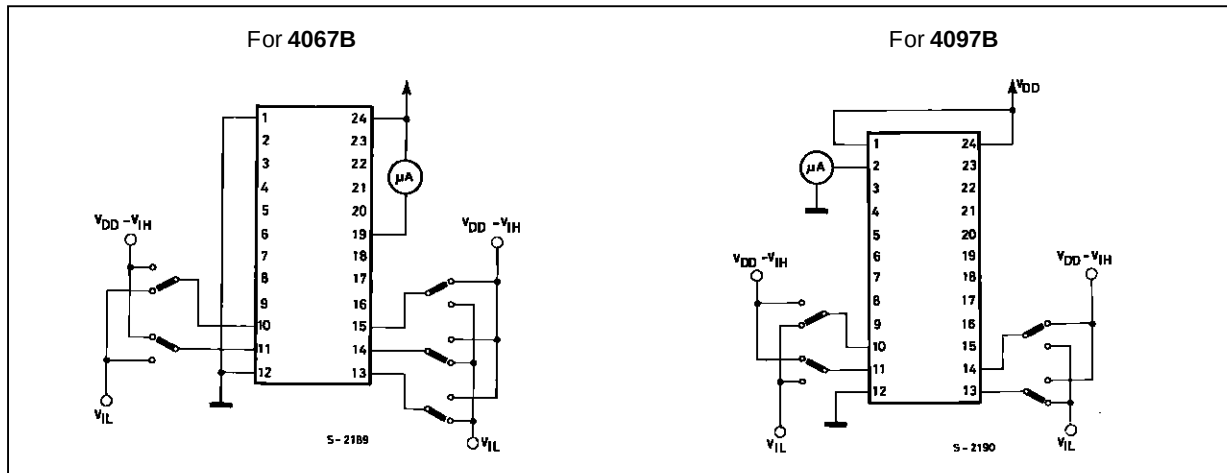


Quiescent Device Current

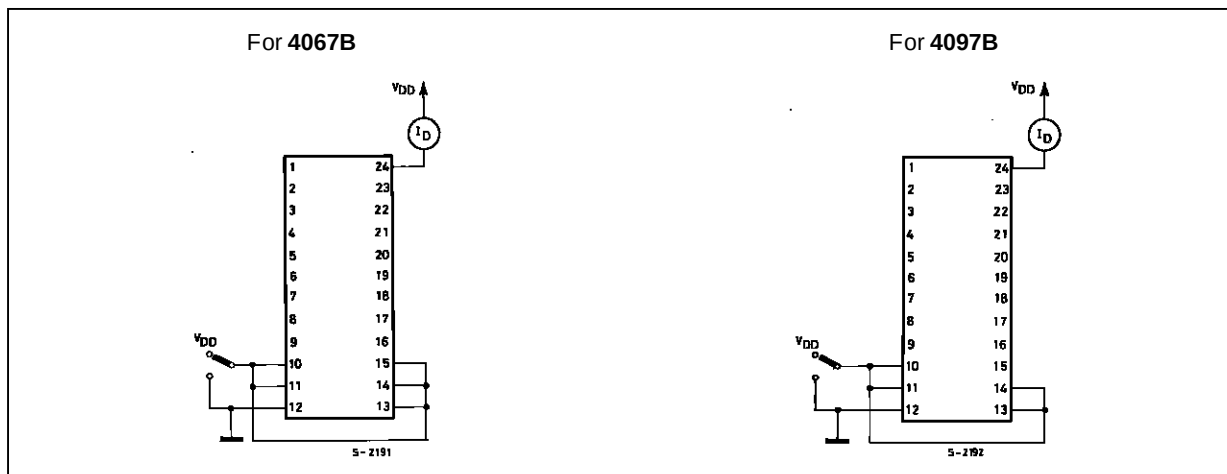


Turn-on and Turn-off Propagation Delay Address Select Input to Signal Output (e. g. Channel 0)

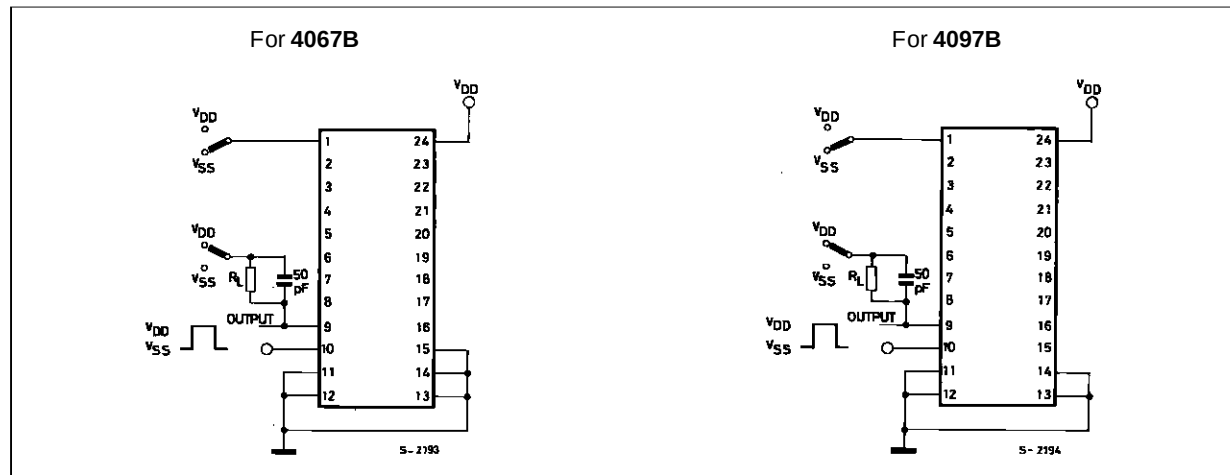


Turn-on and Turn-off Propagation Delay-Inhibit Input to Signal Output (e. g. Channel 1)

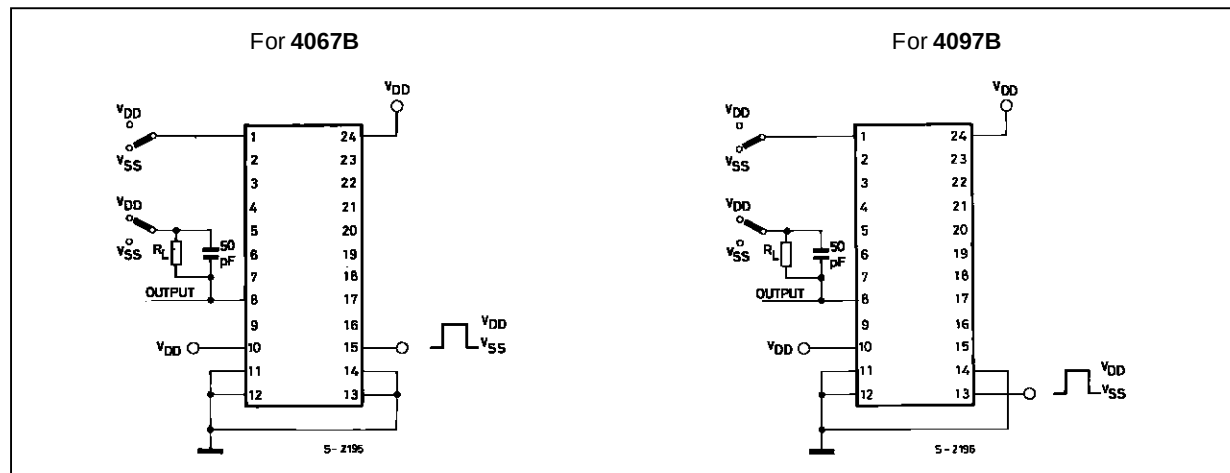


Channel ON Resistance Measurement Circuit

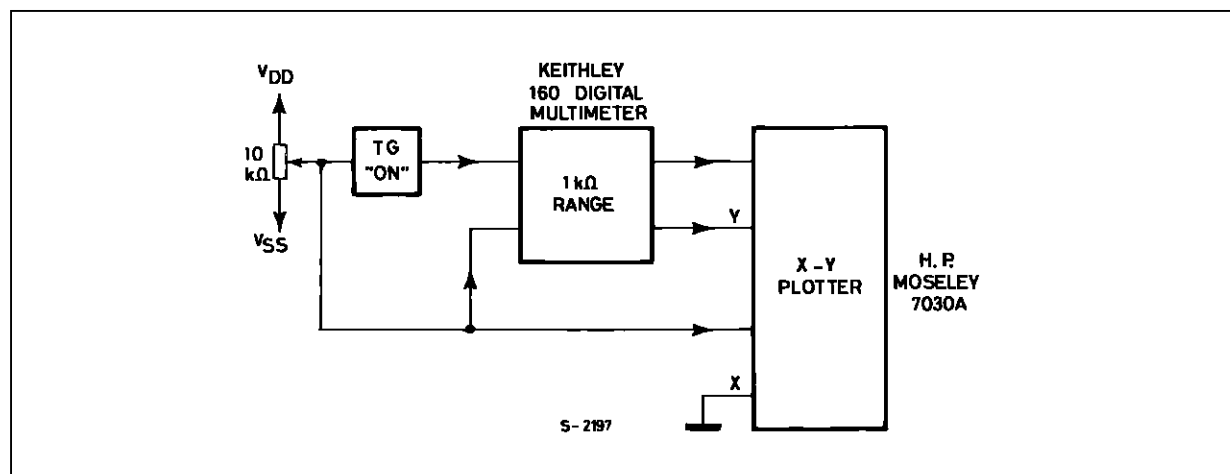

Propagation Delay Waveform Channel Being Turned ON ( $R_L = 10\text{ K}\Omega$ ,  $C_L = 50\text{ pF}$ )

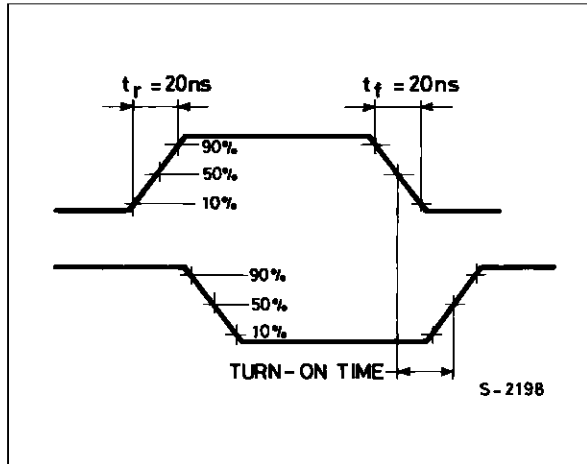

Propagation Delay Waveform Channel Being Turned OFF ( $R_L = 300\text{ }\Omega$ ,  $C_L = 50\text{ pF}$ )

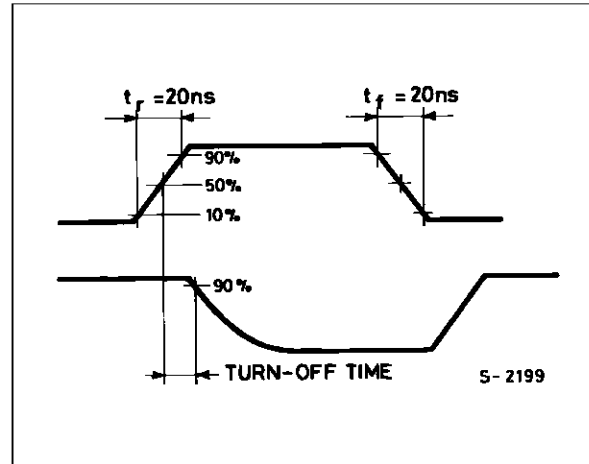

## APPLICATIONS INFORMATION

In applications where separate power sources are used to drive  $V_{DD}$  and the signal inputs, the  $V_{DD}$  current capability should exceed  $V_{DD}/R_L$  ( $R_L$  = effective external load). This provision avoids permanent current flow or clamp action on the  $V_{DD}$  supply when power is applied or removed from the **HCC/HCF4067B** or **HCC/HCF4097B**.

When switching from one address to another, some of the ON periods of the channels of the multiplexers will overlap momentarily, which may be objectionable in certain applications. Also when a channel is turned ON or OFF by an address input, there is a momentary conductive path from the channel to  $V_{SS}$ , which will dump some charge from any capacitor connected to the input or output of the channel. The inhibit input turning on a channel will similarly dump some charge to  $V_{SS}$ .


The amount of charge dumped is mostly a function of the signal level above  $V_{SS}$ . Typically, at  $V_{DD} - V_{SS} = 10\text{V}$ , a 100 pF capacitor connected to the input or output of the channel will

lose 3-4% of its voltage at the moment the channel turns ON or OFF. This loss of voltage is essentially independent of the address or inhibit signal transition time, if the transition time is less than 1-2  $\mu\text{s}$ . When the inhibit signal turns a channel off, there is no charge dumping of  $V_{SS}$ . Rather, there is a slight rise in the channel voltage level (65 mV typ.) due to the capacitance coupling from inhibit input to channel input or output. Address input also couples some voltage steps onto the channel signal levels.

In certain applications, the external load-resistor current may include both  $V_{DD}$  and signal line components. To avoid drawing  $V_{DD}$  current when switch current flows into the transmission gate inputs, the voltage drop across the bidirectional switch must not exceed 0.8 V (calculated from  $R_{ON}$  values shown in ELECTRICAL CHARACTERISTICS CHART). No  $V_{DD}$  current will flow through  $R_L$  if the switch current flows into terminal 1 on the **HCC/HCF4067B**, terminals 1 and 17 on the **HCC/HCF4097B**.


Plastic DIP24 (0.25) MECHANICAL DATA

| DIM. | mm   |       |       | inch  |       |       |
|------|------|-------|-------|-------|-------|-------|
|      | MIN. | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| a1   |      | 0.63  |       |       | 0.025 |       |
| b    |      | 0.45  |       |       | 0.018 |       |
| b1   | 0.23 |       | 0.31  | 0.009 |       | 0.012 |
| b2   |      | 1.27  |       |       | 0.050 |       |
| D    |      |       | 32.2  |       |       | 1.268 |
| E    | 15.2 |       | 16.68 | 0.598 |       | 0.657 |
| e    |      | 2.54  |       |       | 0.100 |       |
| e3   |      | 27.94 |       |       | 1.100 |       |
| F    |      |       | 14.1  |       |       | 0.555 |
| l    |      | 4.445 |       |       | 0.175 |       |
| L    |      | 3.3   |       |       | 0.130 |       |

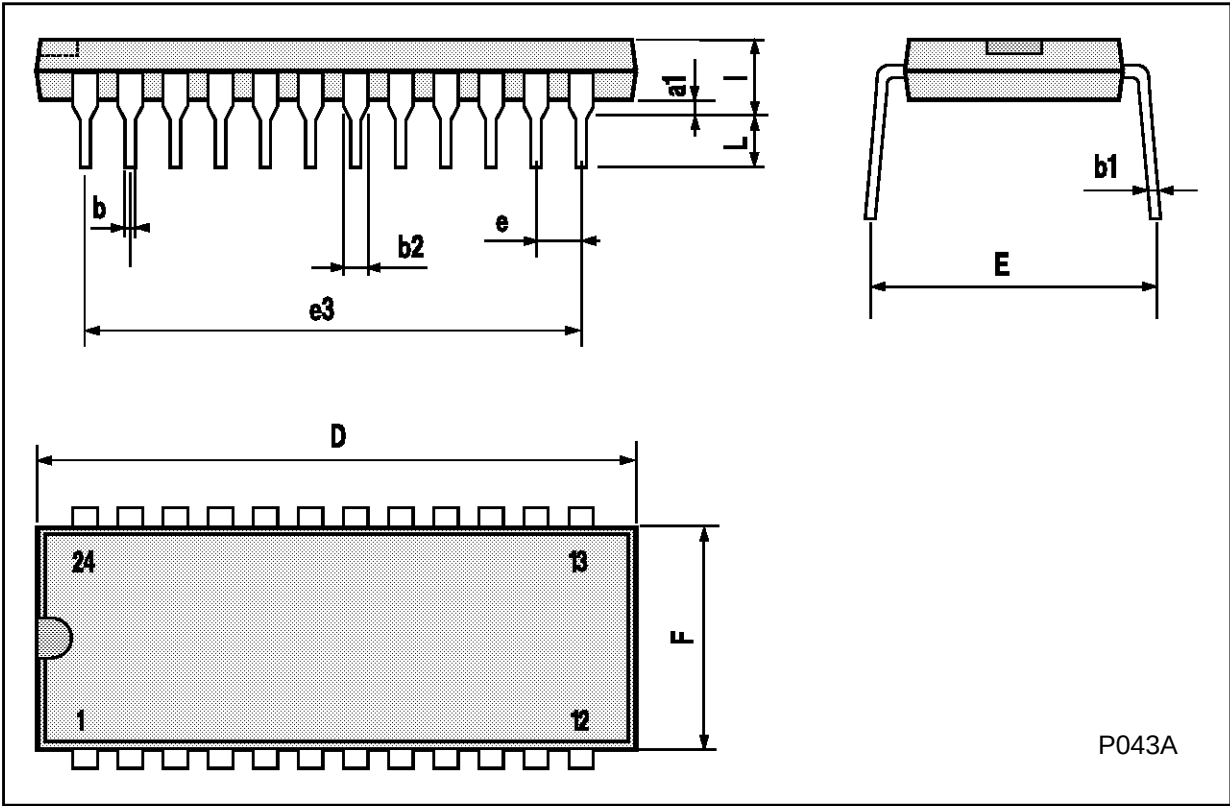

## Ceramic DIP24 MECHANICAL DATA


| DIM. | mm                    |       |       | inch  |       |       |
|------|-----------------------|-------|-------|-------|-------|-------|
|      | MIN.                  | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |                       |       | 32.3  |       |       | 1.272 |
| B    | 13.05                 |       | 13.36 | 0.514 |       | 0.526 |
| C    | 3.9                   |       | 5.08  | 0.154 |       | 0.200 |
| D    | 3                     |       |       | 0.118 |       |       |
| E    | 0.5                   |       | 1.78  | 0.020 |       | 0.070 |
| e3   |                       | 27.94 |       |       | 1.100 |       |
| F    | 2.29                  |       | 2.79  | 0.090 |       | 0.110 |
| G    | 0.4                   |       | 0.55  | 0.016 |       | 0.022 |
| I    | 1.17                  |       | 1.52  | 0.046 |       | 0.060 |
| L    | 0.22                  |       | 0.31  | 0.009 |       | 0.012 |
| M    | 1.52                  |       | 2.49  | 0.060 |       | 0.098 |
| N1   | 4° (min.), 15° (max.) |       |       |       |       |       |
| P    | 15.4                  |       | 15.8  | 0.606 |       | 0.622 |
| Q    |                       |       | 5.71  |       |       | 0.225 |

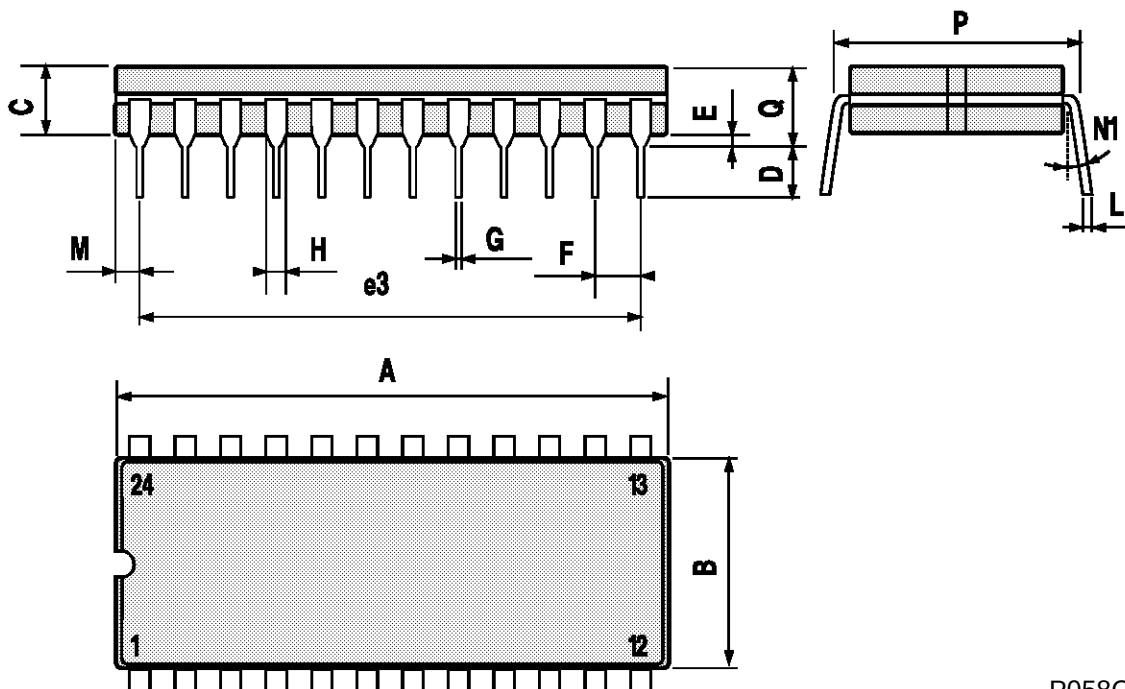

P058C


SO24 MECHANICAL DATA

| DIM. | mm         |       |       | inch  |       |       |
|------|------------|-------|-------|-------|-------|-------|
|      | MIN.       | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    |            |       | 2.65  |       |       | 0.104 |
| a1   | 0.10       |       | 0.20  | 0.004 |       | 0.007 |
| a2   |            |       | 2.45  |       |       | 0.096 |
| b    | 0.35       |       | 0.49  | 0.013 |       | 0.019 |
| b1   | 0.23       |       | 0.32  | 0.009 |       | 0.012 |
| C    |            | 0.50  |       |       | 0.020 |       |
| c1   | 45° (typ.) |       |       |       |       |       |
| D    | 15.20      |       | 15.60 | 0.598 |       | 0.614 |
| E    | 10.00      |       | 10.65 | 0.393 |       | 0.420 |
| e    |            | 1.27  |       |       | 0.05  |       |
| e3   |            | 13.97 |       |       | 0.55  |       |
| F    | 7.40       |       | 7.60  | 0.291 |       | 0.299 |
| L    | 0.50       |       | 1.27  | 0.19  |       | 0.050 |
| S    | 8° (max.)  |       |       |       |       |       |

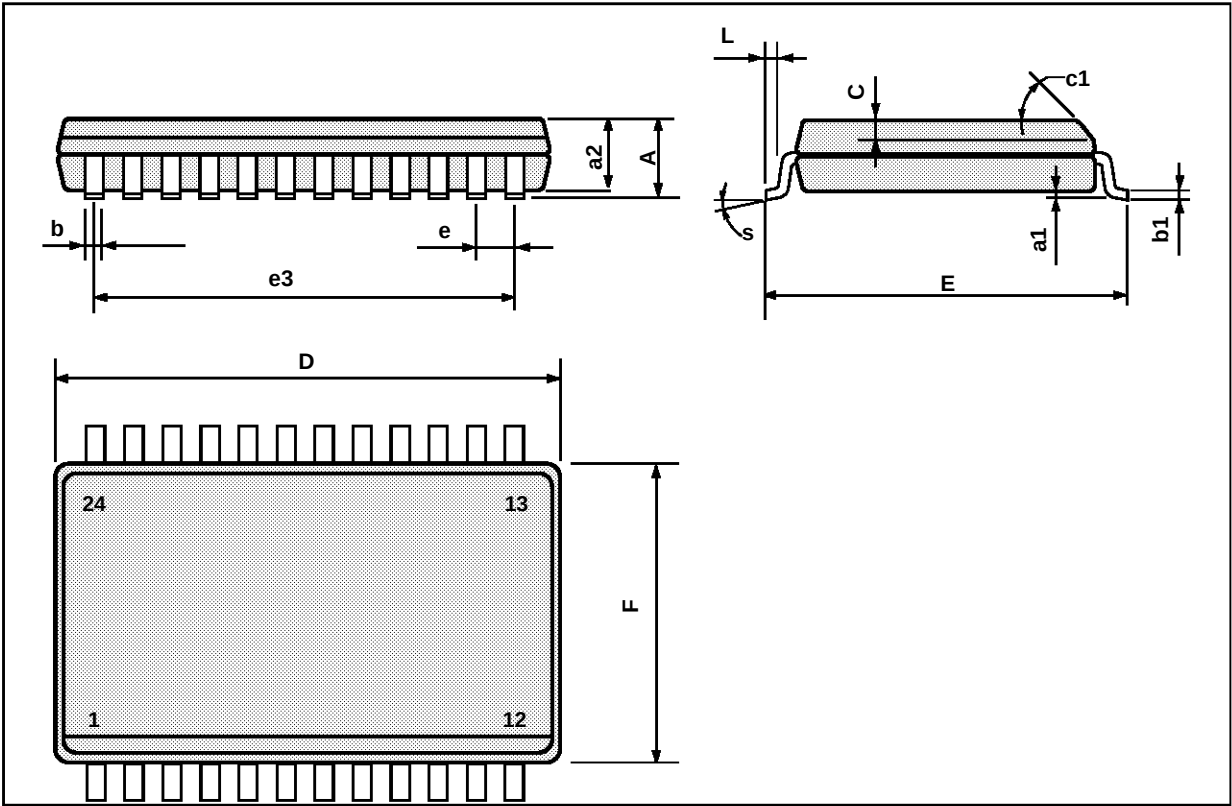

## PLCC20 MECHANICAL DATA

| DIM. | mm   |      |       | inch  |       |       |
|------|------|------|-------|-------|-------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 9.78 |      | 10.03 | 0.385 |       | 0.395 |
| B    | 8.89 |      | 9.04  | 0.350 |       | 0.356 |
| D    | 4.2  |      | 4.57  | 0.165 |       | 0.180 |
| d1   |      | 2.54 |       |       | 0.100 |       |
| d2   |      | 0.56 |       |       | 0.022 |       |
| E    | 7.37 |      | 8.38  | 0.290 |       | 0.330 |
| e    |      | 1.27 |       |       | 0.050 |       |
| e3   |      | 5.08 |       |       | 0.200 |       |
| F    |      | 0.38 |       |       | 0.015 |       |
| G    |      |      | 0.101 |       |       | 0.004 |
| M    |      | 1.27 |       |       | 0.050 |       |
| M1   |      | 1.14 |       |       | 0.045 |       |

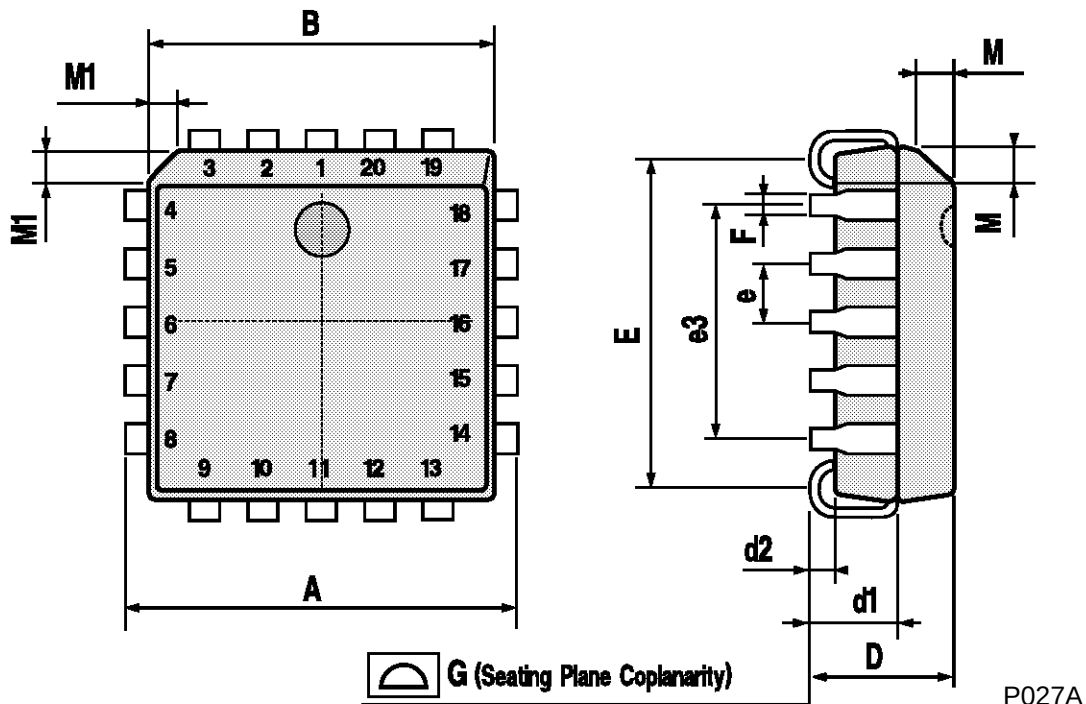

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A