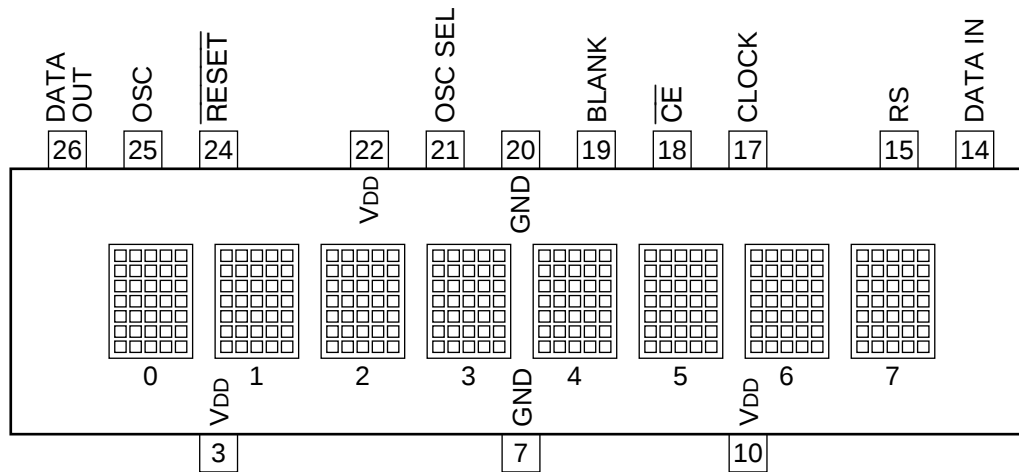


C-MOS DOT MATRIX DISPLAY

—TOP VIEW—

**INPUT**

BLANK : BRIGHT CONTROL
 CE : CHIP ENABLE
 CLOCK : CLOCK
 DATA IN : SERIAL DATA
 OSC : OSCILLATOR
 OSC SEL : OSC SELECT
 RESET : CONTROL REGISTER RESET
 RS : REGISTER SELECT

OUTPUT

DATA OUT : SERIAL DATA

