


Seven Segment Display 13 mm (0.59")

HD 1131
HD 1133

Features

- Excellent readability by ambient light
- Excellent character appearance
- Evenly lighted segments
- Wide viewing angle $2\phi = 50^\circ$
- Mitred corners on segments
- Grey package provides optimum contrast
- IC-compatible
- Right hand decimal

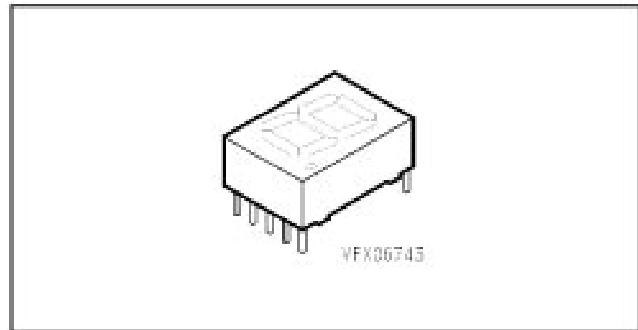

Type	Polarity	Color of emission	Luminous intensity/ Segment $I_F = 10 \text{ mA}$ $I_v (\mu\text{cd})$	Ordering code
HD 1131 R	common anode	red	550 (typ.)	Q68000-A7821
HD 1131 O		super-red	4000 (typ.)	Q68000-A7822
HD 1131 G		green	4500 (typ.)	Q68000-A7820
HD 1133 R	common cathode	red	550 (typ.)	Q68000-A7873
HD 1133 O		super-red	4000 (typ.)	Q68000-A7872
HD 1133 G		green	4500 (typ.)	Q68000-A7871

Maximum Ratings ($T_A = 25^\circ\text{C}$)

Description	Symbol	Value	Unit
Operating temperature range	T_{op}	0 ... + 85	°C
Storage temperature range	T_{stg}	- 40 ... + 85	°C
Lead soldering temperature, 2 mm from base	T_s	260	°C for 3 s
Peak forward current per segment or DP ¹⁾ $t_P \leq 10 \mu\text{s}$ HD 113* R HD 113* O, -G	I_{FM}	500 150	mA mA
DC forward current per segment or DP ²⁾ HD 113* R HD 113* O, -G	I_F	35 25	mA mA
Reverse voltage per segment or DP	V_R	6	V
Total power dissipation $T_A \leq 45^\circ\text{C}$	P_{tot}	600	mW

1) Do not exceed maximum average current per segment (see graph of the permissible pulse handling capability)


2) Derate maximum average current above $T_A = 75^\circ\text{C}$ at 0.5 mA/°C per segment

Characteristics ($T_A = 25^\circ\text{C}$)


Parameter	Symbol	Values			Unit
		min	typ.	ma	
Luminous intensity per segment, $I_F = 10 \text{ mA}$ HD 1131 R, HD 1133 R	I_V	180	550	-	μcd
	I_V	110	400	-	μcd
	I_V	0	0	-	μcd
Peak wavelength, $I_F = 10 \text{ mA}$ HD 1131 R, HD 1133 R	λ_{peak}	-	660	-	nm
	λ_{peak}	-	630	-	nm
	λ_{peak}	-	565	-	nm
Dominant wavelength (Digit average) HD 1131 R, HD 1133 R	λ_{dom}	-	645	-	nm
	λ_{dom}	612	-	625	nm
	λ_{dom}	562	-	575	nm
Forward voltage per segment*, $I_F = 20 \text{ mA}$ HD 1131 R, HD 1133 R	V_F	-	1.6	2.0	V
	V_F	-	2.0	3.0	V
	V_F	-	2.4	3.0	V
Break down voltage per segment* $I_B = 10 \mu\text{A}$	V_{BR}	6	15	-	V
Max. thermal resistance	R_{thJA}	-	-	100	$^\circ\text{C/W/Seg}$

*) AQL = 0.4%


Relative spectral emission $I_{\text{rel}} = f(\lambda)$
 $V(\lambda)$ = Standard eye response curve

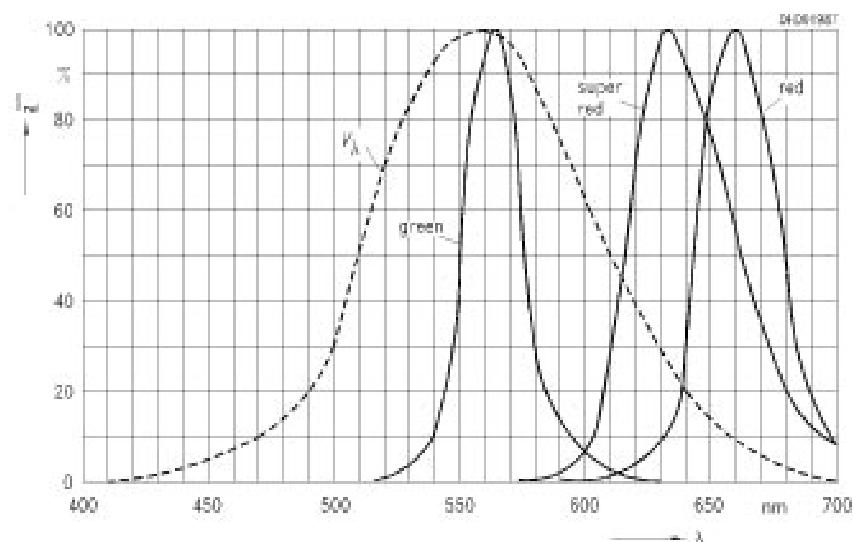


Forward current $I_F = f(V_F)$
 $T_A = 25^\circ\text{C}$

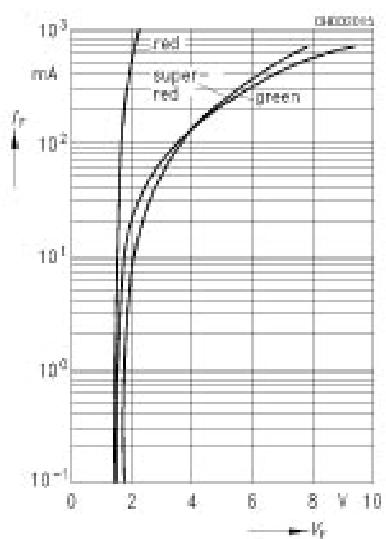


Rel. luminous intensity $I_V/I_V(25^\circ\text{C}) = f(T_A)$
 $I_F = 10 \text{ mA}$

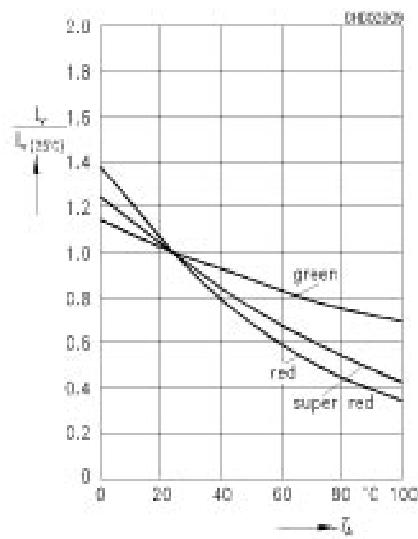


Permissible pulse handling capability
 $I_F = f(t_p)$, $T_A \leq 45^\circ\text{C}$
 red

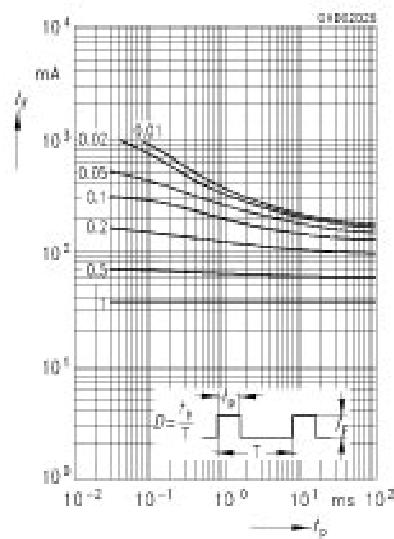


Max. permissible forward current
 $I_F = f(T_A)$

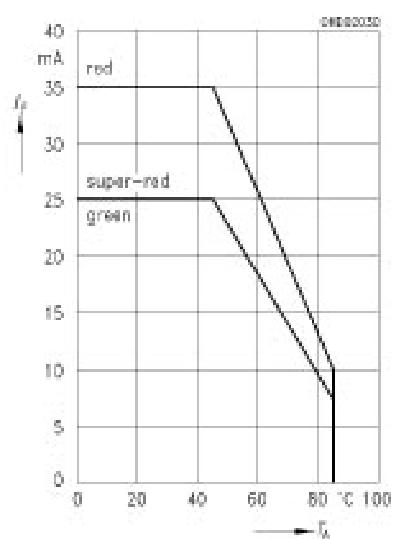

Permissible pulse handling capability
 $I_F = f(t_p)$, $T_A \leq 45^\circ\text{C}$
 super-red, green

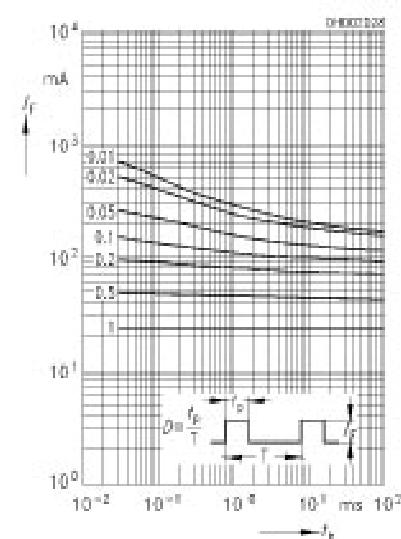

Rel. luminous intensity $I_{V/I_V(10\text{ mA})} = f(I_F)$
 $T_A = 25^\circ\text{C}$

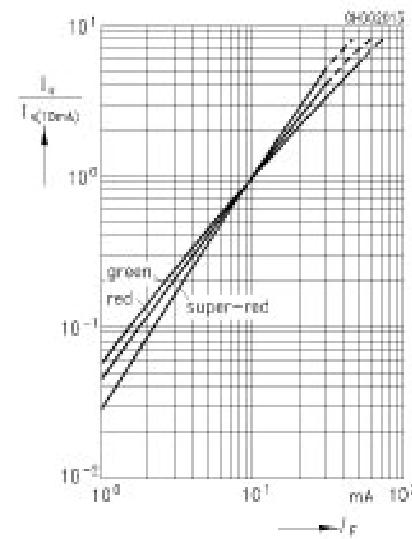

Total power dissipation $P_{\text{tot}} = f(T_A)$



Package Outlines

