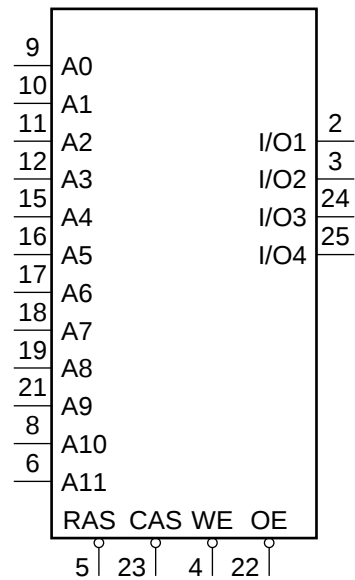
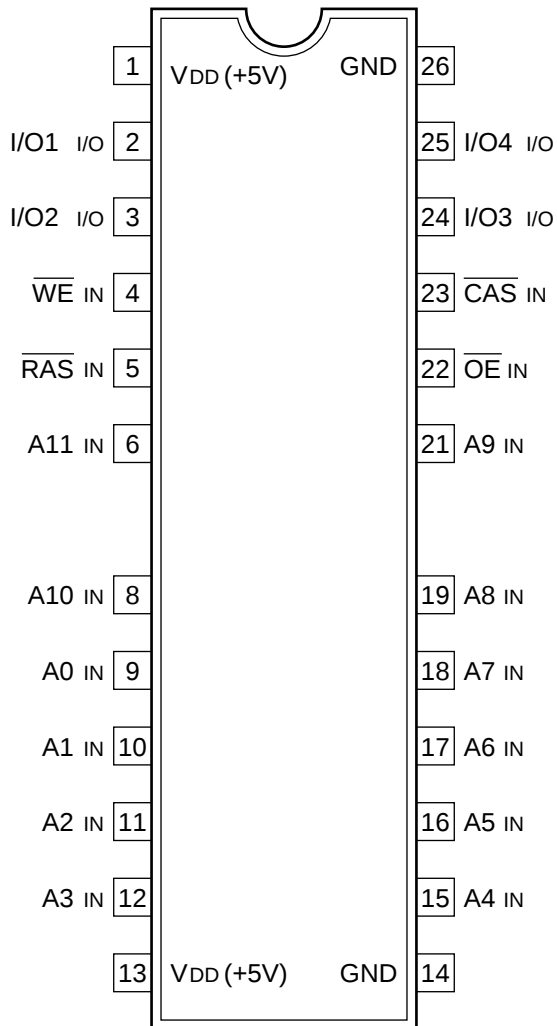

HM5116400AS7GS (1/2)
IL08

C-MOS 16M(4,194,304x4)-BIT DYNAMIC RAM - TOP VIEW -



A0-A11 ; ADDRESS INPUT
CAS ; COLUMN ADDRESS STROBE INPUT
I/O1-I/O4 ; DATA INPUT/OUTPUT
OE ; OUTPUT ENABLE INPUT
RAS ; ROW ADDRESS STROBE INPUT
WE ; READ/WRITE ENABLE INPUT

