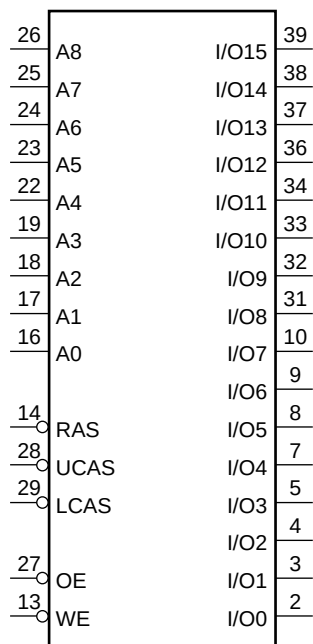
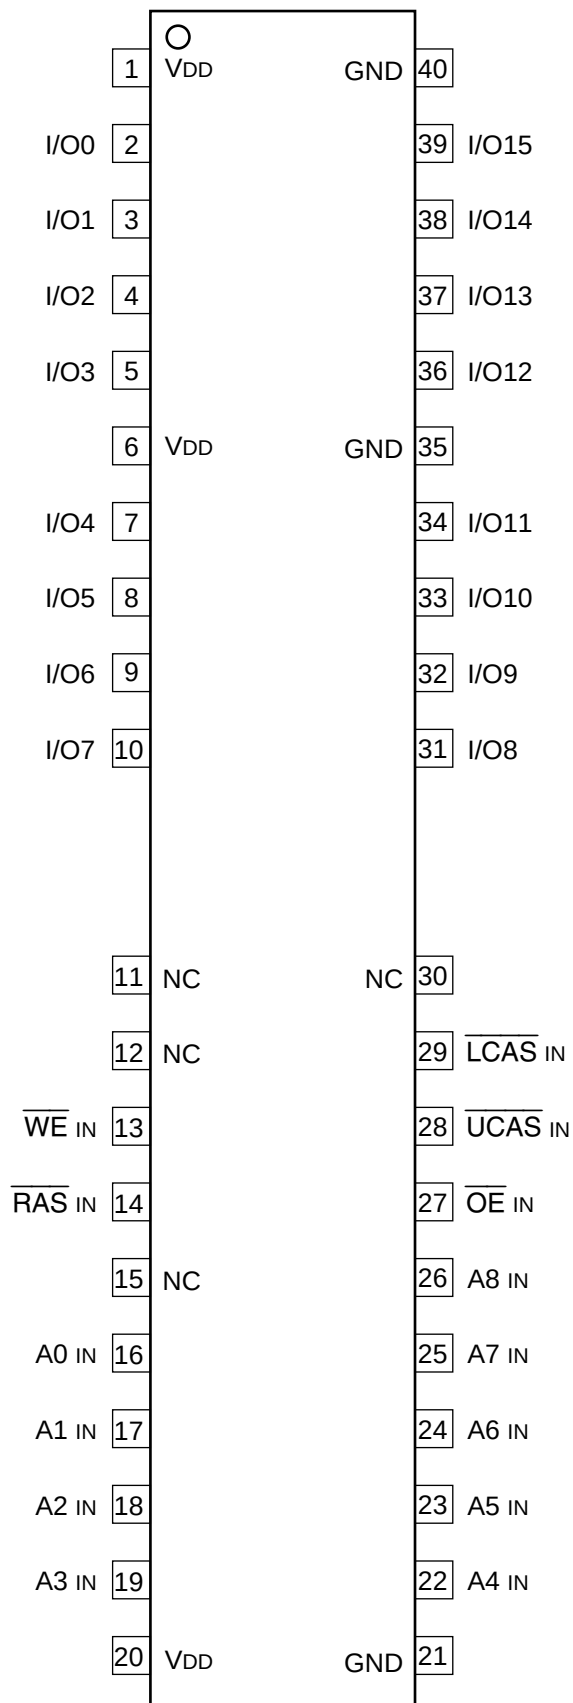


C-MOS (262,144 × 16)-BIT DYNAMIC RAM

—TOP VIEW—

**INPUT**

A0 - A8 : ADDRESS
 LCAS : COLUMN ADDRESS STROBE
 OE : OUTPUT ENABLE
 RAS : ROW ADDRESS STROBE
 UCAS : COLUMN ADDRESS STROBE
 WE : READ/WRITE ENABLE

INPUT/OUTPUT

I/O0 - I/O15 : DATA

