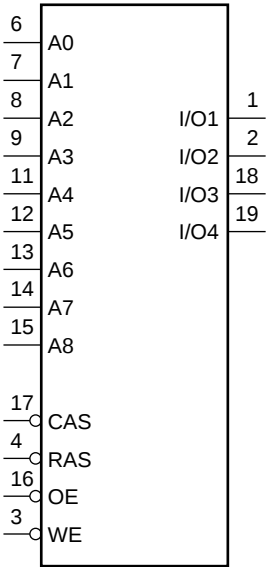
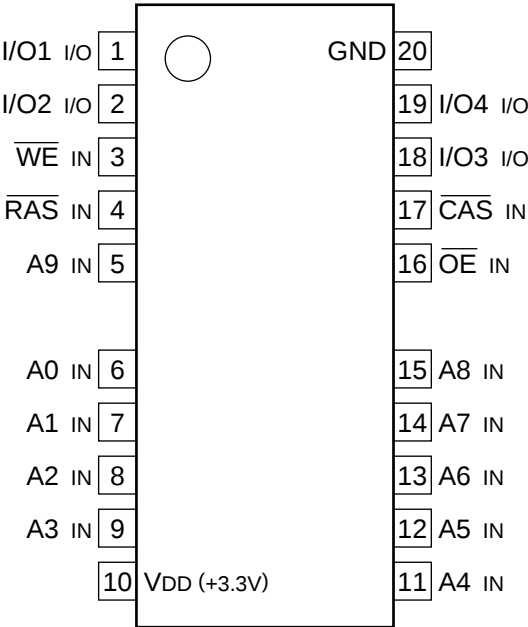

C-MOS 1M×4-BIT DYNAMIC RAM
-TOP VIEW-



INPUT

- A0-A9 ; ADDRESS INPUTS
- A0-A9 ; REFRESH ADDRESS INPUTS
- CAS ; COLUMN ADDRESS STROBE INPUT
- IO1-IO4 ; DATA INPUTS/OUTPUTS
- RAS ; ROW ADDRESS STROBE INPUT
- OE ; OUTPUT ENABLE INPUT
- WE ; READ/WRITE ENABLE INPUT

