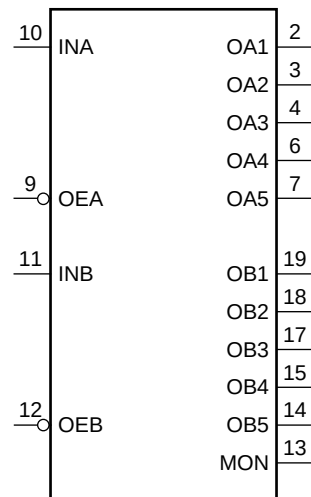
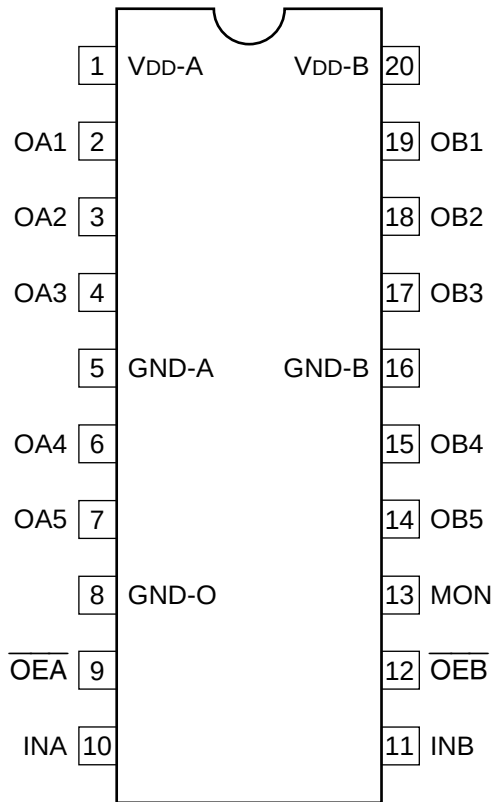


C-MOS 8-BIT NON-INVERTING CLOCK DRIVER

—TOP VIEW—

**INPUT**

INA, INB : CLOCK

 $\overline{OEA}$, $\overline{OEB}$: 3-STATE OUTPUT ENABLE**OUTPUT**

OA1 - OA5 : CLOCK

OB1 - OB5 : CLOCK

MON : MONITOR

