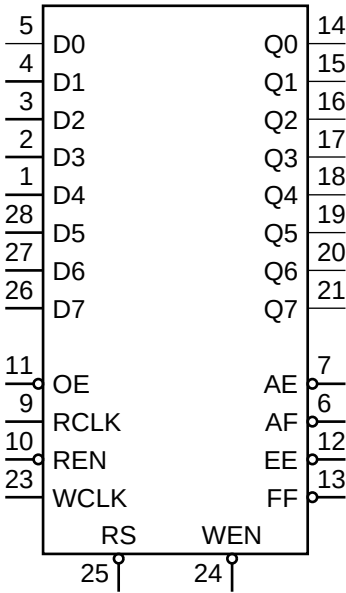
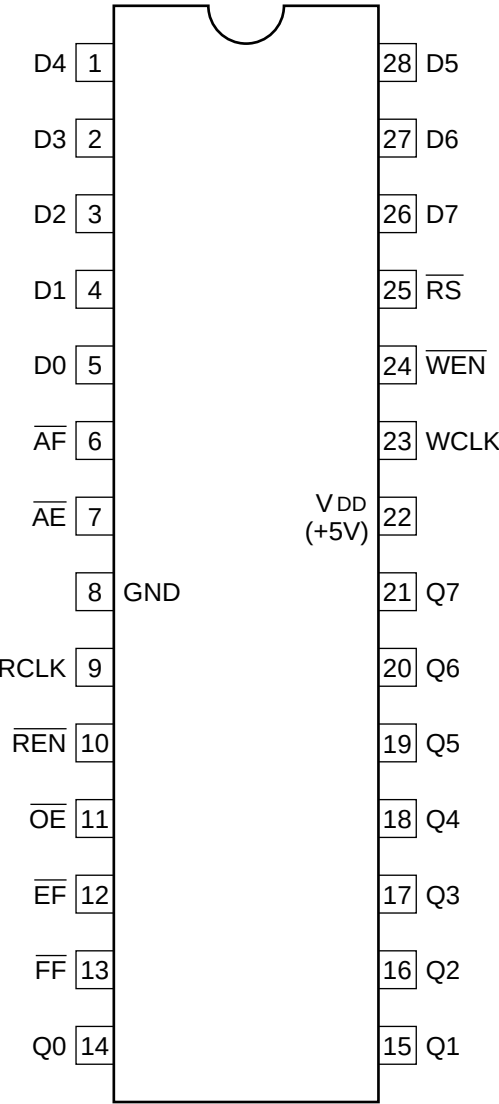

C-MOS FIFO 64x8 BIT DUAL PORT MEMORY

- TOP VIEW -



INPUT

D0-D7 ; DATA INPUTS
OE ; OUTPUT ENABLE
RCLK ; READ CLOCK
REN ; READ ENABLE
RS ; RESET
WCLK ; WRITE CLOCK
WEN ; WRITE ENABLE

OUTPUT

AE ; ALMOST-EMPTY FLAG
AF ; ALMOST-FULL FLAG
EF ; EMPTY FLAG
FF ; FULL FLAG
Q0-Q7 ; DATA OUTPUTS

