



Twin Tetrode Type C180

VHF POWER AMPLIFIER


General. The C 180 is a twin tetrode, suitable for use as a push-pull beam power amplifier.

Cooling. The bulb temperature must not exceed 175°C and if necessary forced-air-cooling must be employed.

APPROXIMATE DATA

(values are for both units)

	Series	Parallel	
V_h	12.6	6.3	V
I_h	0.8	1.6	A
g_m (taken at $I_a=30$ mA) (per unit)	3.5		mA/V
μ_{g1-g2}	6.5		
C_{a-g1} (with external shielding)	0.07		pF
C_{in}	8		pF
C_{out}	3.8		pF
C_{g2-k} (including internal screen by-pass capacitor) (approx.)	65		pF
$f_{(max)}$	250		Mc/s

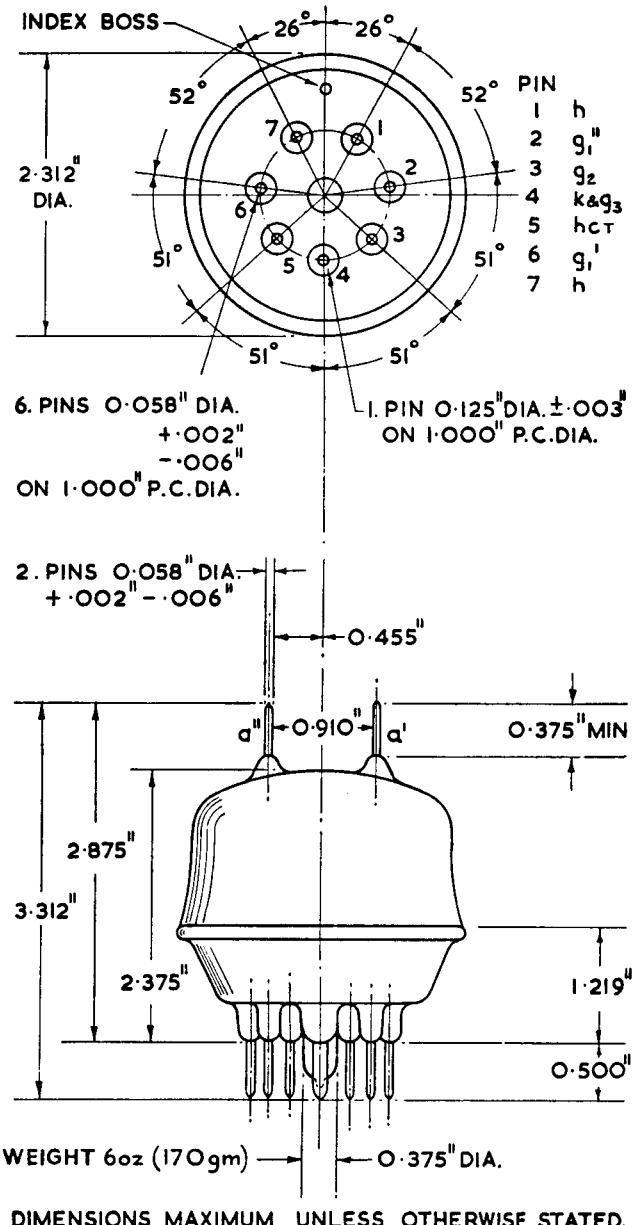

DIMENSIONS MAXIMUM UNLESS OTHERWISE STATED.

MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED

Head Office: Marconi House, Chelmsford, England. Telephone: Chelmsford 3221. Telegraphic Address: Expanse, Chelmsford

(1) PUSH-PULL HF POWER AMPLIFIER AND OSCILLATOR. CLASS C TELEGRAPHY

(*Unmodulated, one valve, key down conditions*) (a)

Maximum permissible ratings

V _a	750	V
V _{g2}	250	V
V _{g1}	-175	V
I _a	90	mA
I _{g1}	6	mA
P _{a (in)}	36	W
P _{g2 (in)}	5	W
p _a	15	W
V _{h-k (pk)} (b)	100	V

Typical Operation

V _a	500	750	V
V _{g2} (i) from a fixed supply of	200	200	V
(ii) via R _{g2}	21,000	37,000	Ω
V _{g1 (c)}			
(i) from a fixed supply of	-65	-65	V
(ii) via R _k	730	1,000	Ω
(iii) via R _{g1-k}	25,000	23,000	Ω
V _{g1'-g1'' (pk)}	150	150	V
I _a	72	48	mA
I _{g2}	14	15	mA
I _{g1*}	2.6	2.8	mA
P _{dr*}	0.18	0.19	W
P _{out*}	26	26	W

(2) PUSH-PULL HF POWER AMPLIFIER CLASS C

(*Anode modulated, one valve, carrier conditions, permissible modulation 100%*)

Maximum permissible ratings

V _a	600	V
V _{g2}	250	V
V _{g1}	-175	V
I _a	75	mA
I _{g1}	6	mA
P _{a (in)}	22	W
P _{g2 (in)}	3.4	W
p _a	10	W
V _{h-k (pk)} (b)	100	V

Typical Operation

V _a	425	600	V
V _{g2} (i) from fixed supply of	200	200	V
(ii) via R _{g2}	14,000	25,000	Ω
V _{g1 (c)} (i) from fixed supply of	-60	-65	V
(ii) via R _{g1-k}	25,000	25,000	Ω
V _{g1'-g1'' (pk)}	140	150	V
I _a	52	36	mA
I _{g2}	16	16	mA
I _{g1*}	2.4	2.6	mA
P _{dr*}	0.15	0.18	W
P _{out*}	16	17	W

The maximum permissible ratings given above apply to frequencies up to 200 Mc/s. For operation up to 250 Mc/s the values of V_a and P_{a (in)} must be reduced to 89% of the maximum permissible ratings.



NOTES

(a) Modulation essentially negative may be used if the positive peak of the audio frequency envelope does not exceed 115% of the carrier conditions.

(b) Heater either negative or positive with respect to cathode.

(c) The grid circuit resistance should never exceed 25,000 Ω (total) per valve, or 50,000 Ω per unit. If additional bias is necessary a cathode resistor or a fixed supply should be used.

* Subject to wide variation. Figures are approximate only.

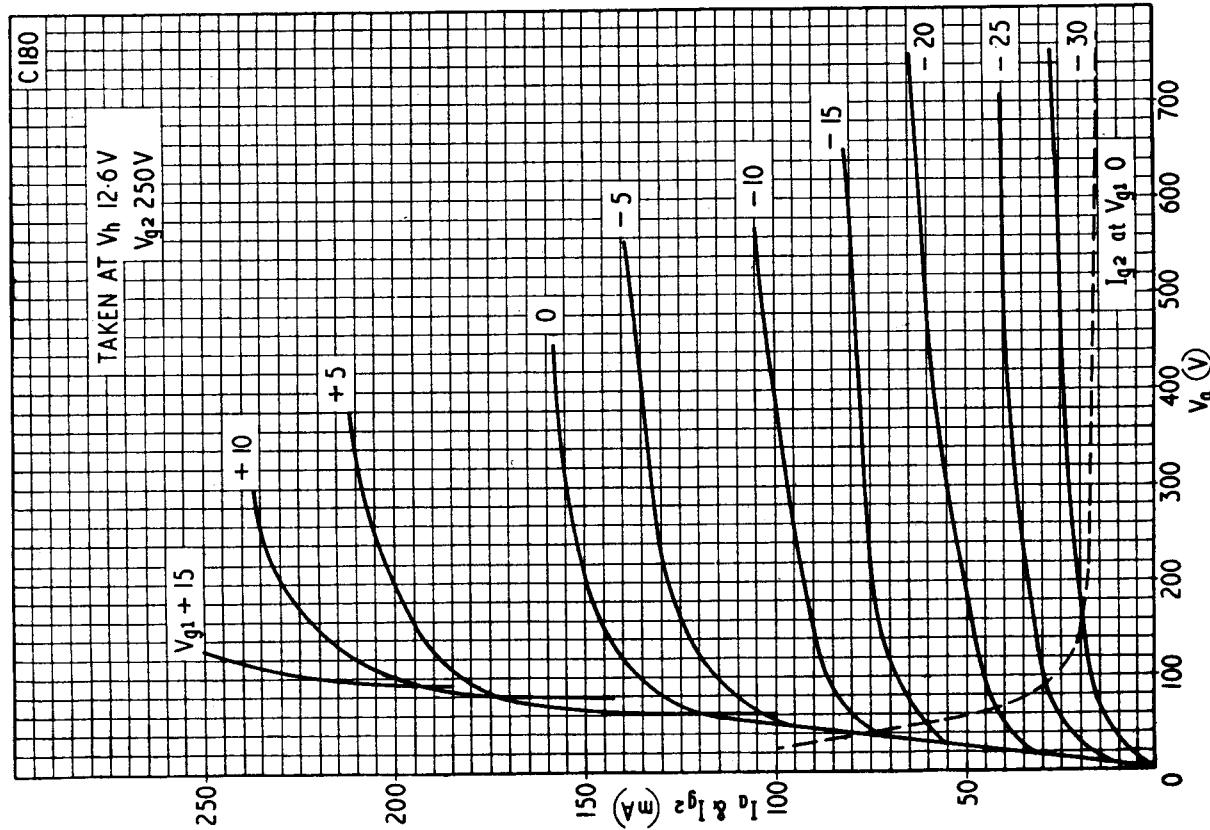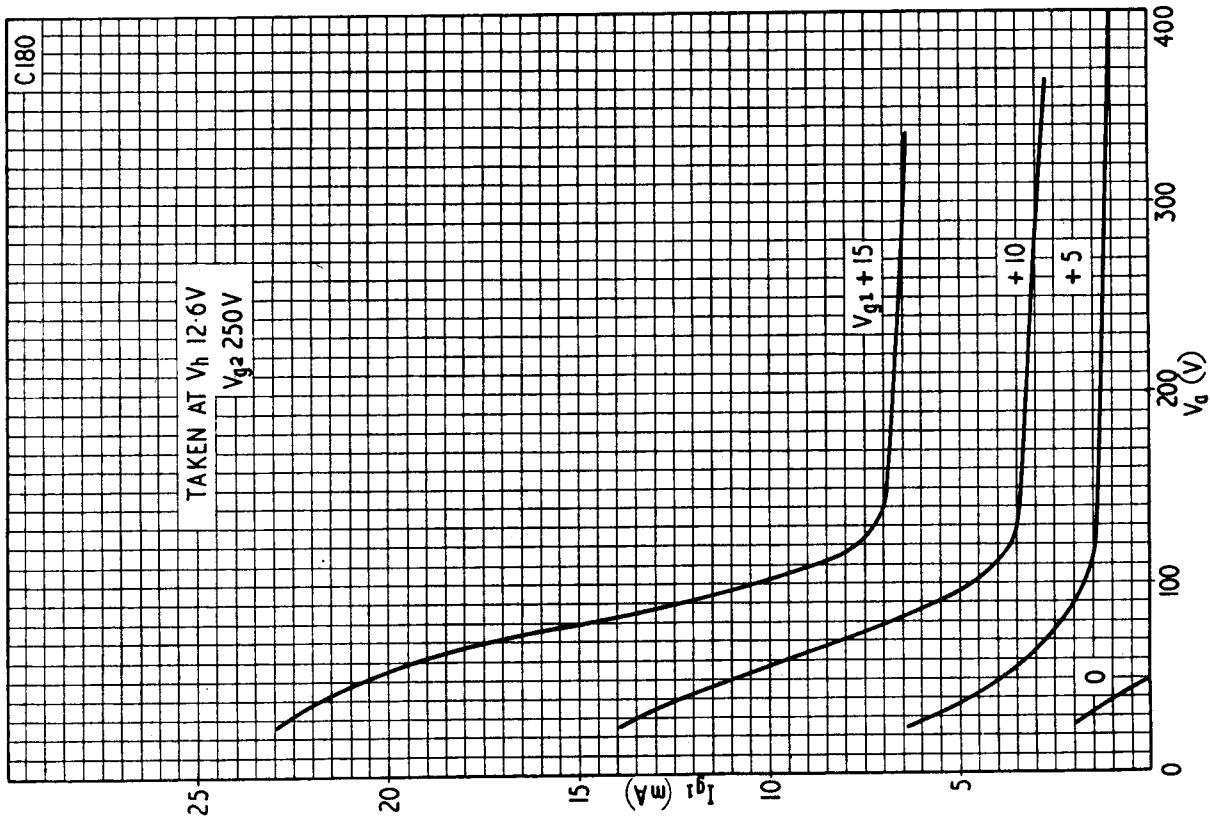



PRINTED IN ENGLAND