

SANYO

No.1700E

L780S00 Series5 to 24V 1A 5-Pin Voltage Regulators
with Strobe Pin**Features**

- Output voltage




L780S05: 5V	L780S06: 6V	L780S07: 7V
L780S08: 8V	L780S09: 9V	L780S10: 10V
L780S12: 12V	L780S15: 15V	L780S18: 18V
L780S20: 20V	L780S24: 24V	
- The strobe pin can be used to turn ON/OFF output voltage (active-low).
- 1A output current.
- On-chip thermal protector.
- On-chip overcurrent limiter.
- On-chip ASO protector.
- The use of package TO220-5H (5 pins) facilitates mounting and thermal design.

[Common to L780S00 series]**Maximum Ratings at Ta=25°C**

			unit
Maximum Supply Voltage	V_{CCmax}	Pin 1	35 V
Strobe Input Voltage	V_{STmax}	Pin 4	18 V
Strobe Input Current	I_{STmax}	Pin 4	5 mA
Allowable Power Dissipation	P_{dmax}		1.75 W
		$T_c=25^\circ\text{C}$	20 W
Thermal Resistance	θ_{j-c}		5 $^\circ\text{C/W}$
Operating Temperature	T_{opr}		-20 to +80 $^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to +150 $^\circ\text{C}$

Strobe Operating Characteristics at Ta=25°C

	unit
Strobe Operation Start Voltage $V_{st(on)}$	2.4 V
Strobe Operation Stop Voltage $V_{st(off)}$	0.5 V

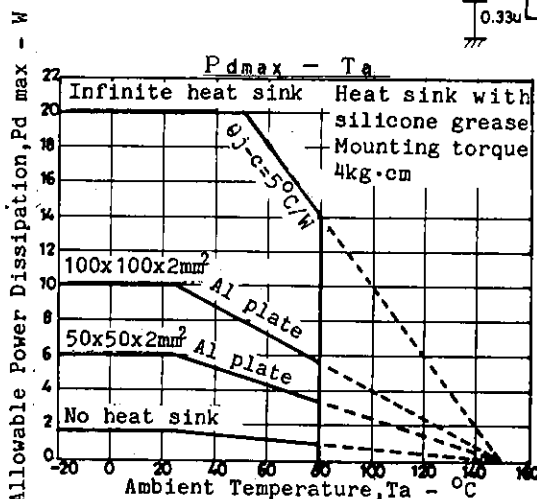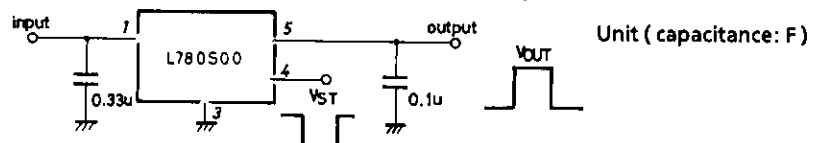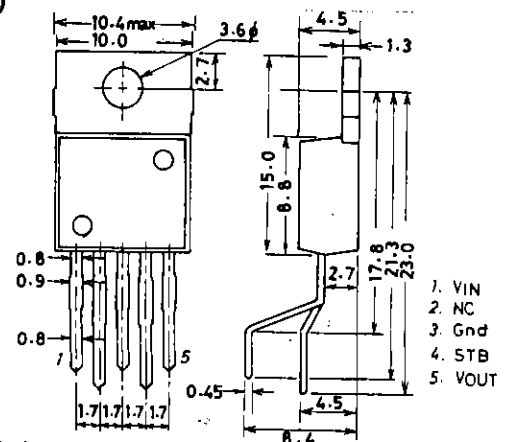DC Characteristics Test Circuit (Common to L780S00 series)**Package Dimensions
(unit: mm)
3079**

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

8119YT/ N307TA/9047KI/7086KI/4045MW, TS No. 1700-1/9

L780S00 Series

L780S05

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	7.5 to 20.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=10V$, $I_o=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{o1}	4.8	5.0	5.2	V
Line Regulation 1	ΔV_{o1n1}	$7V \leq V_{IN} \leq 25V$	3	100	mV
Line Regulation 2	ΔV_{o1n2}	$8V \leq V_{IN} \leq 12V$	1	50	mV
Load Regulation 1	ΔV_{o1d1}	$5mA \leq I_o \leq 1.5A$		100	mV
Load Regulation 2	ΔV_{o1d2}	$250mA \leq I_o \leq 750mA$		50	mV
Output Voltage 2	V_{o2}	$7V \leq V_{IN} \leq 20V$, $5mA \leq V_{IN} \leq 1A$	4.75	5.25	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{cc1n}	$7V \leq V_{IN} \leq 25V$		1.3	mA
Current Dissipation Variation (Load)	ΔI_{cc1d}	$5mA \leq I_o \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	40		uV
Ripple Rejection	R_r	$f=120Hz$, $8V \leq V_{IN} \leq 18V$	62	78	dB
Dropout Voltage	V_{drop}	$I_o=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_o=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S06

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	8.5 to 21.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=11V$, $I_o=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{o1}	5.75	6.0	6.25	V
Line Regulation 1	ΔV_{o1n1}	$8V \leq V_{IN} \leq 25V$	5	120	mV
Line Regulation 2	ΔV_{o1n2}	$9V \leq V_{IN} \leq 13V$	1.5	60	mV
Load Regulation 1	ΔV_{o1d1}	$5mA \leq I_o \leq 1.5A$		120	mV
Load Regulation 2	ΔV_{o1d2}	$250mA \leq I_o \leq 750mA$		60	mV
Output Voltage 2	V_{o2}	$8V \leq V_{IN} \leq 21V$, $5mA \leq V_{IN} \leq 1A$	5.7	6.3	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{cc1n}	$8V \leq V_{IN} \leq 25V$		1.3	mA
Current Dissipation Variation (Load)	ΔI_{cc1d}	$5mA \leq I_o \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	45		uV
Ripple Rejection	R_r	$f=120Hz$, $9V \leq V_{IN} \leq 19V$	59	75	dB
Dropout Voltage	V_{drop}	$I_o=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_o=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S00 Series

L780S07

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	9.5 to 22.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=12V$, $I_o=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{o1}	6.72	7.0	7.28	V
Line Regulation 1	ΔV_{o1n1}	$9V \leq V_{IN} \leq 26V$	6	140	mV
Line Regulation 2	ΔV_{o1n2}	$10V \leq V_{IN} \leq 14V$	2	70	mV
Load Regulation 1	ΔV_{o1d1}	$5mA \leq I_o \leq 1.5A$		140	mV
Load Regulation 2	ΔV_{o1d2}	$250mA \leq I_o \leq 750mA$		70	mV
Output Voltage 2	V_{o2}	$9V \leq V_{IN} \leq 22V$, $5mA \leq I_o \leq 1A$	6.65	7.35	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{cc1n}	$9V \leq V_{IN} \leq 25V$		1.3	mA
Current Dissipation Variation (Load)	ΔI_{cc1d}	$5mA \leq I_o \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *		46	uV
Ripple Rejection	R_r	$f=120Hz$, $10V \leq V_{IN} \leq 21V$	58	73	dB
Dropout Voltage	V_{drop}	$I_o=1A$		2.0	V
Output Short Current	I_{os}	$V_{IN}=35V$		0.75	A
Peak Output Current	I_{op}			2.2	A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_o=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S08

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	10.5 to 23.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=15V$, $I_o=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{o1}	7.7	8.0	8.3	V
Line Regulation 1	ΔV_{o1n1}	$10.5V \leq V_{IN} \leq 25V$	6.0	160	mV
Line Regulation 2	ΔV_{o1n2}	$11V \leq V_{IN} \leq 17V$	2.0	80	mV
Load Regulation 1	ΔV_{o1d1}	$5mA \leq I_o \leq 1.5A$		160	mV
Load Regulation 2	ΔV_{o1d2}	$250mA \leq I_o \leq 750mA$		80	mV
Output Voltage 2	V_{o2}	$10.5V \leq V_{IN} \leq 23V$, $5mA \leq I_o \leq 1A$	7.6	8.4	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{cc1n}	$10.5V \leq V_{IN} \leq 25V$		1.0	mA
Current Dissipation Variation (Load)	ΔI_{cc1d}	$5mA \leq I_o \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *		52	uV
Ripple Rejection	R_r	$f=120Hz$, $11.5V \leq V_{IN} \leq 21.5V$	56	72	dB
Dropout Voltage	V_{drop}	$I_o=1A$		2.0	V
Output Short Current	I_{os}	$V_{IN}=35V$		0.75	A
Peak Output Current	I_{op}			2.2	A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_o=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S00 Series

L780S09

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	11.5 to 25.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=16V$, $I_o=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{o1}	8.64	9.0	9.36	V
Line Regulation 1	ΔV_{o1n1}	$11.5V \leq V_{IN} \leq 25V$	7	180	mV
Line Regulation 2	ΔV_{o1n2}	$12V \leq V_{IN} \leq 20V$	2	90	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_o \leq 1.5A$		180	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_o \leq 750mA$		90	mV
Output Voltage 2	V_{o2}	$11.5V \leq V_{IN} \leq 24V$, $5mA \leq I_o \leq 1A$	8.55	9.45	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{cc1n}	$11.5V \leq V_{IN} \leq 26V$		1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_o \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	57		uV
Ripple Rejection	R_r	$f=120Hz$, $12V \leq V_{IN} \leq 22V$	56	72	dB
Dropout Voltage	V_{drop}	$I_o=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_o=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S10

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	13.0 to 25.0	V
Output Current Range	I_o	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=17V$, $I_o=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{o1}	9.6	10.0	10.4	V
Line Regulation 1	ΔV_{o1n1}	$12.5V \leq V_{IN} \leq 28V$	8	200	mV
Line Regulation 2	ΔV_{o1n2}	$14V \leq V_{IN} \leq 20V$	2.5	100	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_o \leq 1.5A$		200	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_o \leq 750mA$		100	mV
Output Voltage 2	V_{o2}	$12.5V \leq V_{IN} \leq 25V$, $5mA \leq I_o \leq 1A$	9.5	10.5	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{cc1n}	$12.5V \leq V_{IN} \leq 25V$		1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_o \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	63		uV
Ripple Rejection	R_r	$f=120Hz$, $13V \leq V_{IN} \leq 23V$	55	72	dB
Dropout Voltage	V_{drop}	$I_o=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_o=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S00 Series

L780S12

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	15.0 to 27.0	V
Output Current Range	I_O	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=19V$, $I_O=500mA$, $V_{st}=0V$, *Ta=25°C

			min	typ	max	unit
Output Voltage 1	V_{O1}		11.5	12.0	12.5	V
Line Regulation 1	ΔV_{Oln1}	$14.5V \leq V_{IN} \leq 30V$		10	240	mV
Line Regulation 2	ΔV_{Oln2}	$16V \leq V_{IN} \leq 22V$		3	120	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_O \leq 1.5A$			240	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_O \leq 750mA$			120	mV
Output Voltage 2	V_{O2}	$14.5V \leq V_{IN} \leq 27V$, $5mA \leq V_{IN} \leq 1A$	11.4		12.6	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$14.5V \leq V_{IN} \leq 30V$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_O \leq 1A$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *		75		uV
Ripple Rejection	R_r	$f=120Hz$, $15V \leq V_{IN} \leq 25V$	55	71		dB
Dropout Voltage	V_{drop}	$I_O=1A$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{O(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_O=0$, *			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

L780S15

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	18.0 to 30.0	V
Output Current Range	I_O	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=23V$, $I_O=500mA$, $V_{st}=0V$, *Ta=25°C

			min	typ	max	unit
Output Voltage 1	V_{O1}		14.4	15.0	15.6	V
Line Regulation 1	ΔV_{Oln1}	$17.5V \leq V_{IN} \leq 30V$		11	300	mV
Line Regulation 2	ΔV_{Oln2}	$20V \leq V_{IN} \leq 26V$		3	150	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_O \leq 1.5A$			300	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_O \leq 750mA$			150	mV
Output Voltage 2	V_{O2}	$17.5V \leq V_{IN} \leq 30V$, $5mA \leq V_{IN} \leq 1A$	14.25		15.75	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$17.5V \leq V_{IN} \leq 30V$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_O \leq 1A$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *		90		uV
Ripple Rejection	R_r	$f=120Hz$, $18.5V \leq V_{IN} \leq 28.5V$	54	70		dB
Dropout Voltage	V_{drop}	$I_O=1A$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{O(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_O=0$, *			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

L780S00 Series

L780S18

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	21.0 to 33.0	V
Output Current Range	I_O	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=27V$, $I_O=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{O1}	17.3	18.0	18.7	V
Line Regulation 1	ΔV_{Oln1}	$21V \leq V_{IN} \leq 33V$	15	360	mV
Line Regulation 2	ΔV_{Oln2}	$24V \leq V_{IN} \leq 30V$	5	180	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_O \leq 1.5A$		360	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_O \leq 750mA$		180	mV
Output Voltage 2	V_{O2}	$21V \leq V_{IN} \leq 33V$, $5mA \leq V_{IN} \leq 1A$	17.1	18.9	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$21V \leq V_{IN} \leq 33V$		1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_O \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	110		uV
Ripple Rejection	R_r	$f=120Hz$, $22V \leq V_{IN} \leq 32V$	53	69	dB
Dropout Voltage	V_{drop}	$I_O=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{O(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_O=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S20

Recommended Operating Conditions at Ta=25°C

Input Voltage Range	V_{IN}	23.0 to 35.0	V
Output Current Range	I_O	5 to 1000	mA

Operating Characteristics at Tj=25°C, $V_{IN}=29V$, $I_O=500mA$, $V_{st}=0V$, *Ta=25°C

		min	typ	max	unit
Output Voltage 1	V_{O1}	19.2	20.0	20.8	V
Line Regulation 1	ΔV_{Oln1}	$23V \leq V_{IN} \leq 35V$	15	400	mV
Line Regulation 2	ΔV_{Oln2}	$26V \leq V_{IN} \leq 32V$	5	200	mV
Load Regulation 1	ΔV_{old1}	$5mA \leq I_O \leq 1.5A$		400	mV
Load Regulation 2	ΔV_{old2}	$250mA \leq I_O \leq 750mA$		200	mV
Output Voltage 2	V_{O2}	$24V \leq V_{IN} \leq 35V$, $5mA \leq V_{IN} \leq 1A$	19.0	21.0	V
Current Dissipation	I_{cc}			8.0	mA
Current Dissipation Variation (Line)	ΔI_{ccln}	$23V \leq V_{IN} \leq 35V$		1.0	mA
Current Dissipation Variation (Load)	ΔI_{ccld}	$5mA \leq I_O \leq 1A$		0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$ *	110		uV
Ripple Rejection	R_r	$f=120Hz$, $24V \leq V_{IN} \leq 34V$	53	67	dB
Dropout Voltage	V_{drop}	$I_O=1A$	2.0		V
Output Short Current	I_{os}	$V_{IN}=35V$	0.75		A
Peak Output Current	I_{op}		2.2		A
Output Voltage at Strobe Mode	$V_{O(ston)}$	$V_{IN}=35V$, $V_{st}=5V$, $I_O=0$, *		0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"		3.0	mA
Strobe Input Current	I_{st}	"		1.0	mA

L780S00 Series

L780S24


Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$

Input Voltage Range	V_{IN}	27.0 to 35.0	V
Output Current Range	I_o	5 to 1000	mA









Operating Characteristics at $T_j=25^{\circ}\text{C}$, $V_{IN}=33\text{V}$, $I_o=500\text{mA}$, $V_{st}=0\text{V}$, $*T_a=25^{\circ}\text{C}$

			min	typ	max	unit
Output Voltage 1	V_{o1}		23.0	24.0	25.0	V
Line Regulation 1	ΔV_{o1n1}	$27\text{V} \leq V_{IN} \leq 35\text{V}$		18	480	mV
Line Regulation 2	ΔV_{o1n2}	$30\text{V} \leq V_{IN} \leq 35\text{V}$		6	240	mV
Load Regulation 1	ΔV_{o1d1}	$5\text{mA} \leq I_o \leq 1.5\text{A}$			480	mV
Load Regulation 2	ΔV_{o1d2}	$250\text{mA} \leq I_o \leq 750\text{mA}$			240	mV
Output Voltage 2	V_{o2}	$27\text{V} \leq V_{IN} \leq 35\text{V}$, $5\text{mA} \leq V_{IN} \leq 1\text{A}$	22.8		25.2	V
Current Dissipation	I_{cc}				8.0	mA
Current Dissipation Variation (Line)	ΔI_{cc1n}	$27\text{V} \leq V_{IN} \leq 35\text{V}$			1.0	mA
Current Dissipation Variation (Load)	ΔI_{cc1d}	$5\text{mA} \leq I_o \leq 1\text{A}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}^*$		180		μV
Ripple Rejection	R_r	$f=120\text{Hz}$, $28\text{V} \leq V_{IN} \leq 34\text{V}$	50	66		dB
Dropout Voltage	V_{drop}	$I_o=1\text{A}$		2.0		V
Output Short Current	I_{os}	$V_{IN}=35\text{V}$		0.75		A
Peak Output Current	I_{op}			2.2		A
Output Voltage at Strobe Mode	$V_{o(ston)}$	$V_{IN}=35\text{V}$, $V_{st}=5\text{V}$, $I_o=0,^*$			0.8	V
Current Dissipation at Strobe Mode	$I_{cc(ston)}$	"			3.0	mA
Strobe Input Current	I_{st}	"			1.0	mA

Equivalent Circuit Block Diagram

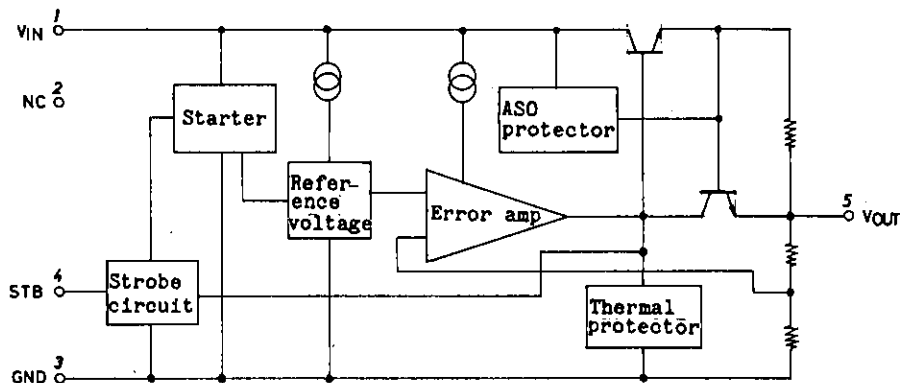

L780S00 Series

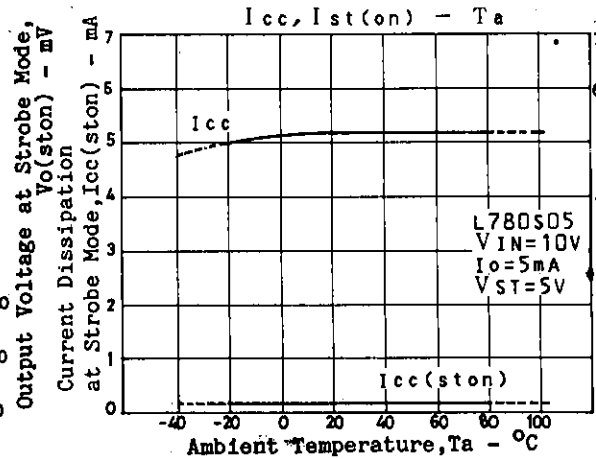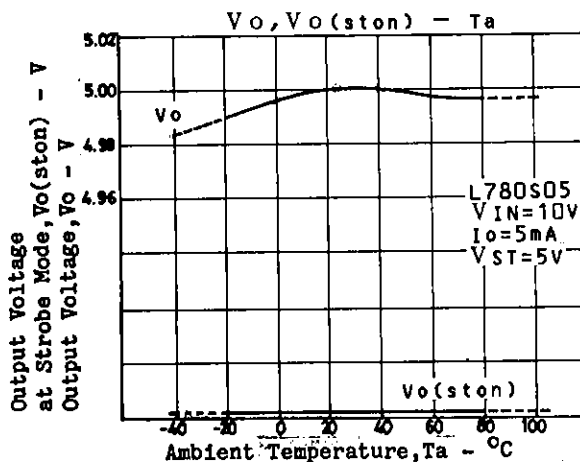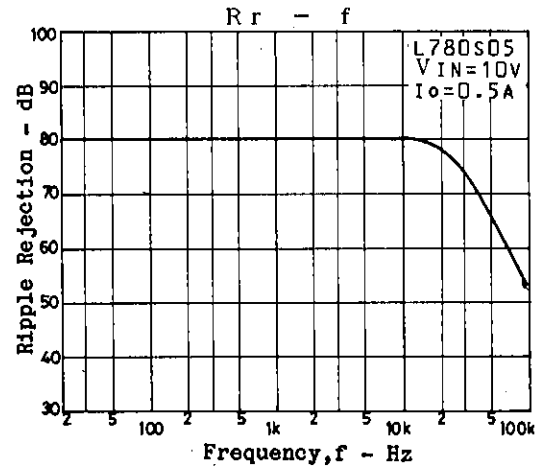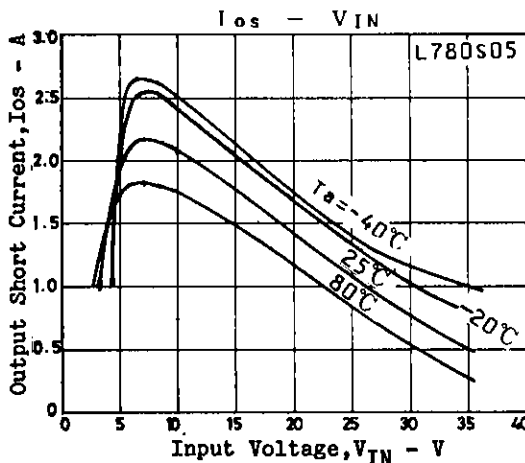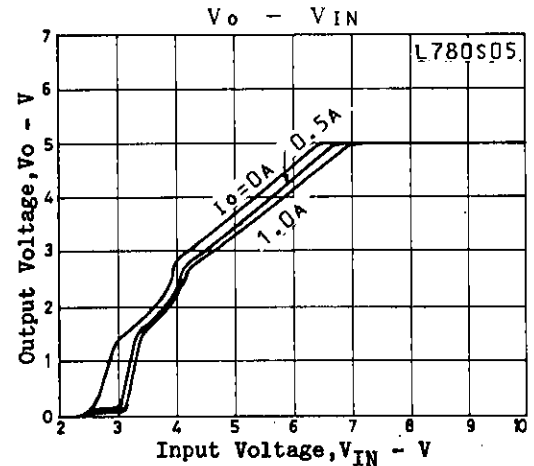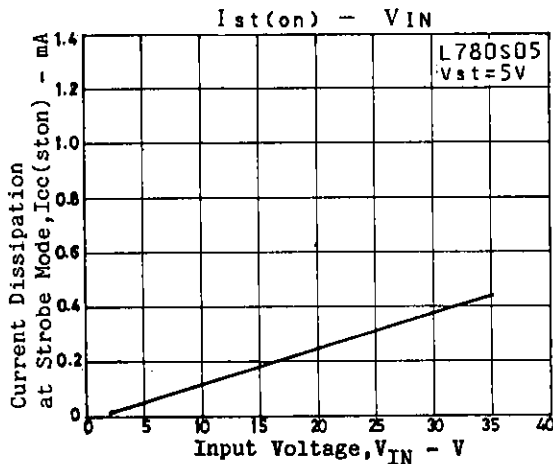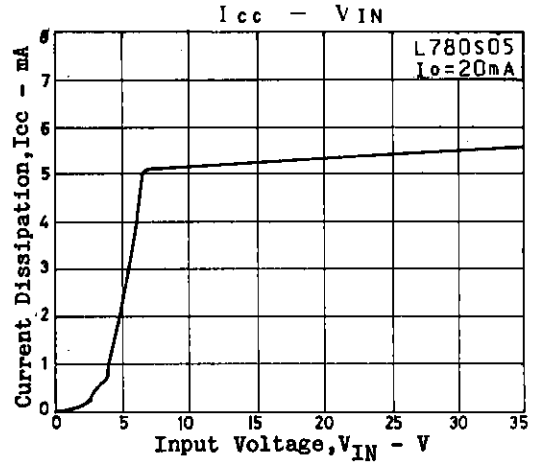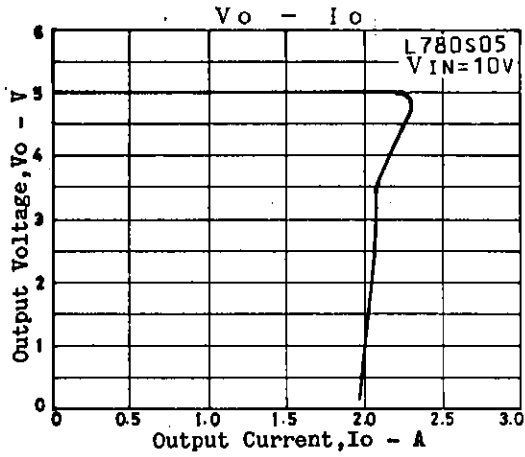

SANYO

No.2609B

L78M00T Series**5 to 24V 0.5A 3-Pin Voltage Regulators****Features**

- Output voltage

L78M05T:5V	L78M06T:6V	L78M07T:7V	L78M08T:8V
L78M09T:9V	L78M10T:10V	L78M12T:12V	L78M15T:15V
L78M18T:18V	L78M20T:20V	L78M24T:24V	
- 500mA output
- On-chip thermal protector
- On-chip overcurrent limiter
- On-chip ASO protector
- Small-sized power package TP-3H permitting the equipment to be made compact
- The allowable power dissipation can be increased by being surface-mounted on the board.
- Capable of being mounted in a variety of methods because of various lead forming versions available

[Common to L78M00T series]**Maximum Ratings at Ta=25°C**

			unit
Maximum Supply Voltage	V_{CC} max	Pin 1	35 V
Allowable Power Dissipation	P_d max	No fin	1.0 W
Operating Temperature	T_{opr}		-20 to +80 °C
Storage Temperature	T_{stg}		-40 to +150 °C



[L78M05T]**Recommended Operating Conditions at Ta=25°C**

		unit
Input Voltage	V_{IN}	7.5 to 20 V
Output Current	I_{OUT}	5 to 500 mA

**Operating Characteristics at Ta=25°C, $V_{IN}=10V$, $I_{OUT}=350mA$,
See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ C$	4.8	5.0	5.2	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ C, 7V \leq V_{IN} \leq 25V, I_{OUT}=200mA$	3.0	50		mV
		$T_j=25^\circ C, 8V \leq V_{IN} \leq 20V, I_{OUT}=200mA$	1.0	25		mV

Continued on next page.

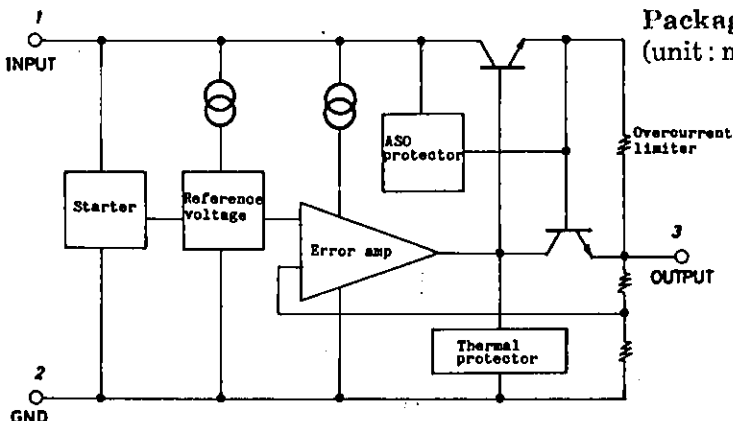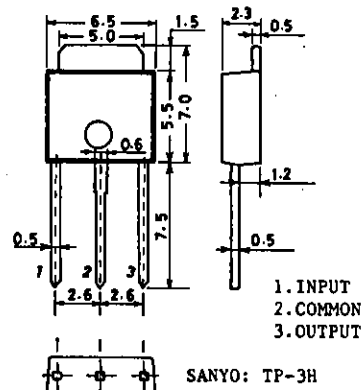Equivalent Circuit**Package Dimensions 3110
(unit: mm)**

L78M00T Series

Continued from preceding page.

			min	typ	max	unit
Load Regulation	ΔV_{oload}	$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 500\text{mA}$			100	mV
		$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 200\text{mA}$			50	mV
Output Voltage	V_{OUT}	$7\text{V} \leq V_{\text{IN}} \leq 20\text{V}, 5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$	4.75		5.25	V
Current Dissipation	I_{CC}	$T_j=25^\circ\text{C}$		4.5	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$8\text{V} \leq V_{\text{IN}} \leq 25\text{V}, I_{\text{OUT}}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		40		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$	62			dB
		$8\text{V} \leq V_{\text{IN}} \leq 19\text{V}$	62	80		dB
		$T_j=25^\circ\text{C}$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{\text{OUT}}=350\text{mA}$		2.0		V
Short Current	I_{OS}	$T_j=25^\circ\text{C}, V_{\text{IN}}=35\text{V}, \text{to GND}$		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ\text{C}$		0.7		A

[L78M06T]

Recommended Operating Conditions at $T_a=25^\circ\text{C}$

			unit
Input Voltage	V_{IN}	8.5 to 21	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at $T_a=25^\circ\text{C}, V_{\text{IN}}=11\text{V}, I_{\text{OUT}}=350\text{mA}$,
See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ\text{C}$	5.75	6.0	6.25	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ\text{C}, 8\text{V} \leq V_{\text{IN}} \leq 25\text{V}, I_{\text{OUT}}=200\text{mA}$		5.0	60	mV
		$T_j=25^\circ\text{C}, 9\text{V} \leq V_{\text{IN}} \leq 20\text{V}, I_{\text{OUT}}=200\text{mA}$		1.5	30	mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 500\text{mA}$			120	mV
		$T_j=25^\circ\text{C}, 5\text{mA} \leq I_{\text{OUT}} \leq 200\text{mA}$			60	mV
Output Voltage	V_{OUT}	$8\text{V} \leq V_{\text{IN}} \leq 21\text{V}, 5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$	5.7		6.3	V
Current Dissipation	I_{CC}	$T_j=25^\circ\text{C}$		4.5	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$9\text{V} \leq V_{\text{IN}} \leq 25\text{V}, I_{\text{OUT}}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{\text{OUT}} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		45		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$	59			dB
		$9\text{V} \leq V_{\text{IN}} \leq 20\text{V}$	59	80		dB
		$T_j=25^\circ\text{C}$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{\text{OUT}}=350\text{mA}$		2.0		V
Short Current	I_{OS}	$T_j=25^\circ\text{C}, V_{\text{IN}}=35\text{V}, \text{to GND}$		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ\text{C}$		0.7		A

[L78M07T]

Recommended Operating Conditions at $T_a=25^\circ\text{C}$

			unit
Input Voltage	V_{IN}	9.5 to 22	V
Output Current	I_{OUT}	5 to 500	mA

L78M00T Series

**Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{IN}=12\text{V}$, $I_{OUT}=350\text{mA}$,
See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}\text{C}$	6.72	7.0	7.28	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}\text{C}$, $9\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$		6.0	60	mV
		$T_j=25^{\circ}\text{C}$, $10\text{V} \leq V_{IN} \leq 20\text{V}$, $I_{OUT}=200\text{mA}$		2.0	30	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$			140	mV
		$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$			70	mV
Output Voltage	V_{OUT}	$9\text{V} \leq V_{IN} \leq 22\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$	6.6		7.4	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}\text{C}$		4.6	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$10\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		48		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$ $I_{OUT}=100\text{mA}$	58			dB
		$10\text{V} \leq V_{IN} \leq 21\text{V}$ $I_{OUT}=300\text{mA}$	58	80		dB
		$T_j=25^{\circ}\text{C}$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350\text{mA}$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}\text{C}$, $V_{IN}=35\text{V}$, to GND		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}\text{C}$		0.7		A

[L78M08T]

Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$

Input Voltage	V_{IN}	10.5 to 23	V
Output Current	I_{OUT}	5 to 500	mA

**Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{IN}=15\text{V}$, $I_{OUT}=350\text{mA}$,
See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}\text{C}$	7.7	8.0	8.3	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}\text{C}$, $10.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$		6.0	60	mV
		$T_j=25^{\circ}\text{C}$, $11\text{V} \leq V_{IN} \leq 20\text{V}$, $I_{OUT}=200\text{mA}$		2.0	30	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$			160	mV
		$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$			80	mV
Output Voltage	V_{OUT}	$10.5\text{V} \leq V_{IN} \leq 23\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$	7.6		8.4	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}\text{C}$		4.6	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$11\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		50		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$ $I_{OUT}=100\text{mA}$	56			dB
		$11.5\text{V} \leq V_{IN} \leq 22\text{V}$ $I_{OUT}=300\text{mA}$	56	80		dB
		$T_j=25^{\circ}\text{C}$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350\text{mA}$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}\text{C}$, $V_{IN}=35\text{V}$, to GND		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}\text{C}$		0.7		A

[L78M09T]

Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$

Input Voltage	V_{IN}	12 to 25	V
Output Current	I_{OUT}	5 to 500	mA

L78M00T Series

**Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{IN}=16\text{V}$, $I_{OUT}=350\text{mA}$,
See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}\text{C}$	8.6	9.0	9.4	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}\text{C}$, $11.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$		6.0	100	mV
		$T_j=25^{\circ}\text{C}$, $12\text{V} \leq V_{IN} \leq 20\text{V}$, $I_{OUT}=200\text{mA}$		2.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$			180	mV
		$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$			90	mV
Output Voltage	V_{OUT}	$11.5\text{V} \leq V_{IN} \leq 24\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$	8.5		9.5	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}\text{C}$		4.6	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$12.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		60		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$	56			dB
		$12\text{V} \leq V_{IN} \leq 23\text{V}$, $I_{OUT}=100\text{mA}$	56	80		dB
		$T_j=25^{\circ}\text{C}$, $I_{OUT}=300\text{mA}$				dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350\text{mA}$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}\text{C}$, $V_{IN}=35\text{V}$, to GND		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}\text{C}$		0.7		A

[L78M10T]

Recommended Operating Conditions at $T_a=25^{\circ}\text{C}$

			unit
Input Voltage	V_{IN}	13 to 25	V
Output Current	I_{OUT}	5 to 500	mA

**Operating Characteristics at $T_a=25^{\circ}\text{C}$, $V_{IN}=17\text{V}$, $I_{OUT}=350\text{mA}$,
See specified Test Circuit.**

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}\text{C}$	9.6	10.0	10.4	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}\text{C}$, $12.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$		7.0	100	mV
		$T_j=25^{\circ}\text{C}$, $13\text{V} \leq V_{IN} \leq 22\text{V}$, $I_{OUT}=200\text{mA}$		2.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$			200	mV
		$T_j=25^{\circ}\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$			100	mV
Output Voltage	V_{OUT}	$12.5\text{V} \leq V_{IN} \leq 25\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$	9.5		10.5	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}\text{C}$		4.6	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$13.5\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=200\text{mA}$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$			0.5	mA
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		65		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$	55			dB
		$13\text{V} \leq V_{IN} \leq 25\text{V}$, $I_{OUT}=100\text{mA}$	55	80		dB
		$T_j=25^{\circ}\text{C}$, $I_{OUT}=300\text{mA}$				dB
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350\text{mA}$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}\text{C}$, $V_{IN}=35\text{V}$, to GND		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}\text{C}$		0.7		A

L78M00T Series

[L78M12T]

Recommended Operating Conditions at Ta=25°C

Input Voltage	V _{IN}	15 to 25	V
Output Current	I _{OUT}	5 to 500	mA

Operating Characteristics at Ta=25°C, V_{IN}=19V, I_{OUT}=350mA,
See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V _{OUT}	Tj=25°C	11.5	12.0	12.5	V
Line Regulation	ΔV _{oline}	Tj=25°C, 14.5V ≤ V _{IN} ≤ 30V, I _{OUT} =200mA	8.0	100		mV
		Tj=25°C, 16V ≤ V _{IN} ≤ 25V, I _{OUT} =200mA	2.0	50		mV
Load Regulation	ΔV _{oload}	Tj=25°C, 5mA ≤ I _{OUT} ≤ 500mA			240	mV
		Tj=25°C, 5mA ≤ I _{OUT} ≤ 200mA			120	mV
Output Voltage	V _{OUT}	14.5V ≤ V _{IN} ≤ 27V, 5mA ≤ I _{OUT} ≤ 350mA	11.4		12.6	V
Current Dissipation	I _{CC}	Tj=25°C		4.8	6.0	mA
Current Dissipation	ΔI _{CCline}	15V ≤ V _{IN} ≤ 30V, I _{OUT} =200mA			0.8	mA
Variation (Line)						
Current Dissipation	ΔI _{CCload}	5mA ≤ I _{OUT} ≤ 350mA			0.5	mA
Variation (Load)						
Output Noise Voltage	V _{NO}	10Hz ≤ f ≤ 100kHz		75		μV
Ripple Rejection	R _{rej}	f=120Hz		55		dB
		15V ≤ V _{IN} ≤ 25V		55	80	dB
		Tj=25°C				
Minimum Input-Output	V _{drop}	I _{OUT} =350mA		2.0		V
Voltage Drop						
Short Current	I _{OS}	Tj=25°C, V _{IN} =35V, to GND		300		mA
Peak Output Current	I _{op}	Tj=25°C		0.7		A

[L78M15T]

Recommended Operating Conditions at Ta=25°C

Input Voltage	V _{IN}	18 to 30	V
Output Current	I _{OUT}	5 to 500	mA

Operating Characteristics at Ta=25°C, V_{IN}=23V, I_{OUT}=350mA,
See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V _{OUT}	Tj=25°C	14.4	15.0	15.6	V
Line Regulation	ΔV _{oline}	Tj=25°C, 17.5V ≤ V _{IN} ≤ 30V, I _{OUT} =200mA	10.0	100		mV
		Tj=25°C, 19V ≤ V _{IN} ≤ 30V, I _{OUT} =200mA	3.0	50		mV
Load Regulation	ΔV _{oload}	Tj=25°C, 5mA ≤ I _{OUT} ≤ 500mA			300	mV
		Tj=25°C, 5mA ≤ I _{OUT} ≤ 200mA			150	mV
Output Voltage	V _{OUT}	17.5V ≤ V _{IN} ≤ 30V, 5mA ≤ I _{OUT} ≤ 350mA	14.25		15.75	V
Current Dissipation	I _{CC}	Tj=25°C		4.8	6.0	mA
Current Dissipation	ΔI _{CCline}	17.5V ≤ V _{IN} ≤ 30V, I _{OUT} =200mA			0.8	mA
Variation (Line)						
Current Dissipation	ΔI _{CCload}	5mA ≤ I _{OUT} ≤ 350mA			0.5	mA
Variation (Load)						
Output Noise Voltage	V _{NO}	10Hz ≤ f ≤ 100kHz		90		μV
Ripple Rejection	R _{rej}	f=120Hz		54		dB
		18.5V ≤ V _{IN} ≤ 28.5V		54	70	dB
		Tj=25°C				
Minimum Input-Output	V _{drop}	I _{OUT} =350mA		2.0		V
Voltage Drop						
Short Current	I _{OS}	Tj=25°C, V _{IN} =35V, to GND		300		mA
Peak Output Current	I _{op}	Tj=25°C		0.7		A

L78M00T Series

[L78M18T]

Recommended Operating Conditions at Ta=25°C

Input Voltage	V_{IN}	21 to 33	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at Ta=25°C, $V_{IN}=27V$, $I_{OUT}=350mA$, See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}C$	17.3	18.0	18.7	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}C, 21V \leq V_{IN} \leq 35V, I_{OUT}=200mA$		10.0	100	mV
		$T_j=25^{\circ}C, 22V \leq V_{IN} \leq 35V, I_{OUT}=200mA$		5.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 500mA$			360	mV
		$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 200mA$			180	mV
Output Voltage	V_{OUT}	$21V \leq V_{IN} \leq 33V, 5mA \leq I_{OUT} \leq 350mA$	17.1		18.9	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}C$		4.9	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$21V \leq V_{IN} \leq 33V, I_{OUT}=200mA$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		100		μV
Ripple Rejection	R_{rej}	$f=120Hz$		53		dB
		$22V \leq V_{IN} \leq 33V$		53	70	dB
		$T_j=25^{\circ}C$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}C, V_{IN}=35V, \text{to GND}$		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}C$		0.7		A

[L78M20T]

Recommended Operating Conditions at Ta=25°C

Input Voltage	V_{IN}	23 to 35	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at Ta=25°C, $V_{IN}=29V$, $I_{OUT}=350mA$, See specified Test Circuit.

			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^{\circ}C$	19.2	20.0	20.8	V
Line Regulation	ΔV_{oline}	$T_j=25^{\circ}C, 23V \leq V_{IN} \leq 35V, I_{OUT}=200mA$		10.0	100	mV
		$T_j=25^{\circ}C, 24V \leq V_{IN} \leq 35V, I_{OUT}=200mA$		5.0	50	mV
Load Regulation	ΔV_{oload}	$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 500mA$			400	mV
		$T_j=25^{\circ}C, 5mA \leq I_{OUT} \leq 200mA$			200	mV
Output Voltage	V_{OUT}	$23V \leq V_{IN} \leq 35V, 5mA \leq I_{OUT} \leq 350mA$	19.0		21.0	V
Current Dissipation	I_{CC}	$T_j=25^{\circ}C$		4.9	6.0	mA
Current Dissipation Variation (Line)	ΔI_{CCline}	$23V \leq V_{IN} \leq 35V, I_{OUT}=200mA$			0.8	mA
Current Dissipation Variation (Load)	ΔI_{CCload}	$5mA \leq I_{OUT} \leq 350mA$			0.5	mA
Output Noise Voltage	V_{NO}	$10Hz \leq f \leq 100kHz$		110		μV
Ripple Rejection	R_{rej}	$f=120Hz$		53		dB
		$24V \leq V_{IN} \leq 34V$		53	70	dB
		$T_j=25^{\circ}C$				
Minimum Input-Output Voltage Drop	V_{drop}	$I_{OUT}=350mA$		2.0		V
Short Current	I_{OS}	$T_j=25^{\circ}C, V_{IN}=35V, \text{to GND}$		300		mA
Peak Output Current	I_{op}	$T_j=25^{\circ}C$		0.7		A

L78M00T Series

[L78M24T]


Recommended Operating Conditions at $T_a=25^\circ\text{C}$

Input Voltage	V_{IN}	27 to 35	V
Output Current	I_{OUT}	5 to 500	mA

Operating Characteristics at $T_a=25^\circ\text{C}$, $V_{IN}=33\text{V}$, $I_{OUT}=350\text{mA}$, See specified Test Circuit.



			min	typ	max	unit
Output Voltage	V_{OUT}	$T_j=25^\circ\text{C}$	23.0	24.0	25.0	V
Line Regulation	ΔV_{oline}	$T_j=25^\circ\text{C}$, $27\text{V} \leq V_{IN} \leq 35\text{V}$, $I_{OUT}=200\text{mA}$	10.0	100		mV
		$T_j=25^\circ\text{C}$, $28\text{V} \leq V_{IN} \leq 35\text{V}$, $I_{OUT}=200\text{mA}$	5.0	50		mV
Load Regulation	ΔV_{oload}	$T_j=25^\circ\text{C}$, $5\text{mA} \leq I_{OUT} \leq 500\text{mA}$			480	mV
		$T_j=25^\circ\text{C}$, $5\text{mA} \leq I_{OUT} \leq 200\text{mA}$			240	mV
Output Voltage	V_{OUT}	$27\text{V} \leq V_{IN} \leq 35\text{V}$, $5\text{mA} \leq I_{OUT} \leq 350\text{mA}$	22.8		25.2	V
Current Dissipation	I_{CC}	$T_j=25^\circ\text{C}$		5.0	6.0	mA
Current Dissipation	ΔI_{CCline}	$27\text{V} \leq V_{IN} \leq 35\text{V}$, $I_{OUT}=200\text{mA}$			0.8	mA
Variation (Line)						
Current Dissipation	ΔI_{CCload}	$5\text{mA} \leq I_{OUT} \leq 350\text{mA}$			0.5	mA
Variation (Load)						
Output Noise Voltage	V_{NO}	$10\text{Hz} \leq f \leq 100\text{kHz}$		170		μV
Ripple Rejection	R_{rej}	$f=120\text{Hz}$	50			dB
		$28\text{V} \leq V_{IN} \leq 35\text{V}$	50	70		dB
		$T_j=25^\circ\text{C}$				
Minimum Input-Output	V_{drop}	$I_{OUT}=350\text{mA}$		2.0		V
Voltage Drop						
Short Current	I_{OS}	$T_j=25^\circ\text{C}$, $V_{IN}=35\text{V}$, to GND		300		mA
Peak Output Current	I_{op}	$T_j=25^\circ\text{C}$		0.7		A

Specified Test Circuit (Common to L78M00T series)

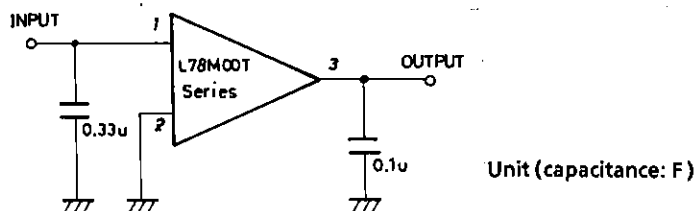


The allowable power dissipation ($P_d \text{ max}$) is 1.0W ($T_a=25^\circ\text{C}$) with no fin attached. When the L78M00T series are surface-mounted on a hybrid IC board or printed circuit board, a high allowable power dissipation can be obtained, though they are placed in a small-sized package.


Shown below is the relationship between the Cu-foiled area and the allowable power dissipation when the L78M00T series are surface-mounted on a glass epoxy board ($50 \times 50 \times 0.8 \text{ mm}^3$).

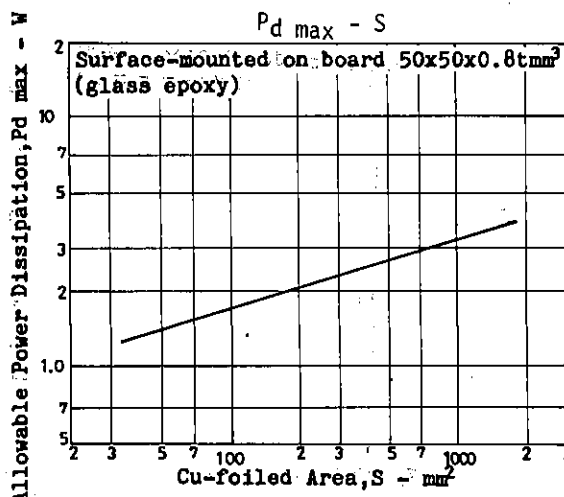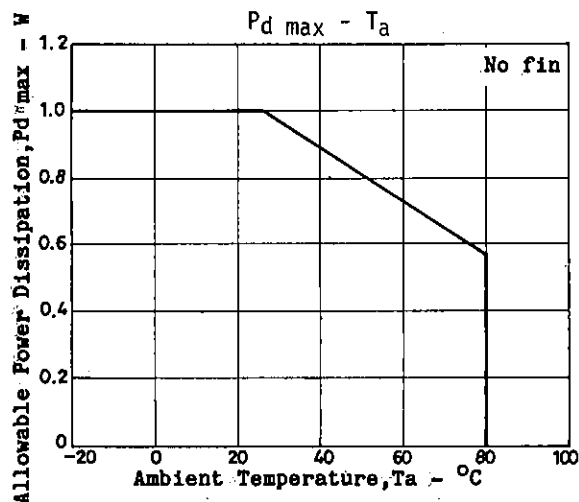

Lead Formings



FA forming

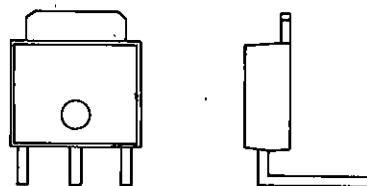

LR forming

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.