



LC6512A, LC6513A

Single-Chip 4-Bit Microcomputer for Control-Oriented Applications (Low-Threshold Input, On-Chip FLT Driver)

General Description

The LC6512A, 6513A are microcomputers that are identical with FLT driver-contained microcomputers LC6502D, 6505D in instruction set but are further enhanced in performance, such as shorter cycle time, more stack levels, increased FLT drive capacity, and are partially changed in specifications for standby function. Since the LC6512A, 6513A are also pin-compatible with the LC6502D, 6505D, they can be used as similar replacements for the LC6502D, 6505D. The LC6512A, 6513A can replace the LC6502B/6502D, 6505B/6505D to enhance performances of equipment in which these microcomputers have been applied so far.

Features


- Low power dissipation CMOS single-chip microcomputer.
- Instruction set with 79 instructions common to the LC6502C, 6502B, 6502D/LC6505C, 6505B, 6505D.
- 2-source, 2-level interrupt function (external interrupt, internal timer interrupt)
- 8-level stack
- 4-bit prescaler-contained 8-bit programmable timer
- FLT driver-contained output ports and low-threshold input ports
 - (1) Digits driving output ports: 10 pins
 - (2) Segments driving output ports: 8 pins
 - (3) Normal voltage input ports: 8 pins (4 pins: Low-threshold input port)
 - (4) Normal voltage input/output ports: 8-pins
- ROM, RAM
 - (1) LC6512A ROM: 2048bytes, RAM: 128 × 4bits
 - (2) LC6513A ROM: 1024 bytes, RAM: 64 × 4bits
- Cycle time 1.33μs min.
400kHz, 800kHz, 1MHz, 3MHz ceramic resonator OSC.
- Power-down by 2 standby modes
 - (1) HALT mode: Power dissipation saving by program standby during normal operation
 - (2) HOLD mode: Power supply backup during power failure

- (3) The standby function is the same as for the LC6514B and its using method is different from that of the LC6502D, 6505D, etc.

Package Dimensions


unit:mm

3025B-D42SIC

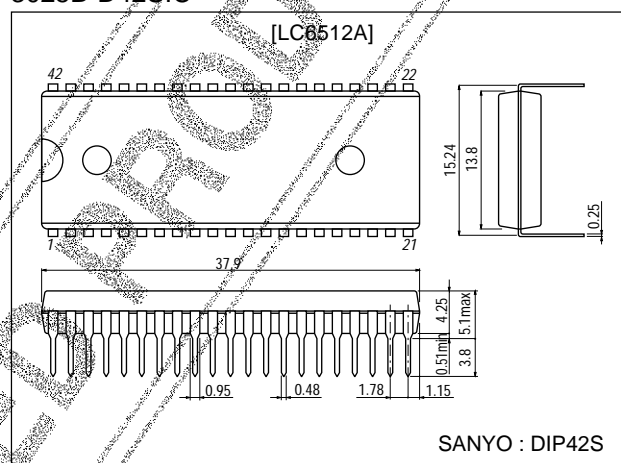

unit:mm

3052A-QIP48A

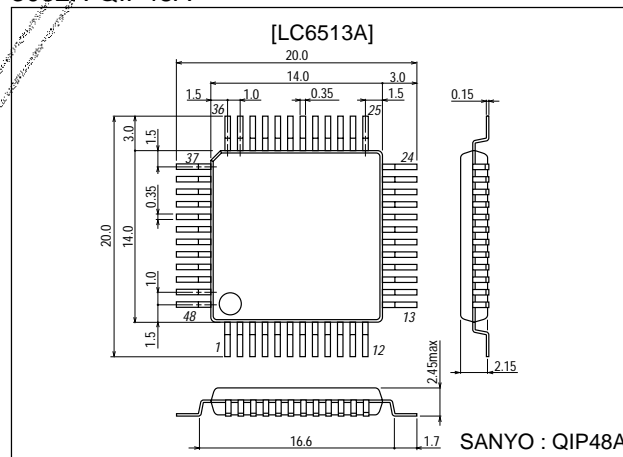

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

LC6512A, LC6513A

• Differences among LC6512D, 6513D, and LC6512A, 6513A

The LC6512D, 6513D and LC6512A, 6513A are different in the OSC circuit only and are the same in the basic features. The differences are shown below.

Item	LC6512A, 6513A	LC6512D, 6513D
OSC circuit configuration	1-stage inverter	5-stage inverter
OSC mode	Ceramic resonator OSC	Ceramic resonator OSC, CR-OSC, application of external clock
OSC waveform	Sine wave	Rectangular wave
Operating frequency	Ceramic resonator OSC: 500kHz, 800kHz, 1MHz, 3MHz	Ceramic resonator OSC: 400kHz, 800kHz, 1 MHz CR OSC: 400kHz typ, 800kHz typ External clock: 222kHz to 1290kHz

Technical Data

The LC6512A, 6513A are members of our LC6500 series of CMOS microcomputers. For their internal functions, refer to the LC6500 SERIES USFR'S MANUAL. Those which differ from the description in the USER'S MANUAL are described in this catalog. Carefully study features and Appendix 4 Standby Function in this catalog before using the LC6512A, 6513A.

Pin Assignments

Pin Name

OSC1, OSC2 : Ceramic resonator for OSC

INT : Interrupt

RES : Reset

HOLD : Hold

PA0-3 : Input port

PB0-3 : Input port

PC0-3 : Input/output common port

PDO-3 : Input/output common port

PE0-3 : Output port (High-voltage port)


PFO-3 : Output port (High-voltage port)

PGO-3 : Output port (High-voltage port)

PHO-3 : Output port (High-voltage port)

PIO, 1 : Output port (High-voltage port)


TEST : Test

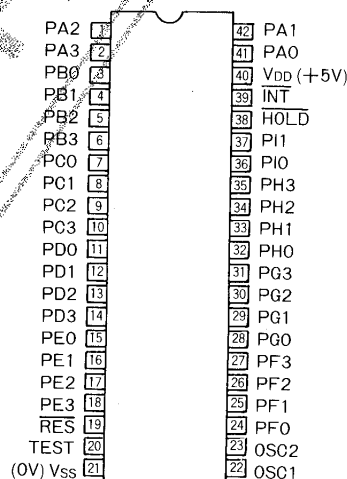

DIP42S


(Note) Nothing must be connected to NC pins internally or externally.

When mounting the QIP version on the board, do not dip it in solder.

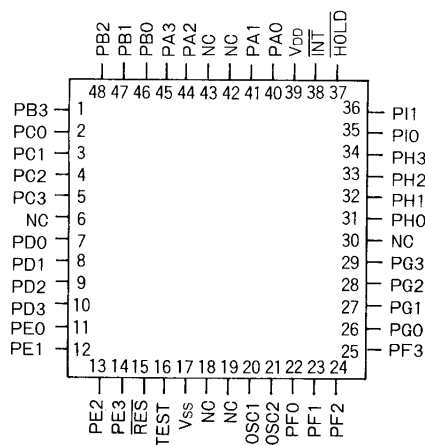

QIP48A

System Block Diagram

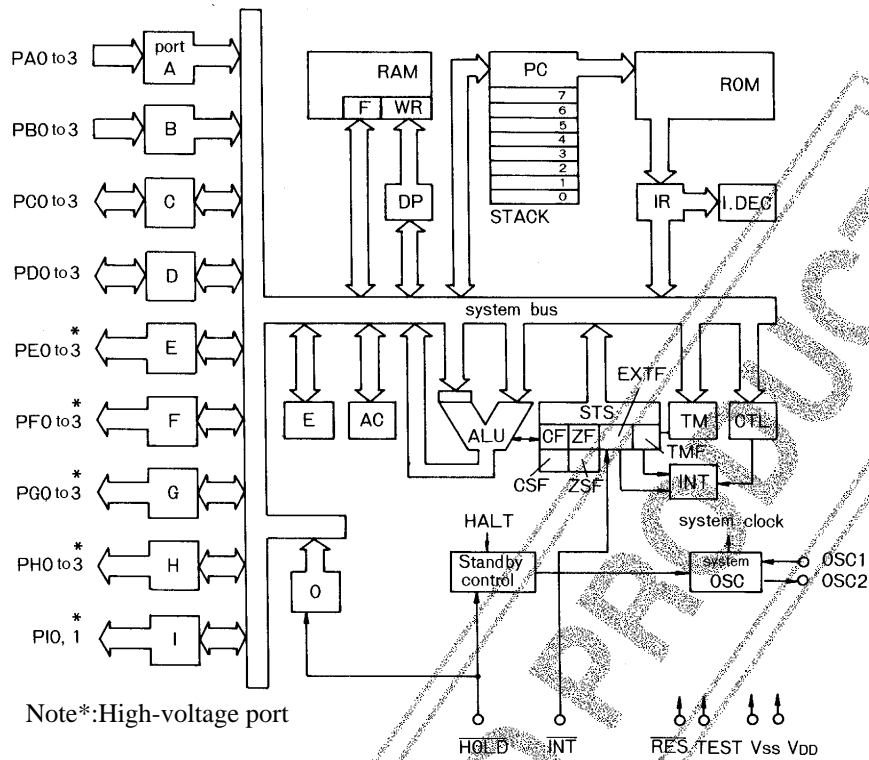

RAM : Data memory
 F : Flag
 WR : Working register
 AC : Accumulator
 ALU : Arithmetic and logic unit
 DP : Data pointer
 E : E register
 CTL : Control register
 OSC : Oscillation circuit
 TM : Timer

STS : Status register
 ROM : Program memory
 PC : Program counter
 INT : Interrupt control
 IR : Instruction register
 I.DEC : Instruction decoder
 CF, CSF : Carry flag, carry save flag
 ZF, ZSF : Zero flag, zero save flag
 EXTIF : External interrupt request flag
 TMF : Internal interrupt request flag

Pin Description

Pin Name	Input/Output	Function
INT	Input	Interrupt request input pin
HOLD	Input	HOLD mode request input pin (The LC6502, 6505 differ in function.) Capable of being used as a general-purpose single-bit input port unless the standby mode is used.
RES	Input	Reset input pin
PA0-3	Input	Input port A ₀ to A ₃ (Normal voltage, low-threshold input) Capable of 4-bit input and single-bit decision for branch Use also for HALT mode release request input

Continued on next page.

LC6512A, LC6513A

Continued from preceding page.

Pin Name	Input/Output	Function
PB ₀₋₃	Input	Input port B ₀ to B ₃ (Normal voltage) Capable of 4-bit input and single-bit decision for branch
PC ₀₋₃	Input/Output	Input/output common port C ₀ to C ₃ (Normal voltage) Capable of 4-bit input and single-bit decision for branch during input Capable of 4-bit output and single-bit set/reset during output
PD ₀₋₃	Input/Output	Input/output common port D ₀ to D ₃ (Normal voltage) Capable of 4-bit input and single-bit decision for branch during input Capable of 4-bit output and single-bit set/reset during output
PE ₀₋₃	Output	Output port E ₀ to E ₃ (Digit driver output) Capable of 4-bit output and single-bit set/reset Capable of 4-bit input of output latch contents and single-bit decision of output latch for branch
PF ₀₋₃	Output	Output port F ₀ to F ₃ (Digit driver output) Capable of 4-bit output and single-bit set/reset Capable of 4-bit input of output latch contents and single-bit decision of output latch for branch
PG ₀₋₃	Output	Output port G ₀ to G ₃ (Segment driver output) Capable of 4-bit output and single-bit set/reset Capable of 4-bit input of output latch contents and single-bit decision of output latch for branch
PH ₀₋₃	Output	Output port H ₀ to H ₃ (Segment driver output) Capable of 4-bit output and single-bit set/reset Capable of 4-bit input of output latch contents and single-bit decision of output latch for branch
PI _{0, 1}	Output	Output port I ₀ , I ₁ (Digit driver output) Capable of 2-bit output and single-bit set/reset Capable of 2-bit input of output latch contents and single-bit decision of output latch for branch
OSC1	Input	A ceramic resonator is connected to this pin and pin OSC2 in the internal clock mode.
OSC2	Output	Pin for externally connecting a resonance circuit for the internal clock mode
V _{DD}	Input	Power supply pin Normally connected to +5V
V _{SS}		Connected to 0V power supply
TEST	Input	IC test pin Normally connected to V _{SS} (0V)

Specifications

Absolute Maximum Ratings at T_a = 25°C, V_{SS} = 0V

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{DD max}		-0.3 to +7.0	V
Input voltage	V _{IN}	Input pins other than OSC1	-0.3 to V _{DD} +0.3 (Note1)	V
Output voltage	V _{OUT(1)}	Ports C,D OSC2	-0.3 to V _{DD} +0.3	V
	V _{OUT(2)}	Ports E,F,G,H,I	V _{DD} -45 to V _{DD} +0.3	V
Peak output current	I _{O(1)}	Ports C,D:Each pin	-2.0 to +2.0	mA
	I _{O(2)}	Ports E,F,I:Each pin	-15 to 0	mA
	I _{O(3)}	Ports G, H:Each pin	-10 to +16	mA
	I _{O(4)}	All pins of ports C to I	-90 to +16	mA
Allowable power dissipation	Pd max(1)	T _a = -30 to +70°C (Flat package)	350	mW
	Pd max(2)	T _a = -30 to +70°C (DIP)	600	mW
Operating temperature	T _{opr}		-30 to +70	°C
Storage temperature	T _{stg}		-55 to +125	°C

(Note1) For pin OSC1, up to oscillation amplitude generated when internally oscillated under the recommended oscillation conditions in Fig. 2 is allowable.


[Note] When mounting the QIP package version on the board, do not dip it in solder.

LC6512A, LC6513A

Allowable Operating Conditions at $T_a = -30$ to $+70^\circ\text{C}$, $V_{DD} = 5V \pm 10\%$, $V_{SS} = 0V$,

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Operating supply voltage	$V_{DD(1)}$		4.5	5.0	5.5	V
Power-down supply voltage	$V_{DD(2)}$	HOLD mode: $\overline{\text{HOLD}} = V_{IL(3)}$	1.8		5.5	V
Input high-level voltage	$V_{IH(1)}$	Port A	1.9		V_{DD}	V
	$V_{IH(2)}$	Ports B, C, D	$0.7V_{DD}$		V_{DD}	V
	$V_{IH(3)}$	$\overline{\text{INT}}$, $\overline{\text{RES}}$, $\overline{\text{HOLD}}$ and OSC1	$0.8V_{DD}$		V_{DD}	V
	$V_{IH(4)}$					
Input low-level voltage	$V_{IL(1)}$	Ports B, C, D	V_{SS}		$0.3V_{DD}$	V
	$V_{IL(2)}$	$\overline{\text{INT}}$, $\overline{\text{RES}}$, OSC1	V_{SS}		$0.2V_{DD}$	V
	$V_{IL(3)}$	HOLD, TEST: $V_{DD} = 1.8$ to $5.5V$	V_{SS}		$0.2V_{DD}$	V
	$V_{IL(4)}$	Port A	V_{SS}		0.5	V
External capacitance for ceramic resonator OSC	C1	See Fig. 2.				
	C2	See Fig. 2.				
Allowable delay in key scan circuit	t_{DH}	See Figs. 3-3, 3-4 in Appendix 3.			(N-2) X_{tcyc}^*	μs
	t_{DL}				(N-2) X_{tcyc}^*	μs
Standby timing	t_{VDDF}	$V_{DD} = 1.8$ to $5.5V$, See Fig. 1.	0			μs
	t_{VDDR}	$V_{DD} = 1.8$ to $5.5V$, See Fig. 1.	0			μs

(Note)* t_{cyc} : Cycle time at microcomputer running mode

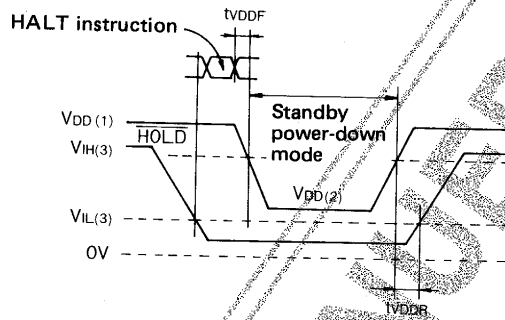

[Note]
No chattering shall be applied to the $\overline{\text{HOLD}}$ pin and PA0 to 3 pins during the HALT instruction execution cycle.

Fig. 1 Standby mode timing

LC6512A, LC6513A

Electrical Characteristics at $T_a = -30$ to $+70^\circ\text{C}$, $V_{DD} = 5.0\text{V} \pm 10\%$, $V_{SS} = 0\text{V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Input high-level current	I_{IH}	Each input pin: $V_{IN}=V_{DD}$			1.0	μA
Input low-level current	I_{IL}	Each input pin: $V_{IN}=V_{SS}$	-1.0			μA
Output high-level voltage	$V_{OH(1)}$	Ports C, D: $I_{OH}=-1\text{mA}$	$V_{DD}-2.0$			V
	$V_{OH(2)}$	Ports C, D: $I_{OH}=-100\mu\text{A}$	$V_{DD}-0.5$			V
	$V_{OH(3)}$	Ports E, F, I: $I_{OH}=-10\text{mA}$	$V_{DD}-1.8$			V
	$V_{OH(4)}$	Ports E, F, I: $I_{OH}=-2\text{mA}$	$V_{DD}-1.0$			V
	$V_{OH(5)}$	Ports E, F, I: $I_{OH}=-1\text{mA}$ (Each port $I_{OH}=\text{Less than } -1\text{mA}$)	$V_{DD}-0.5$			V
	$V_{OH(6)}$	Ports G, H: $I_{OH}=-2\text{mA}$	$V_{DD}-1.0$			V
	$V_{OH(7)}$	Ports G, H: $I_{OH}=-1\text{mA}$ (Each port $I_{OH}=\text{Less than } -1\text{mA}$)	$V_{DD}-0.5$			V
	$V_{OH(8)}$	OSC2: $I_{OH}=-100\mu\text{A}$	$V_{DD}-0.5$			V
Output low-level voltage	$V_{OL(1)}$	Ports C, D: $I_{OL}=1\text{mA}$			0.4	V
	$V_{OL(2)}$	OSC2: $I_{OL}=100\mu\text{A}$			0.4	V
Output OFF leak current	$I_{OFF(1)}$	Ports C, D: $V_{OUT}=V_{DD}$, HOLD mode			1.0	μA
	$I_{OFF(2)}$	Ports C, D: $V_{OUT}=V_{SS}$, HOLD mode	-1.0			μA
	$I_{OFF(3)}$	Ports E, F, G, H, I: $V_{OUT}=V_{DD}$			30	μA
	$I_{OFF(4)}$	Ports E, F, G, H, I: $V_{OUT}=V_{DD}-40\text{V}$	-30			μA
Clock OSC frequency for ceramic resonator OSC	f_{CFOSC}	OSC circuit in Fig. 2:	392	Note 2	408	kHz
		Recommended conditions for ceramic resonator OSC	784	Note 2	816	kHz
			980	Note 2	1020	kHz
			2940	Note 2	3060	kHz
Current drain	$I_{DD(1)}$	Ceramic resonator OSC: $f=400, 800, 1000\text{kHz}$		1.0	2.0	mA
		Operating mode $f=3\text{MHz}$ Recommended conditions for ceramic resonator OSC, output pin open, input pin $V_{IN}=V_{SS}$		2.7	4.0	mA
	$I_{DD(2)}$	HALT mode: $V_{DD}=5\text{V} \pm 10\%$, Test circuit in Fig. 3			10	μA
	$I_{DD(3)}$	HOLD mode: $V_{DD}=1.8$ to 5.5V , Test circuit in Fig. 4			10	μA
Input capacitance	C_{IN}	Each input pin: Measure at $f=1\text{MHz}$, Pins not being measured: V_{SS}		5		pF
Output capacitance	C_{OUT}	Ports E, F, G, H, I: Measure at $f=1\text{MHz}$ Pins not being measured: V_{SS}		10		pF
Input/output capacitance	C_{IO}	Ports C, D: Measure at $f=1\text{MHz}$, Pins not being measured: V_{SS}		10		pF
Hysteresis voltage	V_H	INT, RES, HOLD		$0.1V_{DD}$		V

LC6512A, LC6513A

Center frequency	Ceramic resonator	C ₁ (pF)	C ₂ (pF)
3MHz	CSA3.00MG (Murata)	33±10%	
	KBR3.0MS (Kyocera)	22±10%	
1MHz	CSB1000K, D (Murata)	180±10%	
	KBR1000H (Kyocera)	180±10%	
800kHz	CSB800K, D (Murata)	180±10%	
	KBR800H (Kyocera)	180±10%	
400kHz	CSB400P (Murata)	330±10%	
	KBR400B (Kyocera)	330±10%	


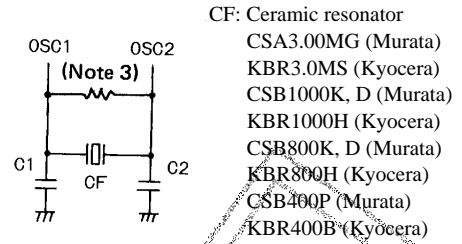


Fig. 2 Recommended OSC circuit, constants for ceramic resonator OSC

Note 2) There is a tolerance of approximately 1% between the center frequency at the ceramic resonator mode and the nominal value presented by the ceramic resonator supplier. For details, refer to the specification for the ceramic resonator.

The min., max. values of OSC frequency represent the oscillatable frequency range.

Note 3) When using the piggyback microcomputer, evaluation chip for evaluation, connect a feedback resistor (approximately 1MΩ).

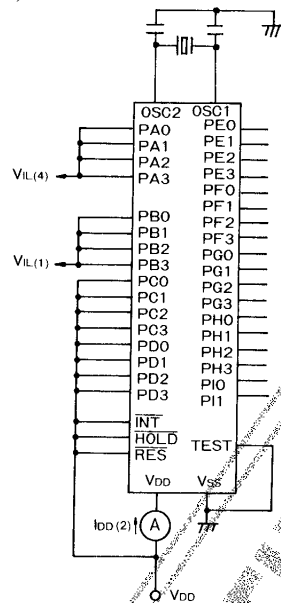

Input/output common ports C, D: Output inhibit
 HALT instruction is executed to provide HALT mode.

Fig. 3 I_{DD}(2) test circuit


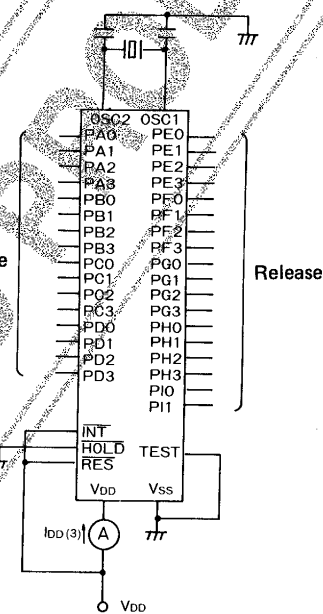


Fig. 4 I_{DD}(3) test circuit

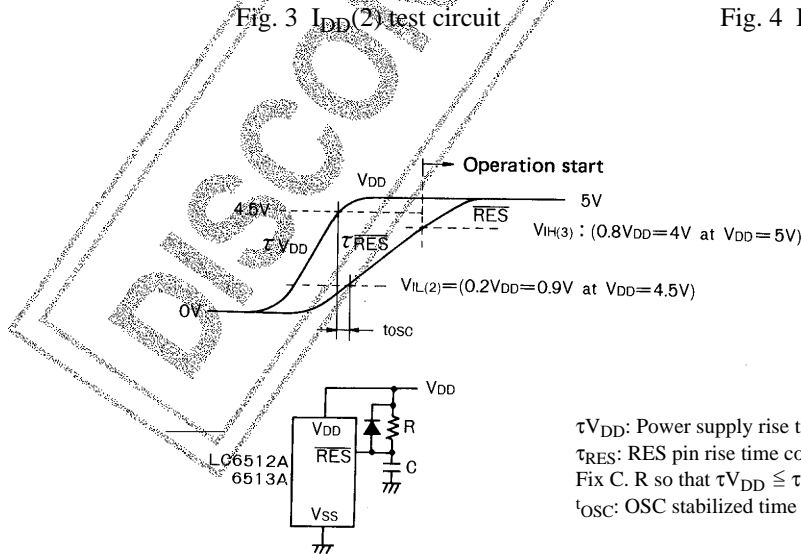

τ_{VDD} : Power supply rise time constant
 τ_{RES} : RES pin rise time constant
 Fix C, R so that $\tau_{VDD} \leq \tau_{RES}$, $t_{OSC} \geq 10\text{ms}$, is obtained.
 t_{OSC} : OSC stabilized time

Fig. 5 Initial reset timing

Appendix 1. Support System

For application development of the LC6512A, 6513A, the support system for the LC6512A, 6513A is used.

1-1. Software support

The support system provides source editor, cross assembler. For cross assembler on CP/M, the "LC6502.COM", "LC6505.COM" are used, and on MS-DOS, the "LC6512.COM", "LC6513.COM" are used.

1-2. Hardware support

(1) Evaluation chip

Evaluation chip LC6597 is used. Level converters, drivers are connected to high-voltage ports (PE₀ to₃, PF₀ to₃, PG₀ to₃, PH₀ to₃, PI₀, 1) externally.

(A dedicated adaptor is available.)

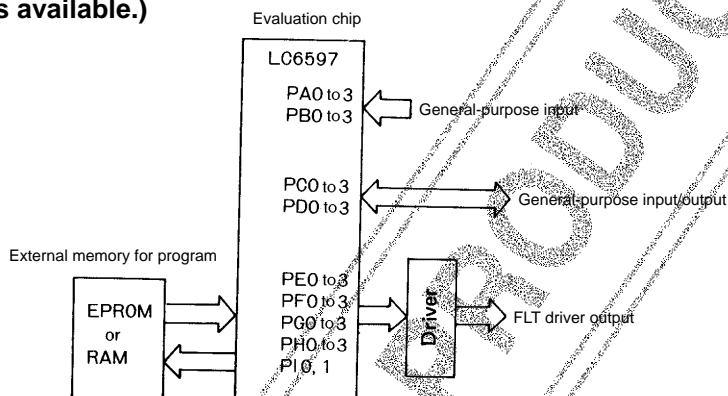


Fig. 1-1 Basic evaluation system using evaluation chip

(2) Simulation chip

Piggyback LC65PG12/13 and adaptor (EVA-97-12D/13D) for the LC6512A, 6513A are used jointly.

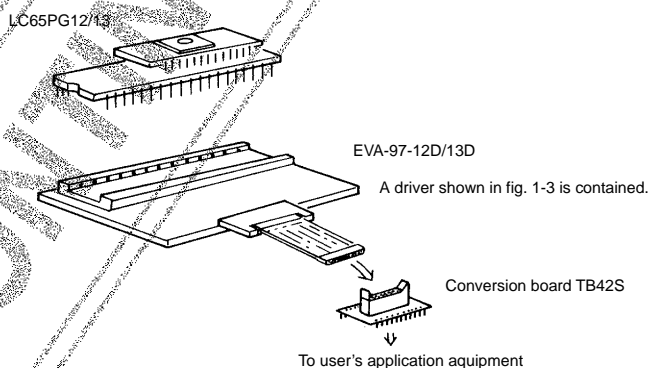


Fig. 1-2 How to use piggyback

LC6512A, LC6513A

(3) Evaluation kit

The EVA-410 and EVA-TB2 are used. For connecting with user's application equipment, adaptor (EVA-97-12D/13D) is used.

(4) Adaptor (EVA-97-12D/13D)

This is used when evaluating the LC6512A, 6513A with the aid of the evaluation chip and piggyback. This contains drivers for FLT. (See Figs. 1-3, 1-4.)

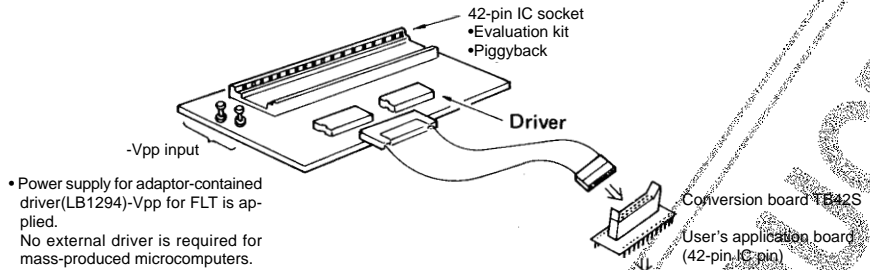


Fig. 1-3 Adaptor (EVA-97-12D/13D) for LC6512A, 6513A

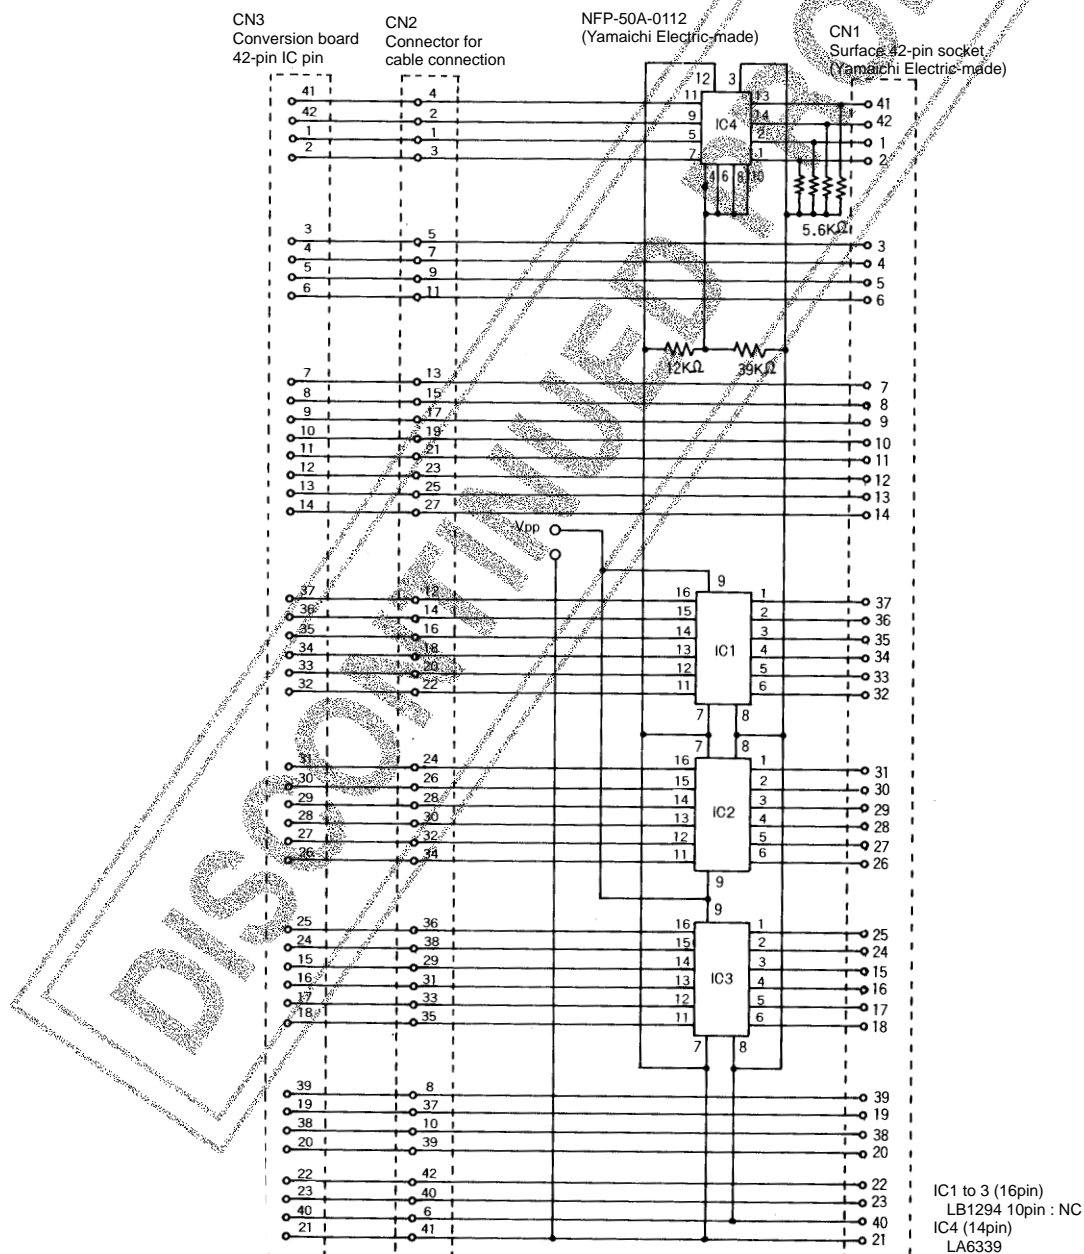


Fig. 1-4 EVA-97-12D/13D

Appendix 2. Internal Architecture of LC6512A, 6513A

The LC6512A, 6513A are identical with the LC6502C, 6505C in the internal architecture and instruction set except that output ports are of high-voltage type and port A is of low-threshold input type and the standby function is the same as for the LC6514B. For details, refer to "LC6500 SERIES USER'S MANUAL"; and for the standby function, refer to Appendix 4 "Standby Function".

2-1. PC

For the LC6512A, 6513A, this is organized with an 11-bit, 10-bit binary counter, respectively, which specifies the ROM address of an instruction to be executed next. The high-order 3(2) bits specify a page and the low-order 8 bits specify an address in the page. The page is updated automatically. () is for the LC6513A.

2-2. ROM

This is used to store user programs. For the LC6512A, 6513A, this is organized with 2048x 8 bits, 1024 x 8 bits, respectively. By using the ROM table read instruction, the whole area can be accessed and the display pattern can be programmed.

2-3. Stack

This is used to save the contents of the PC at the subroutine call or interrupt mode. This allows subroutine nesting up to 8 levels.

2-4. DP

This is a register organized with 4-bit DPL and 3-bit, 2-bit DPH for the LC6512A, 6513A, respectively. When accessing the data RAM, the DPL, DPH specify a column address, row address, respectively. When accessing input/output ports, the DPL specifies port A to port I. The DPL also specifies internal pseudo port O.

2-5. RAM

This is a static RAM used to store data. For the LC6512A, 6513A, this is organized with 128 x 4 bits, 64 x 4 bits, respectively. Row address 7H(3H) is allocated for 16 flags and 8 working registers which can be manipulated without being addressed by the DP. () is for the LC6513A.

2-6. AC, E

The AC is a 4-bit register which stores data to be processed by instructions. The E register is an auxiliary register to be back up the AC and is used as a temporary register or general-purpose register at the instruction execution mode.

2-7. ALU

This is a circuit which performs arithmetic and logic operations specified by individual instructions. This outputs not only data of operation results but also the status of carry (C), zero (Z).

2-8. Status register

This is a 4-bit register which stores the status of carry, zero and the external interrupt, timer interrupt request. The contents of the status register can be tested by the branch instructions.

2-9. Timer

This consists of a 4-bit fixed prescaler and an 8-bit programmable timer. This counts the system clock and requests a timer interrupt when an overflow occurs.


2-10. Control register

This is a 4-bit register, 2-bits of which control input/output of input/output common ports C, D and 2-bits of which enable/disable external interrupt, internal timer interrupt.

2-1 1. Input/output ports


There are 9 ports/34 pins from port A to I. Each port is addressed by the DPL. Ports A, B are of normal-voltage input type, ports C, D are of normal-voltage input/output common type, and ports E, F, G, H, I contain FLT drivers. Port A is of low-threshold input type.

(1) Ports A₀ to 3, B₀ to 3

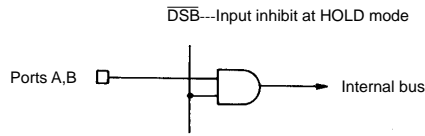


- Functions
- 4-bit input (IP instruction)
 - Single-bit test (BP, BNP instructions)
 - Port A: Low-threshold input
 - Port B: Normal-threshold input

(2) Ports C₀ to 3, D₀ to 3

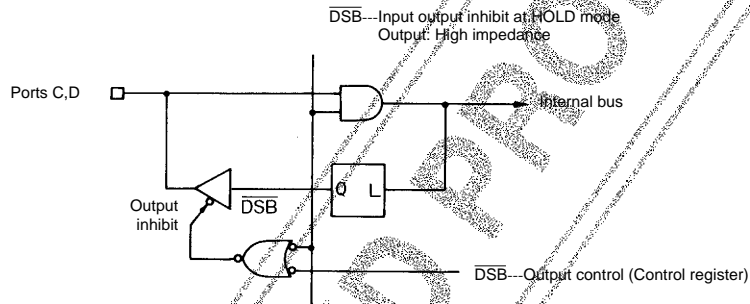

- Functions
1. Input mode (Output inhibit)
 - 4-bit input (IP instruction)
 - Single-bit test (BP, BNP instructions)
 2. Output mode
 - 4-bit output (OP instruction)
 - Single-bit set, reset (SPB, RPB instructions)

(3) Ports E₀ to 3, F₀ to 3, G₀ to 3, H₀ to 3, I₀ to 1 (High-voltage ports)

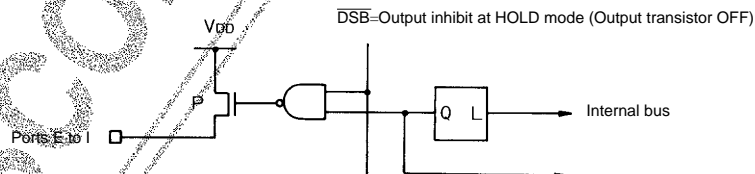

- Functions
- 4-bit (2-bit for port I) output (OP instruction)
 - 4-bit (2-bit for port I) input of output latch contents (IP instruction)
 - Single-bit set, reset (SPB, RPB instructions)
 - Set: The output represents a 1. ----- Output transistor ON
 - Reset: The output represents a 0. ----- Output transistor OFF
 - Single-bit test of output latch contents (BP, BNP instructions)
 - Ports E, F, I: FLT digits drive
 - Ports G, H: FLT segments drive

2-12. External interrupt

The trailing edge of the signal on the $\overline{\text{INT}}$ pin is detected and the interrupt request flag in the status register is set. The occurrence of an interrupt is controlled by the enable/disable flag in the control register.

2-13. Reset

The system is initialized by setting the $\overline{\text{RES}}$ pin to L-level. The contents to be initialized are as follows:

- PC Address 000H
- Control register 0000 → Interrupt disable, Ports C, D: Output inhibit
- Status register Timer, external interrupt flag → Reset
- Output port Output latch (0H) → Output transistor OFF

Appendix 3. Proper Cares in Using IC

3-1. Low-threshold input port A_0 to $_3$ provides the input characteristic shown in Fig. 3-1.




Fig. 3-1

3-2. FLT driver output

Ports E_0 to $_3$, F_0 to $_3$, I_0 to $_1$ (10 pins) are for high-current digits driver output; and ports G_0 to $_3$, H_0 to $_3$ (8 pins) are for intermediate-current segments driver outputs. Of course, digits driver outputs can be used as segments driver outputs. Fig. 3-2 shows a sample application.

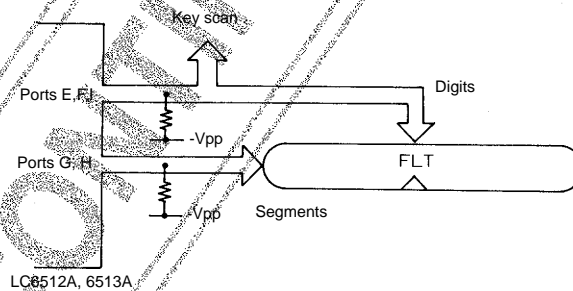


Fig. 3-2 FLT display application

Digit drive signal-used key scan

When key-scanning with the FLT digit drive signal in Fig. 3-3 and inputting the return signal to port A, the following must be observed.

- Estimate voltage drop (V_{ON}) in the output transistor using the current flowing in an FLT used and the V-I characteristic of the output port of the LC6512A, 6513A.
- Estimate voltage drop (V_{SW}) in the switch circuit.
- Check to see that $V_{ON} + V_{SW}$ meets the V_{IH}/V_{IL} requirement of the input port in Fig. 3-1.

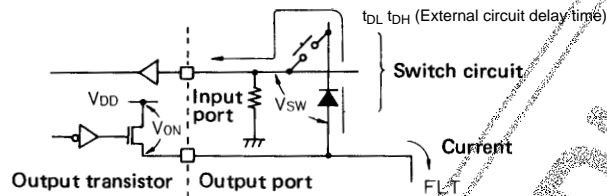


Fig. 3-3 Sample key scan application

For the key scan application in Fig. 3-3, make the program considering the delay in the external circuit and the input delay shown below.

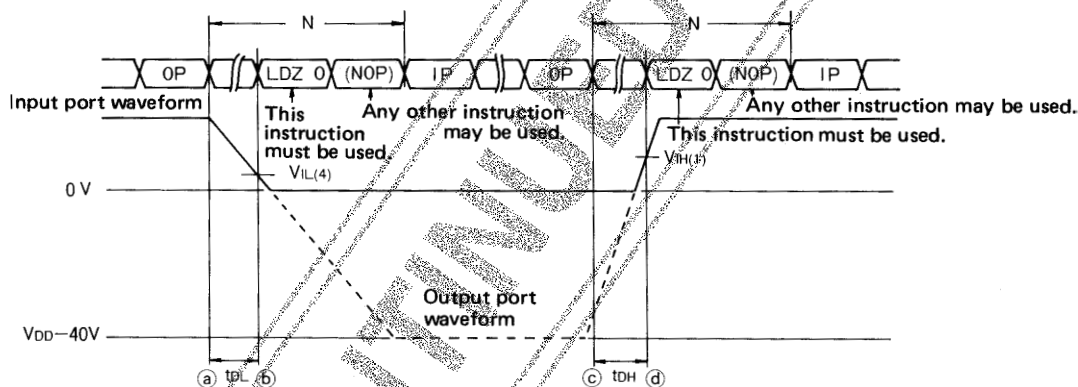


Fig. 3-4

When the IP instruction is used to input the return signal as shown above, the input delay must be considered and two instructions are placed between the IP instruction and the crossing of input port waveform and $V_{IL(4)}$, $V_{IH(1)}$, respectively. Some instructions must be placed additionally according to the length of delay (t_{DL} , t_{DH}) in the external circuit after the digit drive signal is delivered with the execution of the OP instruction (point a and point c).

N: Number of instruction cycles existing between instruction (OP, SPB, RPB) used to output data to output port and instruction (IP, BP, BNP) used to input data from input port.

(Number of instruction cycles to be programmed according to the length of t_{DL} , t_{DH})

t_{DL} , t_{DH} : Delay in external circuit from output port to input port.

Appendix 4. Standby Function

Two standby modes – HALT mode and HOLD mode – are available to minimize the power dissipation when the program is in the wait state or a power failure is backed up. Both modes are set with the execution of the HALT instruction. All the operations including the system clock generator are stopped at the standby mode. (For other models LC6502/05 of the LC6500 series, the HOLD mode is hardware-set with the HOLD pin = "L". Be careful of the difference in the mode setting method.)

The HALT mode and HOLD mode are used properly depending on the purposes. They are different in the mode setting conditions, I/O port state during standby operation, mode releasing method. The HALT mode is entered by executing the HALT instruction when the HOLD pin is at H-Level. The HALT mode is used to save the power dissipation when the program is in the wait state. The HOLD mode is entered by executing the HALT instruction when the HOLD pin is at L-Level. At the HOLD mode all I/O ports are disabled and there is no power dissipation in the interfaces with external circuits, permitting capacitor or battery-used power supply backup during power failure.

4-1. HALT mode setting

The HALT mode is entered by executing the HALT instruction when the HOLD pin is at H-Level and all pins for port A₀ to A₃ are at L-Level. When even one of pins for port A₀ to A₃ is at H-Level, the HALT instruction is disregarded and becomes equal to the NOP instruction.

The HALT mode causes individual blocks to be placed in the following states.

(1) Operation is stopped

- All the operations including the system clock generator are stopped.

(2) I/O port

- The state immediately before setting the HALT mode is held.

(3) Blocks to be cleared/reset

- Timer.....State where all bits are set to "1" (max time).
- Status flag.....The EXTF, TMF are reset (interrupt disable). The CF, ZF contents are held. An interrupt request at the HALT mode is disregarded.

(4) Blocks to be held

- For the registers, data RAM, port output latch, PC (except those in (3), the contents immediately before setting the HALT mode are held.

4-2. HOLD mode setting

The HOLD mode is entered by executing the HALT instruction when the HOLD pin is at L-Level. In this case, the contents of port A₀ to A₃ remain unaffected.

The state in the HOLD mode is the same as that in the HALT mode, except the state of I/O port. The HOLD mode permits the undermentioned power-down mode to be entered.

I/O port

- Input ports A, B: Input inhibit
- Input/output port C, D: Input inhibit, output high impedance
- Output ports E to I: Output Pch transistor OFF
- INT, RES pins: Input inhibit

For the output latch of the output port, the contents immediately before setting the HOLD mode are held.

4-3. HOLD power-down mode setting

The HOLD mode permits the supply voltage to be lowered and also the power dissipation to be reduced after mode setting. The HOLD mode can be used in the capacitor or battery-used backup operation during power failure.

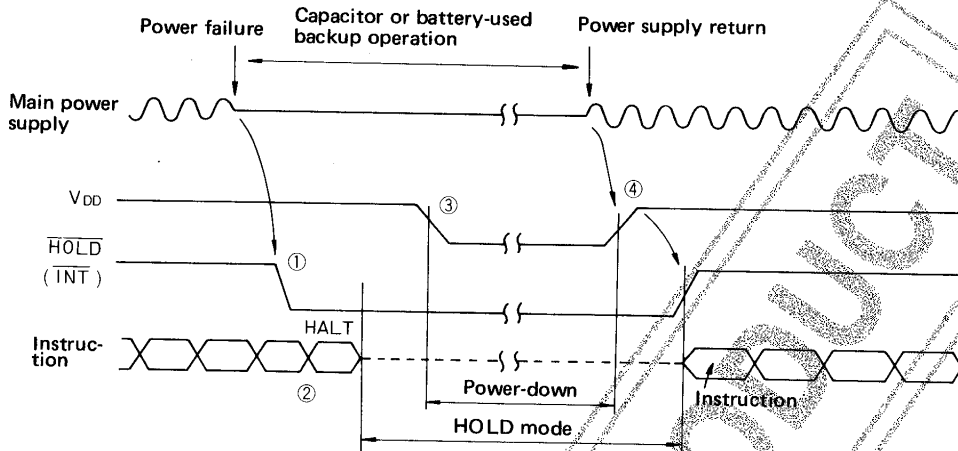


Fig. 4-1 HOLD mode and power-down

- ① A failure of the main power supply is detected and a standby request is made. This is hardware-controlled by the external circuit.
- ② The $\overline{\text{HOLD}}$ pin is software-pollled or the same signal is applied to the $\overline{\text{INT}}$ pin to test the standby request by interrupt. Then, the HALT instruction is executed and the HOLD mode is entered. (Note)
- ③ After the HOLD mode is entered, power-down can be attained by lowering V_{DD} .
- ④ After V_{DD} returns to the prescribed voltage, the $\overline{\text{HOLD}}$ pin is set to H-Level and the normal operation returns.

(Note) The $\overline{\text{HOLD}}$ pin input signal is transferred to pseudo input port PO 0 (DPL = 0EH, 2⁰ bit). Therefore, when polling the $\overline{\text{HOLD}}$ pin, the BP0 or BNP0 instruction is used at DPL = 0EH. (The IP instruction cannot be used.)

When the BP0 instruction is used for testing, a branch occurs when the input voltage is at high level in the same manner as for normal input ports.

4-4. HALT mode release

Release by reset

When L-Level is applied to the $\overline{\text{RES}}$ pin, the HALT mode is released and the system reset state is entered.

When the $\overline{\text{RES}}$ pin is set to H-Level again, the normal operation starts. Since the ceramic resonator mode is used for system clock generation, the release by reset must be performed.

—Notes—

- Since the ceramic resonator mode is used for system clock generation, L-Level must be applied to the $\overline{\text{RES}}$ pin for 5 to 10 ms (oscillation stabilizing time).

Mode change from HALT mode to HOLD Mode

The HALT mode is entered with the execution of the HALT instruction when the $\overline{\text{HOLD}}$ pin is at H-Level.

The HALT mode is changed to the HOLD mode automatically by setting the $\overline{\text{HOLD}}$ pin to L-Level.

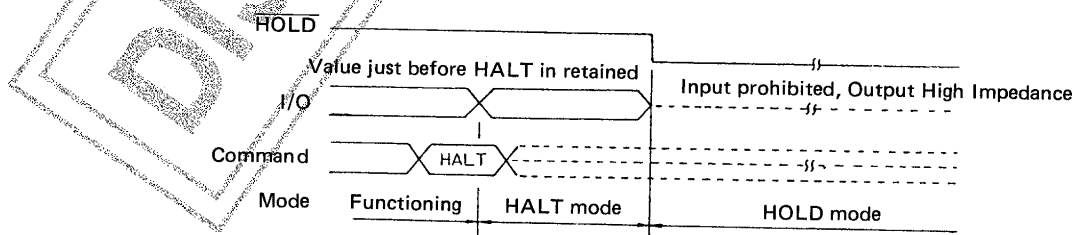


Fig. 4-2 Mode change from HALT mode to HOLD mode

4-5. HOLD mode release

Release by reset

The HOLD mode is released by setting the $\overline{\text{HOLD}}$ pin to H-Level while applying L-Level to the $\overline{\text{RES}}$ pin. When the $\overline{\text{RES}}$ pin is set to H-Level again, the normal operation starts. The contents of the memories remain unaffected except the PC, I/O ports, registers which are initialized by the reset operation.

Since the ceramic resonator mode is used, the reset state must be held until oscillation is fully stabilized (10 ms after oscillation start) after the HOLD mode is released.

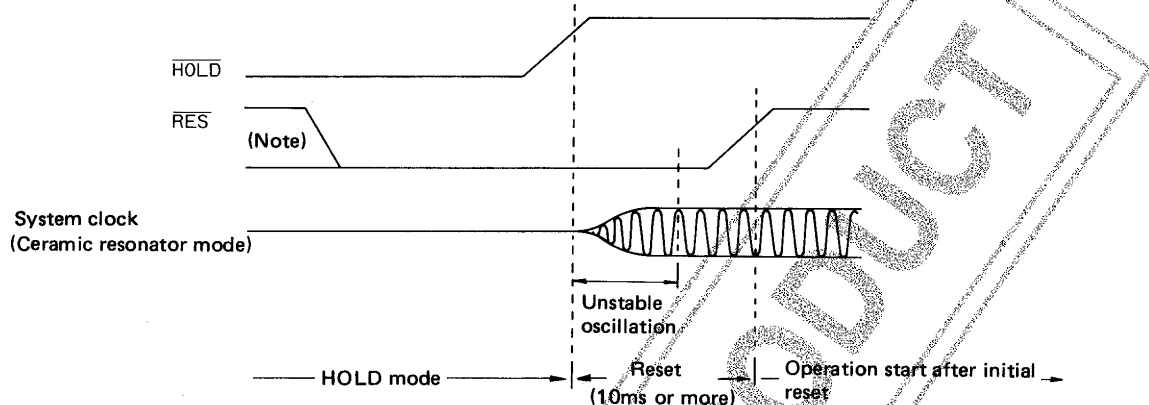


Fig. 4-3 HOLD mode release by reset

Note: With L-Level applied to the $\overline{\text{HOLD}}$ pin as shown above, the CPU is not reset even when the $\overline{\text{RES}}$ pin is set to L-Level. This is because the $\overline{\text{HOLD}}$ pin is given priority lest the CPU is reset unnecessarily when the capacitor or battery-used backup mode causes the CPU peripherals to operate unstably and the $\overline{\text{RES}}$ pin is set to L-Level. Be careful of the level of the $\overline{\text{HOLD}}$ pin and $\overline{\text{RES}}$ pin also at the initial reset mode when power is applied. When the $\overline{\text{HOLD}}$ pin is at L-Level, no reset occurs.

4-6. Proper cares in using standby function

When using the HOLD mode, an application circuit and program must be designed with the following in mind.

- (1) The supply voltage at the standby state must not be less than specified.
- (2) Input timing of each control signal ($\overline{\text{HOLD}}$, $\overline{\text{RES}}$, port A, INT, etc.) at the standby initiate/release state.
- (3) Release operation must not be overlapped at the time of execution of the HALT instruction.

4-7. Sample application where the standby function is used for power failure backup

Power failure backup is an application where power failure of the main power source is detected by the $\overline{\text{HOLD}}$ pin, etc. to cause the HOLD mode to be entered so that the current drain is minimized and a backup capacitor is used to retain the contents of the internal registers even during power failure.

4-7-1. Sample application circuit (ceramic resonator OSC)

Fig. 4-4 shows a ceramic resonator OSC-applied circuit where the standby function is used for power failure backup.


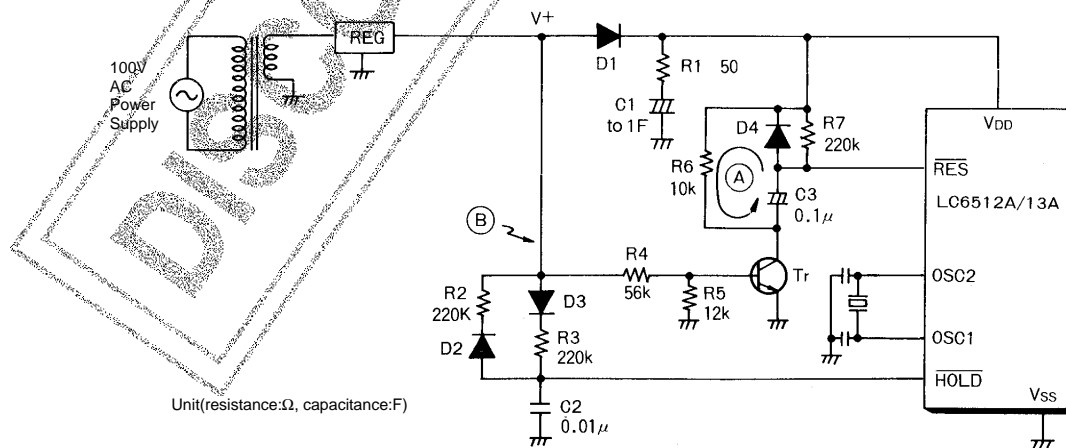


Fig. 4-4 Sample Application Circuit

4-7-2. Operating waveform

The operating waveform in the sample application circuit in Fig. 4-4 is shown below. The mode is roughly divided as follows:

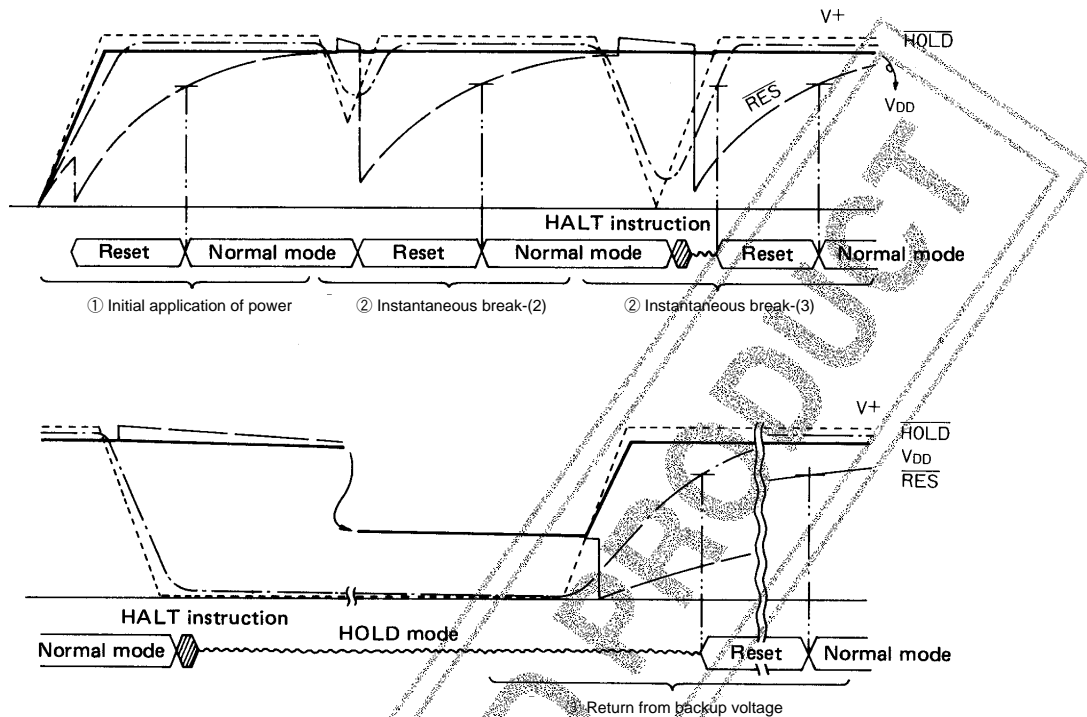

4-7-3. Operation of sample application circuit

- ① At the time of initial application of power
A reset occurs and the execution of the program starts at address 000H of the program counter (PC).
- ② At the time of instantaneous break
 - (1) At the time of very short instantaneous break
The execution of the program continues.
 - (2) At the time of instantaneous break being a little longer than (1) (When the $\overline{\text{RES}}$ input voltage meets V_{IL} and the $\overline{\text{HOLD}}$ input voltage does not meet V_{IL}).
A reset occurs during the execution of the program and the execution of the program starts at address 000H of the program counter (PC).
Since the $\overline{\text{HOLD}}$ request signal is not applied to the $\overline{\text{HOLD}}$ pin, the HOLD mode is not entered.
 - (3) At the time of long instantaneous break (When both of the $\overline{\text{RES}}$ input voltage and $\overline{\text{HOLD}}$ input voltage meet V_{IL}).
The $\overline{\text{HOLD}}$ request signal is applied to the $\overline{\text{HOLD}}$ pin and the HOLD mode is entered.
When $V+$ rises after instantaneous break, a reset occurs to release the HOLD mode and the execution of the program starts at address 000H of the program counter (PC).
- ③ At the time of return from backup voltage
A reset occurs and the execution of the program starts at address 000H of the program counter (PC).

4-7-4. Notes for circuit design

① How to fix C3, R6, C2, R2

Fix closed loop (A) discharge time constants C3, R6 and $\overline{\text{HOLD}}$ pin charge time constants C2, R2 so that closed loop (A) fully discharges before the $\overline{\text{HOLD}}$ input voltage gets lower than V_{IL} at the time of instantaneous break and the $\overline{\text{RES}}$ input voltage is sure to get lower than V_{IL} (a reset occurs) when V_+ rises after instantaneous break where the $\overline{\text{HOLD}}$ input voltage gets lower than V_{IL} .

② How to fix C3, R7

Fix $\overline{\text{RES}}$ pin charge time constants C3, R7 so that when power is applied initially or the $\overline{\text{HOLD}}$ mode is released the ceramic resonator OSC oscillates normally and the $\overline{\text{RES}}$ input voltage exceeds V_{IH} and the program starts running.

③ How to fix R4, R5

Fix Tr bias constants R4, R5 so that when V_+ rises after instantaneous break the $\overline{\text{RES}}$ input voltage gets lower than V_{IL} (brought to L-Level) before the $\overline{\text{HOLD}}$ input voltage exceeds V_{IH} (brought to H-Level).

④ How to fix C2, R3

Fix $\overline{\text{HOLD}}$ pin charge time constants C2, R3 so that when the $\overline{\text{HOLD}}$ mode is released from the backup mode the $\overline{\text{HOLD}}$ input voltage does not exceed V_{OH} (not brought to H-Level) until the $\overline{\text{RES}}$ input voltage gets lower than V_{IL} (brought to L-Level).

Fix C3, R7 and C2, R3 so that the time interval from the moment the $\overline{\text{HOLD}}$ input voltage exceeds V_{IH} until the moment the $\overline{\text{RES}}$ input voltage exceeds V_{IH} is longer than the ceramic resonator OSC stabilizing time.

⑤ When the load is heavy or the polling interval is long

Since C1 discharges largely, increase the capacity of C1 or separate (B) detection from V_+ and use a power supply or signal that rises faster than V_+ .

4-7-5. Notes for software design

When the $\overline{\text{HOLD}}$ request signal is detected, the $\overline{\text{HALT}}$ instruction is executed immediately. A concrete example is shown below.

(1) An interrupt is inhibited before polling the $\overline{\text{HOLD}}$ request pin ($\overline{\text{HOLD}}$ pin).

(2) Polling of the $\overline{\text{HOLD}}$ pin and the $\overline{\text{HALT}}$ instruction are programmed consecutively.

[Concrete example]

```

:
:
RCTL      3      ;EXTEN, TMEN ← 0 (External timer interrupt inhibit)
BP0       AAA    ;Polling of the  $\overline{\text{HOLD}}$  pin (If H-Level, a branch occurs to AAA.)
HALT      ;The  $\overline{\text{HOLD}}$  mode is entered.
:
:
AAA:
```

LC6512A, LC6513A

Appendix LC6500 Series Instruction Set (by Function)

Symbols	Meaning	M:	Memory	(), []:	Contents
AC :	Accumulator	M(DP):	Memory addressed by DP	← :	Transfer and direction
ACt:	Accumulator bit t	P(DPL):	Input/output port addressed by DPL	+	Addition
CF:	Carry flag	PC:	Program counter	-	Subtraction
CTL:	Control register	STACK:	Stack register	^:	AND
DP:	Data pointer	TM :	Timer	∨:	OR
E :	E register	TMF :	Timer (internal) interrupt request flag	⊖:	Exclusive OR
EXTF:	External interrupt request flag	At, Ha, La:	Working register		
Fn:	Flag bit n	ZF:	Zero flag		

Instruction	Mnemonic	Instruction code		Bytes	Cycles	Function	Description	Status flag affected	Remarks
		D ₇ D ₆ D ₅ D ₄	D ₃ D ₂ D ₁ D ₀						
Accumulator manipulation instructions	CLA	Clear AC	1 1 0 0	0 0 0 0	1	1	AC ← 0	ZF	*1
	CLC	Clear CF	1 1 1 0	0 0 0 1	1	1	CF ← 0	CF	
	STC	Set CF	1 1 1 1	0 0 0 1	1	1	CF ← 1	CF	
	CMA	Complement AC	1 1 1 0	1 0 1 1	1	1	AC ← (AC)	ZF	
	INC	Increment AC	0 0 0 0	1 1 1 0	1	1	AC ← (AC)+1	ZF CF	
	DEC	Decrement AC	0 0 0 0	1 1 1 1	1	1	AC ← (AC)-1	ZF CF	
	RAL	Rotate AC left through CF	0 0 0 0	0 0 0 1	1	1	AC ₀ ← (CF), AC _{n+1} ← (AC _n), CF ← (AC ₃)	ZF CF	
	TAE	Transfer AC to E	0 0 0 0	0 0 1 1	1	1	E ← (AC)		
	XAE	Exchange AC with E	0 0 0 0	1 1 0 1	1	1	(AC) ↔ (E)		
Memory manipulation instructions	INM	Increment M	0 0 1 0	1 1 1 0	1	1	M(DP) ← [M(DP)]+1	ZF CF	
	DEM	Decrement M	0 0 1 0	1 1 1 1	1	1	M(DP) ← [M(DP)]-1	ZF CF	
	SMB bit	Set M data bit	0 0 0 0	10B ₁ B ₀	1	1	M(DP) ← B ₁ (B ₀)-1		
	RMB bit	Reset M data bit	0 0 1 0	10B ₁ B ₀	1	1	M(DP) ← B ₁ (B ₀)-0	ZF	
Operation/comparison instructions	AD	Add M to AC	0 1 1 0	0 0 0 0	1	1	AC ← (AC)+[M(DP)]	ZF CF	
	ADC	Add M to AC with CF	0 0 1 0	0 0 0 0	1	1	AC ← (AC)+[M(DP)]+(CF)	ZF CF	
	DAA	Decimal adjust AC in addition	1 1 1 0	0 1 1 0	1	1	AC ← (AC)+6	ZF	
	DAS	Decimal adjust AC in Subtraction	1 1 1 0	1 0 1 0	1	1	AC ← (AC)+10	ZF	
	EXL	Exclusive or M to AC	1 1 1 1	0 1 0 1	1	1	AC ← (AC) ⊕ [M(DP)]	ZF	
	AND	And M to AC	1 1 1 0	0 1 1 1	1	1	AC ← (AC) ∧ [M(DP)]	ZF	
	OR	Or M to AC	1 1 1 0	0 1 0 1	1	1	AC ← (AC) ∨ [M(DP)]	ZF	
	CM	Compare AC with M	1 1 1 1	1 0 1 1	1	1	[M(DP)]-(AC)+1	ZF CF	
	CI data	Compare AC with immediate data	0 0 1 0 0 1 0 0	1 1 0 0 1 3 2 1 1 0	2	2	1 3 2 1 1 0 + (AC)+1	ZF CF	
	CLI data	Compare DPL with immediate data	0 0 1 0 0 1 0 1	1 1 0 0 1 3 2 1 1 0	2	2	(DPL) ⊖ 1 3 2 1 1 0	ZF	
Load/store instructions	LI data	Load AC with immediate data	1 1 0 0	1 3 2 1 1 0	1	1	AC ← 1 3 2 1 1 0	ZF	*1
	S	Store AC to M	0 0 0 0	0 0 1 0	1	1	M(DP) ← (AC)		
	L	Load AC from M	0 0 1 0	0 0 0 1	1	1	AC ← [M(DP)]	ZF	
	XM data	Exchange AC with M then modify DPH with immediate data	1 0 1 0	00M ₂ M ₁ M ₀	1	2	(AC) ↔ [M(DP)] DPH ← (DPH) ⊕ • 00M ₂ M ₁ M ₀	ZF	The ZF is set/reset according to the result of (DPH) ⊕ 00M ₂ M ₁ M ₀ .
	X	Exchange AC with M	1 0 1 0	0 0 0 0	1	2	(AC) ↔ [M(DP)]	ZF	The ZF is set/reset according to the DPH contents at the time of instruction execution.
	XI	Exchange AC with M. then increment DPL	1 1 1 1	1 1 1 0	1	2	(AC) ↔ [M(DP)] DPL ← (DPL)+1	ZF	The ZF is set/reset according to the result of (DPL)+1.
	XD	Exchange AC with M. then decrement DPL	1 1 1 1	1 1 1 1	1	2	(AC) ↔ [M(DP)] DPL ← (DPL)-1	ZF	The ZF is set/reset according to the result of (DPL)-1.
	RTBL	Read table data from program ROM	0 1 1 0	0 0 1 1	1	2	AC ← ROM (PCh.E. AC)		

LC6512A, LC6513A

Instruction	Mnemonic		Instruction code		Bytes	Cycles	Function	Description	Status flag affected	Remarks
			D ₇ D ₆ D ₅ D ₄	D ₃ D ₂ D ₁ D ₀						
Data pointer manipulation instructions	LDZ data	Load DPH With Zero and DPL with immediate data respectively	1 0 0 0	I ₃ I ₂ I ₁ I ₀	1	1	DP _H ← 0 DPL ← I ₃ I ₂ I ₁ I ₀	The DP _H and DPL are loaded with 0 and immediate data I ₃ I ₂ I ₁ I ₀ respectively.		
	LHI data	Load DPH with immediate data	0 1 0 0	I ₃ I ₂ I ₁ I ₀	1	1	DP _H ← I ₃ I ₂ I ₁ I ₀	The DP _H is loaded with immediate data I ₃ I ₂ I ₁ I ₀ .		
	IND	Increment DPL	1 1 1 0	1 1 1 0	1	1	DPL ← (DPL) + 1	The DPL contents are incremented +1.	ZF	
	DED	Decrement DPL	1 1 1 0	1 1 1 1	1	1	DPL ← (DPL) - 1	The DPL contents are decremented -1.	ZF	
	TAL	Transfer AC to DPL	1 1 1 1	0 1 1 1	1	1	DPL ← (AC)	The AC contents are transferred to the DPL.		
	TLA	Transfer DPL to AC	1 1 1 0	1 0 0 1	1	1	AC ← (DPL)	The DPL contents are transferred to the AC.	ZF	
	XAH	Exchange AC with DPH	0 0 1 0	0 0 1 1	1	1	(AC) ↔ (DP _H)	The AC contents and the DPH contents are exchanged.		
Working register manipulation instructions	XAt XA0 XA1 XA2 XA3	Exchange AC with working register At	1 1 1 0 1 1 1 0 1 1 1 0 1 1 1 0	t ₁ t ₀ 0 0 0 0 0 1 0 0 1 0 0 0 1 1 0 0	1 1 1 1	1 1 1 1	(AC) ↔ (A0) (AC) ↔ (A1) (AC) ↔ (A2) (AC) ↔ (A3)	The AC contents and the contents of working register A ₀ , A ₁ , A ₂ , or A ₃ specified by t ₁ t ₀ are exchanged.		
	XHa XH0 XH1	Exchange DPH with working register Ha	1 1 1 1 1 1 1 1	a 1 0 0 0 1 1 0 0	1 1	1 1	(DP _H) ↔ (H0) (DP _H) ↔ (H1)	The DPH contents and the contents of working register H ₀ or H ₁ specified by a are exchanged.		
	XLa XL0 XL1	Exchange DPL with working register La	1 1 1 1 1 1 1 1	a 0 0 0 0 0 1 0 0	1 1	1 1	(DPL) ↔ (L0) (DPL) ↔ (L1)	The DPL contents and the contents of working register L ₀ or L ₁ specified by a are exchanged.		
	SFB flag	Set flag bit	0 1 0 1	B ₃ B ₂ B ₁ B ₀	1	1	F _n ← 1	A flag specified by B ₃ B ₂ B ₁ B ₀ is set.		
	RFB flag	Reset flag bit	0 0 0 1	B ₃ B ₂ B ₁ B ₀	1	1	F _n ← 0	A flag specified by B ₃ B ₂ B ₁ B ₀ is reset.	ZF	The flags are divided into 4 groups of F0 to F3, F4 to F7, F8 to F11, F12 to F15. The ZF is set/reset according to the 4 bits including a single bit specified by immediate data B3B2B1B0.
Flag manipulation instructions	JMP addr	Jump in the current bank	0 1 1 0 P ₇ P ₆ P ₅ P ₄	1 P ₁₀ P ₉ P ₈ P ₃ P ₂ P ₁ P ₀	2	2	PC ← PC ₁₁ (or PC ₁₁) P ₁₀ P ₉ P ₈ P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀	A jump to an address specified by the PC ₁₁ (or PC ₁₁) and immediate data P ₁₀ to P ₀ occurs.		
	JPEA	Jump in the current page modified by E and AC	1 1 1 1	1 0 1 0	1	1	PC ₇ to 0 ← (E, AC)	A jump to an address specified by the contents of the PC whose low-order 8 bits are replaced with the E and AC contents occurs.		
	CZP addr	Call subroutine in the Zero Page	1 0 1 1	P ₃ P ₂ P ₁ P ₀	1	1	STACK ← (PC) + 1 PC ₁₁ to 6, PC ₁₁ to 0 ← 0 PC ₅ to 2 ← P ₃ P ₂ P ₁ P ₀	A subroutine in page 0 of bank 0 is called.		
	CAL addr	Call subroutine in the zero bank	1 0 1 0	1 P ₁₀ P ₉ P ₈ P ₇ P ₆ P ₅ P ₄	2	2	STACK ← (PC) + 2 PC ₁₁ to 0 ← OP ₁₀ P ₉ P ₈ P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀	A subroutine in bank 0 is called.		
	RT	Return from subroutine	0 1 1 0	0 0 1 0	1	1	PC ← (STACK)	A return from a subroutine occurs.		
	RTI	Return from interrupt routine	0 0 1 0	0 0 1 0	1	1	PC ← (STACK) CF ZF ← CSF.ZSF	A return from an Interrupt servicing routine occurs.	ZF CF	
Branch instructions	BAt addr	Branch on AC bit	0 1 1 1 P ₇ P ₆ P ₅ P ₄	0 0 t ₁ t ₀ P ₃ P ₂ P ₁ P ₀	2	2	PC ₇ to 0 ← P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀ If AC _t =1	If a single bit of the AC specified by immediate data t ₁ t ₀ is 1, a branch to an address specified by immediate data P ₇ to P ₀ within the current page occurs.		Mnemonic is BA0 to BA3 according to the value of t.
	BNAt addr	Branch on no AC bit	0 0 1 1 P ₇ P ₆ P ₅ P ₄	0 0 t ₁ t ₀ P ₃ P ₂ P ₁ P ₀	2	2	PC ₇ to 0 ← P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀ If AC _t =0	If a single bit of the AC specified by immediate data t ₁ t ₀ is 0, a branch to an address specified by immediate data P ₇ to P ₀ within the current page occurs.		Mnemonic is BNA0 to BNA3 according to the value of t.
	BMt addr	Branch on M bit	0 1 1 1 P ₇ P ₆ P ₅ P ₄	0 1 t ₁ t ₀ P ₃ P ₂ P ₁ P ₀	2	2	PC ₇ to 0 ← P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀ If [M(DP.t ₁ t ₀)] = 1	If a single bit of the M(DP) specified by immediate data t ₁ t ₀ is 1, a branch to an address specified by immediate data P ₇ to P ₀ within the current page occurs.		Mnemonic is BM0 to BM3 according to the value of t.
	BNMt addr	Branch on no M bit	0 0 1 1 P ₇ P ₆ P ₅ P ₄	0 1 t ₁ t ₀ P ₃ P ₂ P ₁ P ₀	2	2	PC ₇ to 0 ← P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀ If [M(DP.t ₁ t ₀)] = 0	If a single bit of the M(DP) specified by immediate data t ₁ t ₀ is 0, a branch to an address specified by immediate data P ₇ to P ₀ within the current page occurs.		Mnemonic is BNM0 to BNM3 according to the value of t.
	BPt addr	Branch on Port bit	0 1 1 1 P ₇ P ₆ P ₅ P ₄	1 0 t ₁ t ₀ P ₃ P ₂ P ₁ P ₀	2	2	PC ₇ to 0 ← P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀ If [P(DP.L.t ₁ t ₀)] = 1	If a single bit of port P(DPL) specified by immediate data t ₁ t ₀ is 1, a branch to an address specified by immediate data P ₇ to P ₀ within the current page occurs.		Mnemonic is BP0 to BP3 according to the value of t.
	BNPt addr	Branch on no Port bit	0 0 1 1 P ₇ P ₆ P ₅ P ₄	1 0 t ₁ t ₀ P ₃ P ₂ P ₁ P ₀	2	2	PC ₇ to 0 ← P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀ If [P(DP.L.t ₁ t ₀)] = 0	If a single bit of port P(DPL) specified by immediate data t ₁ t ₀ is 0, a branch to an address specified by immediate data P ₇ to P ₀ within the current page occurs.		Mnemonic is BNP0 to BNP3 according to the value of t.
	BTTM addr	Branch on timer	0 1 1 1 P ₇ P ₆ P ₅ P ₄	1 1 0 0 P ₃ P ₂ P ₁ P ₀	2	2	PC ₇ to 0 ← P ₇ P ₆ P ₅ P ₄ P ₃ P ₂ P ₁ P ₀ If TMF = 1 then TMF ← 0	If the TMF is 1, a branch to an address specified by immediate data P ₇ to P ₀ within the current page occurs. The TMF is reset.	TMF	

LC6512A, LC6513A

Instruction	Mnemonic		Instruction code		Bytes	Cycles	Function	Description	Status flag affected	Remarks
			D7D6D5D4	D3D2D1D0						
Branch instructions	BNTM addr	Branch on no timer	0 0 1 1 P7P6P5P4	1 1 0 0 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If TMF=0 then TMF←0	If the TMF is 0, a branch to an address specified by immediate data P7 to P0 within the current page occurs. The TMF is reset.	TMF	
	BI addr	Branch on interrupt	0 1 1 1 P7P6P5P4	1 1 0 1 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If EXTF=1 then EXTF←0	If the EXTF is 1, a branch to an address specified by immediate data P7 to P0 within the current page occurs. The EXTF is reset.	EXTF	
	BNI addr	Branch on no Interrupt	0 0 1 1 P7P6P5P4	1 1 0 1 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If EXTF=0 then EXTF←0	If the EXTF is 0, a branch to an address specified by immediate data P7 to P0 within the current page occurs. The EXTF is reset.	EXTF	
	BC addr	Branch on CF	0 1 1 1 P7P6P5P4	1 1 1 1 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If CF=1	If the CF is 1, a branch to an address specified by immediate data P7 to P0 within the current page occurs.		
	BNC addr	Branch on no CF	0 0 1 1 P7P6P5P4	1 1 1 1 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If CF=0	If the CF is 0, a branch to an address specified by immediate data P7 to P0 within the current page occurs.		
	BZ addr	Branch on ZF	0 1 1 1 P7P6P5P4	1 1 1 0 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If ZF=1	If the ZF is 1, a branch to an address specified by immediate data P7 to P0 within the current page occurs.		
	BNZ addr	Branch on no ZF	0 0 1 1 P7P6P5P4	1 1 1 0 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If ZF=0	If the ZF is 0, a branch to an address specified by immediate data P7 to P0 within the current page occurs.		
	BFn addr	Branch on flag bit	1 1 0 1 P7P6P5P4	n3n2n1n0 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If Fn=1	If a flag bit of the 16 flags specified by immediate data n3n2n1n0 is 1, a branch to an address specified by immediate data P7 to P0 within the current page occurs.		Mnemonic is BFO to BF15 according to the value of n.
BNFn addr	Branch on no flag bit	1 0 0 1 P7P6P5P4	n3n2n1n0 P3P2P1P0	2	2	PC7 to 0←P7P6P5P4 P3P2P1P0 If Fn=0	If a flag bit of the 16 flags specified by immediate data n3n2n1n0 is 1, a branch to an address specified by immediate data P7 to P0 within the current page occurs.		Mnemonic is BNFO to BNF15 according to the value of n.	
Input/Output instructions	IP	Input port to AC	0 0 0 0	1 1 0 0	1	1	AC←[P(DPL)]	The contents of port P(DPL) are inputted to the AC.	ZF	
	OP	Output AC to port	0 1 1 0	0 0 0 1	1	1	P(DPL)←(AC)	The AC contents are outputted to port P(DPL)		
	SPB bit	Set port bit	0 0 0 0	0 1 B1B0	1	2	P(DPL B1B0)←1	Immediate data B1B0- specified one bit in port p(DPL) is set.		Mnemonic is BNFO to BNF15 according to the value of n.
	RPB bit	Reset port bit	0 0 1 0	0 1 B1B0	1	2	P(DPL B1B0)←0	Immediate data B1B0- specified one bit in port p(DPL) is reset.	ZF	When this instruction is executed, the E register contents are destroyed.
Other instructions	SCTL bit	Set control register bit(S)	0 0 1 0 1 0 0 0	1 1 0 0 B3B2B1B0	2	2	CTL←(CTL)∨ B3B2B1B0	Immediate data B3B2B1B0-specified bits in the control register are set.		
	RCTL bit	Reset control register bit(S)	0 0 1 0 1 0 0 1	1 1 0 0 B3B2B1B0	2	2	CTL←(CTL)∧ B3B2B1B0	Immediate data B3B2B1B0-specified bits in the control register are reset.	ZF	
	WTTM	Write timer	1 1 1 1	1 0 0 1	1	1	TM←(E).(AC) TMF←0	The E and AC contents are loaded in the timer. The TMF reset.	TMF	
	HALT	Halt	1 1 1 1	0 1 1 0	1	1	Halt	All operations stop.		
	NOP	No operation	0 0 0 0	0 0 0 0	1	1	No operation	No operation is performed, but 1 machine cycle is consumed.		

*1 If the LI instruction or CLA instruction is used consecutively in such a manner as LI, LI, LI,....., or CLA, CLA, CLA,, the first LI instruction or CLA instruction only is effective and the following LI instructions or CLA instructions are changed to the NOP instructions.

LC6500 Series Instruction Map

H L		0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F		
0		NOP		RAI	S	TAE		SPB				SMB				IP	XAE	INC	DEC
1		RFB																	
2		ADC		L	RTI	XAH	RPB		RMB				RCTL-CLI SCTL-CL		INM		DEM		
3				BNA _t				BNM _t		BNP _t				BNTM		BNI	BNZ	BNC	
4		LHI																	
5		SFB																	
6		AD	OP	RT	RTBL		JMP												
7		BA _t				BM _t		BP _t				BTM		BI	BZ	BC			
8		LDZ																	
9		BNF _n																	
A		X					XM		CAL										
B		CZP																	
C		CLA		LI															
D		BF _n																	
E		XA0	CLC			XA1	OR	DAA	AND	XA2	TLA	DAS	CMA	XA3	IND		DED		
F		XL0	STC			XL1	EXL	HALT	TAL	XH0	WTTM	JPEA	CM	XH1	XI	XD			
4		CI																	
5		CLI																	
8		SCTL																	
9		RCTL																	

1st byte


2nd byte

1-cycle instruction

1-byte, 2-cycle instruction

2-byte instruction

LC6500 Series Programming Model

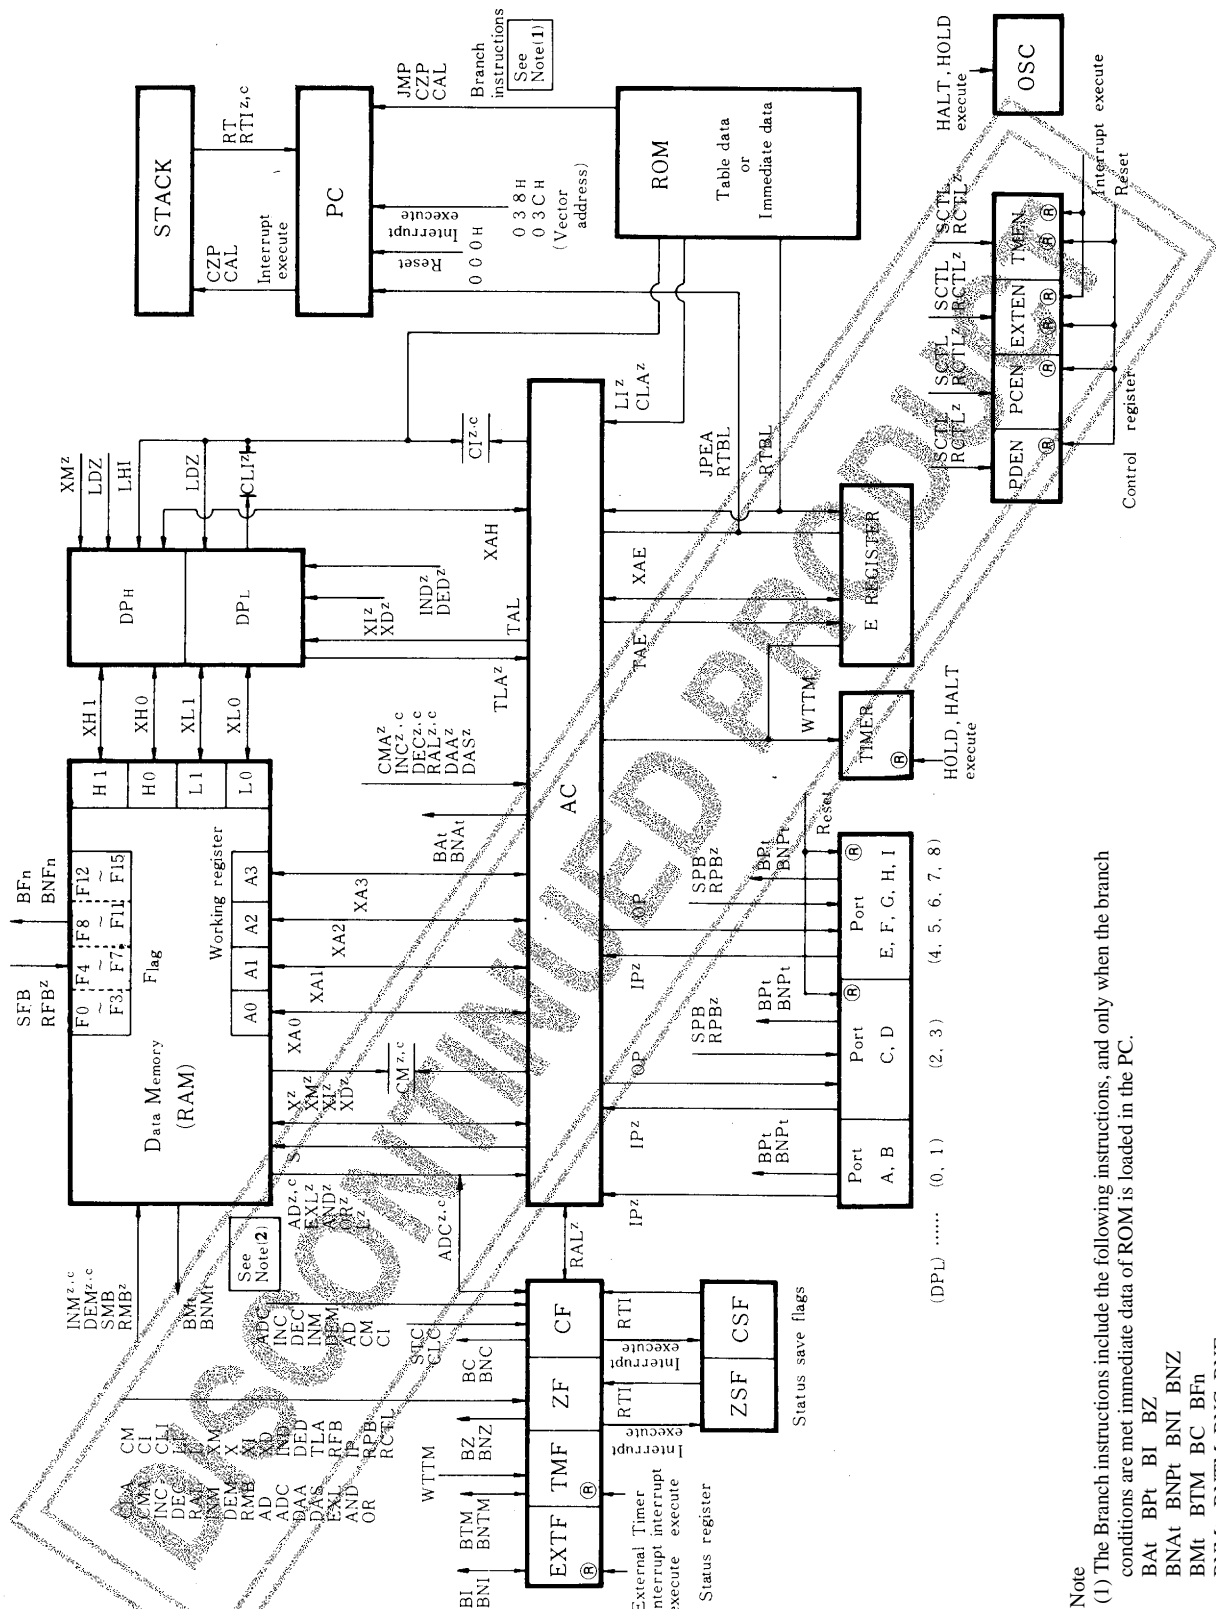


Note

(1) The Branch instructions include the following instructions, and only when the branch conditions are met immediate data of ROM is loaded in the PC.

- BAI BPI BI BZ
- BNAt BNpI BNI BNZ
- BMt BTM BC BFn
- BNMt BNTM BNC BNFn

(2) ACZC-----Suffix Z, C represent that the ZF, CF flags of the status register are affected.

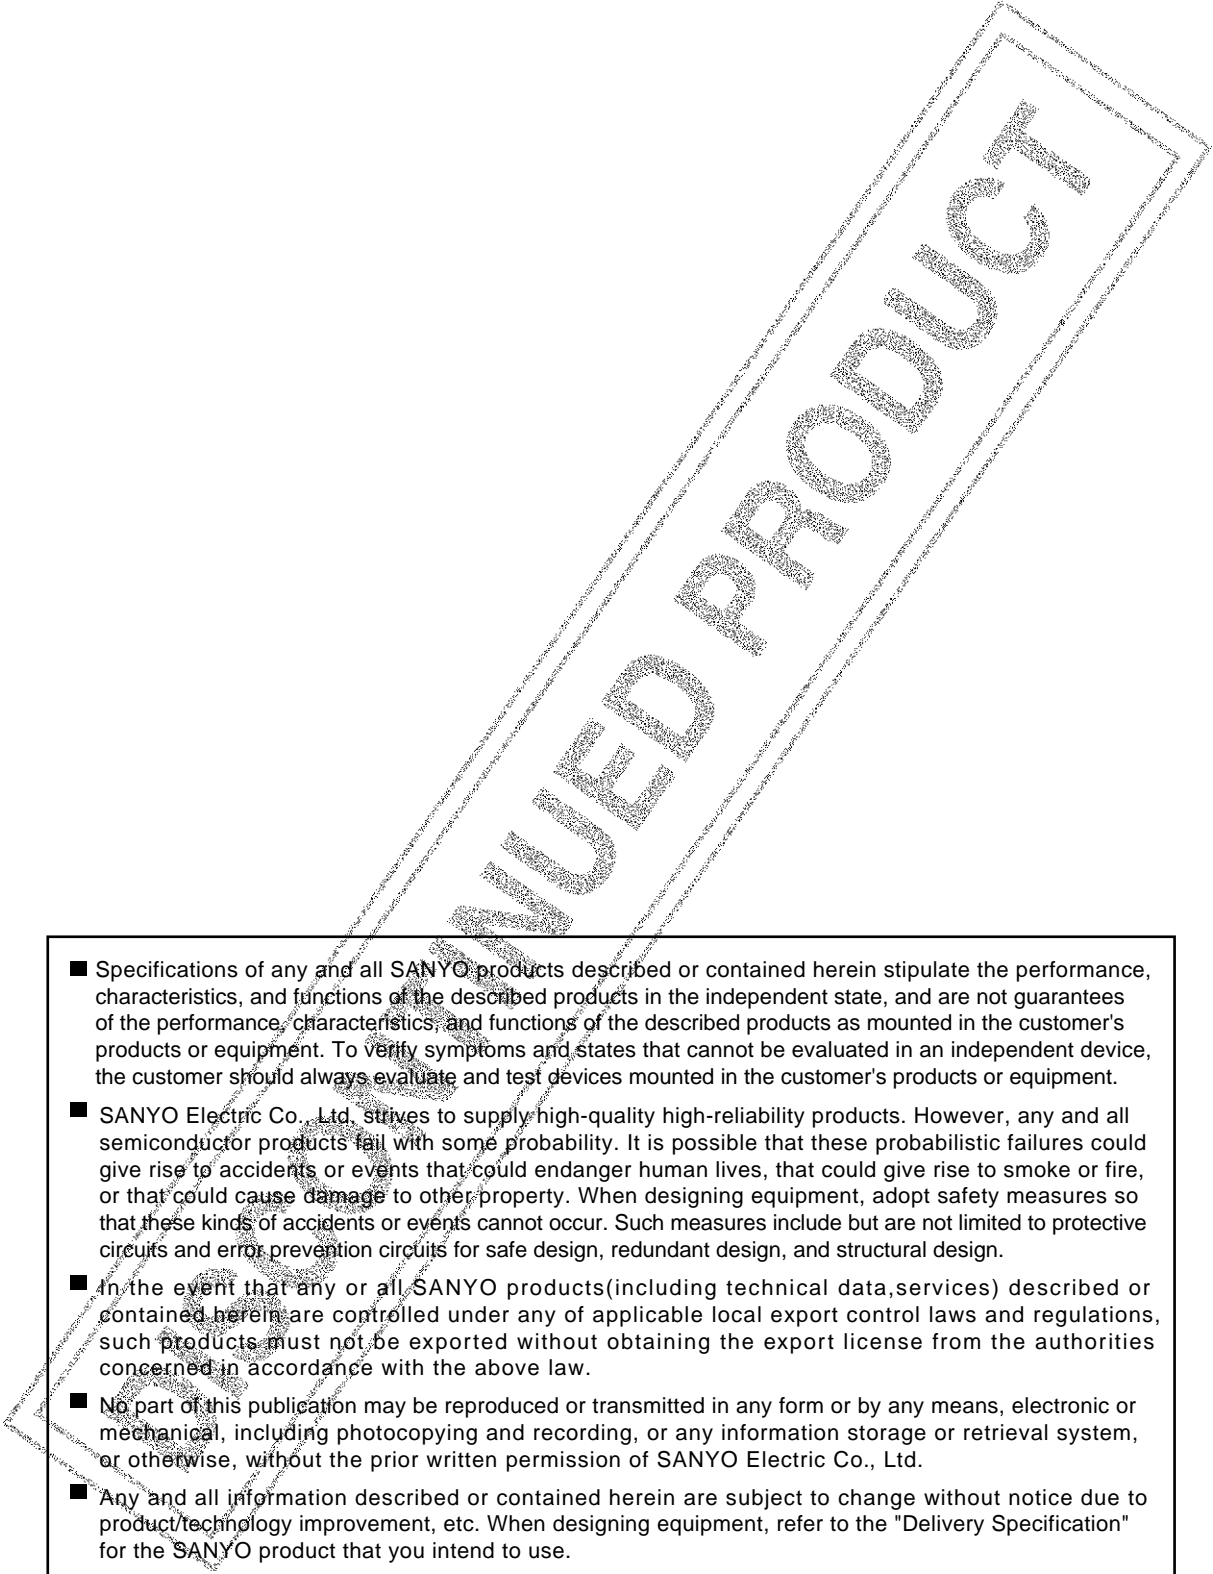- 
- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
 - SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
 - In the event that any or all SANYO products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
 - No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
 - Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
 - Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of October, 2001. Specifications and information herein are subject to change without notice.