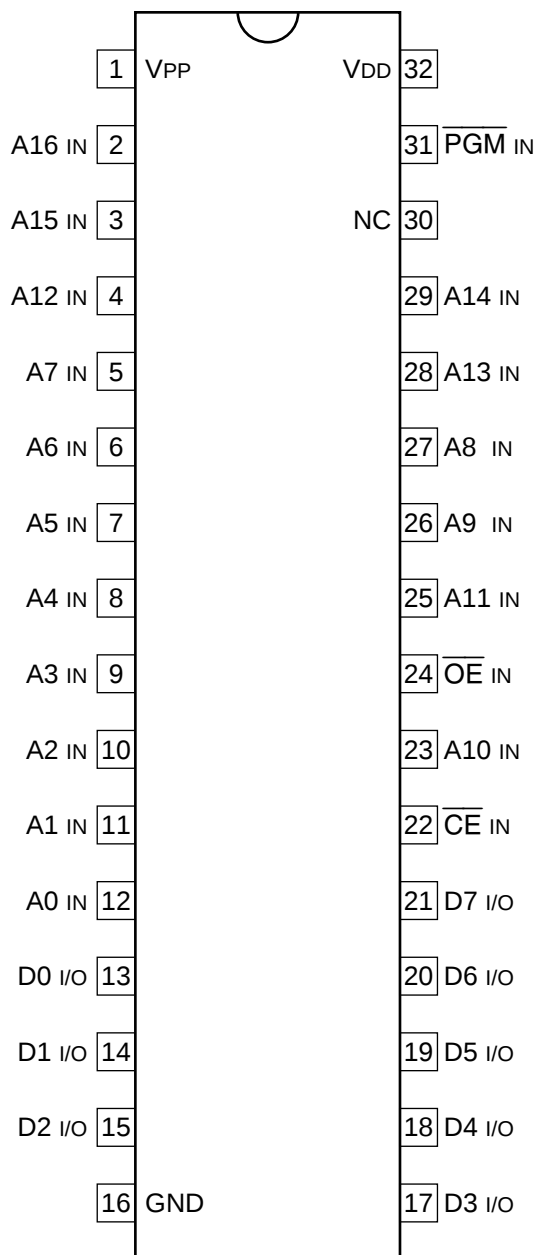


1M (131,072 × 8)-BIT UV EPROM

—TOP VIEW—

**INPUTS**

A0 - A16 : ADDRESS

 $\overline{\text{CE}}$: CHIP ENABLE $\overline{\text{OE}}$: OUTPUT ENABLE

PGM : PROGRAM

INPUTS/OUTPUTS

D0 - D7 : DATA

1 : HIGH LEVEL
 0 : LOW LEVEL
 X : DON'T CARE
 V_H : 12.0 V $\pm$ 0.5 V
 HI-Z : HIGH IMPEDANCE

MODE	CE	OE	A9	PGM	VPP	OUTPUT
READ	0	0	X	X	X	DOUT
OUTPUT DISABLE	0	1	X	X	X	HI-Z
STANDBY	1	X	X	X	X	HI-Z
PROGRAM	0	1	X	0	VPP	DIN
PROGRAM VERIFY	0	0	X	1	VPP	DOUT
PROGRAM INHIBIT	1	X	X	X	VPP	HI-Z
ELECTRONIC SIGNATURE	0	0	V_H	1	VPP	CODE

