
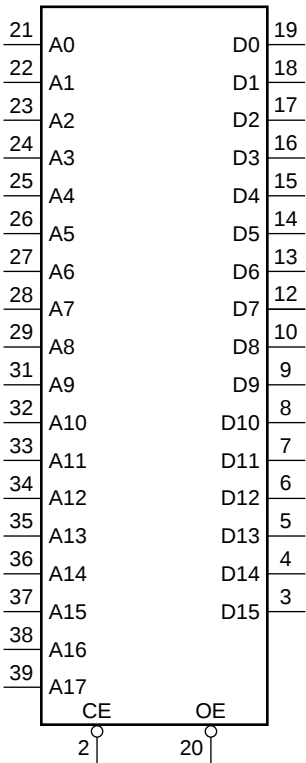


C-MOS 4 M (256 K × 16)-BIT UV EPROM

—TOP VIEW—

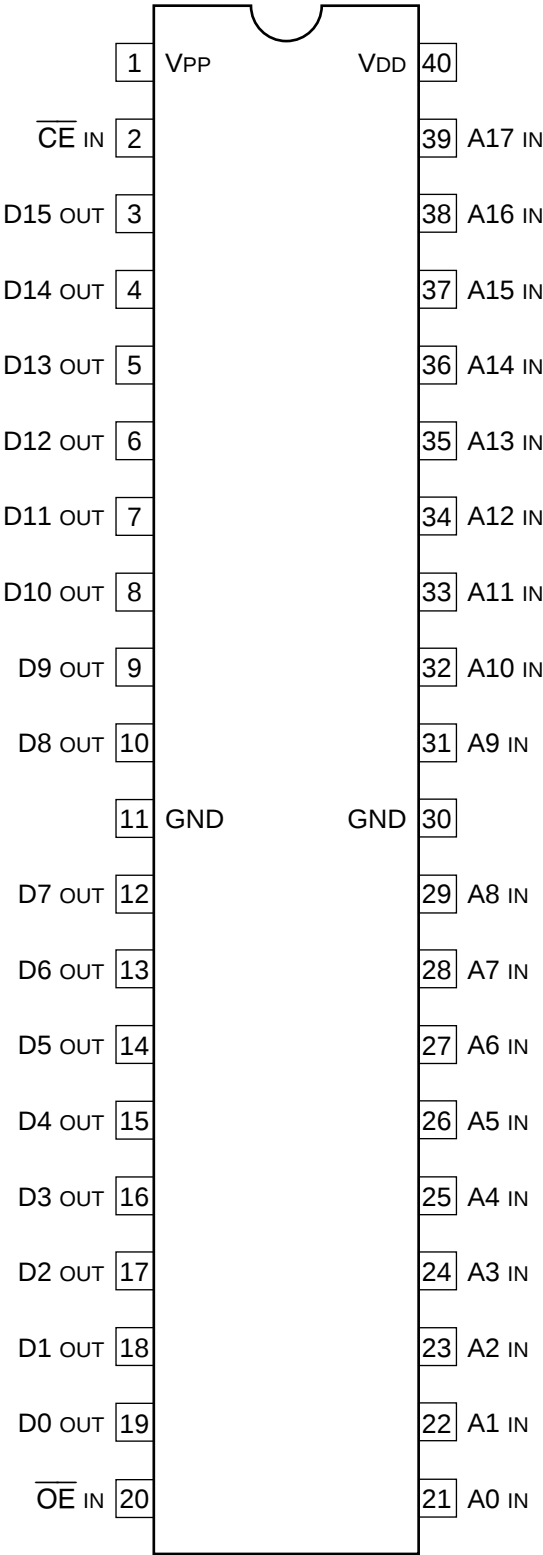

INPUT
A0 - A17 : ADDRESS
CE : CHIP ENABLE
OE : OUTPUT ENABLE

OUTPUT
D0 - D15 : DATA

CE	OE	A9	VPP	OUTPUT	FUNCTION
0	0	x	x	DOUT	READ
0	1	x	x	HI-Z	OUTPUT DISABLE
0	1	x	VPP	DIN	PROGRAM
1	0	x	VPP	DOUT	VERIFY
1	1	x	VPP	HI-Z	PROGRAM INHIBIT
1	x	x	x	HI-Z	STANDBY
0	0	VH	VDD	CODE	ELECTRONIC SIGNATURE

1 : HIGH LEVEL

0 : LOW LEVEL

x ; DON'T CARE

HI-Z : HIGH IMPEDANCE

VH : 12.0 ± 0.5 V