

Triacs

logic level

BT131W series

GENERAL DESCRIPTION

Passivated, sensitive gate triacs in a plastic envelope suitable for surface mounting, intended for use in general purpose bidirectional switching and phase control applications. These devices are intended to be interfaced directly to microcontrollers, logic integrated circuits and other low power gate trigger circuits.


QUICK REFERENCE DATA

SYMBOL	PARAMETER	MAX.	MAX.	UNIT
V_{DRM}	BT131W- Repetitive peak off-state voltages	500 500	600 600	V
$I_{\text{T(RMS)}}$	RMS on-state current	1	1	A
I_{TSM}	Non-repetitive peak on-state current	10	10	A


PINNING - SOT223

PIN	DESCRIPTION
1	main terminal 1
2	main terminal 2
3	gate
tab	main terminal 2

PIN CONFIGURATION

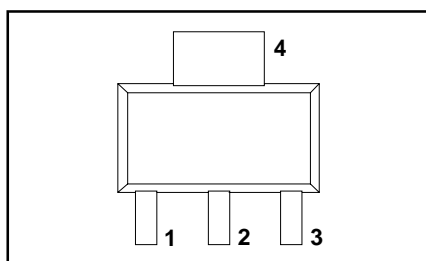

SYMBOL

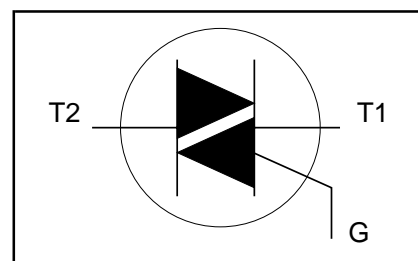

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.		UNIT
V_{DRM}	Repetitive peak off-state voltages		-	-500 500 ¹	-600 600 ¹	V
$I_{\text{T(RMS)}}$	RMS on-state current	full sine wave; $T_{\text{lead}} \leq 108^\circ\text{C}$	-	1		A
I_{TSM}	Non-repetitive peak on-state current	full sine wave; $T_{\text{j}} = 25^\circ\text{C}$ prior to surge	-	10		A
		$t = 20\text{ ms}$	-	11		A
		$t = 16.7\text{ ms}$	-	0.5		A ² s
I^2t	I^2t for fusing	$t = 10\text{ ms}$	-	50		A/μs
di_{T}/dt	Repetitive rate of rise of on-state current after triggering	$I_{\text{TM}} = 1.5\text{ A}$; $I_{\text{G}} = 0.2\text{ A}$; $di_{\text{G}}/dt = 0.2\text{ A}/\mu\text{s}$	-	50		A/μs
		T2+ G+	-	50		A/μs
		T2+ G-	-	50		A/μs
		T2- G-	-	10		A/μs
		T2- G+	-	2		A
I_{GM}	Peak gate current		-	5		V
V_{GM}	Peak gate voltage		-	5		W
P_{GM}	Peak gate power		-	0.5		W
$P_{\text{G(AV)}}$	Average gate power	over any 20 ms period	-	150		°C
T_{stg}	Storage temperature		-40	125		°C
T_{j}	Operating junction temperature		-			

¹ Although not recommended, off-state voltages up to 800V may be applied without damage, but the triac may switch to the on-state. The rate of rise of current should not exceed 3 A/μs.

Triacs

logic level

BT131W series

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th\ j-sp}$	Thermal resistance junction to solder point	full or half cycle	-	-	15	K/W
$R_{th\ j-a}$	Thermal resistance junction to ambient	pcb mounted; minimum footprint	-	-	-	K/W
		pcb mounted; pad area as in fig:14	-	156	-	K/W
			-	70	-	K/W

STATIC CHARACTERISTICS

$T_j = 25\ ^\circ\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{GT}	Gate trigger current	$V_D = 12\ \text{V}$; $I_T = 0.1\ \text{A}$	-	-	-	-
		T2+ G+	-	0.4	3	mA
		T2+ G-	-	1.3	3	mA
		T2- G-	-	1.4	3	mA
		T2- G+	-	3.8	7	mA
I_L	Latching current	$V_D = 12\ \text{V}$; $I_{GT} = 0.1\ \text{A}$	-	-	-	-
		T2+ G+	-	1.2	5	mA
		T2+ G-	-	4.0	8	mA
		T2- G-	-	1.0	5	mA
		T2- G+	-	2.5	8	mA
I_H	Holding current	$V_D = 12\ \text{V}$; $I_{GT} = 0.1\ \text{A}$	-	1.3	5	mA
V_T	On-state voltage	$I_T = 2\ \text{A}$	-	1.2	1.5	V
V_{GT}	Gate trigger voltage	$V_D = 12\ \text{V}$; $I_T = 0.1\ \text{A}$	-	0.7	1.5	V
		$V_D = 400\ \text{V}$; $I_T = 0.1\ \text{A}$; $T_j = 125\ ^\circ\text{C}$	0.2	0.3	-	V
I_D	Off-state leakage current	$V_D = V_{DRM(max)}$; $T_j = 125\ ^\circ\text{C}$	-	0.1	0.5	mA

DYNAMIC CHARACTERISTICS







$T_j = 25\ ^\circ\text{C}$ unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
dV_D/dt	Critical rate of rise of off-state voltage	$V_{DM} = 67\% V_{DRM(max)}$; $T_j = 125\ ^\circ\text{C}$; exponential waveform; $R_{GK} = 1\ \text{k}\Omega$	5	15	-	V/ μs
t_{gt}	Gate controlled turn-on time	$I_{TM} = 1.5\ \text{A}$; $V_D = V_{DRM(max)}$; $I_G = 0.1\ \text{A}$; $di_G/dt = 5\ \text{A}/\mu\text{s}$	-	2	-	μs

Triacs







logic level

BT131W series

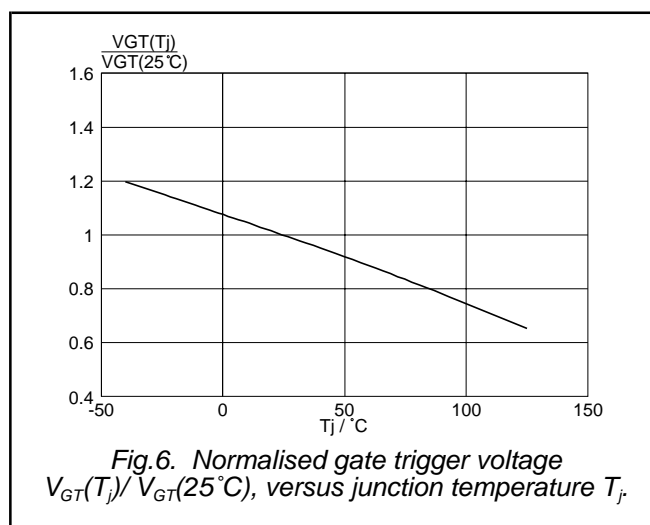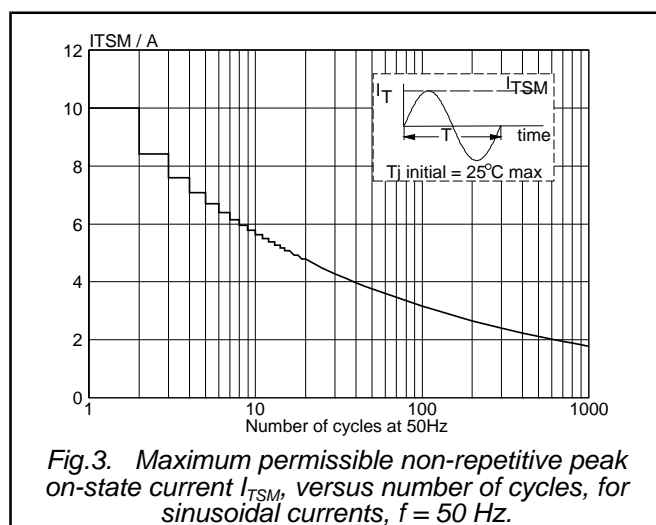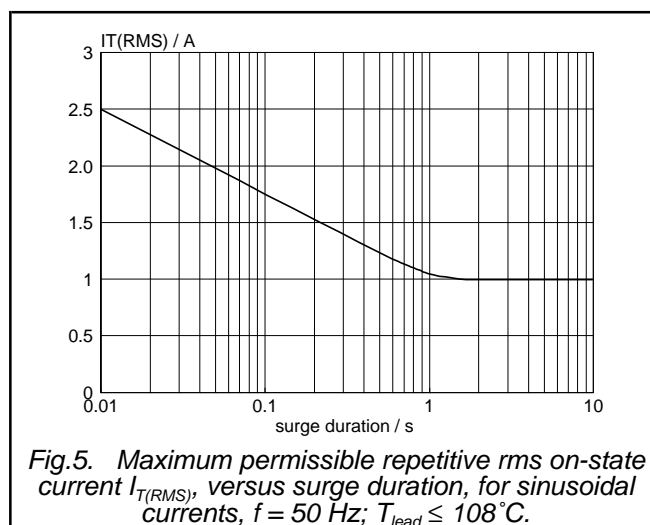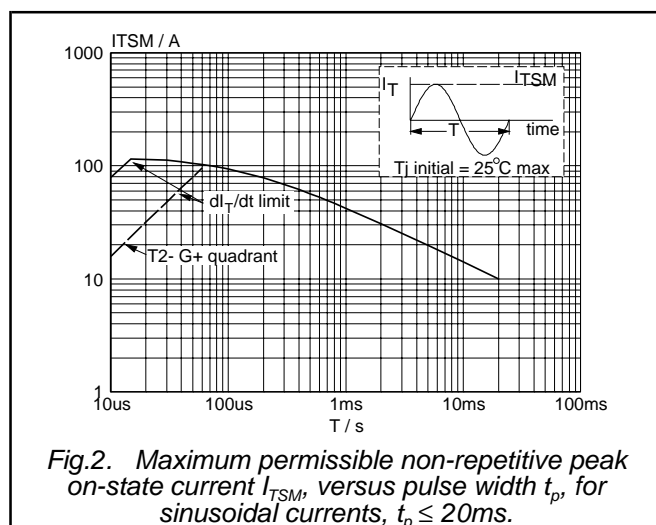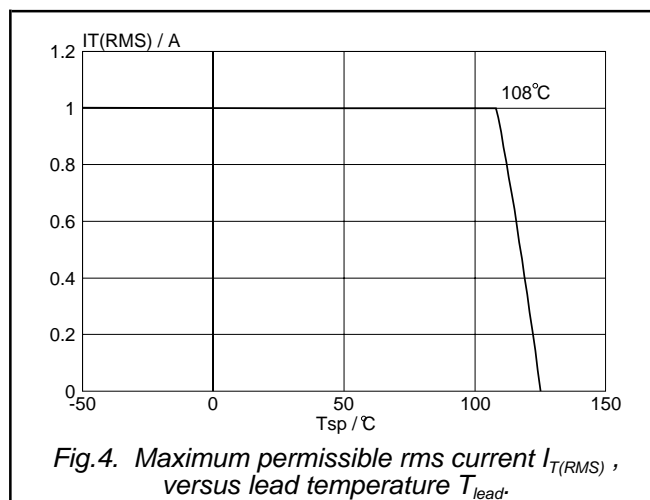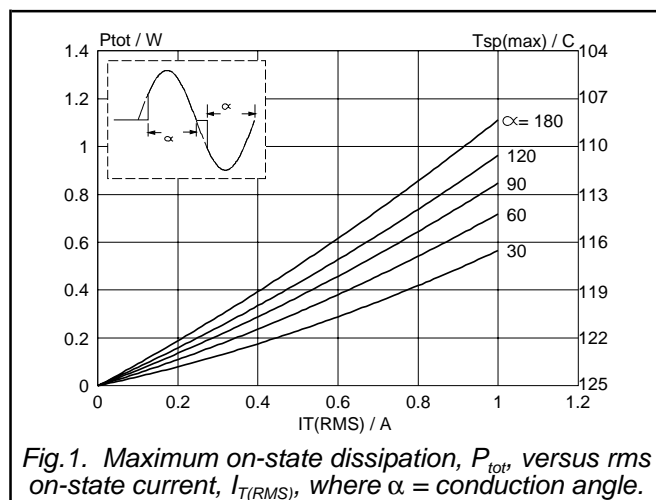

Triacs
logic level


BT131W series

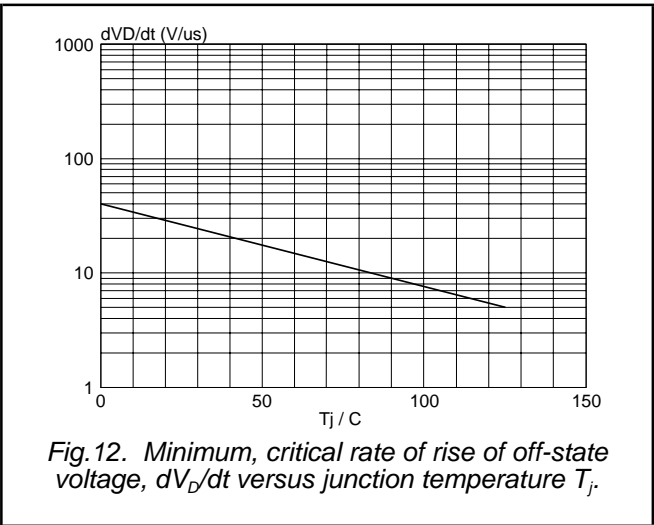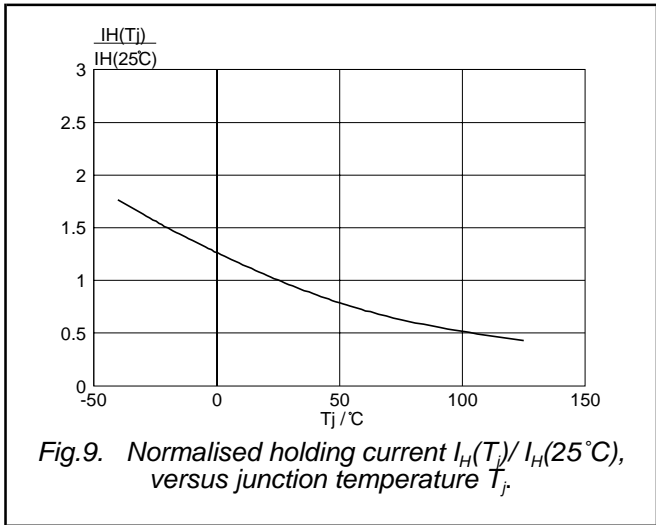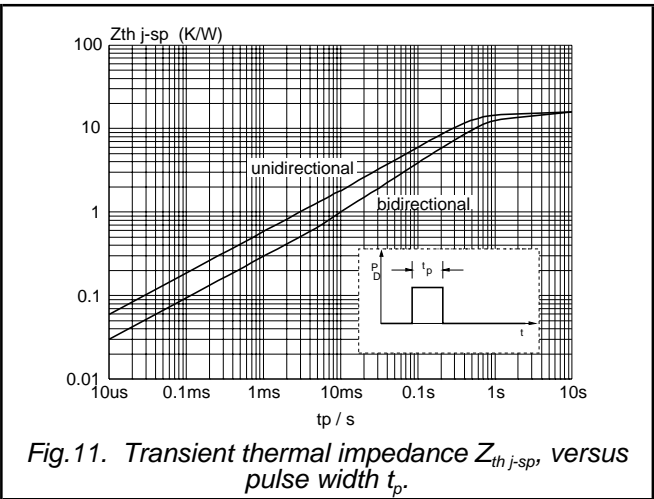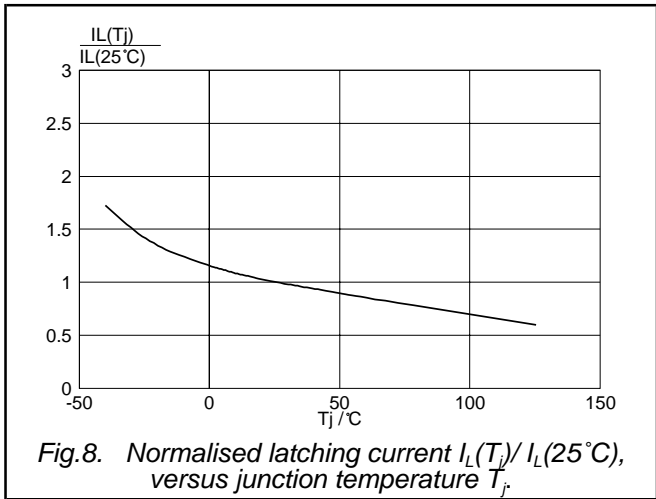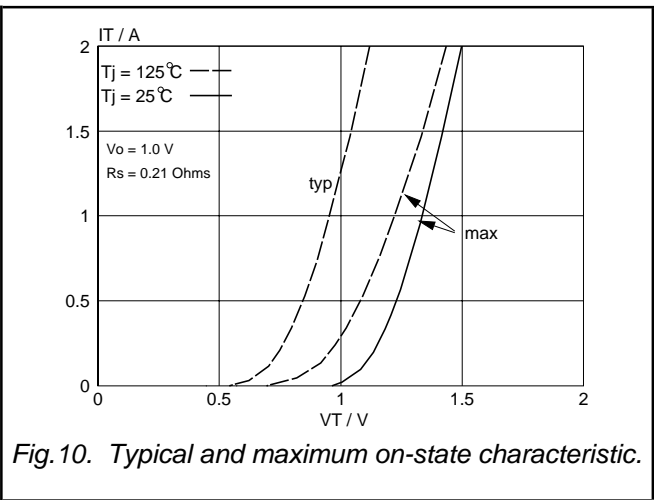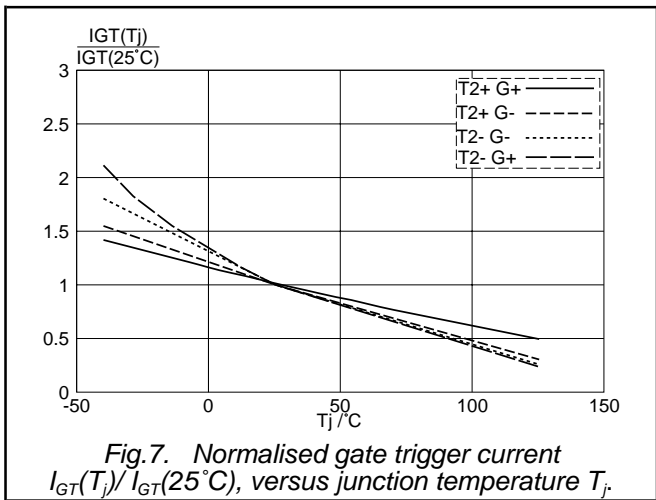

Triacs
logic level

BT131W series


MOUNTING INSTRUCTIONS

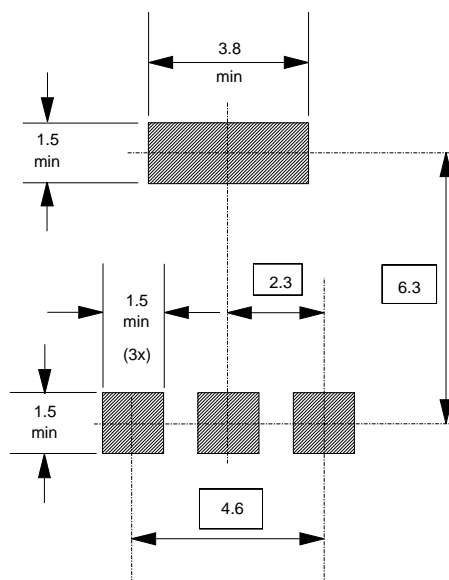Dimensions in mm.*Fig.13. soldering pattern for surface mounting SOT223.*

Triacs logic level

BT131W series

MECHANICAL DATA

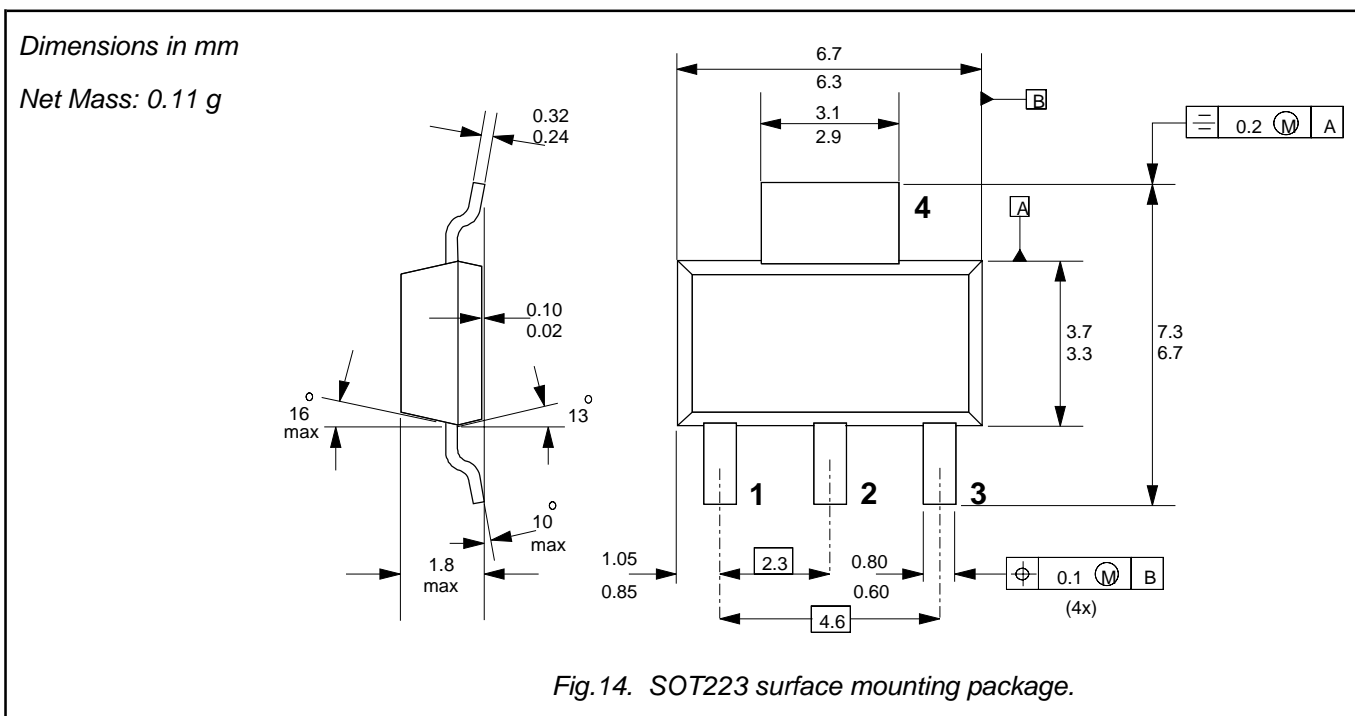

Notes

1. For further information, refer to Philips publication SC18 "SMD Footprint Design and Soldering Guidelines".
Order code: 9397 750 00505.
2. Epoxy meets UL94 V0 at 1/8".

Triacs
logic level

BT131W series

DEFINITIONS

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 2000	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.