


8 Mbit (1Mb x 8) Low Voltage OTP EPROM

DATA BRIEFING

- **LOW VOLTAGE READ OPERATION:**
2.7V to 3.6V
- **FAST ACCESS TIME:**
 - 70ns at $V_{CC} = 3.0V$ to 3.6V
 - 80ns at $V_{CC} = 2.7V$ to 3.6V
- **LOW POWER CONSUMPTION:**
 - Active Current 15mA
 - Standby Current 20 μ A
- **PROGRAMMING VOLTAGE:** 12.75V $\pm$ 0.25V
- **PROGRAMMING TIMES** of AROUND 52sec.
(PRESTO IIB ALGORITHM)
- **ELECTRONIC SIGNATURE**
 - Manufacturer Code: 20h
 - Device Code: 42h

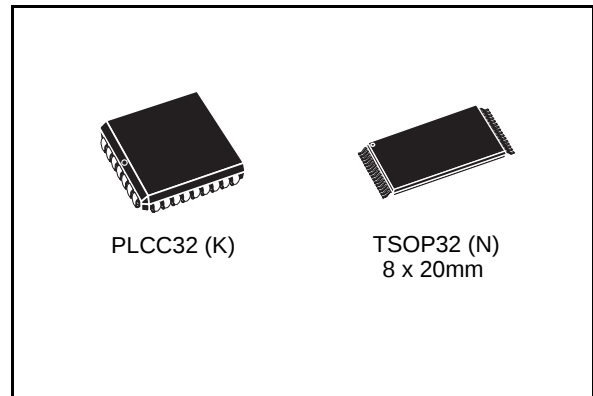

DESCRIPTION

The M27W801 is a low voltage 8 Mbit EPROM offered in the OTP ranges (one time programmable). It is ideally suited for microprocessor systems requiring large data or program storage and is organized as 1,048,576 by 8 bits.


The M27W801 operates in the read mode with a supply voltage as low as 2.7V at -40 to $85^{\circ}C$ temperature range. The decrease in operating power allows either a reduction of the size of the battery or an increase in the time between battery recharges.

The M27W801 is offered in PLCC32 and TSOP32 (8 x 20 mm) packages.

Signal Names


A0-A19	Address Inputs
Q0-Q7	Data Outputs
$\bar{E}$	Chip Enable
$\bar{G}V_{PP}$	Output Enable / Program Supply
V_{CC}	Supply Voltage
V_{SS}	Ground

Logic Diagram

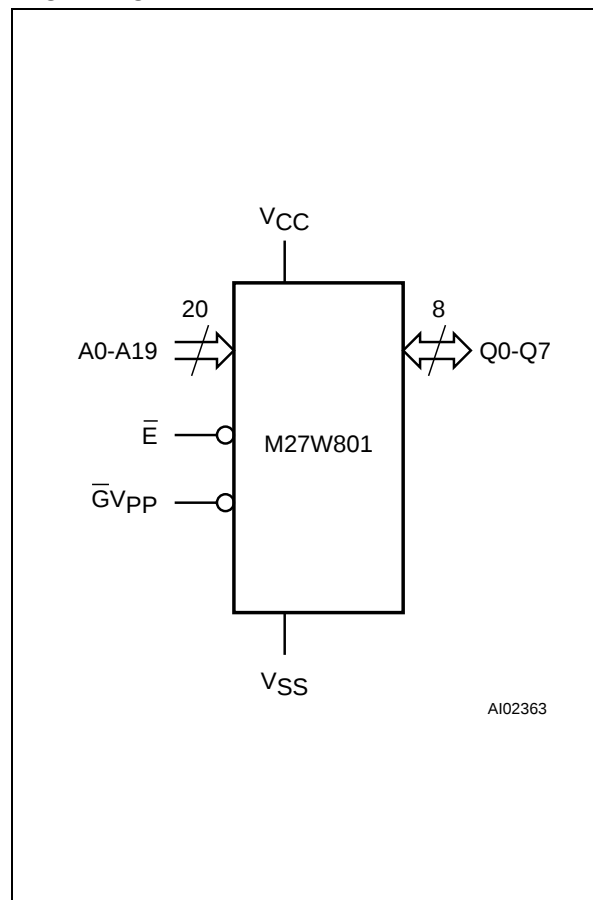


M27W801


PLCC Pin Connections

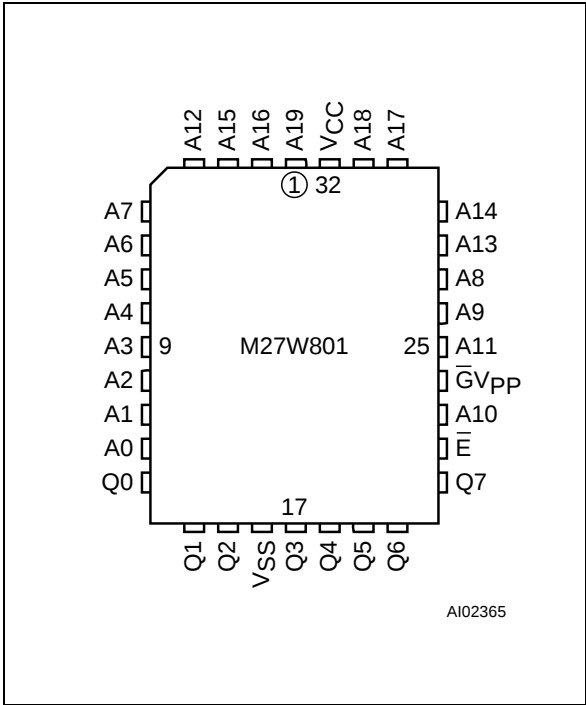

TSOP Pin Connections

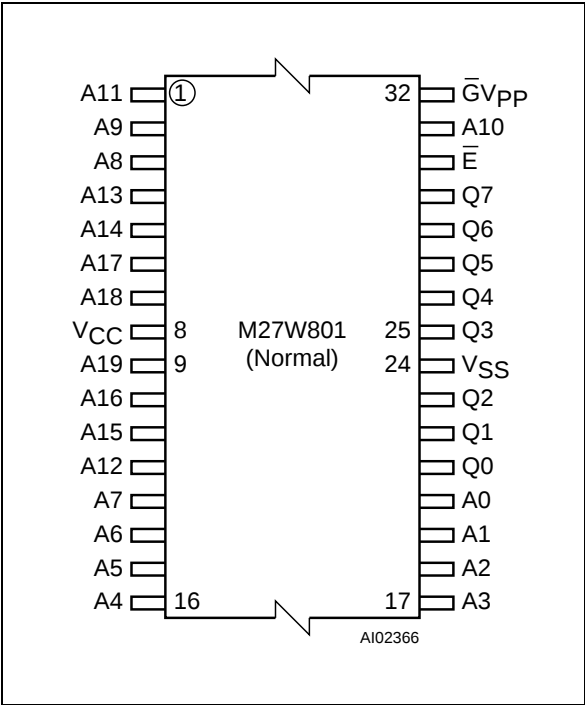

ORDERING INFORMATION SCHEME

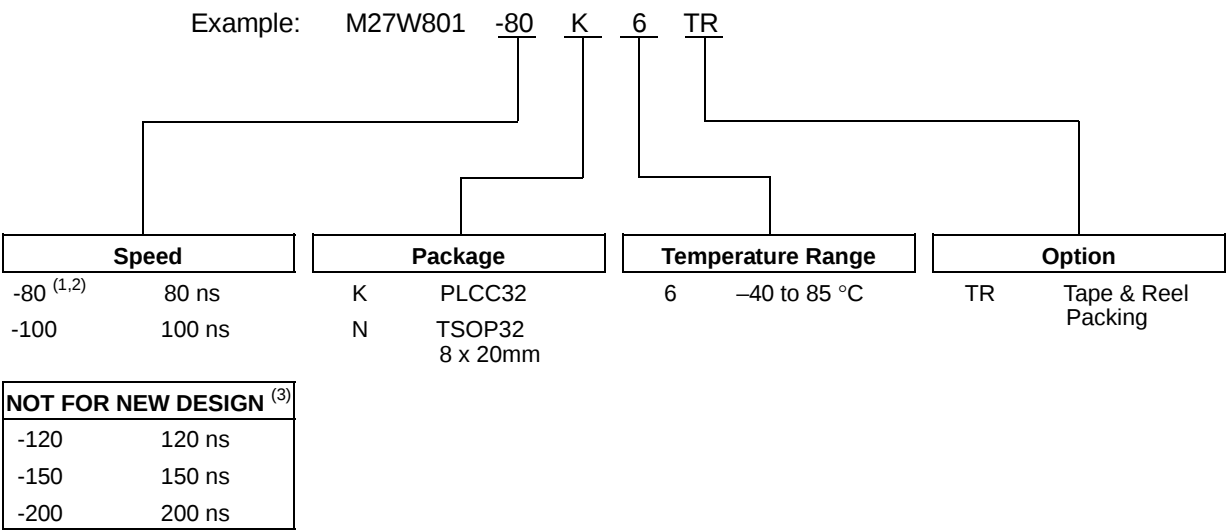

Notes: 1. High Speed, see AC Characteristics section for further information.
2. This speed also guarantees 70ns access time at V_{CC} = 3.0V to 3.6V (M27V801).
3. These speeds are replaced by the 100ns.

For a list of available options (Speed, Package, etc...) or for further information on any aspect of this device, please contact the SGS-THOMSON Sales Office nearest to you.

