# BT136X series D

## GENERAL DESCRIPTION

Glass passivated, sensitive gate triacs in a full pack plastic envelope, intended for use in general purpose bidirectional switching and phase control applications. These devices are intended to be interfaced directly to microcontrollers, logic integrated circuits and other low power gate trigger circuits.


## PINNING - SOT186A


# QUICK REFERENCE DATA


SYMBOL	PARAMETER	MAX.	MAX.	UNIT
V <sub>drm</sub> I <sub>t(rms)</sub> I <sub>tsm</sub>	BT136X- Repetitive peak off-state voltages RMS on-state current Non-repetitive peak on-state current	<b>500D</b> 500 4 25	600D 600 4 25	V A A

### PIN CONFIGURATION

## SYMBOL







## LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MA	AX.	UNIT
V <sub>drm</sub>	Repetitive peak off-state voltages		-	<b>-500</b> 500 <sup>1</sup>	<b>-600</b> 600 <sup>1</sup>	V
I <sub>T(RMS)</sub> I <sub>TSM</sub>	RMS on-state current Non-repetitive peak on-state current	full sine wave; $T_{hs} \le 92 \degree C$ full sine wave; $T_j = 25 \degree C$ prior to surge	-		4	A
		t = 20  ms	-	2	5	A
l <sup>2</sup> t	1 <sup>2</sup> t for fusing	t = 16.7 ms t = 10 ms	-	3	7	A A <sup>2</sup> s
dl <sub>T</sub> /dt	I <sup>2</sup> t for fusing Repetitive rate of rise of on-state current after	$I_{TM} = 6 \text{ A}; I_G = 0.2 \text{ A};$ $dI_G/dt = 0.2 \text{ A}/\mu\text{s}$	-	S	. I	AS
	triggering	T2+ G+	-		0	A/μs
		T2+ G-	-		0	A/µs
		T2- G-	-		0	A/μs
		T2- G+	-	1	0	A/µs
I <sub>GM</sub> V <sub>GM</sub>	Peak gate current		-		2	A
V <sub>GM</sub>	Peak gate voltage		-		5	V W
P <sub>GM</sub>	Peak gate power Average gate power	over any 20 ms period	-		.5	Ŵ
$\begin{array}{c} P_{G(AV)}^{G(AV)} \\ T_{stg} \\ T_{j} \end{array}$	Storage temperature Operating junction temperature	over any 20 ms period	-40 -	1:	50 25	°°,

<sup>1</sup> Although not recommended, off-state voltages up to 800V may be applied without damage, but the triac may switch to the on-state. The rate of rise of current should not exceed 3  $A/\mu s$ .

Triacs		
logic level		

## BT136X series D

## **ISOLATION LIMITING VALUE & CHARACTERISTIC**

 $T_{\text{hs}}$  = 25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V <sub>isol</sub>	R.M.S. isolation voltage from all three terminals to external heatsink	f = 50-60 Hz; sinusoidal waveform; R.H. ≤ 65% ; clean and dustfree	-		2500	V
C <sub>isol</sub>	Capacitance from T2 to external heatsink	f = 1 MHz	-	10	-	рF

### THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
R <sub>th j-hs</sub> R <sub>th j-a</sub>	Thermal resistance junction to heatsink Thermal resistance junction to ambient	full or half cycle with heatsink compound without heatsink compound in free air	- - -	- - 55	5.5 7.2 -	K/W K/W K/W

### STATIC CHARACTERISTICS

 $T_i = 25$  °C unless otherwise stated


SYMBOL	PARAMETER	CONDITIONS		MIN.	TYP.	MAX.	UNIT
I <sub>GT</sub>	Gate trigger current	$V_{\rm D} = 12 \text{ V}; I_{\rm T} = 0.1 \text{ A}$					
01			T2+ G+	-	2.0	5	mA
		-	T2+ G-	-	2.5	5	mA
		-	T2- G-	-	2.5	5	mA
			T2- G+	-	5.0	10	mA
I,	Latching current	$V_{\rm D} = 12 \text{ V}; I_{\rm GT} = 0.1 \text{ A}$					
-			T2+ G+	-	1.6	10	mA
		-	T2+ G-	-	4.5	15	mA
		-	T2- G-	-	1.2	10	mA
		-	T2- G+	-	2.2	15	mA
I <sub>H</sub>	Holding current	$V_{\rm D} = 12 \text{ V}; I_{\rm GT} = 0.1 \text{ A}$		-	1.2	10	mA
I <sub>H</sub> V⊤	On-state voltage	$I_{T} = 5 A$		-	1.4	1.70	V
V <sub>GT</sub>	Gate trigger voltage	$\dot{V}_{\rm D} = 12 \text{ V}; \text{ I}_{\rm T} = 0.1 \text{ A}$		-	0.7	1.5	V
		$V_{\rm D} = 400 \text{ V}; I_{\rm T} = 0.1 \text{ A}; T_{\rm i} = 125^{\circ}$	С	0.25	0.4	-	V
I <sub>D</sub>	Off-state leakage current	$V_{D}^{i} = 400 \text{ V}; I_{T} = 0.1 \text{ A}; T_{j} = 125 \text{ °V}$ $V_{D} = V_{DRM(max)}; T_{j} = 125 \text{ °C}$		-	0.1	0.5	mA


#### **DYNAMIC CHARACTERISTICS**


 $T_j = 25$  °C unless otherwise stated


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
dV <sub>D</sub> /dt	Critical rate of rise of off-state voltage	$V_{DM} = 67\% V_{DRM(max)}; T_j = 125 °C;$ exponential waveform; $R_{GK} = 1 k\Omega$	-	5	-	V/μs
t <sub>gt</sub>		$I_{TM} = 6 \text{ A}; V_D = V_{DRM(max)}; I_G = 0.1 \text{ A}; $ $dI_G/dt = 5 \text{ A/}\mu\text{s}$	-	2	-	μs

## BT136X series D







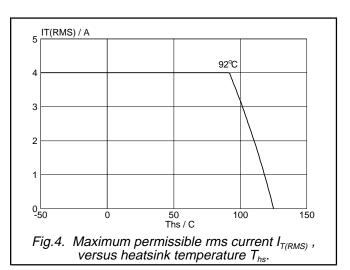








Fig.5. Maximum permissible repetitive rms on-state current  $I_{T(RMS)}$ , versus surge duration, for sinusoidal currents, f = 50 Hz;  $T_{hs} \le 92^{\circ}C$ .

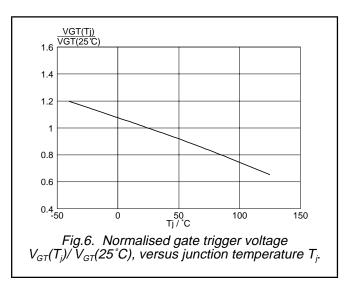



## BT136X series D

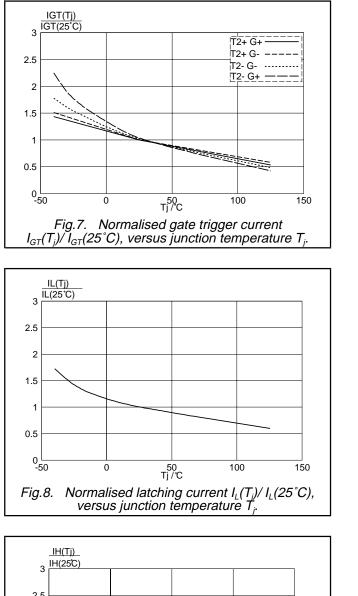










## BT136X series D

### **MECHANICAL DATA**

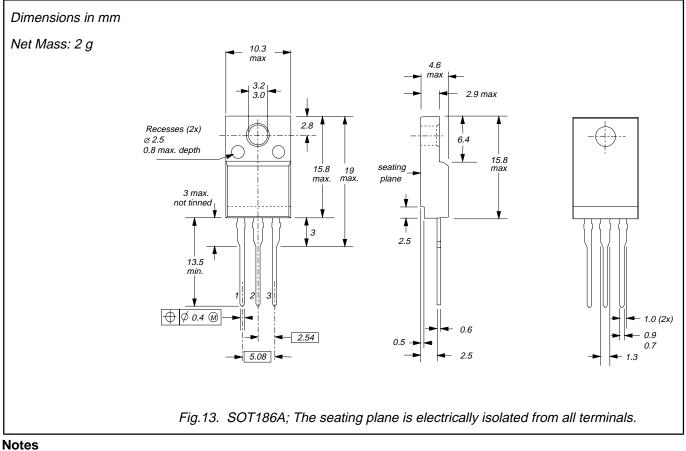

Refer to mounting instructions for F-pack envelopes.
Epoxy meets UL94 V0 at 1/8".

Triacs	BT136X series D
logic level	

#### DEFINITIONS

Data sheet status					
Objective specification	This data sheet contains target or goal specifications for product development.				
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.				
Product specification	This data sheet contains final product specifications.				
Limiting values					
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.					
Application information					
Where application information is given, it is advisory and does not form part of the specification.					

© Philips Electronics N.V. 1997

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

#### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.