

Silicon Diffused Power Transistor**BUJ103AU****GENERAL DESCRIPTION**



High-voltage, high-speed planar-passivated npn power switching transistor in the SOT533 envelope intended for use in high frequency electronic lighting ballast applications, converters, inverters, switching regulators, motor control systems, etc.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
V_{CESM}	Collector-emitter voltage peak value	$V_{BE} = 0 \text{ V}$	-	700	V
V_{CBO}	Collector-base voltage (open emitter)		-	700	V
V_{CEO}	Collector-emitter voltage (open base)		-	400	V
I_C	Collector current (DC)		-	4	A
I_{CM}	Collector current peak value		-	8	A
P_{tot}	Total power dissipation	$T_{mb} \leq 25 \text{ }^{\circ}\text{C}$	-	50	W
V_{CEsat}	Collector-emitter saturation voltage	$I_C = 3.0 \text{ A}; I_B = 0.6 \text{ A}$	0.25	1.0	V
h_{FEsat}	D.C. current gain	$I_C = 3.0 \text{ A}; V_{CE} = 5 \text{ V}$	12.5	-	
t_f	Fall time	$I_C = 2.5 \text{ A}; I_{B1} = 0.4 \text{ A}$	46	60	ns

PINNING - SOT533

PIN	DESCRIPTION
1	base
2	collector
3	emitter
tab	collector

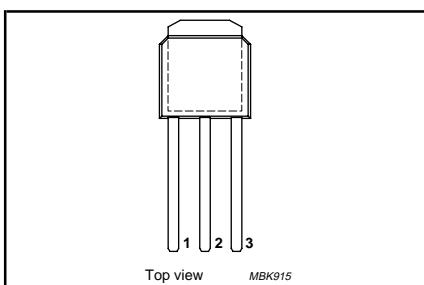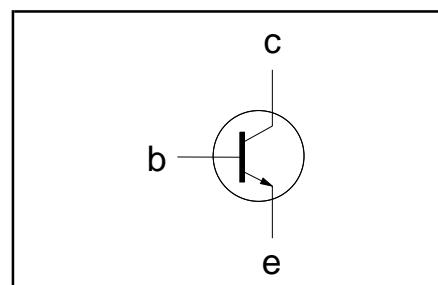PIN CONFIGURATION**SYMBOL****LIMITING VALUES**

Limiting values in accordance with the Absolute Maximum Rating System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CESM}	Collector to emitter voltage	$V_{BE} = 0 \text{ V}$	-	700	V
V_{CEO}	Collector to emitter voltage (open base)		-	400	V
V_{CBO}	Collector to base voltage (open emitter)		-	700	V
I_C	Collector current (DC)		-	4	A
I_{CM}	Collector current peak value		-	8	A
I_B	Base current (DC)		-	2	A
I_{BM}	Base current peak value		-	4	A
P_{tot}	Total power dissipation	$T_{mb} \leq 25 \text{ }^{\circ}\text{C}$	-	50	W
T_{stg}	Storage temperature		-65	150	$^{\circ}\text{C}$
T_j	Junction temperature		-	150	$^{\circ}\text{C}$

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
R_{thj-mb}	Junction to mounting base		-	2.5	K/W
R_{thj-a}	Junction to ambient	in free air	70	-	K/W

Silicon Diffused Power Transistor

BUJ103AU

STATIC CHARACTERISTICS $T_{mb} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CES}, I_{CBO} I_{CES}	Collector cut-off current ¹	$V_{BE} = 0 \text{ V}; V_{CE} = V_{CESMmax}$ $V_{BE} = 0 \text{ V}; V_{CE} = V_{CESMmax}$ $T_j = 125^\circ\text{C}$	-	-	0.1 0.5	mA mA
I_{CEO} I_{EBO} $V_{CEO}sust$	Collector cut-off current ¹ Emitter cut-off current Collector-emitter sustaining voltage	$V_{CEO} = V_{CEOMmax} (400\text{V})$ $V_{EB} = 7 \text{ V}; I_c = 0 \text{ A}$ $I_B = 0 \text{ A}; I_c = 10 \text{ mA};$ $L = 25 \text{ mH}$	- - 400	- - -	0.1 0.1 -	mA mA V
V_{CEsat} V_{BEsat} h_{FE} h_{FE} h_{FEsat}	Collector-emitter saturation voltage Base-emitter saturation voltage DC current gain	$I_c = 3.0 \text{ A}; I_B = 0.6 \text{ A}$ $I_c = 3.0 \text{ A}; I_B = 0.6 \text{ A}$ $I_c = 1 \text{ mA}; V_{CE} = 5 \text{ V}$ $I_c = 500\text{mA}; V_{CE} = 5 \text{ V}$ $I_c = 2.0 \text{ A}; V_{CE} = 5 \text{ V}$ $I_c = 3.0 \text{ A}; V_{CE} = 5 \text{ V}$	- - 10 13 11 -	0.25 0.97 17 22 16 12.5	1.0 1.5 32 32 22 -	V V

DYNAMIC CHARACTERISTICS $T_{mb} = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	TYP.	MAX.	UNIT
t_{on} t_s t_f	Switching times (resistive load) Turn-on time Turn-off storage time Turn-off fall time	$I_{Con} = 2.5 \text{ A}; I_{Bon} = -I_{Boff} = 0.5 \text{ A};$ $R_L = 75 \text{ ohms}; V_{BB2} = 4\text{V};$	0.48 2.7 0.27	0.6 3.3 0.35	μs μs μs
t_s t_f	Switching times (inductive load) Turn-off storage time Turn-off fall time	$I_{Con} = 2.5 \text{ A}; I_{Bon} = 0.5 \text{ A}; L_B = 1 \mu\text{H};$ $-V_{BB} = 5 \text{ V}$	1.2 46	1.4 60	μs ns
t_s t_f	Switching times (inductive load) Turn-off storage time Turn-off fall time	$I_{Con} = 2.5 \text{ A}; I_{Bon} = 0.5 \text{ A}; L_B = 1 \mu\text{H};$ $-V_{BB} = 5 \text{ V}; T_j = 100^\circ\text{C}$	1.34 98	1.8 200	μs ns

¹ Measured with half sine-wave voltage (curve tracer).

Silicon Diffused Power Transistor

BUJ103AU

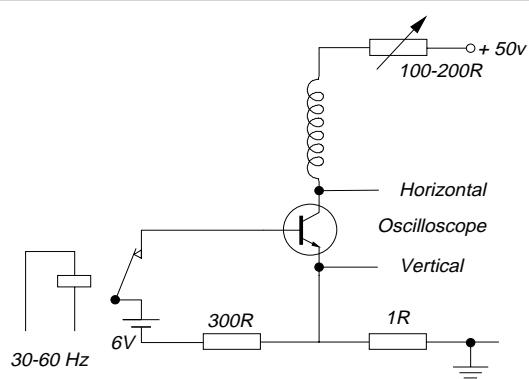
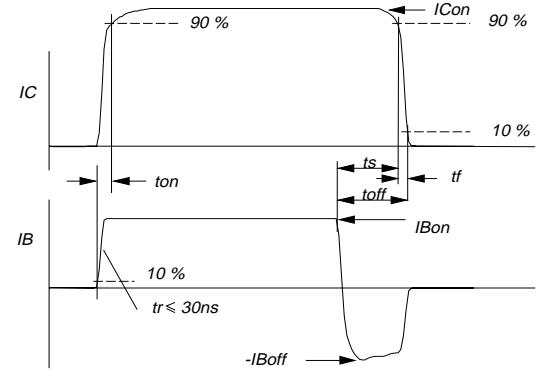
Fig.1. Test circuit for V_{CEO}^{sust} .

Fig.4. Switching times waveforms with resistive load.

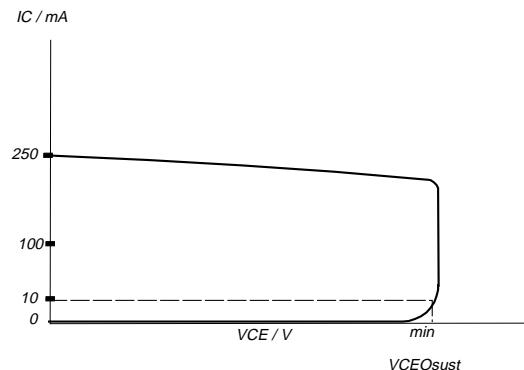
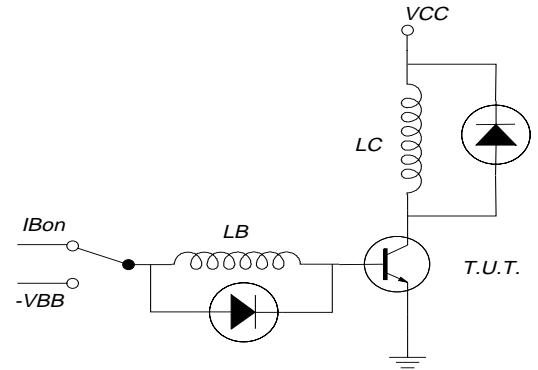
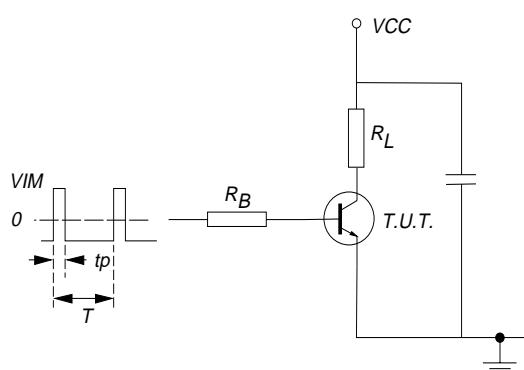
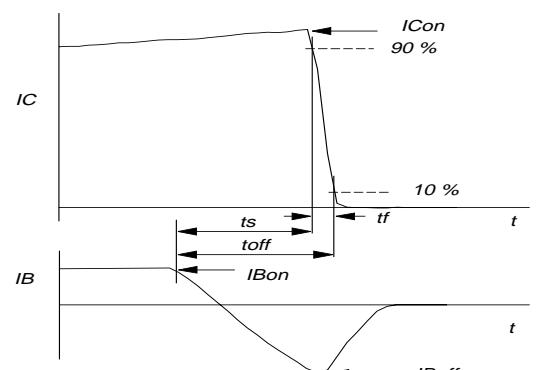
Fig.2. Oscilloscope display for V_{CEO}^{sust} .Fig.5. Test circuit inductive load.
 $V_{CC} = 300 \text{ V}$; $-V_{BE} = 5 \text{ V}$, $L_C = 200 \mu\text{H}$; $L_B = 1 \mu\text{H}$ Fig.3. Test circuit resistive load. $V_{IM} = -6 \text{ to } +8 \text{ V}$
 $V_{CC} = 250 \text{ V}$; $t_p = 20 \mu\text{s}$; $\delta = t_p/T = 0.01$.
 R_B and R_L calculated from I_{Con} and I_{Bon} requirements.

Fig.6. Switching times waveforms with inductive load.

Silicon Diffused Power Transistor

BUJ103AU

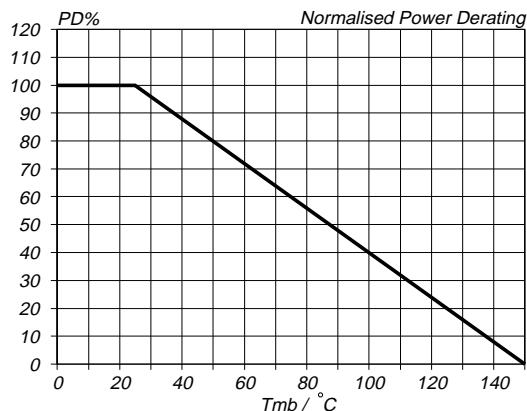


Fig.7. Normalised power dissipation.
 $PD\% = 100 \cdot PD/PD_{25^\circ\text{C}} = f(T_{mb})$

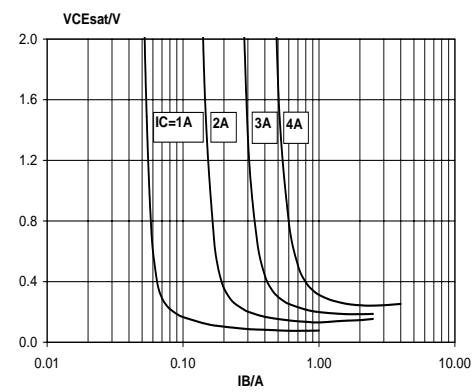


Fig.10. Collector-Emitter saturation voltage.
Solid lines = typ values, $VCE_{sat} = f(IV)$; $T_j = 25^\circ\text{C}$

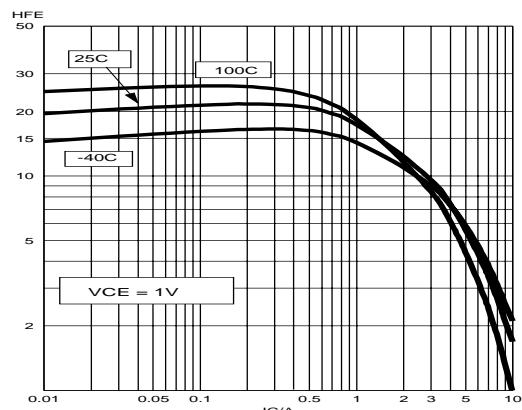


Fig.8. Typical DC current gain. $h_{FE} = f(IV)$
parameter V_{CE}

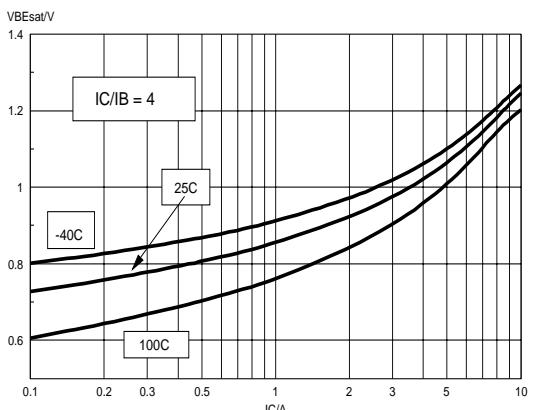


Fig.11. Base-Emitter saturation voltage.
Solid lines = typ values, $V_{BE_{sat}} = f(IV)$.

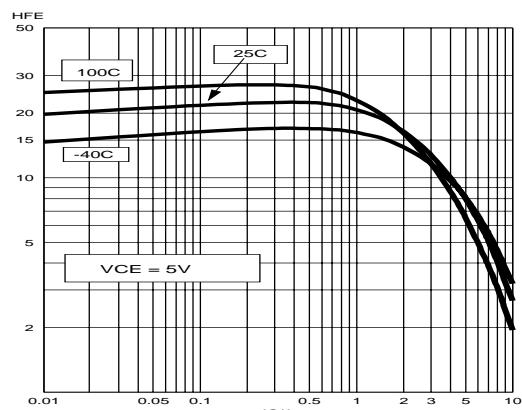


Fig.9. Typical DC current gain. $h_{FE} = f(IV)$
parameter V_{CE}

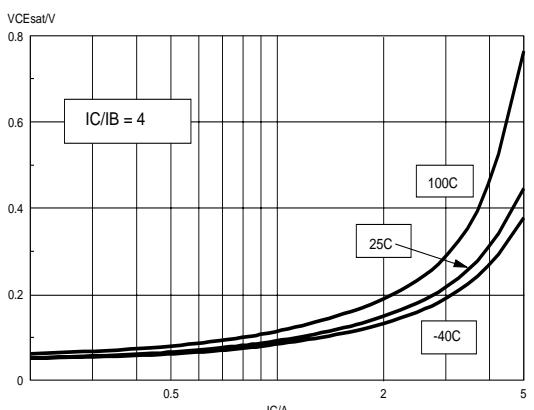


Fig.12. Collector-Emitter saturation voltage.
Solid lines = typ values, $VCE_{sat} = f(IV)$.

Silicon Diffused Power Transistor

BUJ103AU

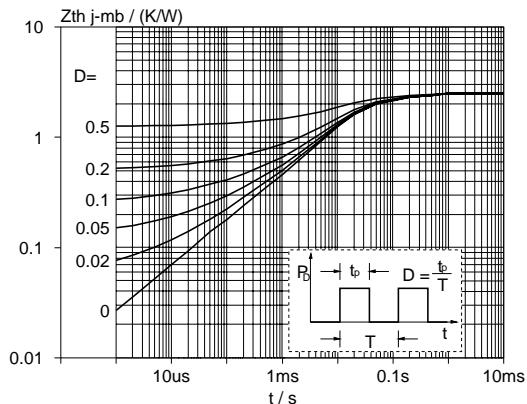


Fig.13. Transient thermal impedance.
 $Z_{th(j\text{-}mb)} = f(t)$; parameter $D = t_p/T$

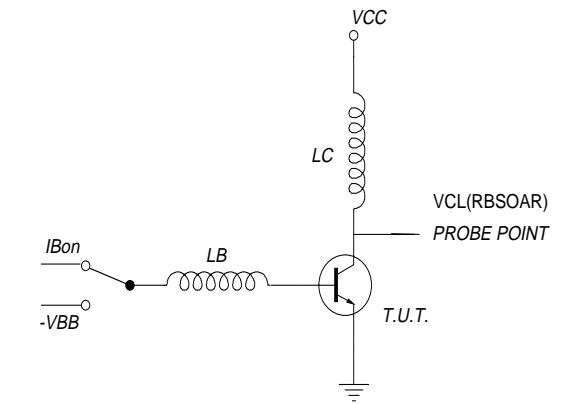


Fig.16. Test Circuit for reverse bias safe operating area.
 $V_{cl} \leq 700V$; $V_{cc} = 150V$; $V_{BB} = -5V$; $L_B = 1\mu H$; $L_c = 200\mu H$

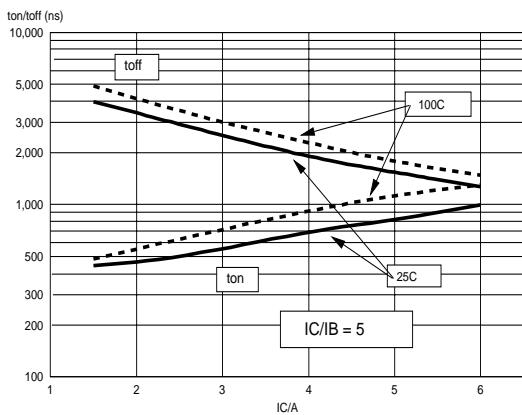


Fig.14. Resistive Switching.
 $ton, toff = f(IC)$.

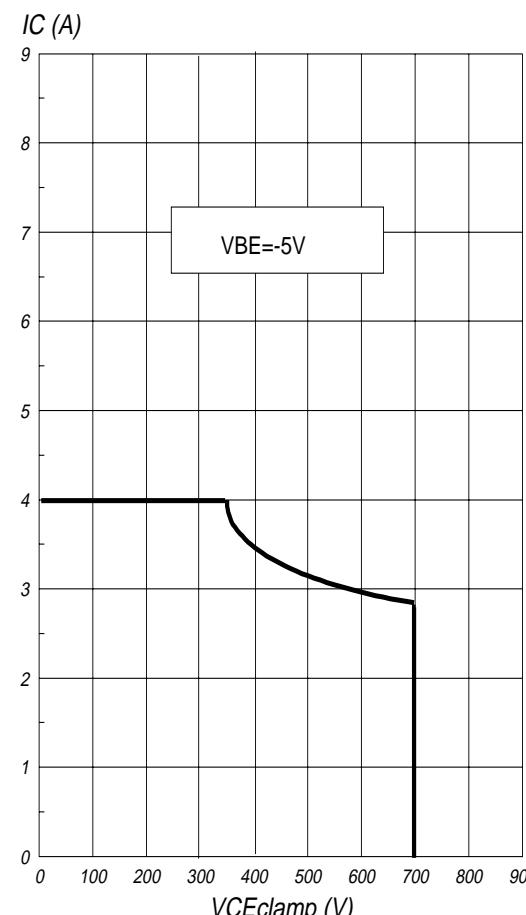


Fig.17. Reverse bias safe operating area $T_j \leq T_{j\text{max}}$


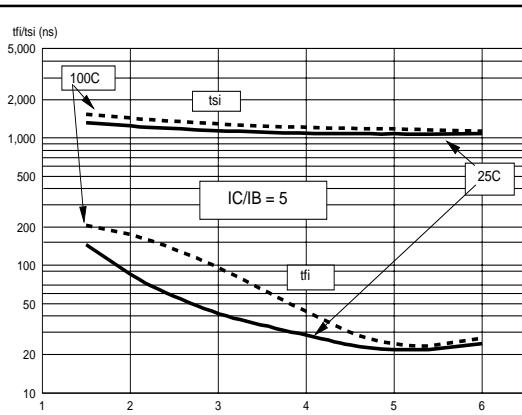


Fig.15. Inductive switching.
 $ton, toff = f(IC)$

Silicon Diffused Power Transistor

BUJ103AU

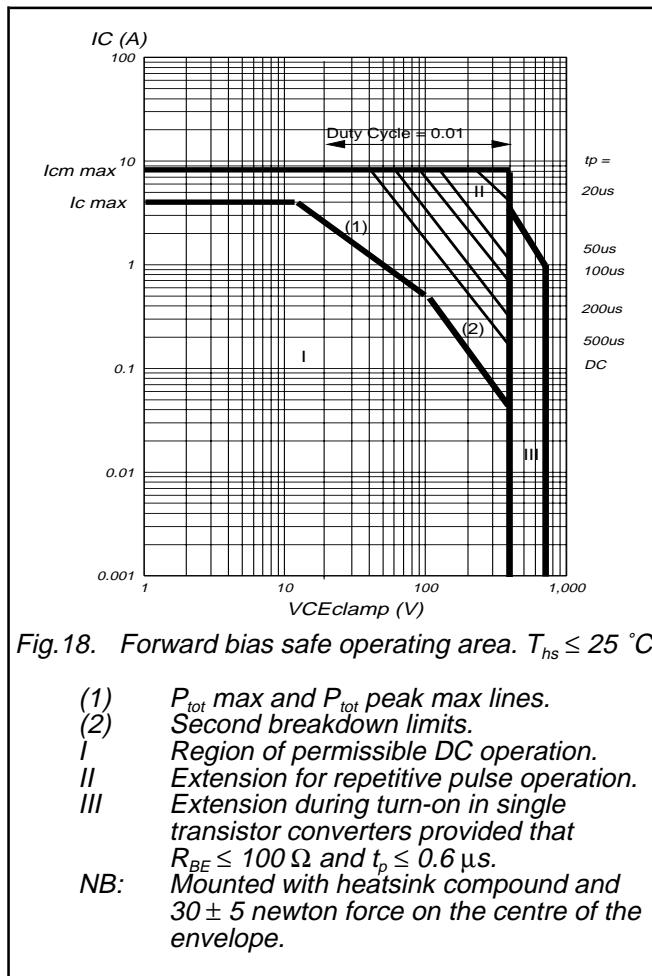


Silicon Diffused Power Transistor

BUJ103AU

MECHANICAL DATA

Plastic single-ended package (Philips version of I-PAK); 3 leads (in-line)

SOT533

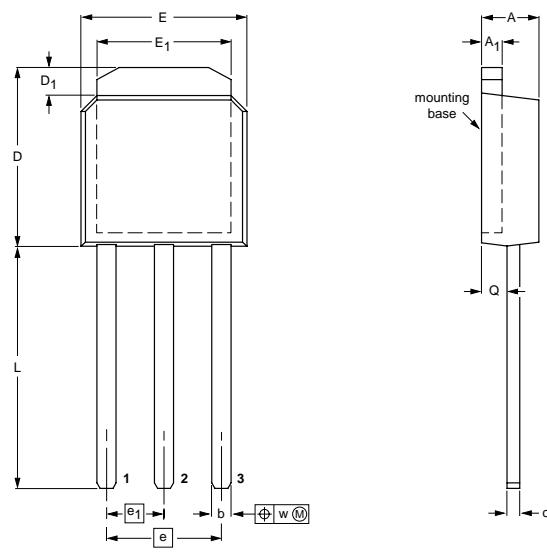

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁	b	c	D	D ₁	E	E ₁	e	e ₁	L	Q
mm	2.38	0.89	0.89	0.56	7.28	1.06	6.73	5.36	4.57	2.285	9.8	1.00
	2.22	0.71	0.71	0.46	6.94	0.96	6.47	5.26			9.4	1.10

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT533		TO-251				99-02-18

Fig.19. SOT533 surface mounting package. Pin 2 connected to mounting base.

Silicon Diffused Power Transistor**BUJ103AU****DEFINITIONS**

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	
© Philips Electronics N.V. 1999	
All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.	
The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.