


C-MOS DECODER DATA TRANSFER IC

—TOP VIEW—



PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL	PIN NO.	I/O	SIGNAL
1	O	SOUTE	61	I/O	CD4	121	I/O	UDATA18	181	—	GND
2	O	SOUTF	62	I/O	CD3	122	I/O	UDATA17	182	O	FD15
3	O	PLAYE	63	I/O	CD2	123	I/O	UDATA16	183	O	FD14
4	O	PLAYF	64	I/O	CD1	124	I/O	UDATA15	184	O	FD7
5	O	PCMCKE	65	I/O	CD0	125	I/O	UDATA14	185	O	FD6
6	—	Vdd2	66	—	Vdd2	126	—	Vdd2	186	—	Vdd2
7	—	GND	67	—	GND	127	—	GND	187	—	GND
8	O	PCMCKF	68	I	CCS	128	I/O	UDATA13	188	O	FD5
9	O	LPCME	69	I	CRD	129	I/O	UDATA12	189	O	FD4
10	O	LPCMF	70	I	CWR	130	I/O	UDATA11	190	O	FD3
11	O	MUTEE	71	I	VCFLX	131	I/O	UDATA10	191	O	FD2
12	—	GND	72	O	VCDX7	132	I/O	UDATA9	192	O	FD1
13	O	MUTEF	73	O	VCDX6	133	I/O	UDATA8	193	O	FD0
14	O	DSTRBE	74	O	VCDX5	134	I/O	UDATA7	194	O	FWR
15	O	DSTRBF	75	O	VCDX4	135	I/O	UDATA6	195	O	FRD
16	I	REQE	76	O	VCDX3	136	I/O	UDATA5	196	O	FRST
17	I	REQF	77	—	Vdd1	137	I/O	UDATA4	197	—	Vdd1
18	—	Vdd2	78	—	GND	138	—	Vdd2	198	—	GND
19	—	GND	79	O	VCDX2	139	—	GND	199	I	FEF
20	I	PCMINE	80	O	VCDX1	140	I/O	UDATA3	200	I	FFF
21	I	PCMINF	81	O	VCDX0	141	I/O	UDATA2	201	—	GND
22	I	SCLKE	82	O	VCERX	142	I/O	UDATA1	202	—	NC
23	I	SCLKF	83	O	VCSTX	143	I/O	UDATA0	203	—	NC
24	I	LRCKE	84	O	VCCKX	144	O	UDREQ	204	—	NC
25	—	Vdd1	85	I	VCFLY	145	—	Vdd1	205	—	NC
26	I	LRCKF	86	O	VCDY7	146	I	UDIR	206	—	NC
27	I	FSY	87	O	VCDY6	147	I	ADV H	207	I	RESET
28	I	FSY256	88	O	VCDY5	148	I	ADV V	208	I	FSX
29	I	FSZ	89	—	Vdd1	149	I	CK27	209	—	Vdd1
30	—	GND	90	—	GND	150	—	GND	210	—	GND
31	I	FSZ256	91	O	VCDY4	151	I	ADV F	211	I	FSX256
32	I	CA17	92	O	VCDY3	152	O	RG1 H	212	I	REQA
33	I	CA16	93	O	VCDY2	153	O	RG1 V	213	I	REQB
34	I	CA15	94	O	VCDY1	154	O	RG1 F	214	I	PCMINA
35	I	CA14	95	O	VCDY0	155	O	RG1 CFIF	215	I	PCMINB
36	—	Vdd1	96	O	VCERY	156	—	Vdd1	216	—	Vdd1
37	I	CA13	97	O	VCSTY	157	O	RG2 H	217	I	SCLKA
38	I	CA12	98	O	VCCKY	158	O	RG2 V	218	I	SCLKB
39	I	CA11	99	I	UDACK	159	O	RG2 F	219	I	LRCKA
40	I	CA10	100	I	UCLK	160	O	RG2 CFIF	220	I	LRCKB
41	I	CA9	101	—	Vdd1	161	I	REF H	221	—	Vdd1
42	—	Vdd1	102	—	GND	162	—	Vdd1	222	—	GND
43	—	GND	103	I/O	UDATA31	163	—	GND	223	O	SOUTA
44	I	CA8	104	I/O	UDATA30	164	I	REF V	224	O	SOUTB
45	I	CA7	105	I/O	UDATA29	165	I	REF F	225	O	PLAYA
46	I	CA6	106	I/O	UDATA28	166	I	ADV CF2	226	O	PLAYB
47	I	CA5	107	I/O	UDATA27	167	I	ADV CF1	227	O	PCMCKA
48	I	CA4	108	I/O	UDATA26	168	I	ADV CF0	228	O	PCMCKB
49	I	CA3	109	I/O	UDATA25	169	I	ADV CFIF	229	O	LPCMA
50	I	CA2	110	I/O	UDATA24	170	O	RG3 H	230	—	GND
51	I	CA1	111	I	SM	171	O	RG3 V	231	—	NC
52	I	CA0	112	I	TST	172	O	RG3 F	232	—	NC
53	O	CINT	113	I	SDI0	173	O	RG3 CFIF	233	—	NC
54	—	Vdd2	114	—	Vdd2	174	—	Vdd2	234	—	Vdd2
55	—	GND	115	—	GND	175	—	GND	235	—	GND
56	O	CWAIT	116	I/O	UDATA23	176	I	REF CF2	236	O	LPCMB
57	I/O	CD7	117	I/O	UDATA22	177	I	REF CF1	237	O	MUTEA
58	I/O	CD6	118	I/O	UDATA21	178	I	REF CF0	238	O	MUTEB
59	I/O	CD5	119	I/O	UDATA20	179	I	REF CFIF	239	O	DSTRBA
60	—	GND	120	I/O	UDATA19	180	O	ATRIG	240	O	DSTRBB

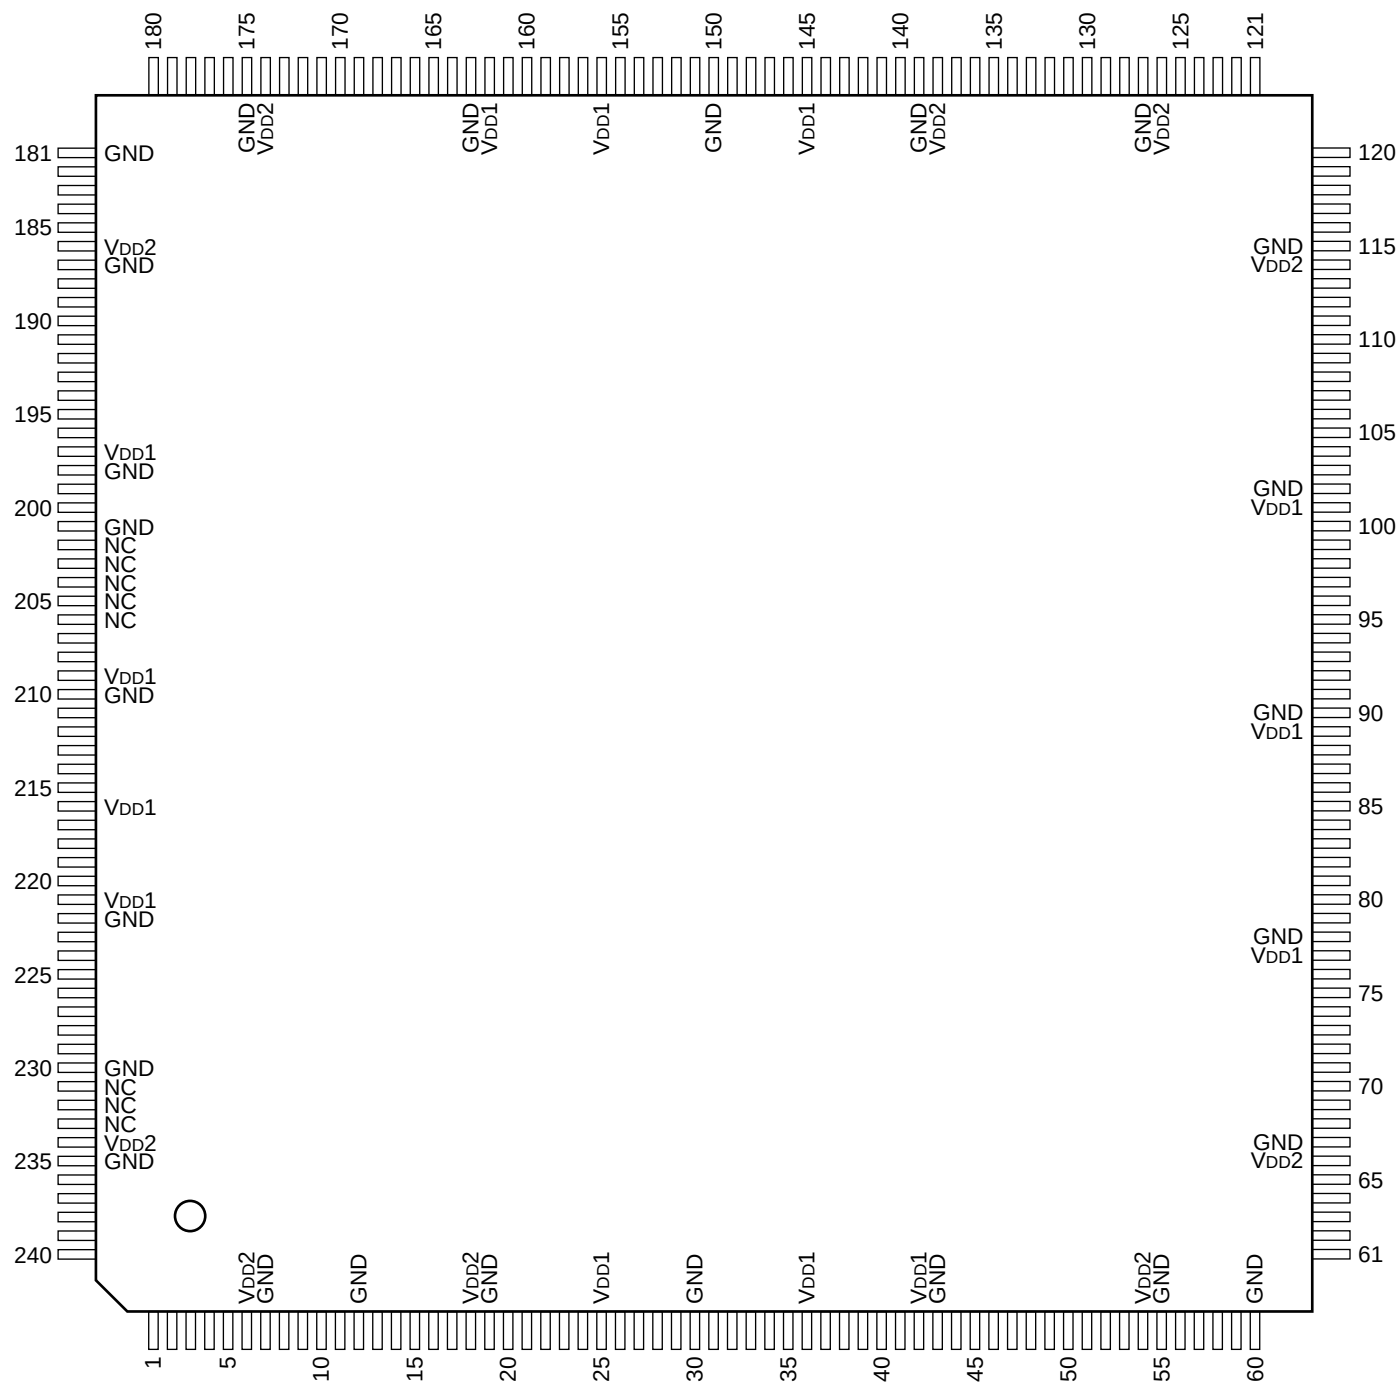